

Acknowledgment Letter

Customer: Hanchai

Customer Part Number:

Model: G25-2.3-7.5UH-3200GS-7MM

datelanded: Dec. 06, 2024

supplier: Dongguan Jierestech Technology Co., Ltd.

draw	audit	Approve
Lu Lin	Deng Xianggu	Lu Ru Shi

customer acknowledges:

Qualified	unqualified	acknowledge
Remark		

Dongguan Jierestech Technology Co., Ltd.


Tel:

Fax: 86+13632701380

Add: No. 96, Langhu Road, Dalingshan Town, Dongguan City (3rd floor, Building L, Jinxiangda Science and Technology Park)

Customer	Customer Part Number	Model	Version	Date
Hanchai		G25-2.3-7.5UH-3200GS-7MM	A0	Dec. 06, 2024

一、Planar structure diagram: Unit:MM

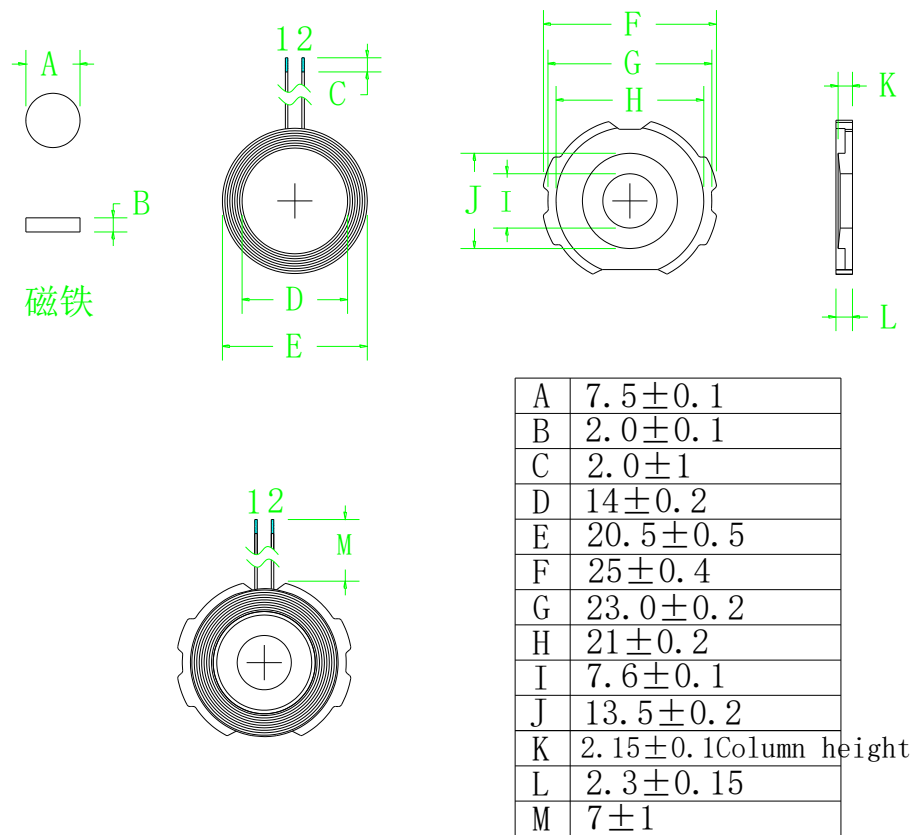

二、Product Parameter:

foot position	Path	Circle Number	Remark
1 - 2	0.08*24	12	热风绞合线

三、technical requirements:

1. Fix the ends of the wires securely to prevent any loosening or breakage of the wires.
2. According to the customer's requirements, cut the excessively long wire ends, tin them, and ensure that the tin coating depth is uniformly  $2 \pm 1$ MM.
3. Apply the appropriate white glue on the soft magnetic sheet, attach the coil, and during the process, ensure that the surface of the product remains clean and tidy.
4. The hard magnetic sheet used has round holes and is undamaged.
5. Additional processing (as per customer requirements): A 7.5\*2.0MM magnet is installed in the central round hole of the finished product, and a 513-14MM back adhesive is attached to the back of the finished product, followed by packaging.

四、electrical parameter:

1.Inductance value, Q value:

PIN 1 - 2 = 7.5uH ±0.4UH

Q value (before magnetization) ≥35

The above inductance values were measured using the Quanhua 1062A instrument. , Using 10 KHz/0.3 Vrms as the standard or equivalent instrument.  
The Q value was measured using the Quanhua 1062A instrument, with a standard of 100 KHZ/0.3 Vrms or an equivalent instrument.

五、bill of materials:

No.	Name	material	supplier	Remark
1	Hot air twisted yarn	0.08X24	Uighur-Han or equivalent	
2	magnetic sheet	G25 Hard substrate	Uighur-Han or equivalent	
3	tin	High-temperature environmental protection	Thousand Islands or equivalent	
4	white glues	BY882	Bao Yue or equivalent	
5	magnet	7.5*2.0*3200GS		Additional processing
6	gum	513-14MM		procedures, as per customer requirements