




PSD NVNT ax40 52@37 2437MHz Ant2




PSD NVNT ax40 52@37 2452MHz Ant2

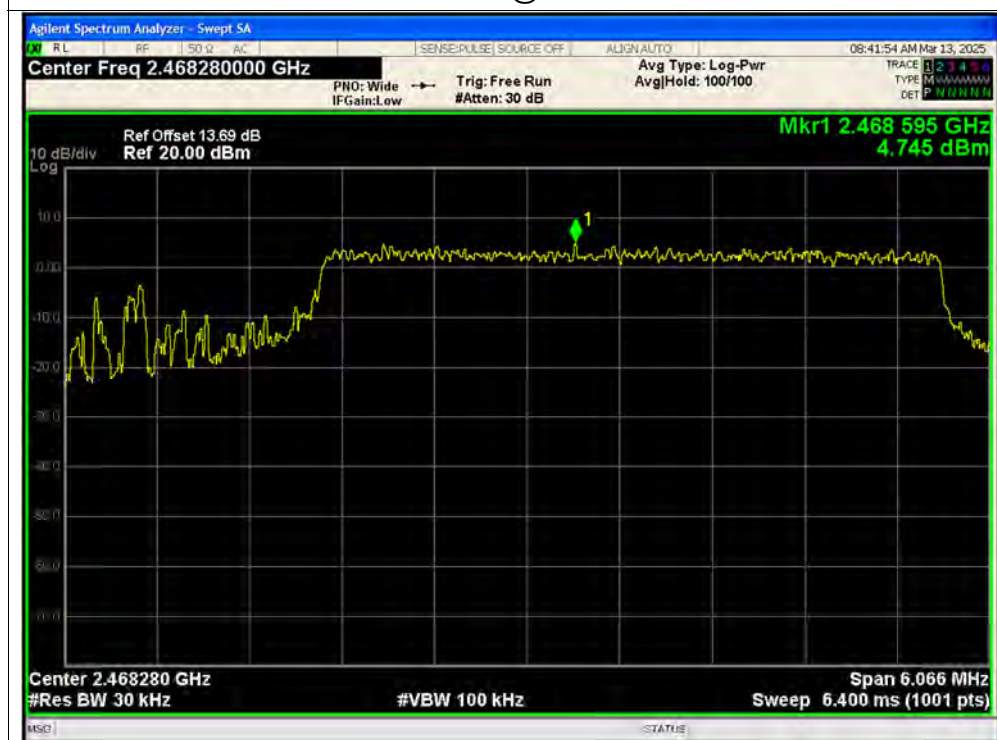

PSD NVNT ax40 52@37 2422MHz Ant1



PSD NVNT ax40 52@37 2422MHz Ant2

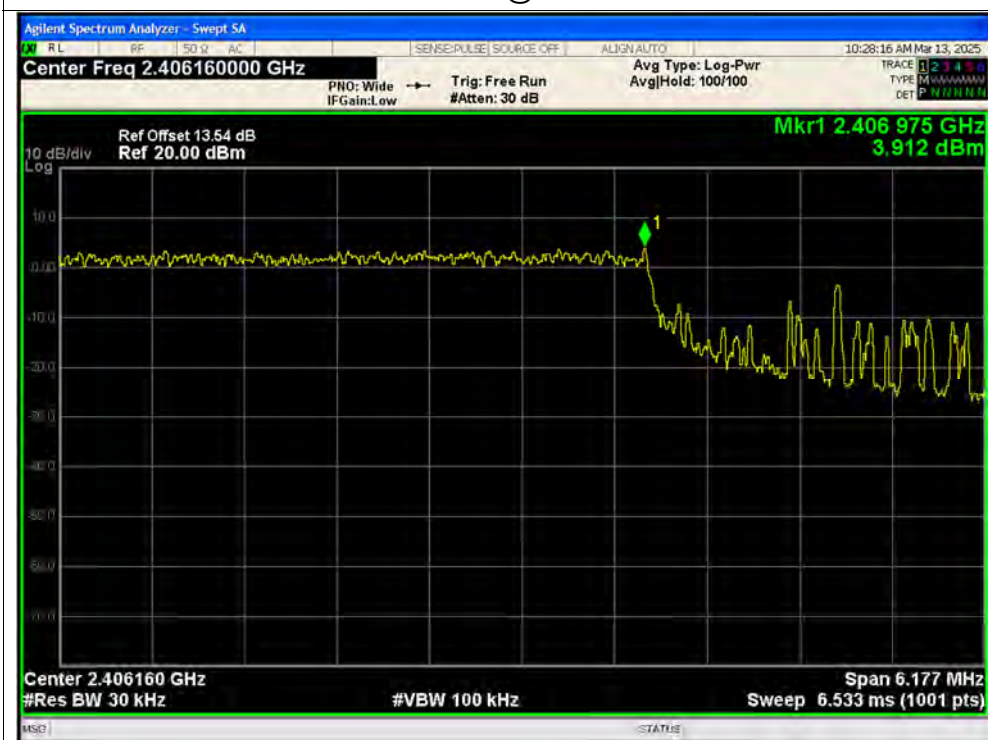

PSD NVNT ax40 52@37 2437MHz Ant1




PSD NVNT ax40 52@37 2437MHz Ant2





PSD NVNT ax40 52@37 2452MHz Ant1

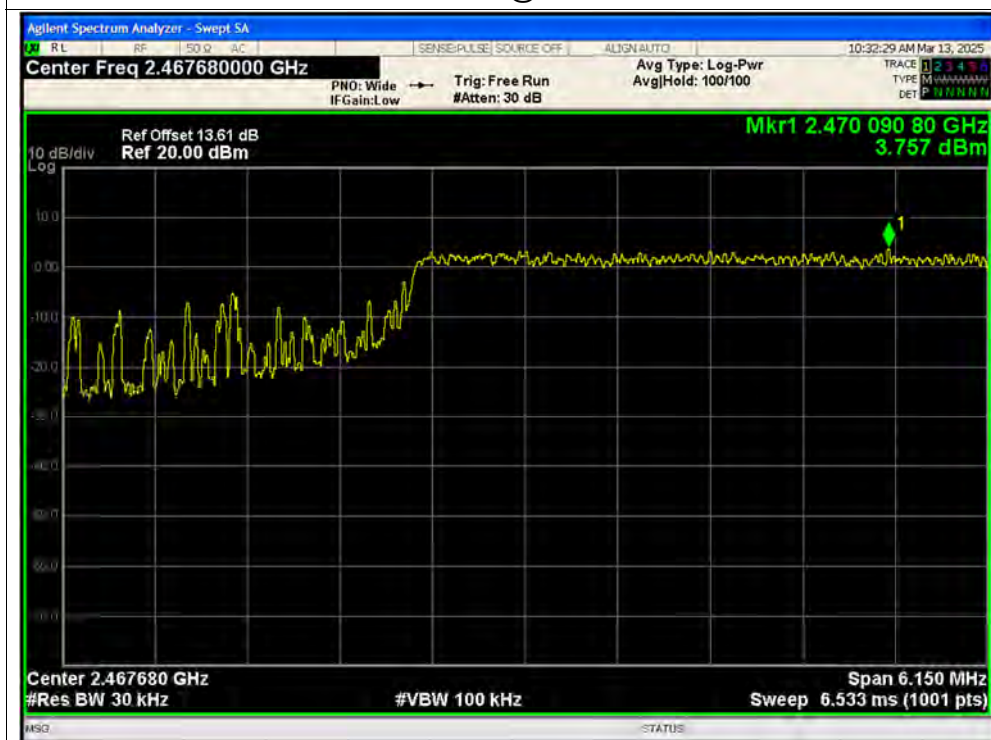


PSD NVNT ax40 52@37 2452MHz Ant2



PSD NVNT ax40 106@53 2422MHz Ant1



PSD NVNT ax40 106@53 2437MHz Ant1

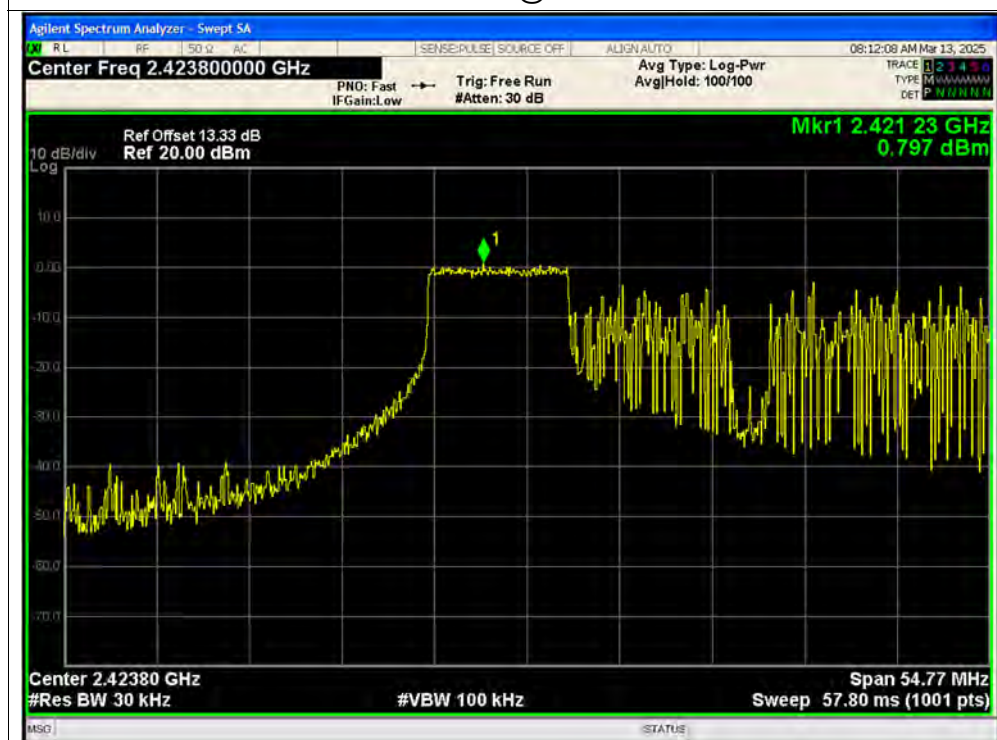





PSD NVNT ax40 106@53 2452MHz Ant1




PSD NVNT ax40 106@53 2422MHz Ant2

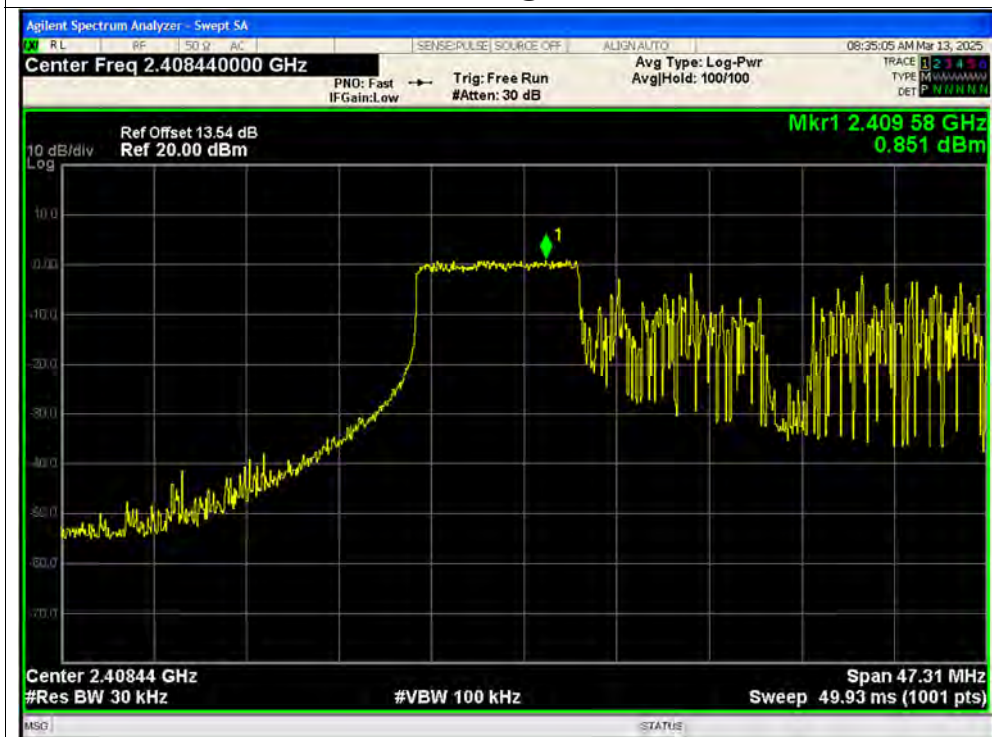


PSD NVNT ax40 106@53 2437MHz Ant2

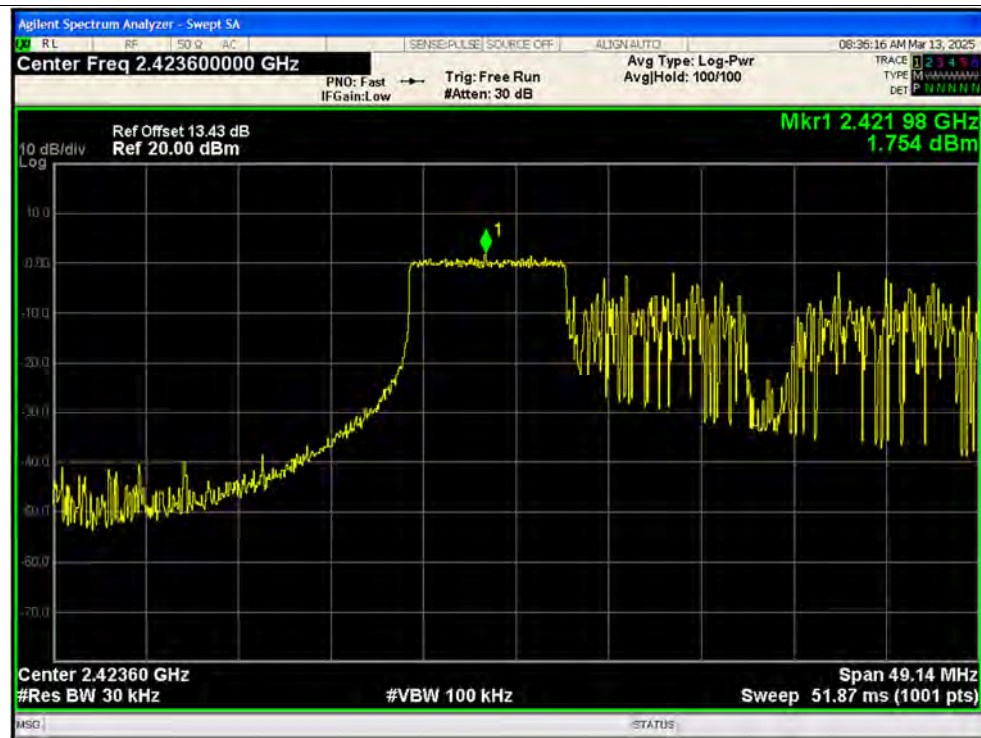


PSD NVNT ax40 106@53 2452MHz Ant2

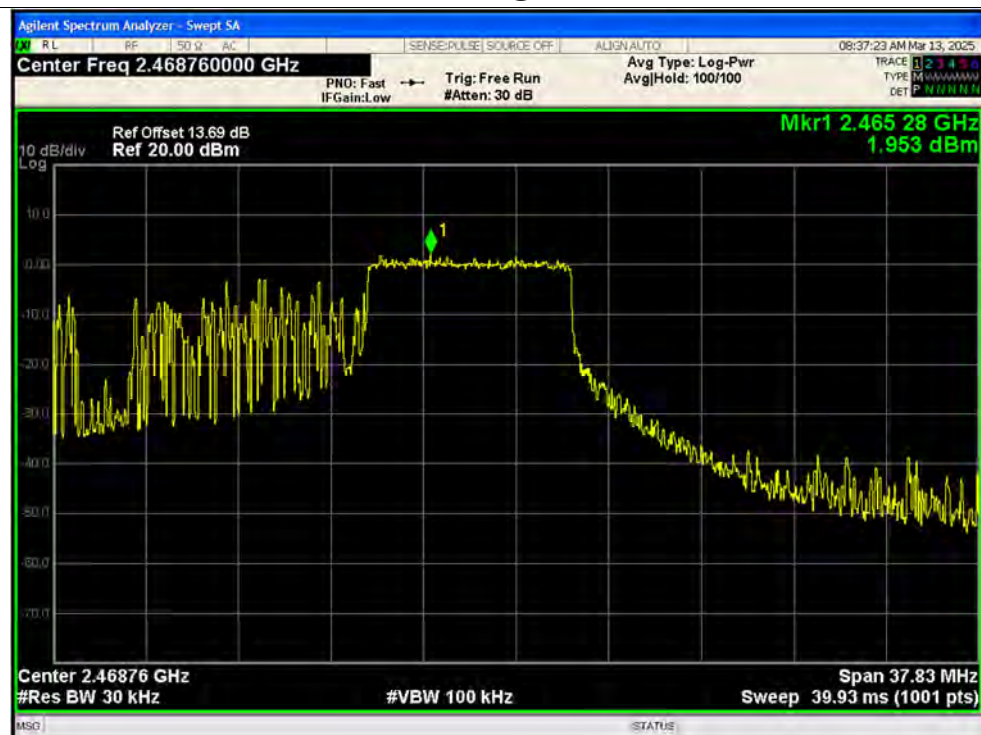


PSD NVNT ax40 106@53 2422MHz Ant1

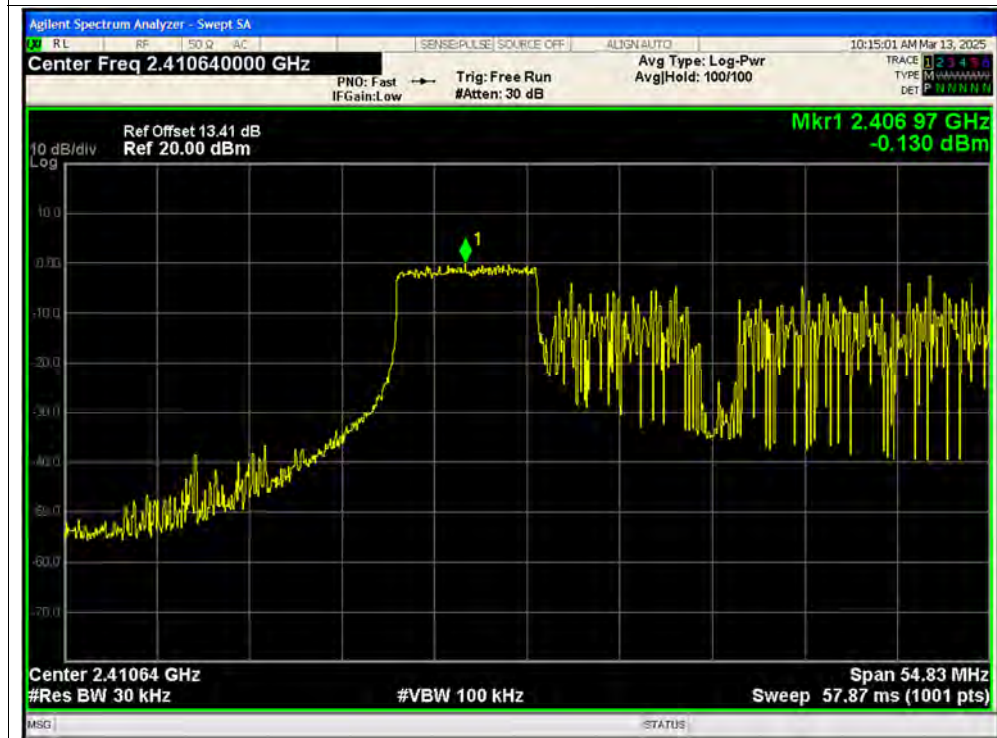


PSD NVNT ax40 106@53 2422MHz Ant2

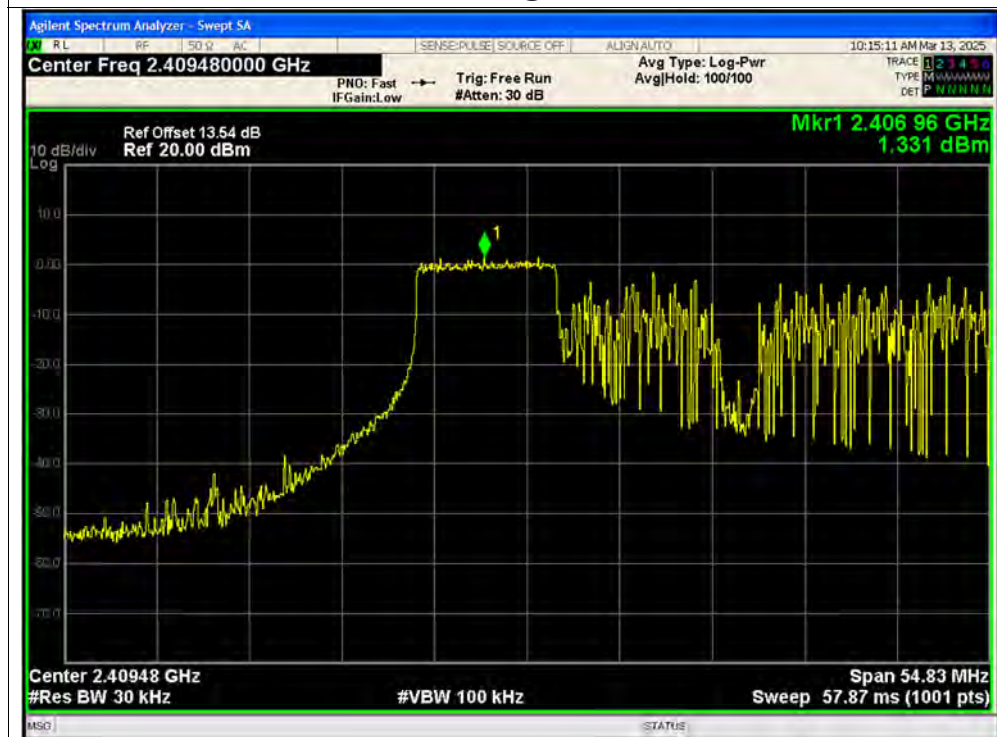

PSD NVNT ax40 106@53 2437MHz Ant1

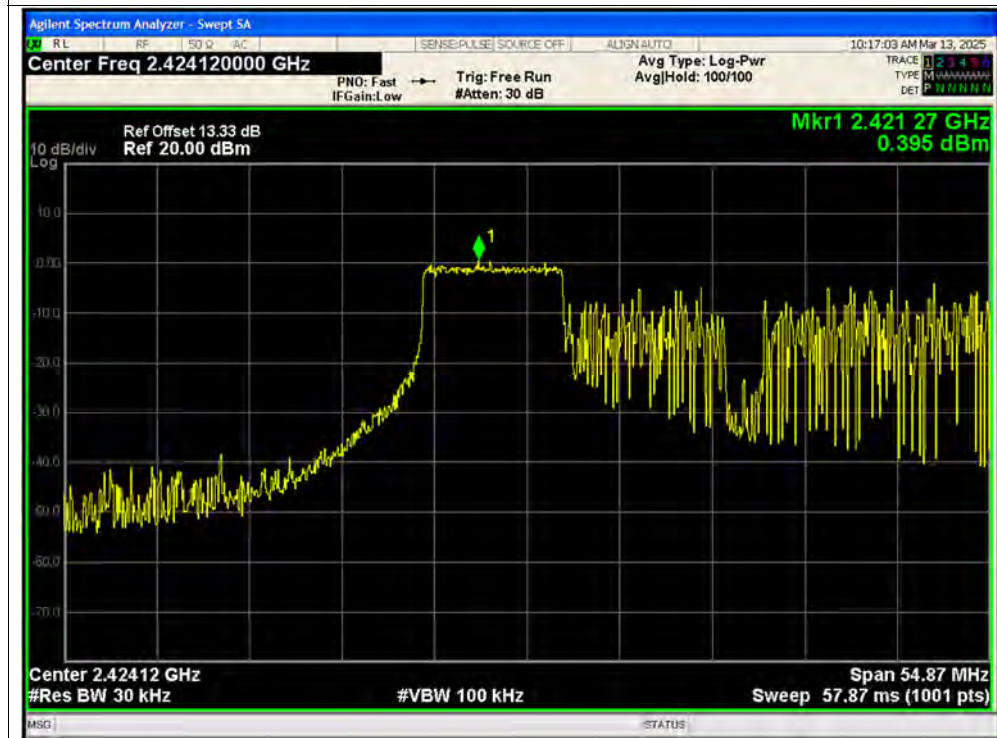


PSD NVNT ax40 106@53 2437MHz Ant2

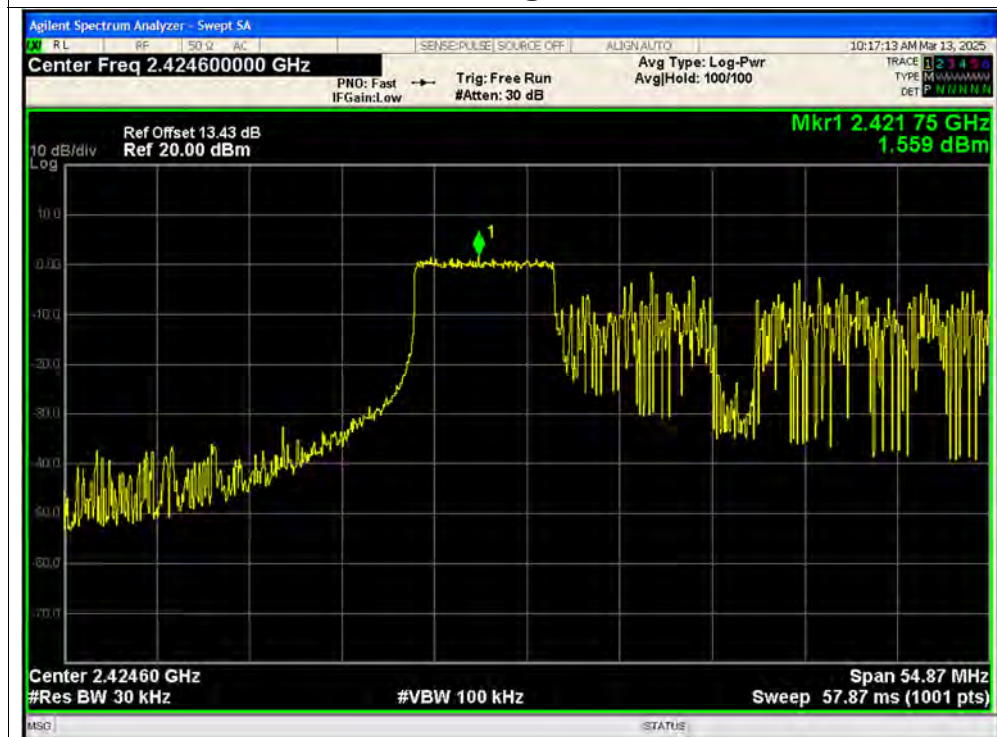


PSD NVNT ax40 106@53 2452MHz Ant1




PSD NVNT ax40 106@53 2452MHz Ant2

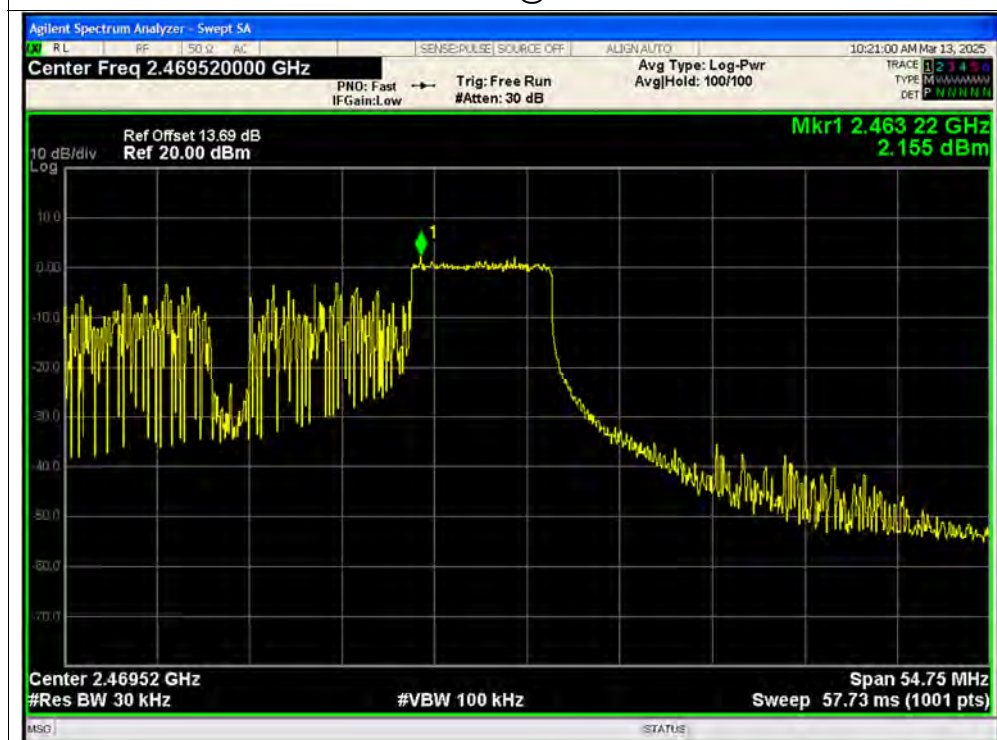

PSD NVNT ax40 242@61 2422MHz Ant1

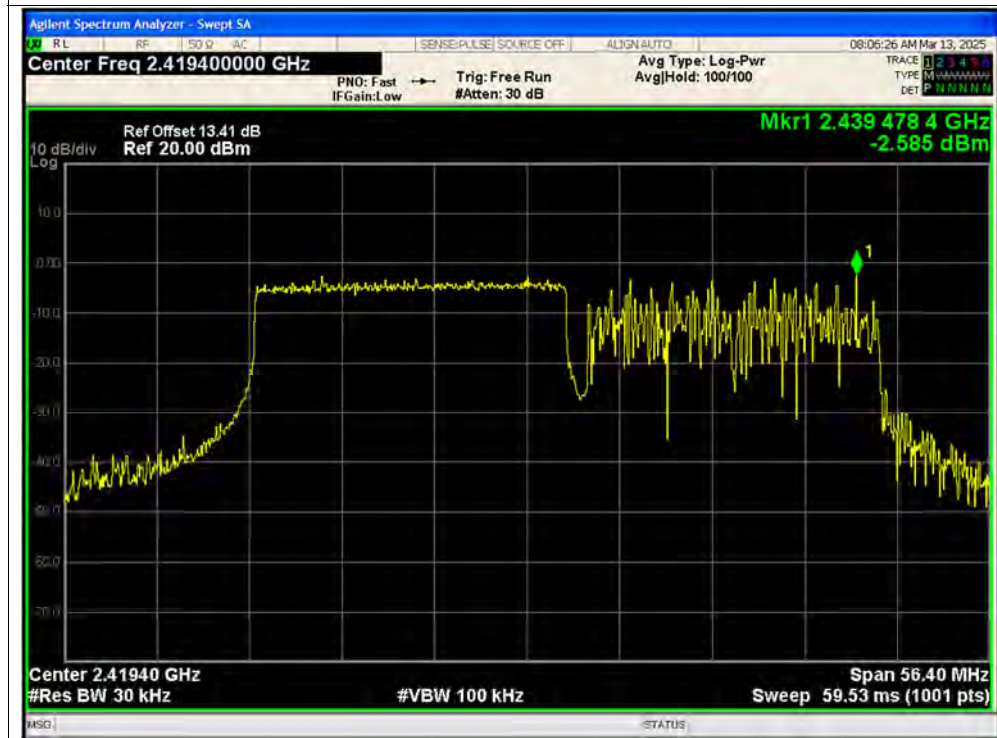


PSD NVNT ax40 242@61 2437MHz Ant1

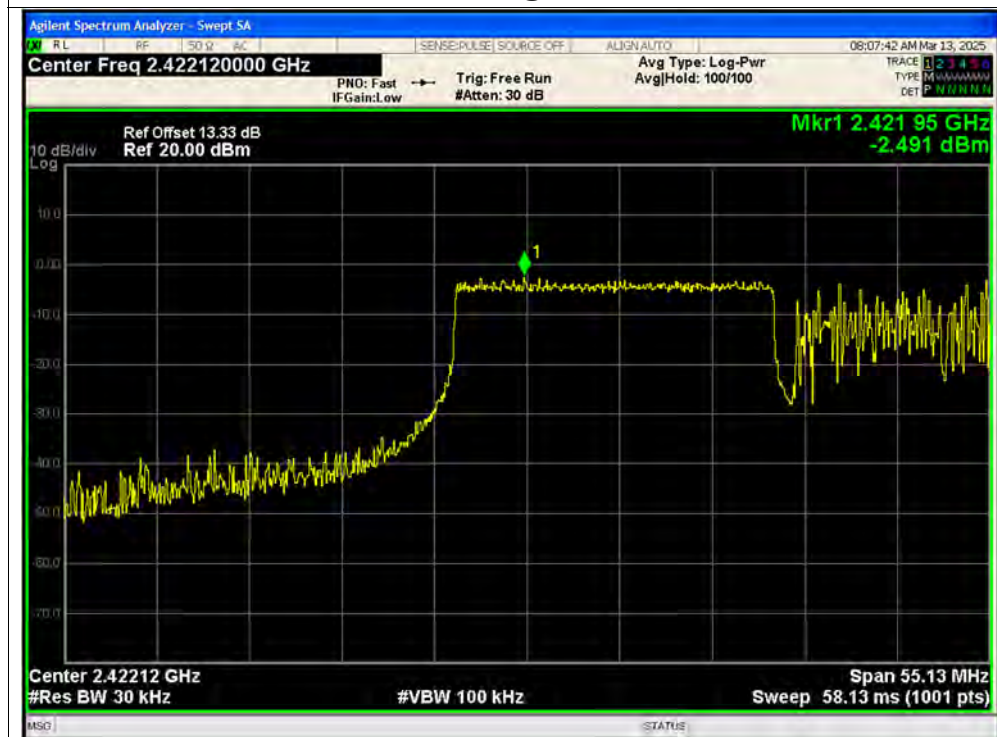


PSD NVNT ax40 242@61 2452MHz Ant1



PSD NVNT ax40 242@61 2422MHz Ant2

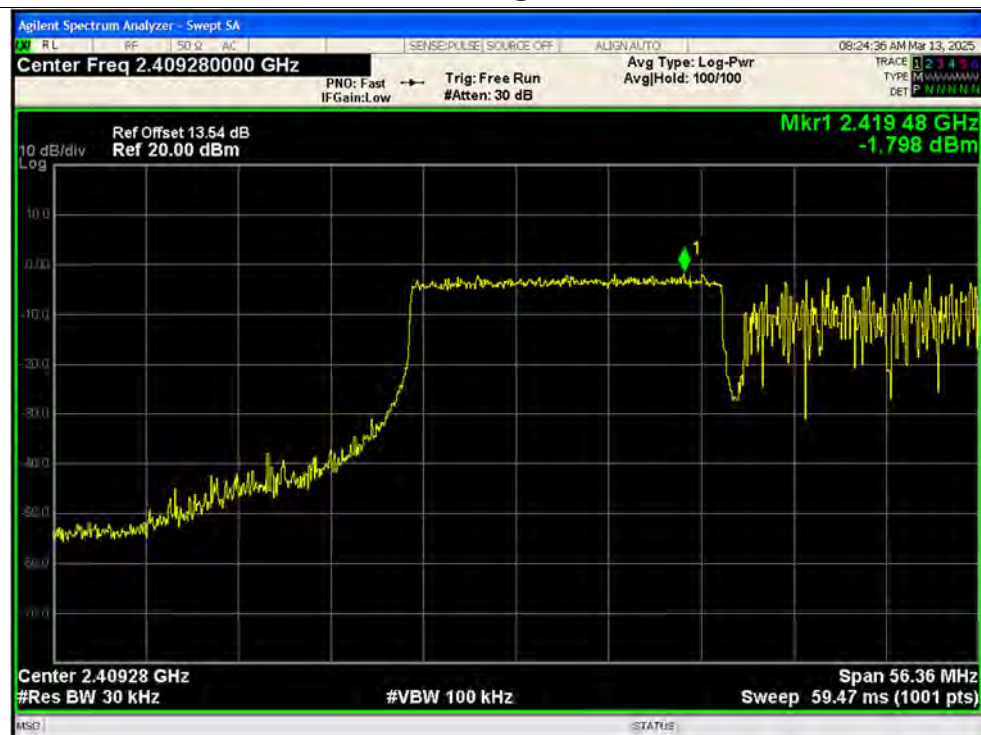

PSD NVNT ax40 242@61 2437MHz Ant2

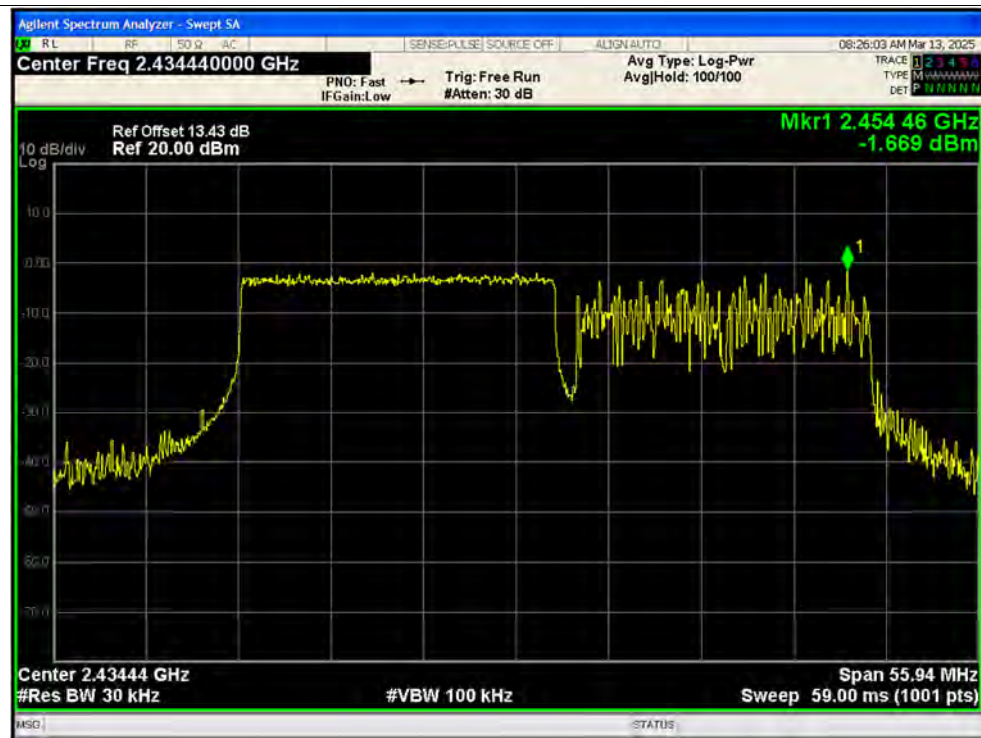


PSD NVNT ax40 242@61 2452MHz Ant2



PSD NVNT ax40 242@61 2422MHz Ant1



PSD NVNT ax40 242@61 2422MHz Ant2

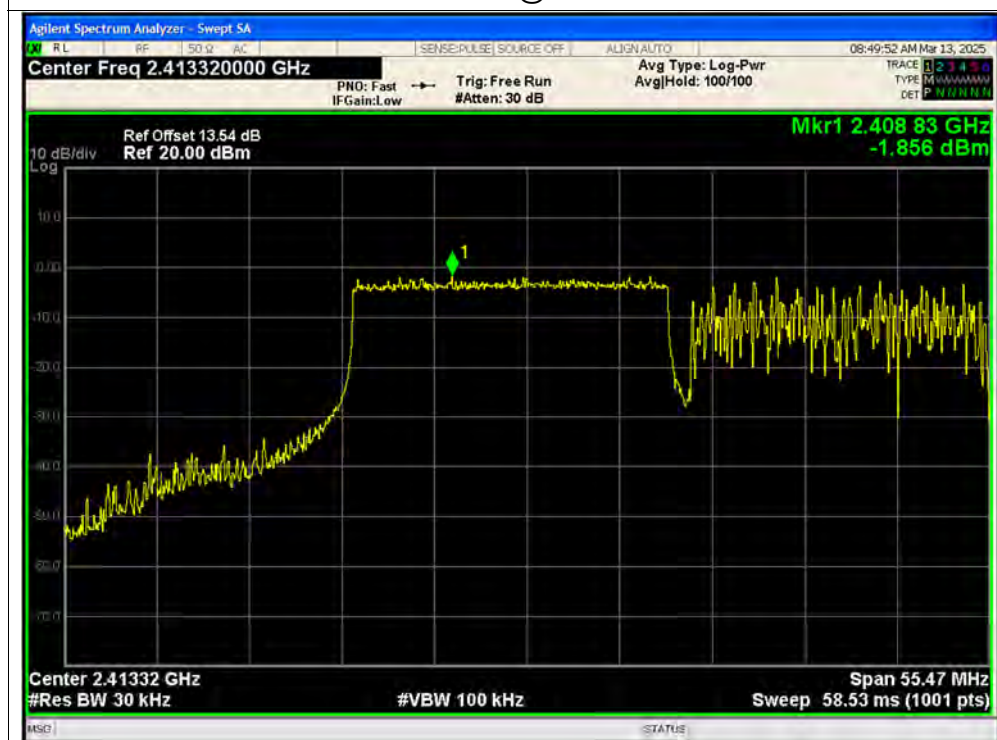




PSD NVNT ax40 242@61 2437MHz Ant1



PSD NVNT ax40 242@61 2437MHz Ant2

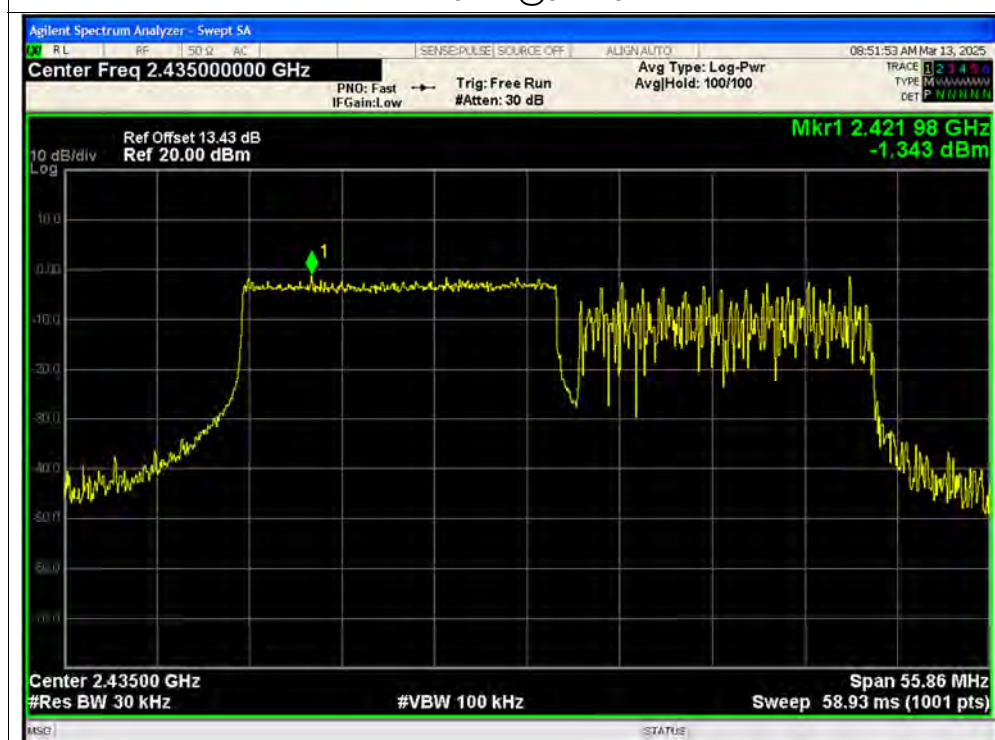

PSD NVNT ax40 242@61 2452MHz Ant1



PSD NVNT ax40 242@61 2452MHz Ant2





A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+Adapter+Data cable+WIFI TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

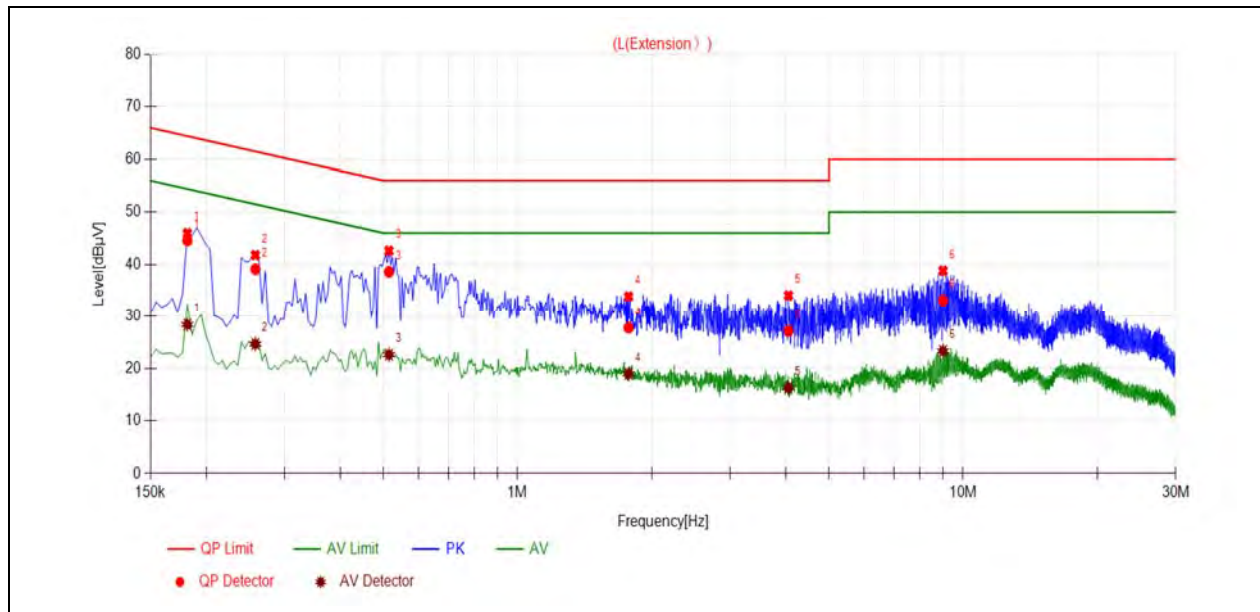

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1815	44.58	28.37	64.42	54.42	Line	PASS
2	0.2580	39.11	24.65	61.50	51.50		PASS
3	0.5145	38.61	22.60	56.00	46.00		PASS
4	1.7745	27.77	18.94	56.00	46.00		PASS
5	4.0558	27.15	16.28	56.00	46.00		PASS
6	9.0141	33.09	23.32	60.00	50.00		PASS

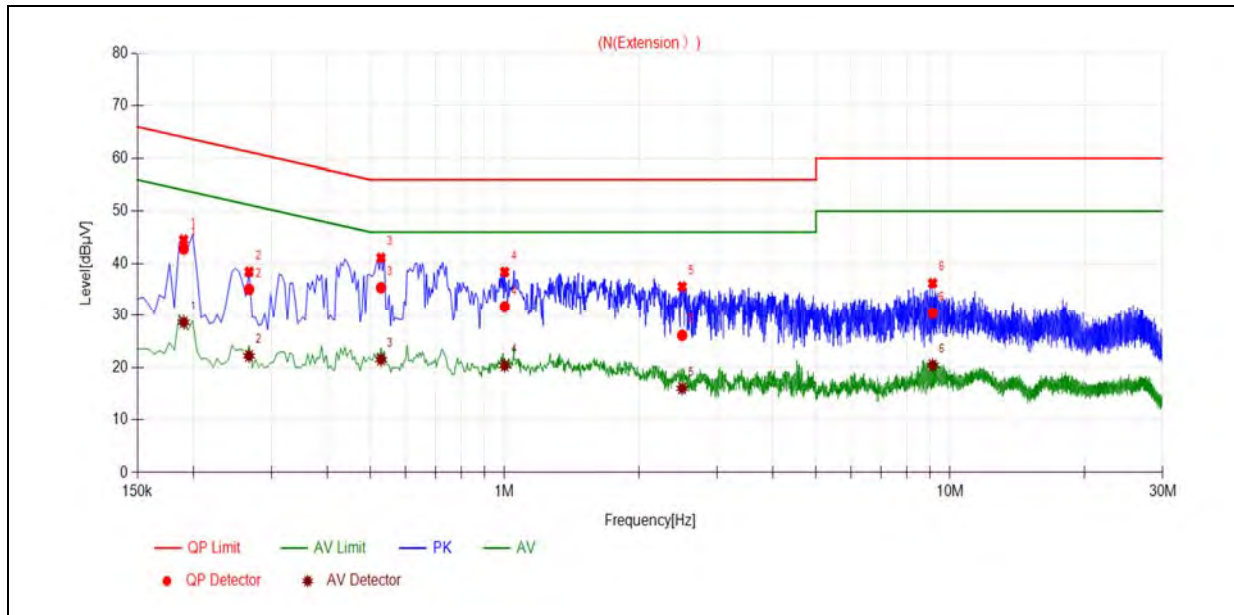

(N Phase)


No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1905	42.79	28.62	64.02	54.02	Neutral	PASS
2	0.2670	35.08	22.19	61.21	51.21		PASS
3	0.5280	35.38	21.48	56.00	46.00		PASS
4	1.0004	31.68	20.33	56.00	46.00		PASS
5	2.5034	26.12	15.98	56.00	46.00		PASS
6	9.1364	30.45	20.39	60.00	50.00		PASS

A.9. Restricted Frequency Bands

Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (horizontal) was recorded in this test report.


Note 2 All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.

802.11b Mode

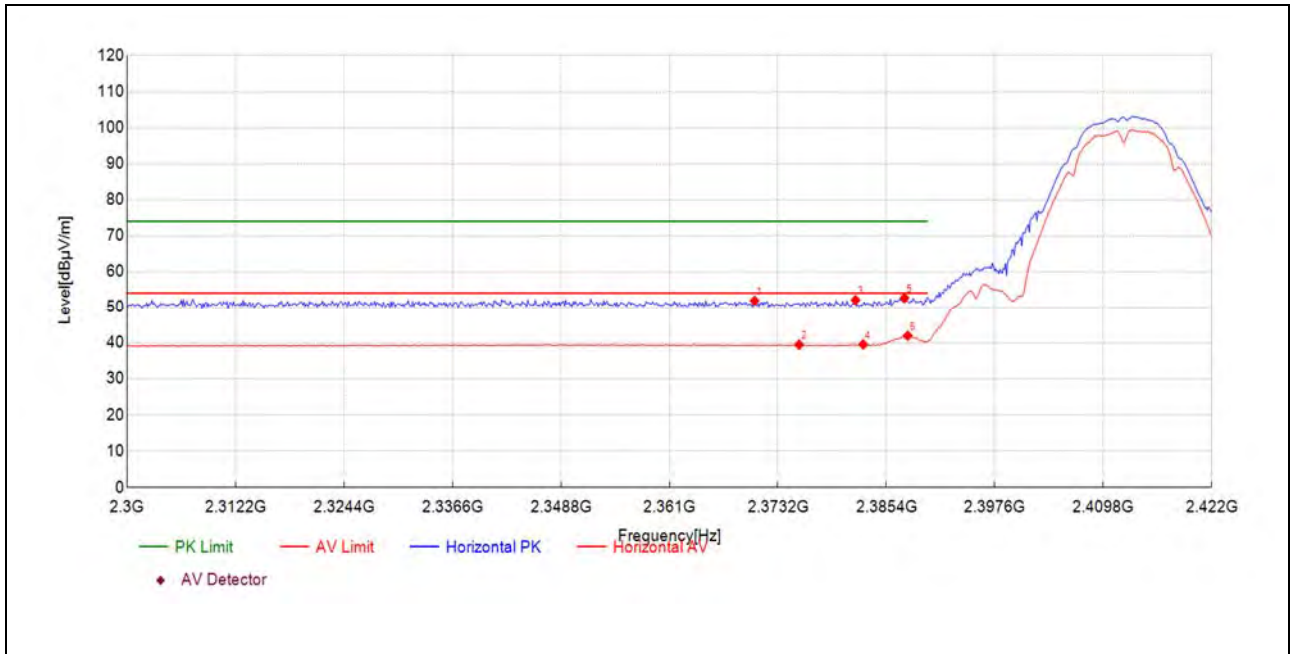

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2370.59	14.5	51.92	37.470	74.00	22.08	150	111	PK	PASS
2375.59	2.0	39.50	37.480	54.00	14.50	150	137	AV	PASS
2381.94	14.6	52.10	37.480	74.00	21.90	150	239	PK	PASS
2382.80	2.1	39.56	37.480	54.00	14.44	150	45	AV	PASS
2387.44	15.2	52.67	37.490	74.00	21.33	150	62	PK	PASS
2387.81	4.5	41.99	37.490	54.00	12.01	150	62	AV	PASS


Plot for Channel 11

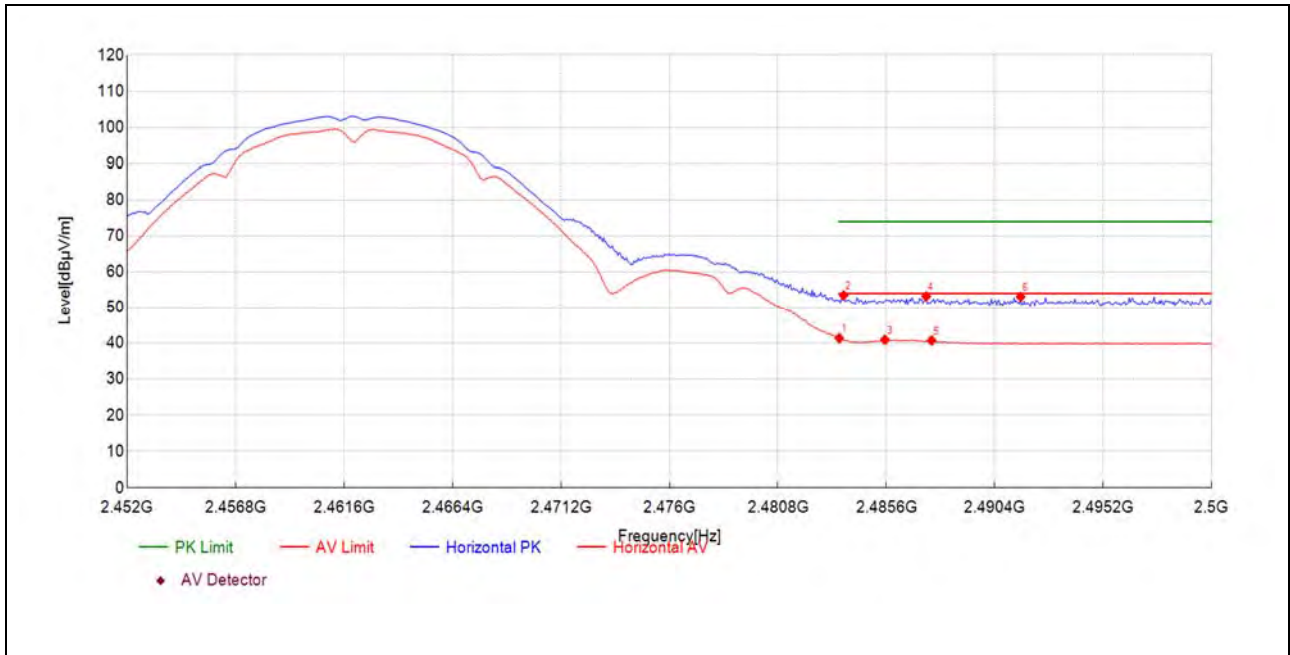

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.52	3.1	41.38	38.280	54.00	12.62	150	28	AV	PASS
2483.71	15.3	53.54	38.280	74.00	20.46	150	223	PK	PASS
2485.54	2.7	40.93	38.270	54.00	13.07	150	63	AV	PASS
2487.36	15.0	53.25	38.270	74.00	20.75	150	37	PK	PASS
2487.60	2.5	40.75	38.270	54.00	13.25	150	63	AV	PASS
2491.54	14.9	53.12	38.260	74.00	20.88	150	223	PK	PASS


**802.11ax (HEW40) Mode**

Plot for Channel 3

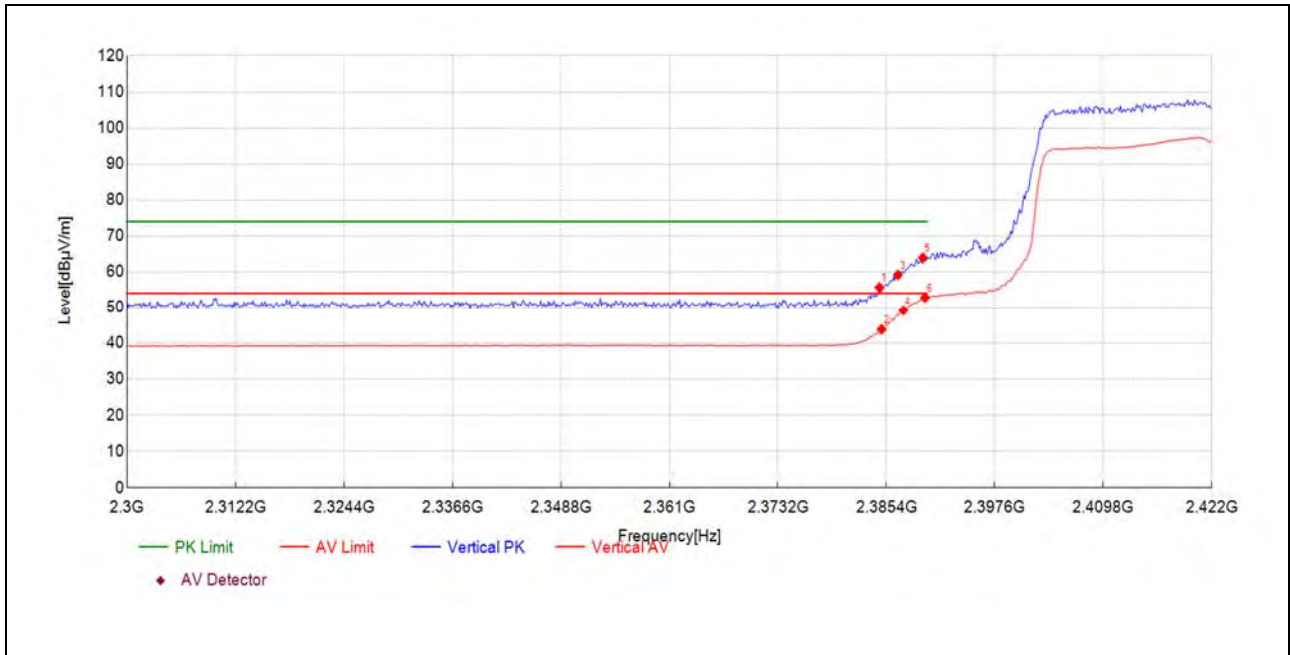

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2384.63	18.2	55.67	37.490	74.00	18.33	150	280	PK	PASS
2384.87	6.4	43.85	37.490	54.00	10.15	150	307	AV	PASS
2386.71	21.7	59.18	37.490	74.00	14.82	150	285	PK	PASS
2387.32	11.7	49.23	37.490	54.00	4.77	150	298	AV	PASS
2389.52	26.5	63.96	37.490	74.00	10.04	150	298	PK	PASS
2389.76	15.4	52.87	37.490	54.00	1.13	150	302	AV	PASS


Plot for Channel 9

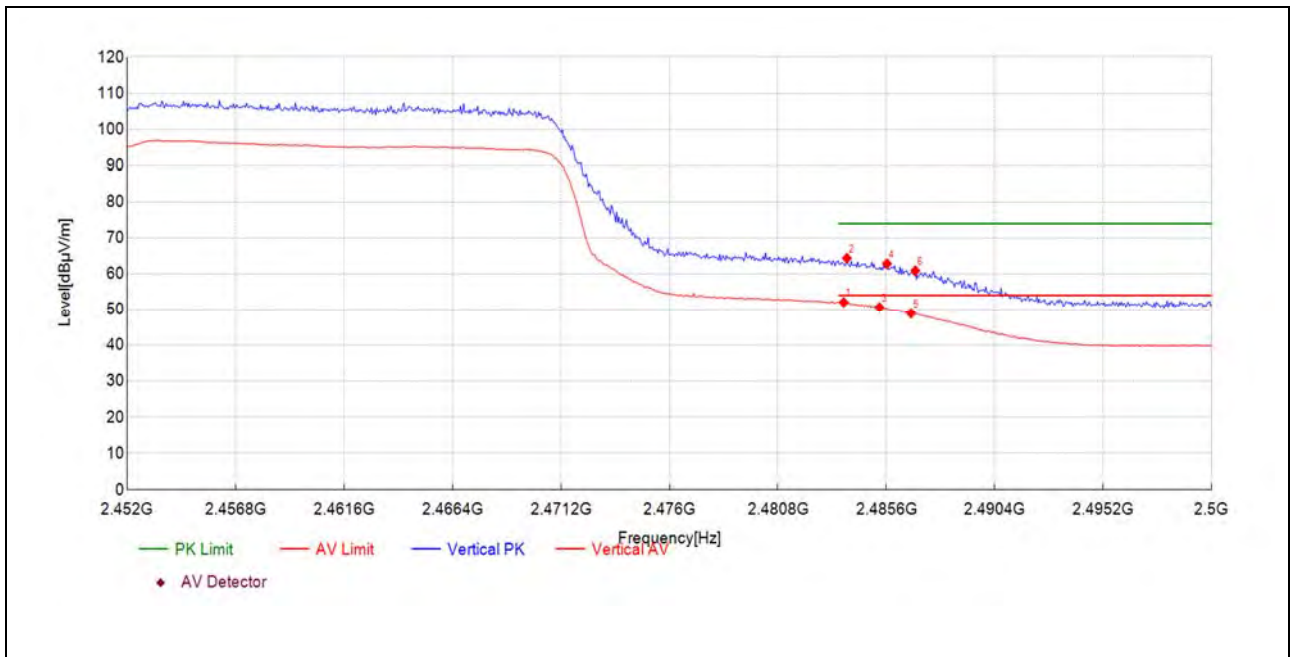

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.71	13.8	52.11	38.280	54.00	1.89	150	287	AV	PASS
2483.86	26.1	64.40	38.270	74.00	9.60	150	310	PK	PASS
2485.30	12.4	50.68	38.270	54.00	3.32	150	296	AV	PASS
2485.63	24.6	62.88	38.270	74.00	11.12	150	301	PK	PASS
2486.69	10.7	48.98	38.270	54.00	5.02	150	301	AV	PASS
2486.88	22.7	60.93	38.270	74.00	13.07	150	305	PK	PASS




802.11ax (HEW20)_RU26 Mode

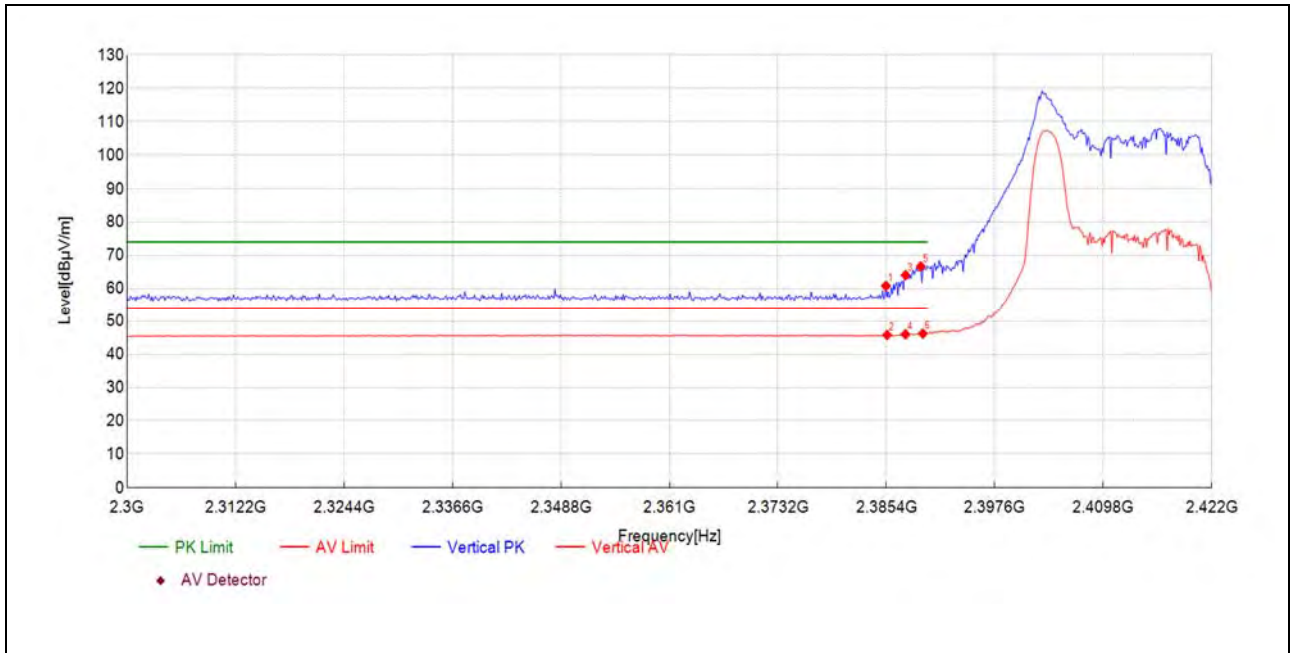

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2385.36	23.4	60.85	37.490	74.00	13.15	150	311	PK	PASS
2385.49	8.3	45.77	37.490	54.00	8.23	150	5	AV	PASS
2387.56	26.6	64.08	37.490	74.00	9.92	150	306	PK	PASS
2387.56	8.5	45.99	37.490	54.00	8.01	150	328	AV	PASS
2389.27	29.2	66.68	37.490	74.00	7.32	150	315	PK	PASS
2389.52	8.7	46.21	37.490	54.00	7.79	150	289	AV	PASS


Plot for Channel 11

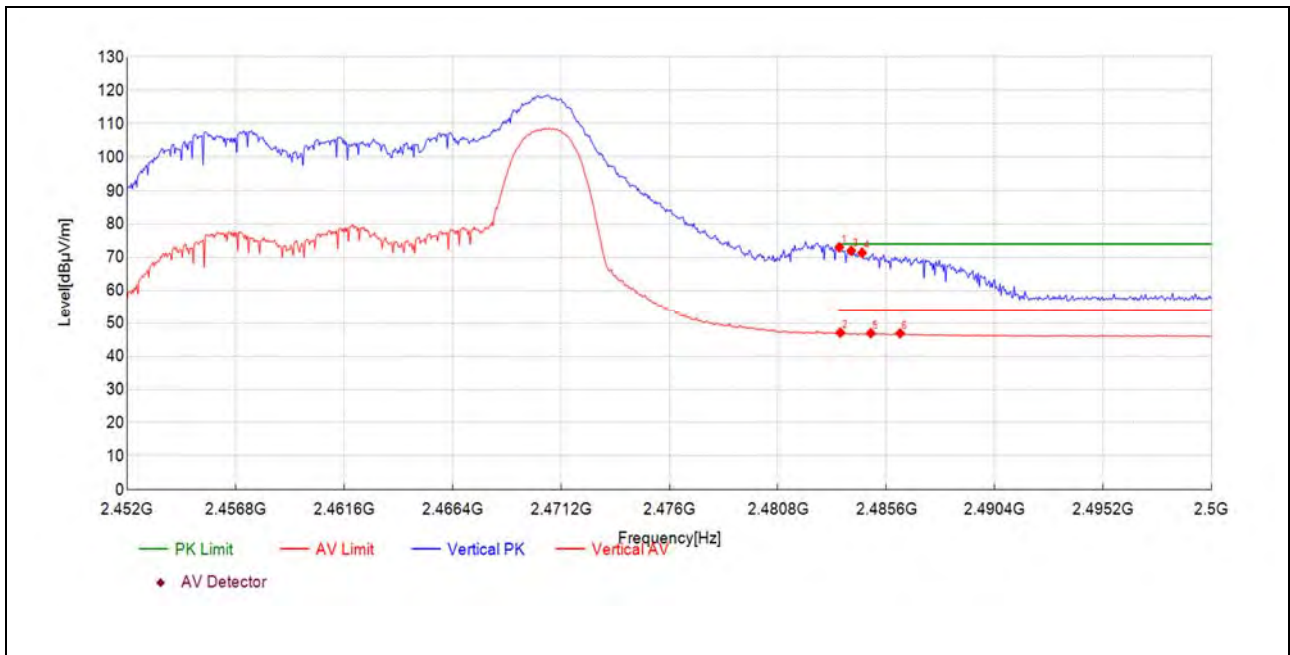

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.52	34.8	73.05	38.280	74.00	0.95	150	320	PK	PASS
2483.57	8.8	47.09	38.280	54.00	6.91	150	320	AV	PASS
2484.05	33.8	72.03	38.270	74.00	1.97	150	324	PK	PASS
2484.53	33.1	71.40	38.270	74.00	2.60	150	324	PK	PASS
2484.91	8.7	46.94	38.270	54.00	7.06	150	294	AV	PASS
2486.21	8.6	46.89	38.280	54.00	7.11	150	285	AV	PASS




802.11ax (HEW20)_RU52 Mode

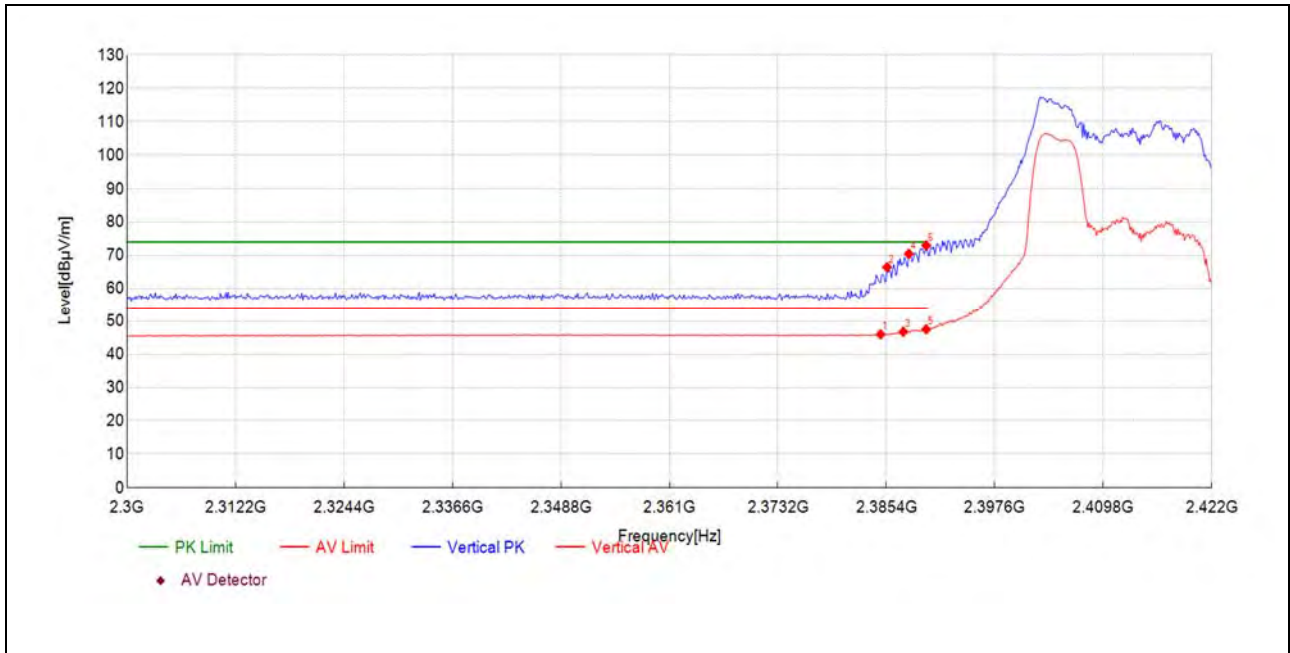

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2384.75	8.5	46.00	37.490	54.00	8.00	150	284	AV	PASS
2385.49	29.0	66.45	37.490	74.00	7.55	150	109	PK	PASS
2387.32	9.3	46.77	37.490	54.00	7.23	150	295	AV	PASS
2387.93	33.0	70.49	37.490	74.00	3.51	150	115	PK	PASS
2389.88	10.0	47.50	37.490	54.00	6.50	150	316	AV	PASS
2389.88	35.5	73.01	37.490	74.00	0.99	150	106	PK	PASS


Plot for Channel 11

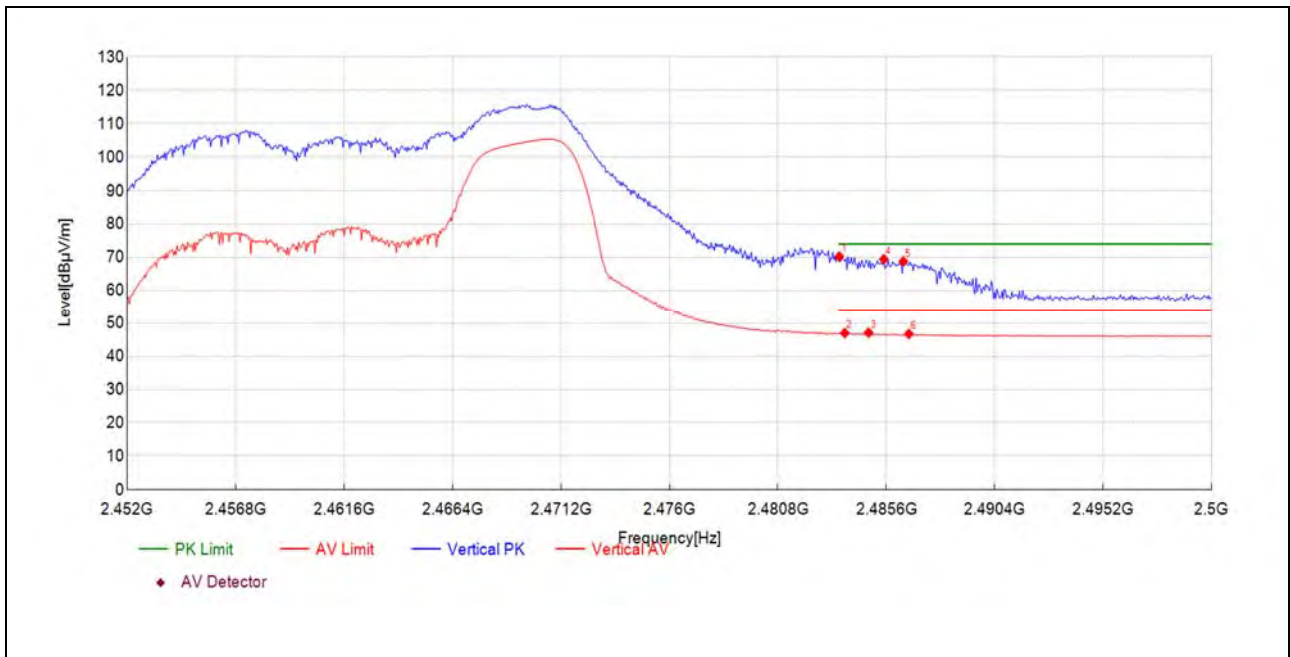

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.52	32.0	70.24	38.280	74.00	3.76	150	327	PK	PASS
2483.76	8.7	46.99	38.270	54.00	7.01	150	322	AV	PASS
2484.82	8.8	47.08	38.270	54.00	6.92	150	270	AV	PASS
2485.49	31.2	69.47	38.270	74.00	4.53	150	327	PK	PASS
2486.35	30.5	68.80	38.270	74.00	5.20	150	318	PK	PASS
2486.59	8.4	46.71	38.270	54.00	7.29	150	336	AV	PASS




802.11ax (HEW20)_RU106 Mode

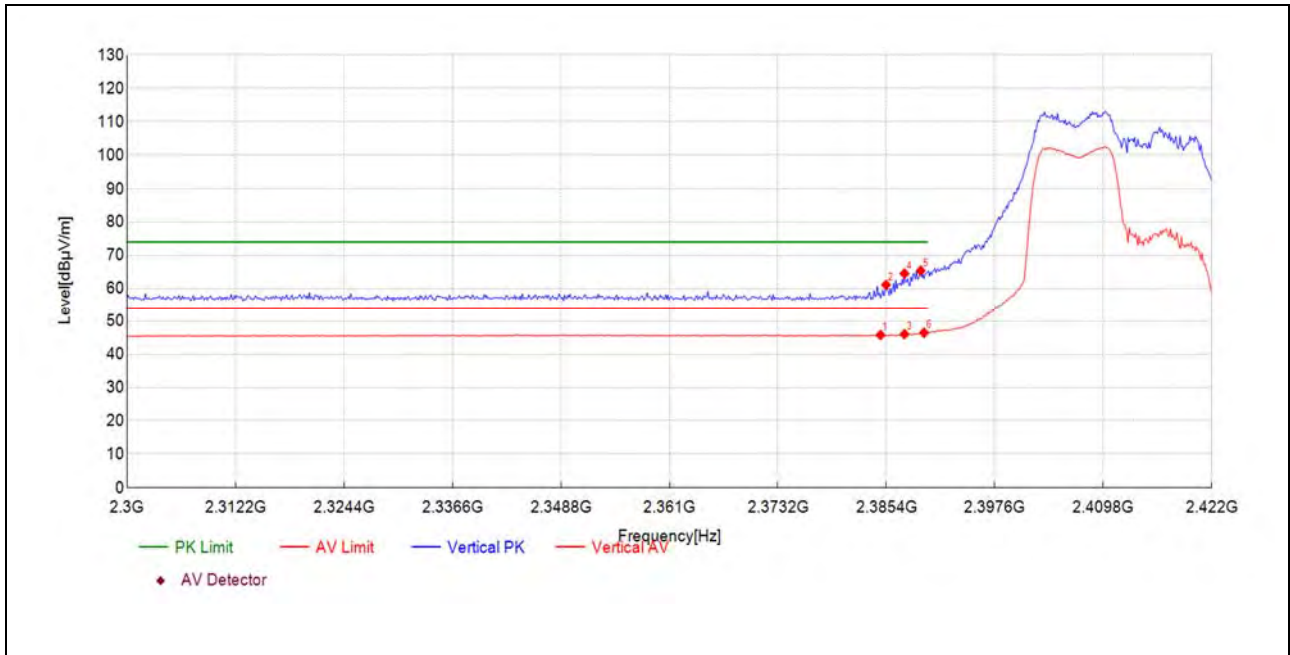

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2384.75	8.3	45.77	37.490	54.00	8.23	150	118	AV	PASS
2385.36	23.7	61.15	37.490	74.00	12.85	150	96	PK	PASS
2387.44	8.5	46.03	37.490	54.00	7.97	150	280	AV	PASS
2387.44	27.1	64.56	37.490	74.00	9.44	150	100	PK	PASS
2389.27	27.9	65.43	37.490	74.00	8.57	150	109	PK	PASS
2389.64	9.0	46.45	37.490	54.00	7.55	150	311	AV	PASS

Plot for Channel 11

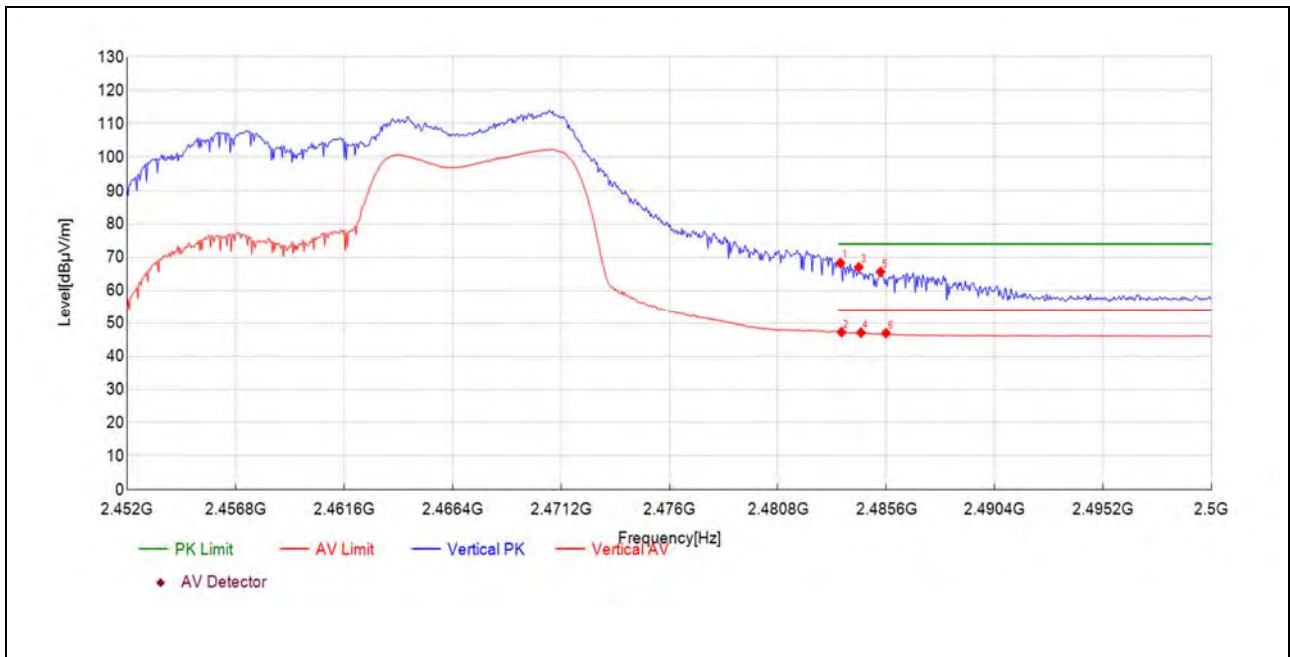

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.57	30.1	68.34	38.280	74.00	5.66	150	301	PK	PASS
2483.62	9.0	47.23	38.280	54.00	6.77	150	288	AV	PASS
2484.38	28.8	67.06	38.270	74.00	6.94	150	324	PK	PASS
2484.48	8.8	47.07	38.270	54.00	6.93	150	297	AV	PASS
2485.35	27.4	65.65	38.270	74.00	8.35	150	328	PK	PASS
2485.59	8.7	46.92	38.270	54.00	7.08	150	324	AV	PASS



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Field strength of fundamental:

Frequency [MHz]	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Detector	Antenna Polarity
2414.67	66.9	104.66	37.750	PK	Horizontal


The field strength (the lowest) of fundamanta is more than 20dB higher than the unwanted emissions, in accordance with FCC part 15.215(b).

Plot for Channel 1

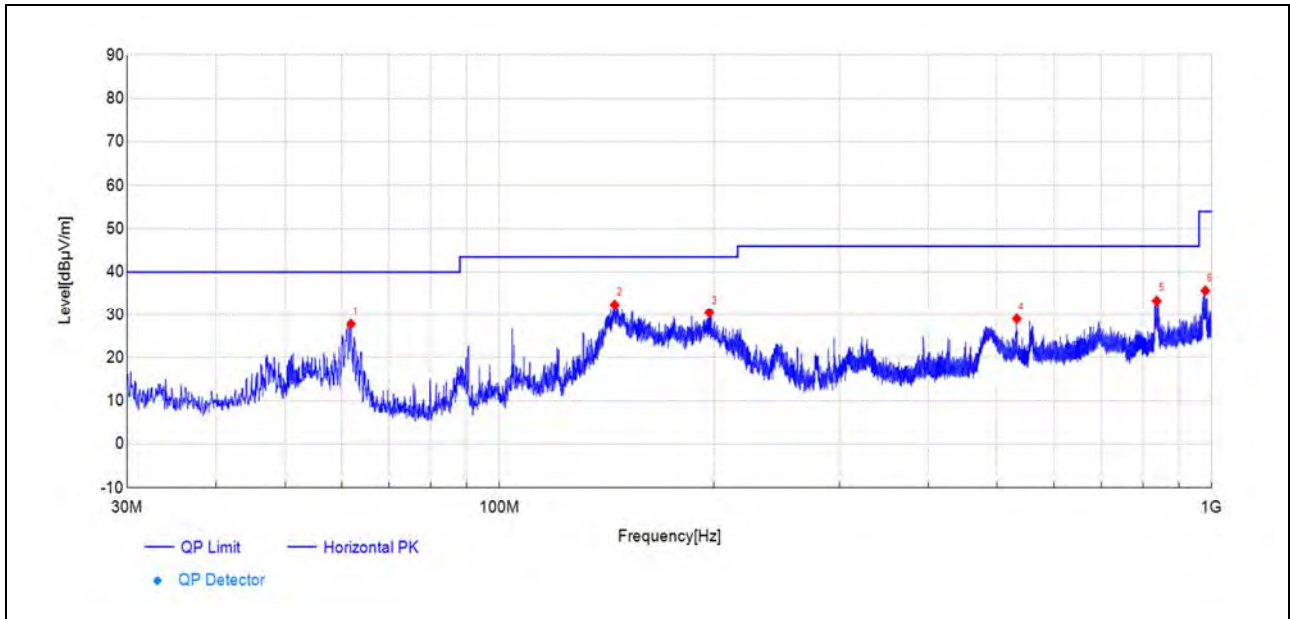


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
61.87	56.3	27.77	-28.570	40.00	12.23	150	345	PK	PASS
145.14	63.9	32.37	-31.500	43.50	11.13	150	219	PK	PASS
197.09	59.5	30.43	-29.040	43.50	13.07	150	290	PK	PASS
532.49	48.0	29.00	-18.990	46.00	17.00	150	111	PK	PASS
836.93	47.2	33.31	-13.870	46.00	12.69	150	107	PK	PASS
979.63	47.0	35.71	-11.300	54.00	18.29	150	24	PK	PASS

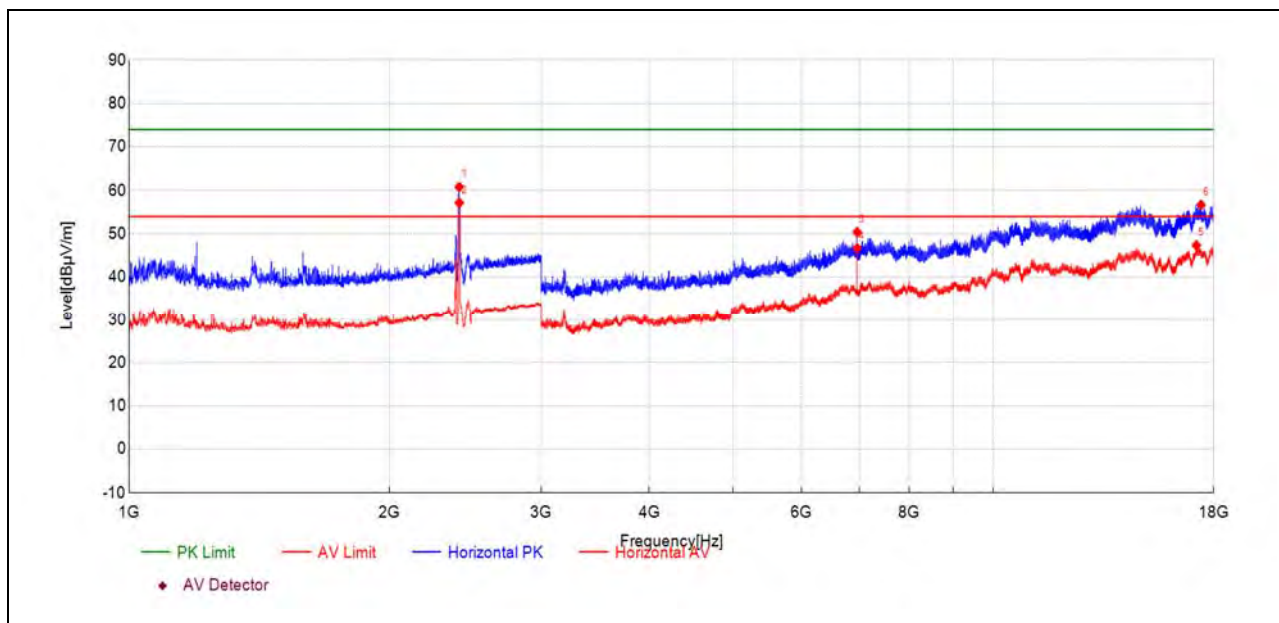


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2410.54	55.5	60.87	5.380	-	-	150	62	PK	NA
2411.42	51.8	57.19	5.390	-	-	150	62	AV	NA
6960.16	47.3	50.42	3.130	74.00	23.58	150	201	PK	PASS
6960.76	43.6	46.69	3.120	54.00	7.31	150	201	AV	PASS
17187.57	27.5	47.37	19.840	54.00	6.63	150	159	AV	PASS
17405.98	36.5	56.72	20.200	74.00	17.28	150	201	PK	PASS

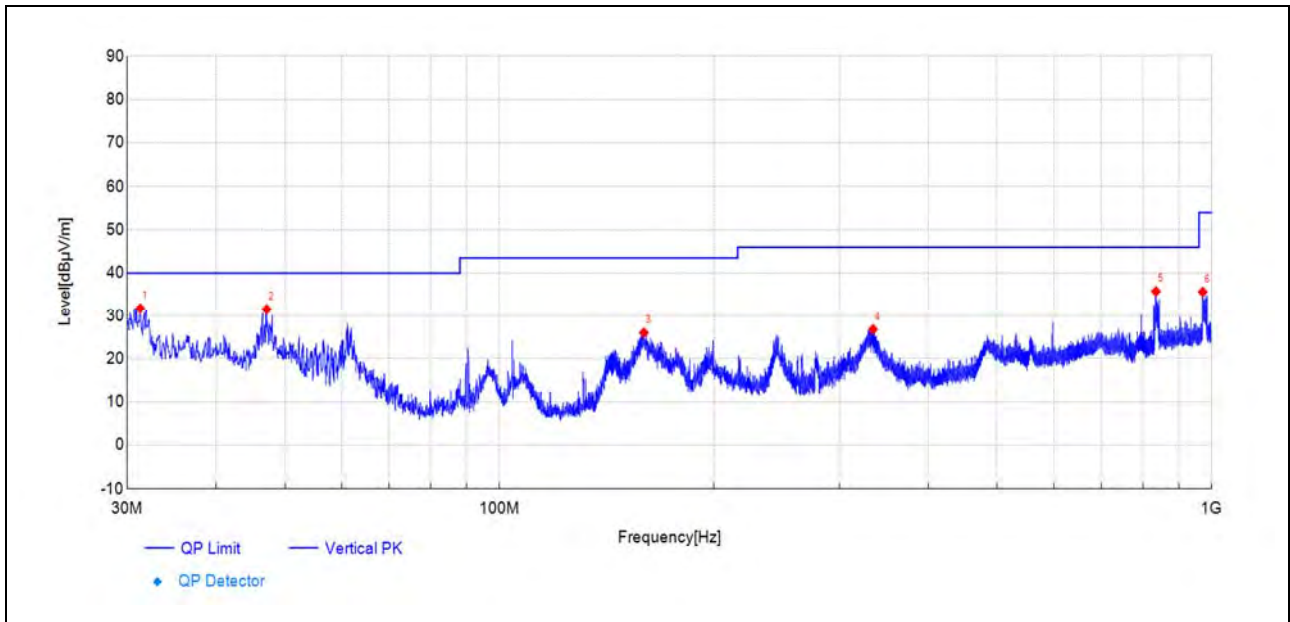

(Antenna Vertical, 30MHz to 1GHz)


Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
31.31	62.4	31.73	-30.640	40.00	8.27	150	314	PK	PASS
47.12	59.9	31.52	-28.360	40.00	8.48	150	346	PK	PASS
159.50	57.1	26.00	-31.120	43.50	17.50	150	238	PK	PASS
334.55	51.4	26.79	-24.640	46.00	19.21	150	253	PK	PASS
834.95	49.5	35.75	-13.740	46.00	10.25	150	100	PK	PASS
971.24	47.1	35.62	-11.430	54.00	18.38	150	130	PK	PASS

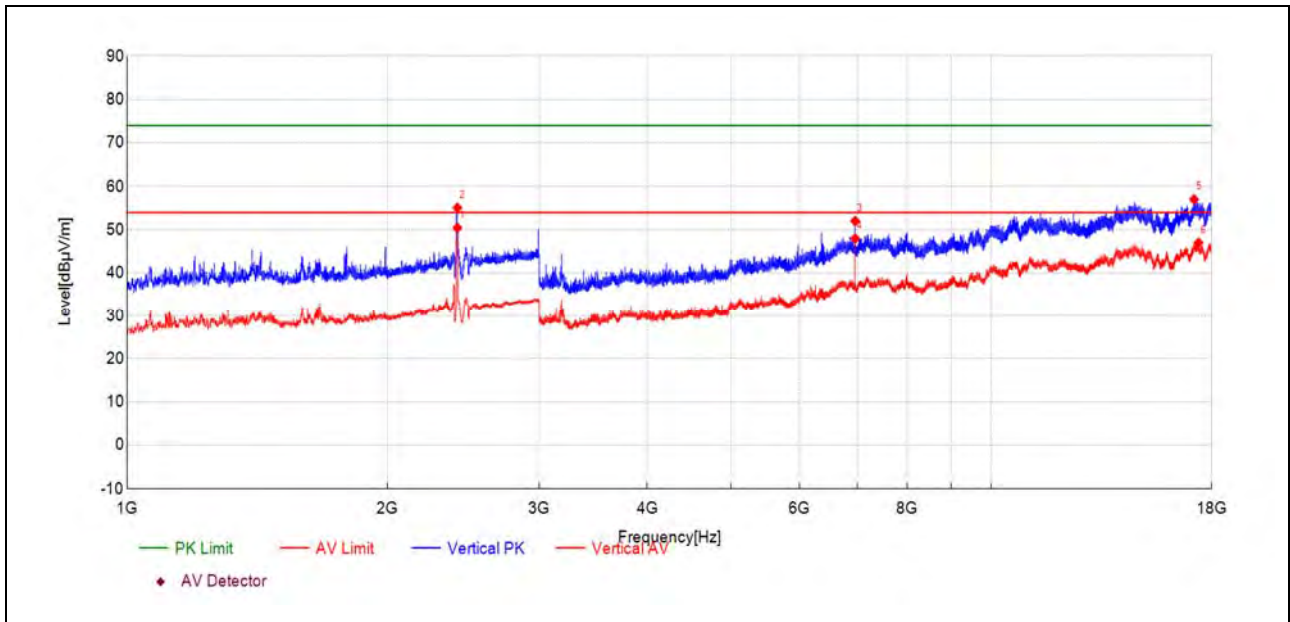

(Antenna Vertical, 1GHz to 18GHz)


Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2411.42	45.1	50.47	5.390	-	-	150	42	AV	NA
2411.87	49.7	55.10	5.400	-	-	150	42	PK	NA
6960.16	48.9	52.06	3.130	74.00	21.94	150	20	PK	PASS
6960.76	44.9	48.00	3.120	54.00	6.00	150	137	AV	PASS
17174.37	37.3	57.05	19.760	74.00	16.95	150	191	PK	PASS
17380.78	27.1	47.00	19.920	54.00	7.00	150	137	AV	PASS

Plot for Channel 6

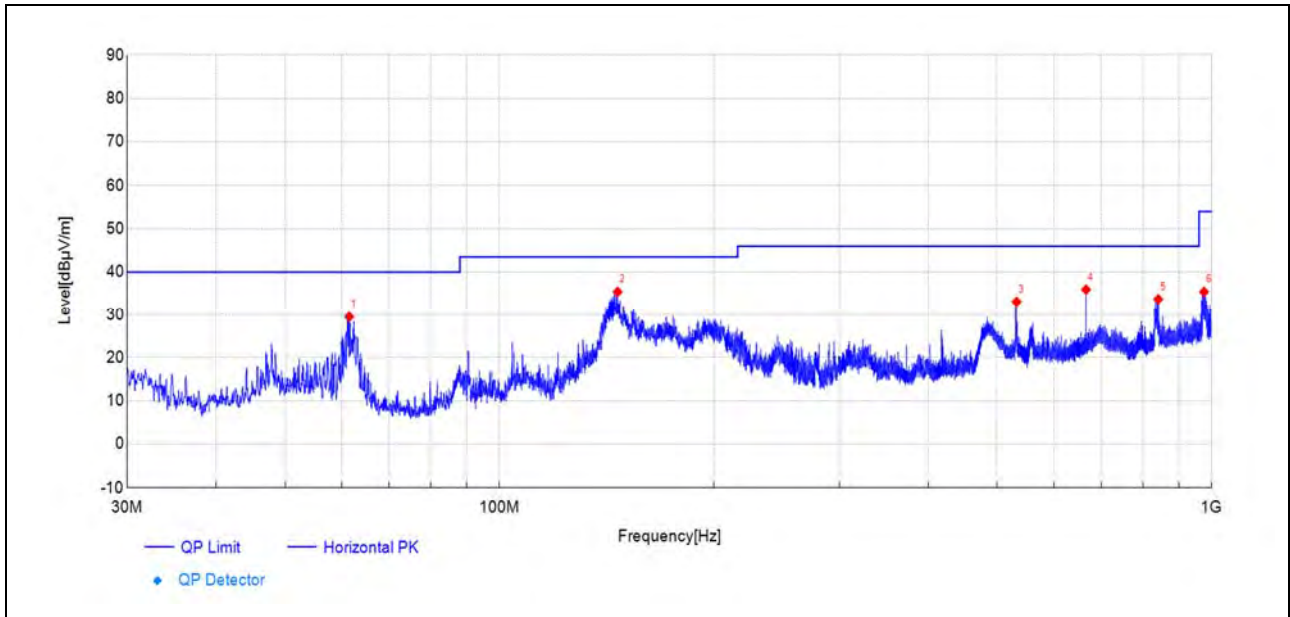


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
61.53	58.1	29.46	-28.670	40.00	10.54	150	178	PK	PASS
146.50	67.2	35.42	-31.770	43.50	8.08	150	69	PK	PASS
532.19	52.1	33.09	-18.980	46.00	12.91	150	151	PK	PASS
666.06	52.1	35.93	-16.160	46.00	10.07	150	14	PK	PASS
841.15	47.6	33.70	-13.930	46.00	12.30	150	54	PK	PASS
975.51	46.3	35.43	-10.850	54.00	18.57	150	244	PK	PASS

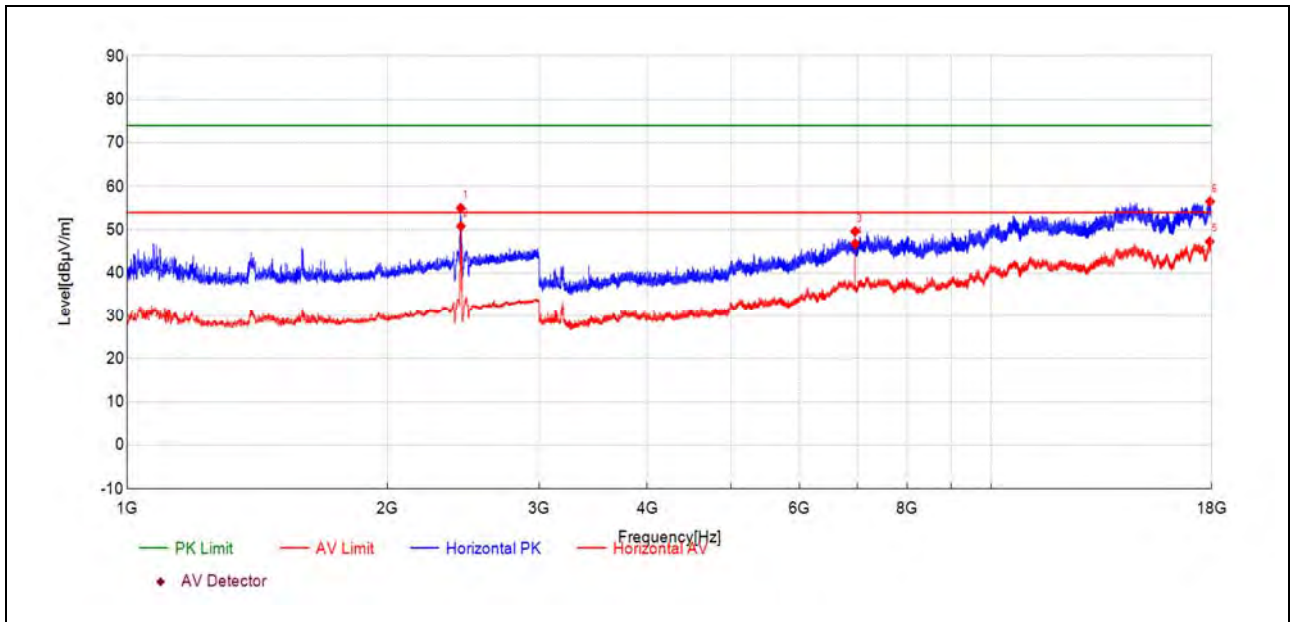


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2433.21	49.3	55.05	5.710	-	-	150	64	PK	NA
2434.10	45.1	50.87	5.730	-	-	150	59	AV	NA
6959.56	46.5	49.66	3.130	74.00	24.34	150	211	PK	PASS
6960.76	43.7	46.82	3.120	54.00	7.18	150	200	AV	PASS
17904.60	27.8	47.30	19.470	54.00	6.70	150	253	AV	PASS
17920.80	37.4	56.56	19.200	74.00	17.44	150	179	PK	PASS

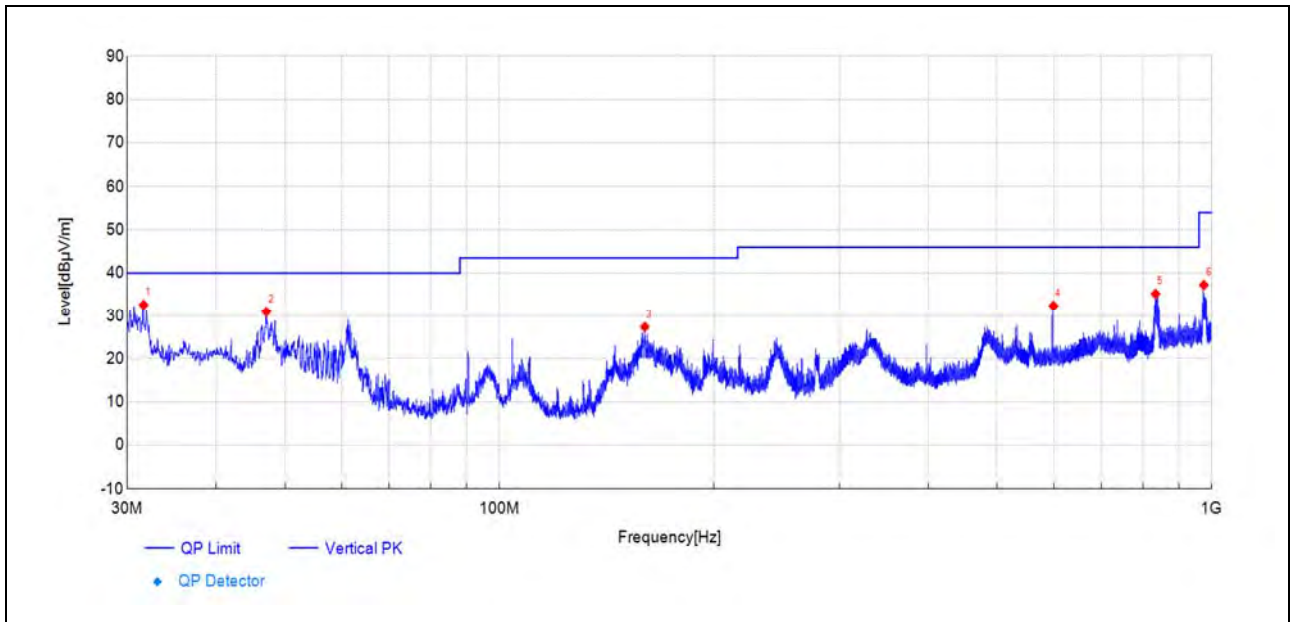

(Antenna Vertical, 30MHz to 1GHz)


Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
31.65	63.2	32.59	-30.560	40.00	7.41	150	333	PK	PASS
47.07	59.3	30.94	-28.360	40.00	9.06	150	29	PK	PASS
159.99	58.5	27.35	-31.160	43.50	16.15	150	224	PK	PASS
599.56	49.3	32.35	-16.920	46.00	13.65	150	101	PK	PASS
834.02	49.1	35.15	-13.900	46.00	10.85	150	132	PK	PASS
974.92	48.0	37.22	-10.810	54.00	16.78	150	78	PK	PASS

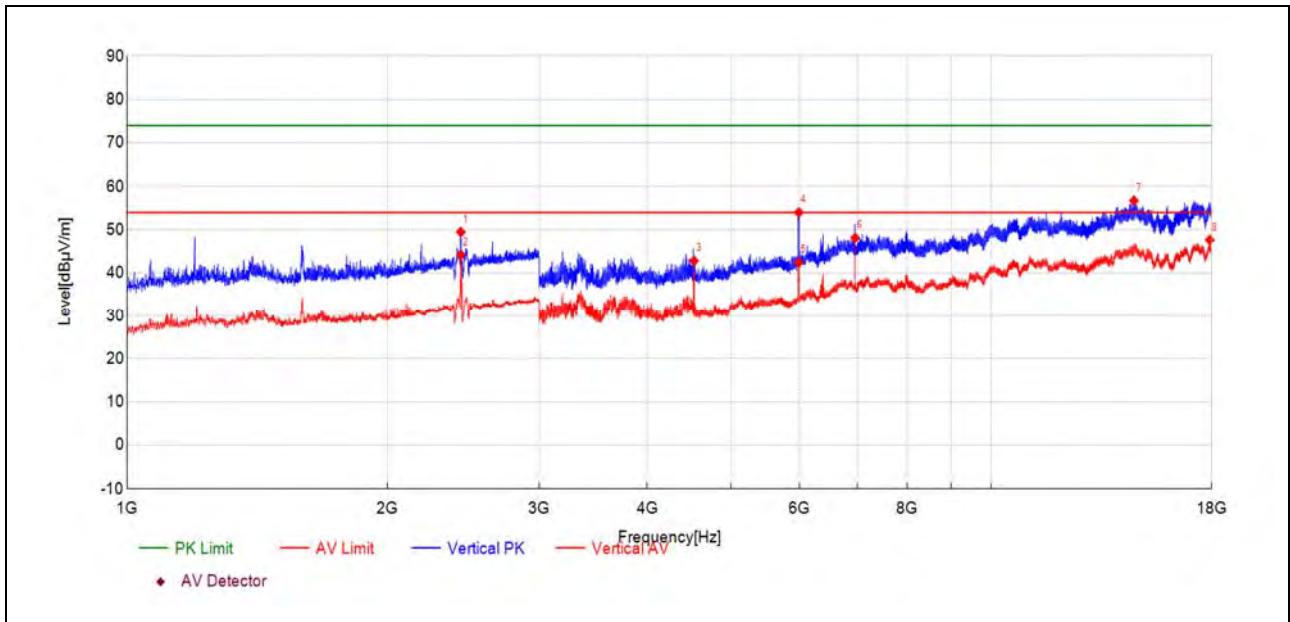

(Antenna Vertical, 1GHz to 18GHz)


Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2433.65	43.8	49.51	5.720	-	-	150	49	PK	NA
2434.54	38.5	44.23	5.740	-	-	150	44	AV	NA
4530.06	49.2	42.84	-6.400	54.00	11.16	150	148	AV	PASS
5989.92	54.3	54.05	-0.260	74.00	19.95	150	116	PK	PASS
5990.52	42.7	42.45	-0.250	54.00	11.55	150	116	AV	PASS
6960.76	45.0	48.16	3.120	54.00	5.84	150	127	AV	PASS
14632.07	36.3	56.76	20.420	74.00	17.24	150	137	PK	PASS
17909.40	28.3	47.67	19.380	54.00	6.33	150	340	AV	PASS

Plot for Channel 11

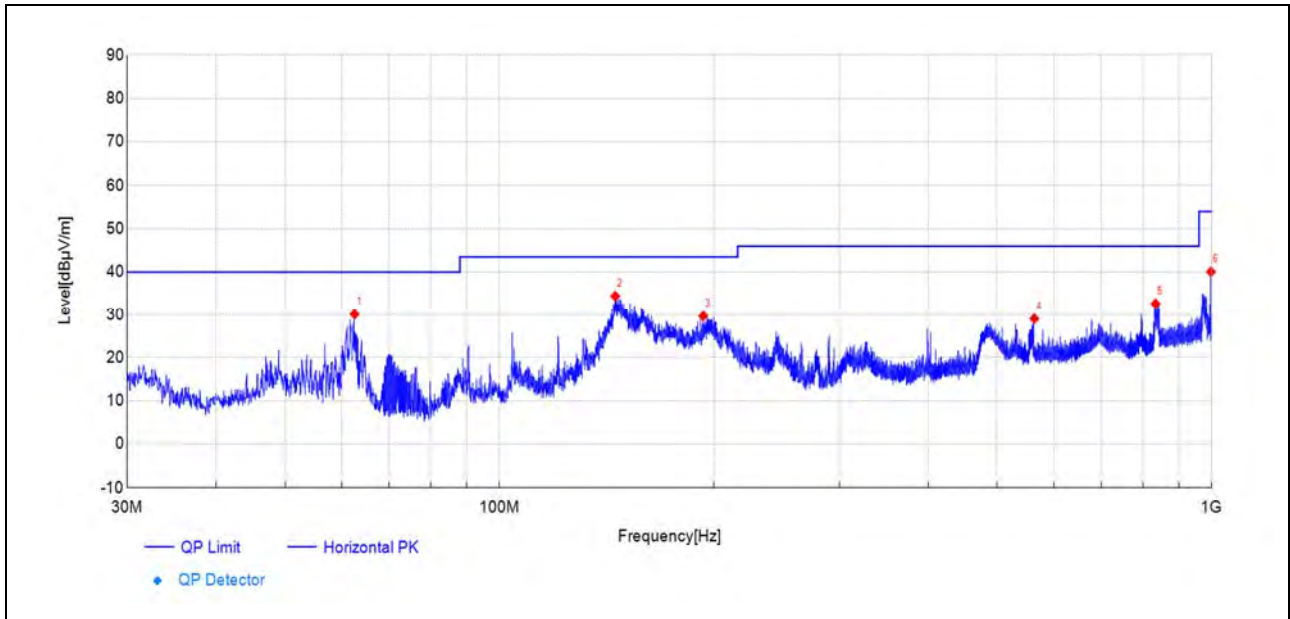


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
62.59	58.9	30.09	-28.820	40.00	9.91	150	113	PK	PASS
145.39	66.0	34.41	-31.590	43.50	9.09	150	124	PK	PASS
193.31	59.8	29.65	-30.140	43.50	13.85	150	205	PK	PASS
563.58	47.5	29.04	-18.460	46.00	16.96	150	154	PK	PASS
834.02	46.5	32.64	-13.900	46.00	13.36	150	108	PK	PASS
997.57	50.7	40.05	-10.630	54.00	13.95	150	29	PK	PASS

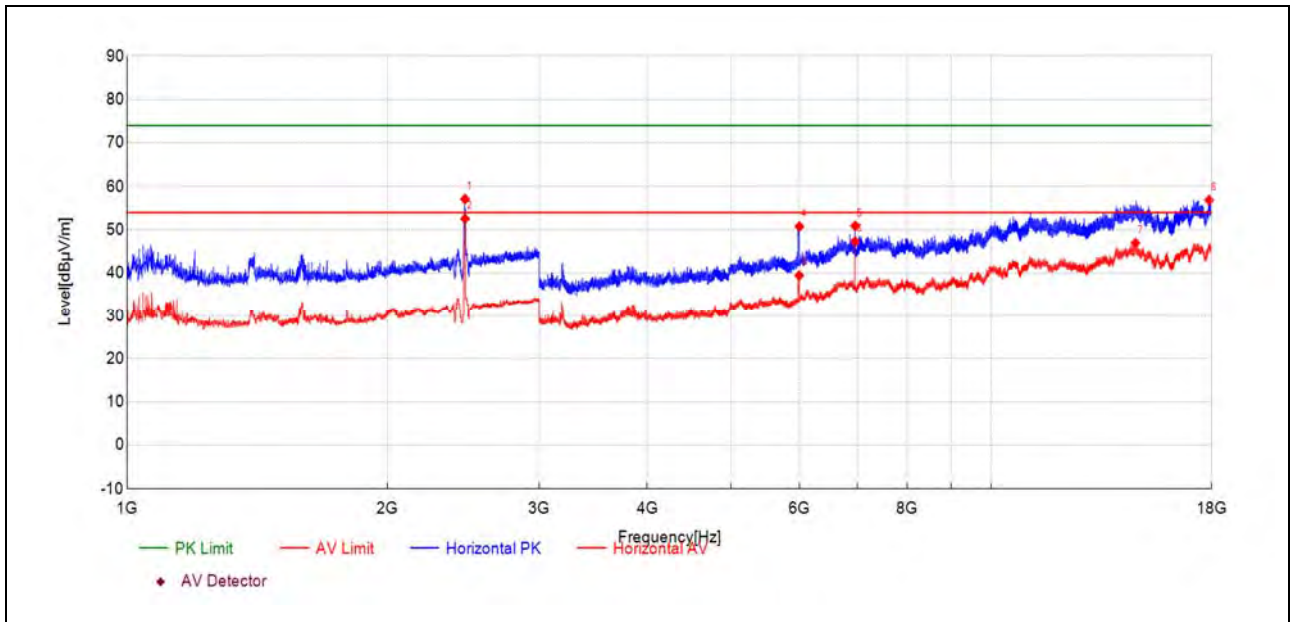


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2461.21	51.2	57.14	5.950	-	-	150	58	PK	NA
2461.66	46.7	52.59	5.940	-	-	150	64	AV	NA
5996.52	39.6	39.44	-0.190	54.00	14.56	150	85	AV	PASS
5999.52	51.0	50.79	-0.160	74.00	23.21	150	85	PK	PASS
6960.16	47.8	50.93	3.130	74.00	23.07	150	203	PK	PASS
6960.76	44.2	47.32	3.120	54.00	6.68	150	192	AV	PASS
14689.67	26.4	46.97	20.570	54.00	7.03	150	257	AV	PASS
17879.40	37.5	56.90	19.420	74.00	17.10	150	171	PK	PASS

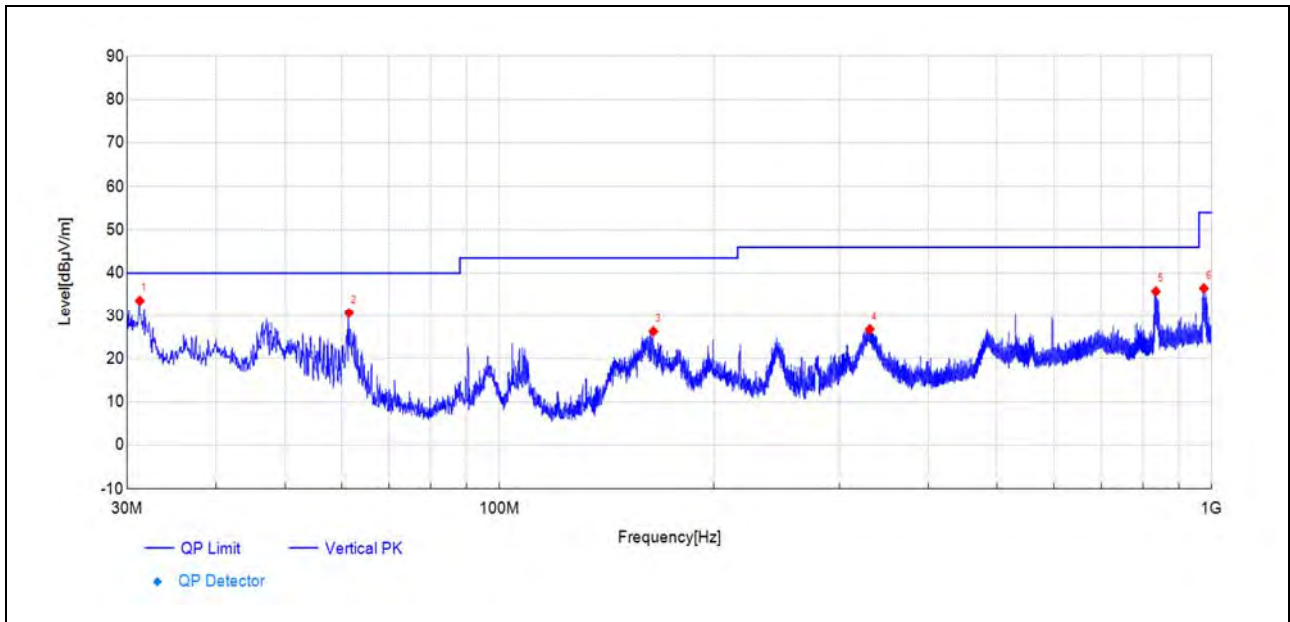

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
31.26	64.2	33.57	-30.650	40.00	6.43	150	83	PK	PASS
61.48	59.4	30.66	-28.690	40.00	9.34	150	330	PK	PASS
164.50	57.5	26.31	-31.220	43.50	17.19	150	186	PK	PASS
331.10	51.1	26.77	-24.320	46.00	19.23	150	259	PK	PASS
834.80	49.5	35.76	-13.760	46.00	10.24	150	120	PK	PASS
975.17	47.3	36.47	-10.820	54.00	17.53	150	130	PK	PASS

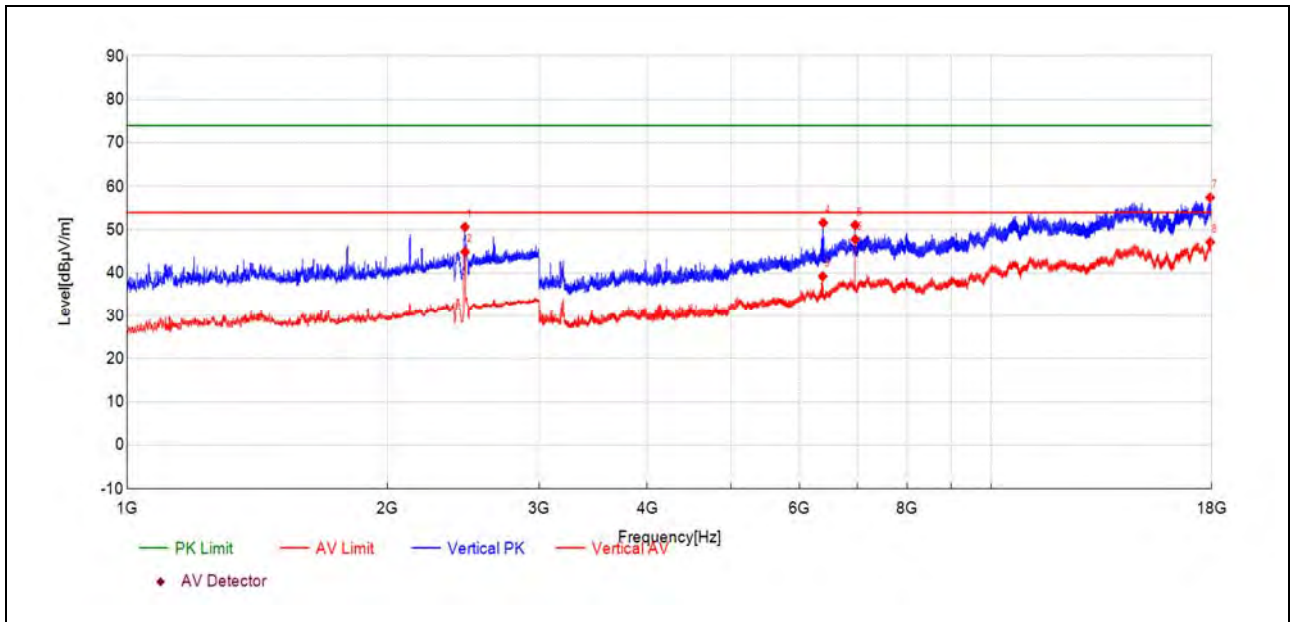

(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2460.32	44.7	50.66	5.950	-	-	150	282	PK	NA
2461.66	39.0	44.93	5.940	-	-	150	45	AV	NA
6384.14	38.2	39.25	1.070	54.00	14.75	150	63	AV	PASS
6391.34	50.6	51.66	1.030	74.00	22.34	150	63	PK	PASS
6959.56	48.0	51.12	3.130	74.00	22.88	150	9	PK	PASS
6960.76	44.7	47.81	3.120	54.00	6.19	150	20	AV	PASS
17925.60	38.4	57.48	19.120	74.00	16.52	150	245	PK	PASS
17927.40	28.1	47.17	19.100	54.00	6.83	150	9	AV	PASS

END OF REPORT