

Huizhou Qitai Electronic Technology Co., LTD



SPECIFICATIONS SHEET

CUSTOMER :

金致卓

DESCRIPTION :

TX线圈

CUSTOMER P/N :

PART NUMBER :


DATE OF APPLICATION :

2024-8-1

CLASSIFICATION OF SPEC. PRESENTATION. (Tick the relevant box "√")

- New application
- New part is added to accepted specification
- Revision of accepted specification

ACCEPTANCE STAMP



APPROVAL BY

CHECK BY

PREPARE BY

陈璐

ADDRESS : 3rd Floor, No. 101, Mingyue 2nd Road, Shiwan Town, Boluo County, Huizhou city

TELPHONE : 0752-6668681

E-MAIL : 839689578@qq.com

Huizhou Qitai Electronic Technology Co., LTD				
History For Revised Specification		CUSTOMER P/N : PART NUMBER :	金致卓	
Item	DESCRIPTION (Content Or Reason For Changed)	Rev.	Cust Rev.	Date
1	Initial Release	A0		2024-8-1
APPROVED BY	CHECKED BY	PREPARED BY	DATE	PAGE
晁子奇		陈璇	2024-8-1	1 of 3




Specification

CUSTOMER P/N : 金致卓

PART NUMBER :

1. DIMENSIONS : (Unit: mm)

Unit: mm

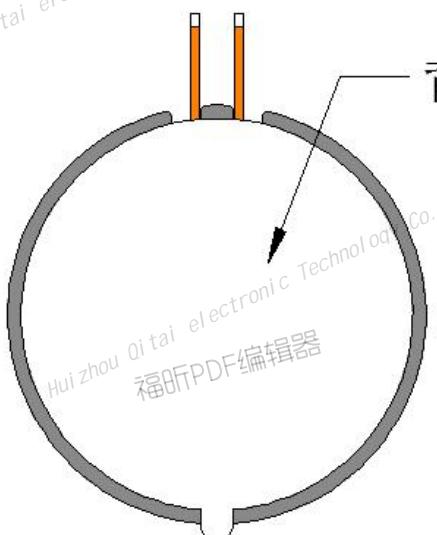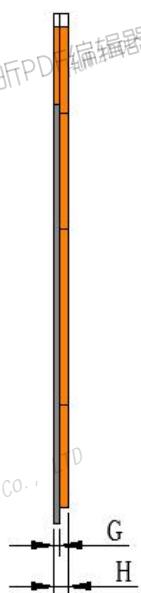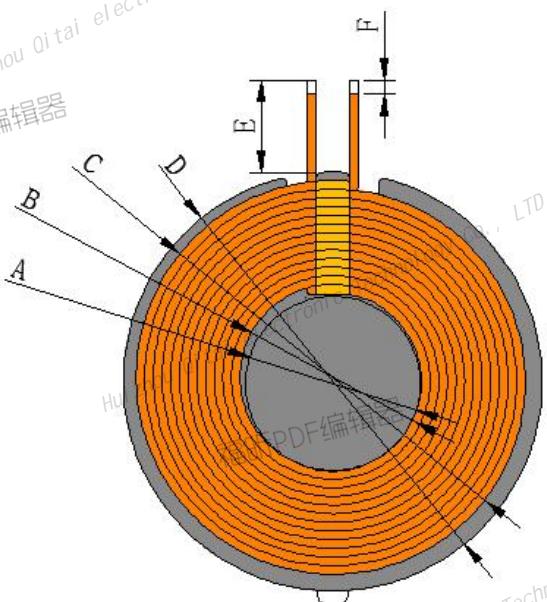

A	B	C	D	E	F	G	H
20 ± 0.3	20.5 ± 0.5	39.5 ± 1	42.5 ± 0.5	15 ± 1	3 ± 1	0.8 ± 0.1	2.8max

1. The back adhesive is pure white.
2. Coil fitting position is centered.

APPROVED BY	CHECKED BY	PREPARED BY	DATE	PAGE
昆子奇		陈璐	2024-8-1	2 of 3

Huizhou Qitai Electronic Technology Co., LTD

Specification

CUSTOMER P/N :

金致卓

PART NUMBER :

2. WINDING DETAILS

Coil1

Turns	Wire Dia	Wdg. Type Spred/Close	Wdg.Direction	Intersect Yes/Not
11TS	0.08*100P/Hot air self-adhesive wire	Close winding	backwind	Yes

3. ELECTRICAL CHARACTERISTICS) :

TEMPERATURE:25±10°C,RELATIVE HUMIDITY:65±10%

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
Coil 1					
1.	IND	S-F	7.9uh±5%	100kHz/V	UC2906A
2.	Q	S-F	40Min	100kHz/V	UC2906A
3.	DCR	S-F	80mΩ Max	100kHz/V	UC2906A

APPROVED BY

CHECKED BY

PREPARED BY

DATE

PAGE

昆子奇

陈璇

2024-8-1

3 of 3