


TEST REPORT

Applicant:	JB-Tag Solutions BV
Address of Applicant:	Ampere 10 7942 DD, Meppel, Nederland
Manufacturer:	E-Pac Industrial Products(Shenzhen)Co. Ltd
Address of Manufacturer:	Room 15A3 Block 1, Kangli city, No.66, Pingji Avenue. Nanwan, Longgang, Shenzhen, Guangdong, China
Product name:	JB-Tag Light spots
Model(s):	JB-Tag Light Spot
Rating(s):	INPUT: AC 100-240V 50-60Hz 2A OUTPUT: DC 12.0V 5.0A 60W
Standards:	47 CFR Part 15 Subpart C section 15.247
FCC ID:	2BK73-TAGLAMP
Data of Receipt:	2024-06-25
Date of Test:	2024-06-25~2024-11-05
Date of Issue:	2024-11-05
Test Result	Pass*

* In the configuration tested, the test item complied with the standards specified above.


Authorized for issue by:

Test by:

Nov.05, 2024 Chivas Tsang 
Project Engineer

Date Name/Position Signature

Reviewed by:

Nov.05, 2024 Victor Meng 
Project Manager

Date Name/Position Signature

Testing Laboratory information:

Testing Laboratory Name : ITL Co., Ltd

Address : No. 8, Jinqianling Street 5, Huangjiang Town, Dongguan,
Guangdong, China

Testing location : Same as above

Tel : 0086-769-39001678

Fax : 0086-20-62824387

E-mail : itl@i-testlab.com

Possible test case verdicts:

- test case does not apply to the test object.. : N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement..: F (Fail)

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report would be invalid test report without all the signatures of testing technician and approver.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

General product information:

/

1 Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth	FCC PART 15 C section 15.247 (a)(2)	ANSI C63.10:2013	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(3)	ANSI C63.10: 2013	PASS
Peak Power Spectral Density	FCC PART 15 C section 15.247(e)	ANSI C63.10:2013	PASS
Conducted Spurious Emission (30MHz to 25GHz)	FCC PART 15 C section 15.209&15.247(d)	ANSI C63.10:2013	PASS
Radiated Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.209&15.247(d)	ANSI C63.10:2013	PASS
Radiated Emissions which fall in the restricted bands	FCC PART 15 C section 15.209	ANSI C63.10:2013	PASS
Band Edges Measurement	FCC PART 15 C section 15.209&15.247(d)	ANSI C63.10:2013	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10:2013	PASS

2 Contents

	Page
TEST REPORT	1
1 TEST SUMMARY	3
2 CONTENTS	4
3 GENERAL INFORMATION	5
3.1 CLIENT INFORMATION	5
3.2 GENERAL DESCRIPTION OF E.U.T.	5
3.3 DETAILS OF E.U.T.	5
3.4 DESCRIPTION OF SUPPORT UNITS	5
3.5 TEST LOCATION	5
3.6 DEVIATION FROM STANDARDS	6
3.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
3.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
3.9 TEST FACILITY	6
3.10 MEASUREMENT UNCERTAINTY	6
4 INSTRUMENTS USED DURING TEST	7
5 TEST RESULTS	8
5.1 E.U.T. TEST CONDITIONS	8
5.2 ANTENNA REQUIREMENT	10
5.3 OCCUPIED BANDWIDTH	11
5.4 MAXIMUM PEAK OUTPUT POWER	20
5.5 PEAK POWER SPECTRAL DENSITY	25
5.6 CONDUCTED SPURIOUS EMISSIONS	30
5.7 RADIATED SPURIOUS EMISSIONS	35
5.7.1 <i>Harmonic and other spurious emissions</i>	38
5.8 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	47
5.9 BAND EDGES REQUIREMENT	50
5.10 CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHz TO 30MHz	53
5.10.1 <i>Measurement Data</i>	55

3 General Information

3.1 Client Information

Applicant: JB-Tag Solutions BV
Address of Applicant: Ampere 10 7942 DD, Meppel, Nederland

3.2 General Description of E.U.T.

Name: JB-Tag Light spots
Model No.: JB-Tag Light Spot
Operating Frequency: 2402 MHz to 2480 MHz for Bluetooth
Bluetooth Version: 5.0

This report is for BLE mode.

40 channels with 2MHz step

Channels:

channel	Frequency	channel	Frequency	channel	Frequency	channel	Frequency
1	2402	11	2422	21	2442	31	2462
2	2404	12	2424	22	2444	32	2464
3	2406	13	2426	23	2446	33	2466
4	2408	14	2428	24	2448	34	2468
5	2410	15	2430	25	2450	35	2470
6	2412	16	2432	26	2452	36	2472
7	2414	17	2434	27	2454	37	2474
8	2416	18	2436	28	2456	38	2476
9	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480

Type of Modulation: GFSK
Antenna Type: PCB Antenna with 3.44dBi peak Gain
Function: Lighting Activation

3.3 Details of E.U.T.

EUT Power Supply: AC 120V 60Hz (For Adapter)
Test mode: The program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel lowest (2402MHz), middle (2440MHz) and highest (2480MHz) are chosen for full testing.

3.4 Description of Support Units

The EUT has been tested as an independent unit for fixed frequency by testing lab.

3.5 Test Location

All the tests were performed in ITL Co., Ltd. Which is located at No. 8, Jinqianling Street 5, Huangjiang Town, Dongguan, Guangdong, China.

Tel: 0086-769-39001678, Fax: 0086-20-62824387

No tests were sub-contracted.

3.6 Deviation from Standards

None.

3.7 Abnormalities from Standard Conditions

None.

3.8 Other Information Requested by the Customer

None.

3.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS Lab code:L9342**
- **FCC Designation No.:CN5035**
- **IC Registration NO.: 12593A**
- **NVLAP LAB CODE: 600199-0**

3.10 Measurement Uncertainty

The below measurement uncertainties given below are based on a 95% confidence level (base on a coverage factor ($k=2$).)

Parameter	Uncertainty
Radio frequency	2.25%
total RF power, conducted	± 1.34 dB
RF power density , conducted	± 1.49 dB
All emissions, radiated	± 2.72 dB
Temperature	± 5.02 dB
Humidity	$\pm 0.8^{\circ}\text{C}$
DC and low frequency voltages	± 1.5 %

4 Instruments Used during Test

No.	Test Equipment	Manufacturer	Model	Serial No.	Cal Data	Due Date
DGITL-301	Semi-Anechoic chamber	ETS•Lindgren	9*6*6	CT000874-1181	2023.08.02	2026.08.02
DGITL-307	EMI test receiver	SCHWARZBEC K	ESVS10	833616/003	2024.03.15	2025.03.15
DGITL-376	Wideband Radio Communication Tester	SCHWARZBEC K	CMW500	LR114195	2024.03.15	2025.03.15
DGITL-349a	Vector Signal Generator	ROHDE&SCHW ARZ	SMBV100A	259268	2024.03.15	2025.03.15
DGITL-306	Spectrum Analyzer	Agilent Technologies	N9010A	MY54200334	2024.03.15	2025.03.15
DGITL-352	Pre Amplifier	MInI-CIrcuits	ZFC-1000HX	SN292801110	2024.03.15	2025.03.15
DGITL-375	Spectrum Analyzer	SCHWARZBEC K	FSV40-N	6625-01-588-5515	2024.03.15	2025.03.15
DGITL-309	Horn Antenna	ETS Lindgren	3117	SN00152265	2023.05.14	2025.05.14
DGITL-308	Bilog Antenna	ETS· Lindgren	3142E	156975	2023.05.14	2025.05.14
DGITL-350	Wideband Amplifier Super Ultra	MInI-CIrcuits	ZVA-183X-S+	SN986401426	2024.03.15	2025.03.15
DGITL-371	Pre Amplifier	teramicrowave	TALA-0040G35	18081001	2024.03.15	2025.03.15
DGITL-363	Active Loop Antenna	SCHWARZBEC K	FMZB1519B	00062	2024.05.15	2026.05.11

5 Test Results

5.1 E.U.T. test conditions

Test Voltage: AC 120V 60Hz

Temperature: 23.2 -25.0 °C

Humidity: 38-50 % RH

Atmospheric Pressure: 1000 -1010 mbar

Requirements: **15.31(e):** For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

15.32: Power supplies and CPU boards used with personal computers and for which separate authorizations are required to be obtained shall be tested as follows: Testing shall be in accordance with the procedures specified in Section 15.31 of this part.

Test frequencies and frequency range:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which	Number of	Location in frequency range
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz,
At or above 10 GHz to below	5th harmonic of highest fundamental frequency or to 100 GHz,
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz,

EUT channels and frequencies list:

channel	Frequency	channel	Frequency	channel	Frequency	channel	Frequency
1	2402	11	2422	21	2442	31	2462
2	2404	12	2424	22	2444	32	2464
3	2406	13	2426	23	2446	33	2466
4	2408	14	2428	24	2448	34	2468
5	2410	15	2430	25	2450	35	2470
6	2412	16	2432	26	2452	36	2472
7	2414	17	2434	27	2454	37	2474
8	2416	18	2436	28	2456	38	2476
9	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480

Test frequencies are the lowest channel: 1 channel (2402MHz), middle channel: 20 channel (2440 MHz) and highest channel: 40 channel (2480 MHz)

Test the EUT in continuous transmission mode, duty cycle > 98%.

5.2 Antenna requirement

Standard requirement

15.203 requirement:

For intentional device. According to 15.203. An intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna


The antenna is a PCB Antenna and no consideration of replacement. The best-case gain of the antenna is 3.44dBi.

Test result: The unit does meet the FCC requirements.

5.3 Occupied Bandwidth

Test Requirement:	FCC Part 15 C section 15.247 (a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10:2013
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

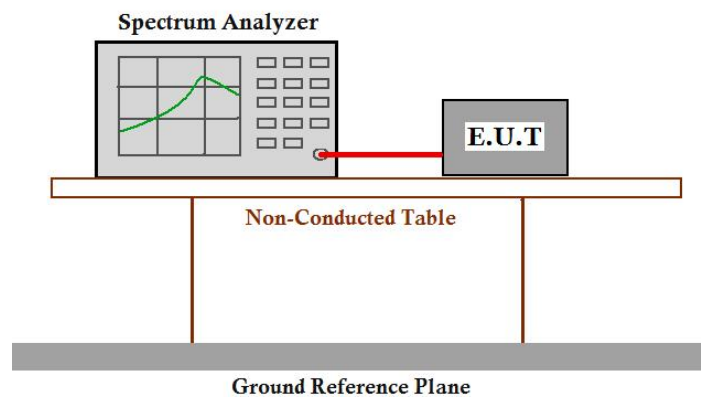



Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW=100kHz. VBW = 300kHz, Sweep = auto; Detector Function = Peak. Trace = Max Hold, Set span to encompass the entire emission bandwidth of the signal.
3. Mark the peak power frequency and -6dB (upper and lower) power frequency.
4. Repeat until all the test status is investigated.
5. Report the worst case.


Test result (6 dB bandwidth)

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
BLE 1M	2402	0.685	0.5	Pass
BLE 1M	2440	0.676	0.5	Pass
BLE 1M	2480	0.64	0.5	Pass
BLE 2M	2402	1.132	0.5	Pass
BLE 2M	2440	1.313	0.5	Pass
BLE 2M	2480	1.139	0.5	Pass

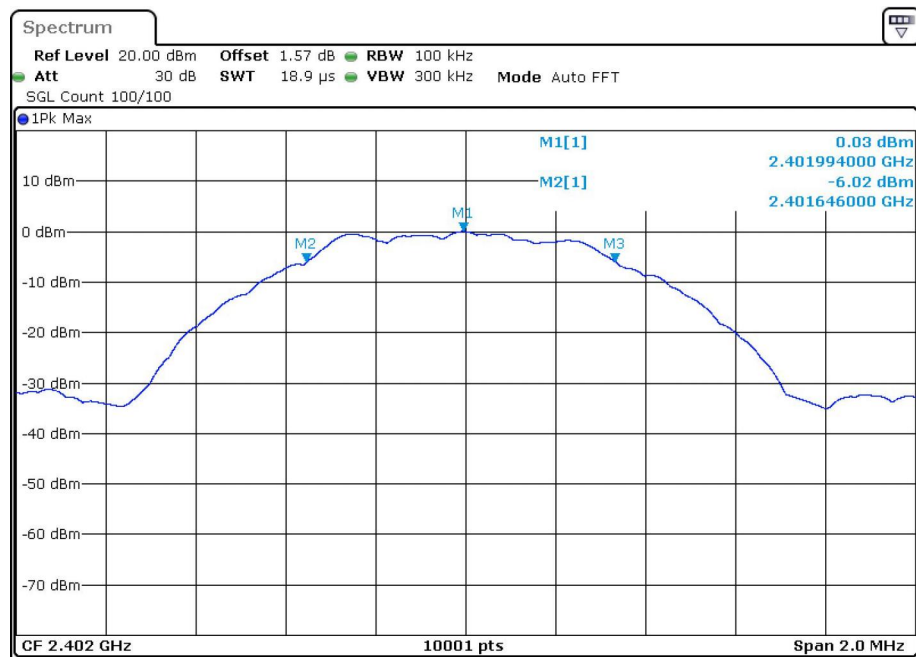
**-6dB Bandwidth BLE 1M 2402MHz**

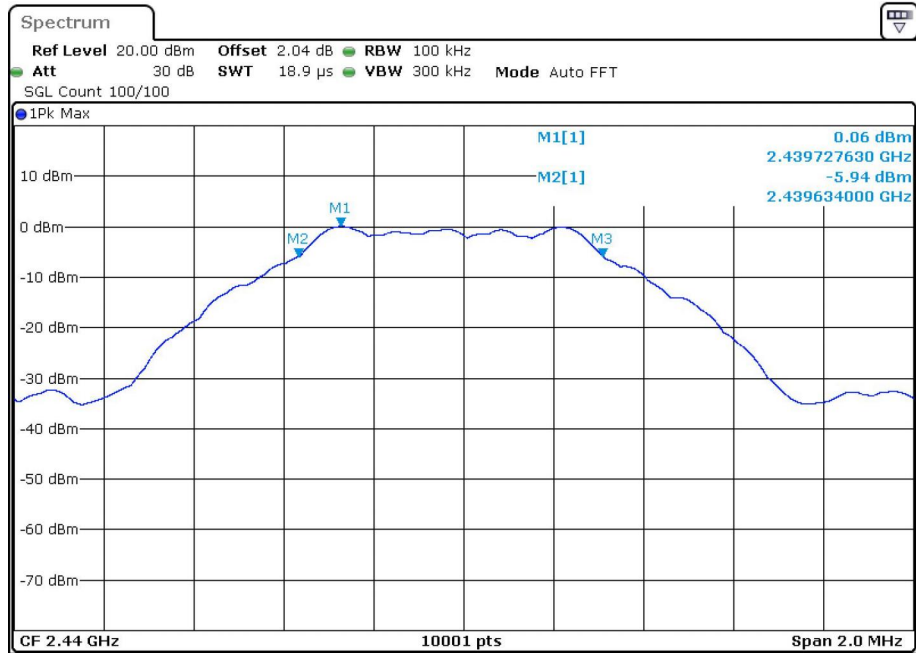


-6dB Bandwidth BLE 1M 2440MHz

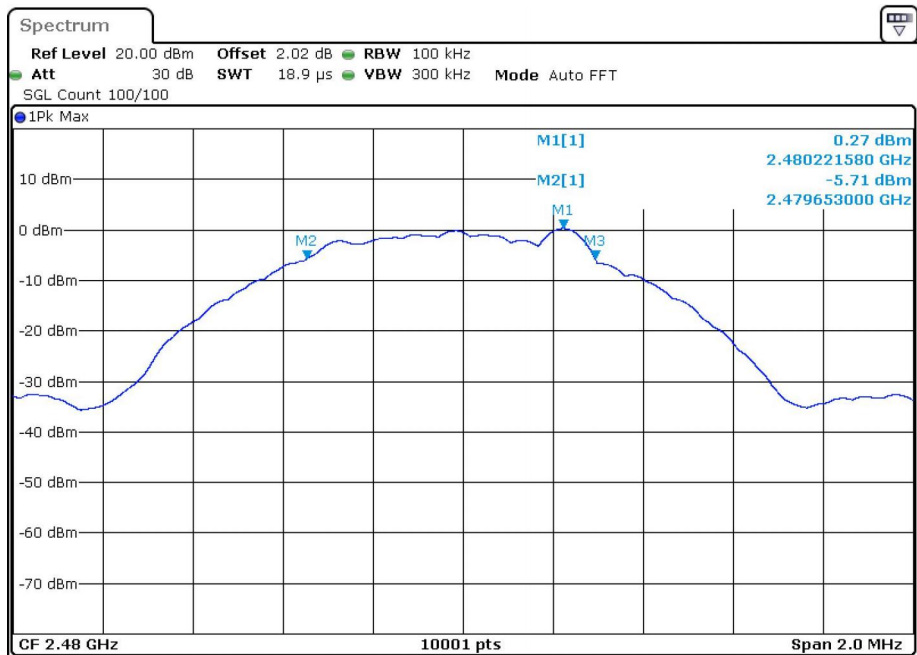


-6dB Bandwidth BLE 1M 2480MHz

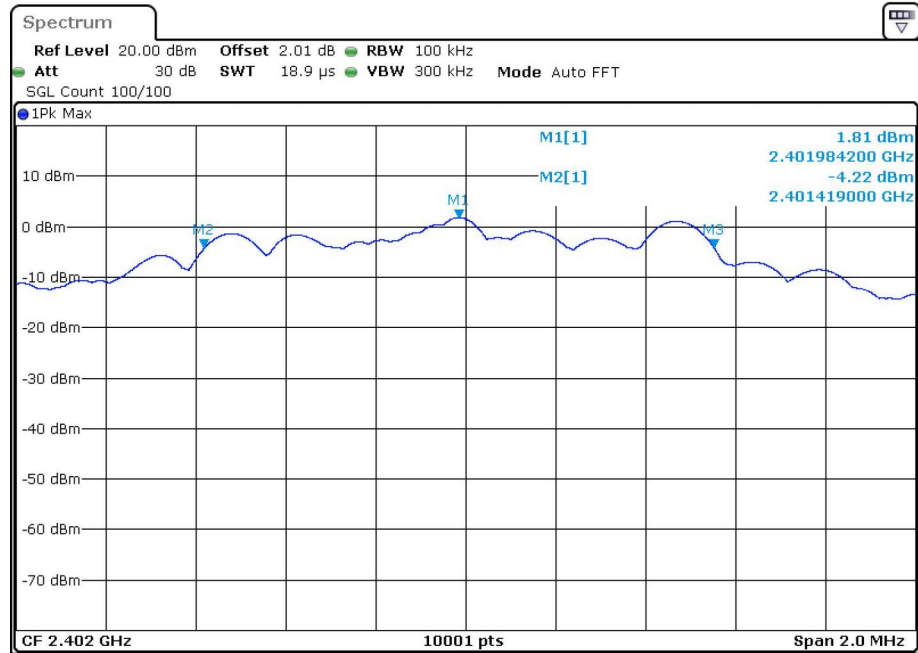

-6dB Bandwidth BLE 2M 2402MHz

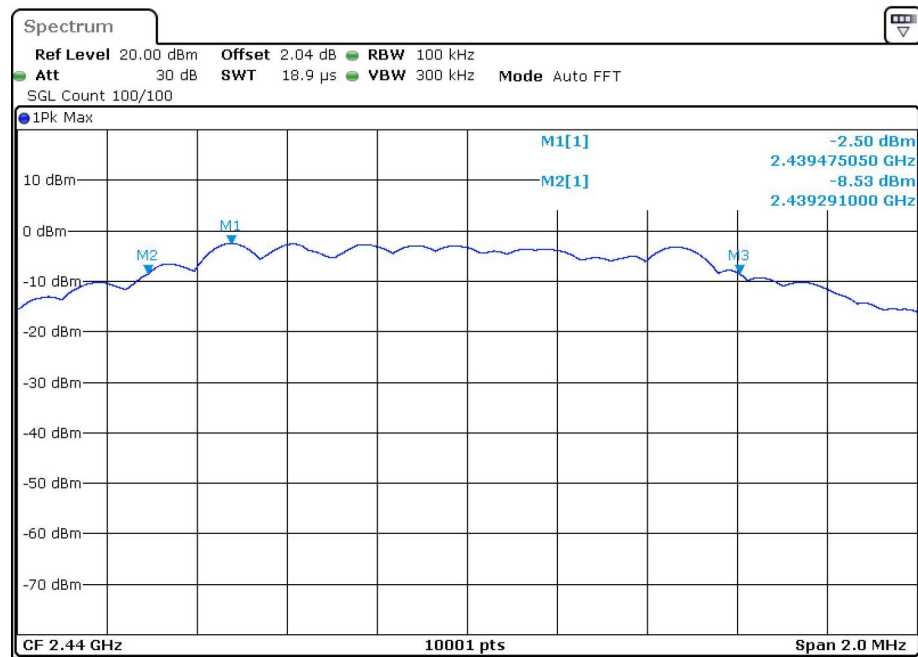


-6dB Bandwidth BLE 2M 2440MHz

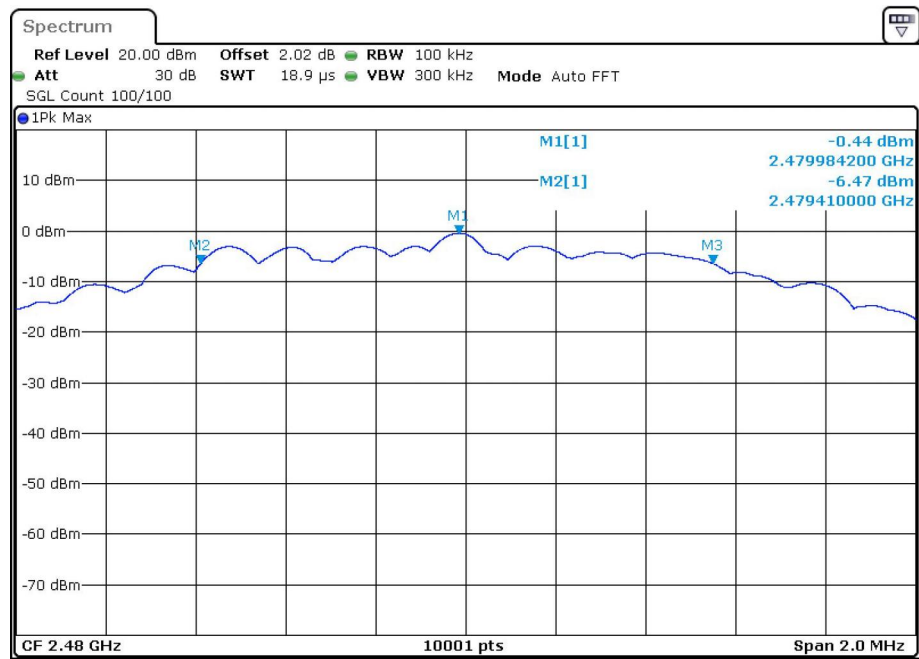


-6dB Bandwidth BLE 2M 2480MHz

Test Result(99% Occupied Bandwidth)


Mode	Frequency (MHz)	99% OBW (MHz)
BLE 1M	2402	1.017
BLE 1M	2440	1.016
BLE 1M	2480	1.005
BLE 2M	2402	2.026
BLE 2M	2440	2.028
BLE 2M	2480	2.017

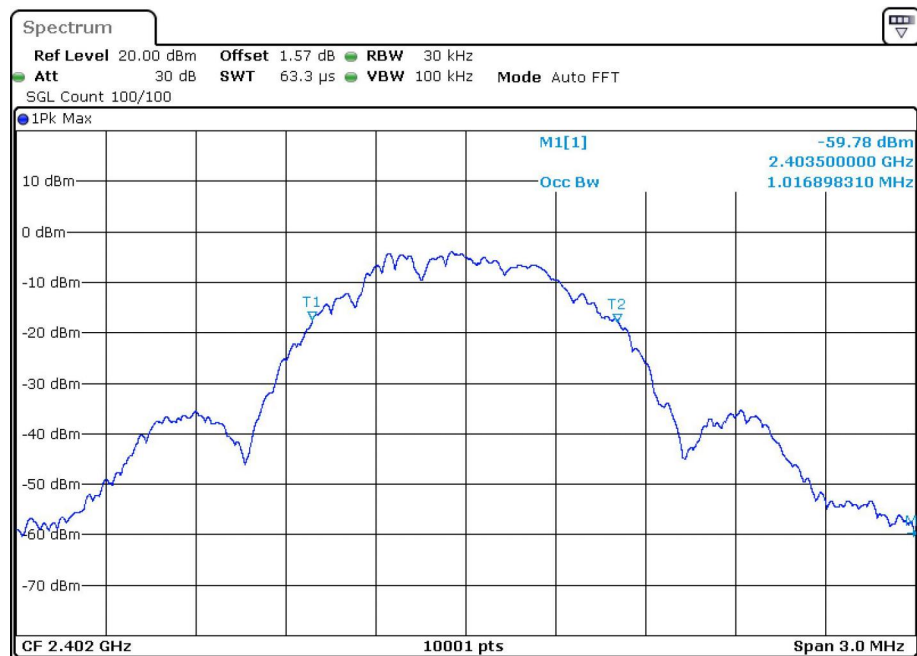


OBW BLE 1M 2402MHz

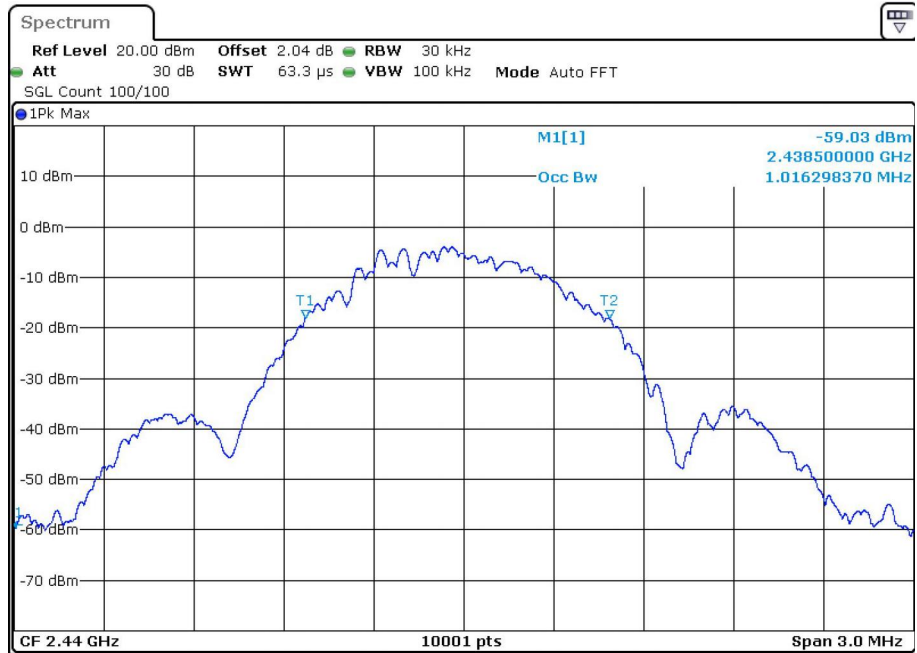


OBW BLE 1M 2440MHz

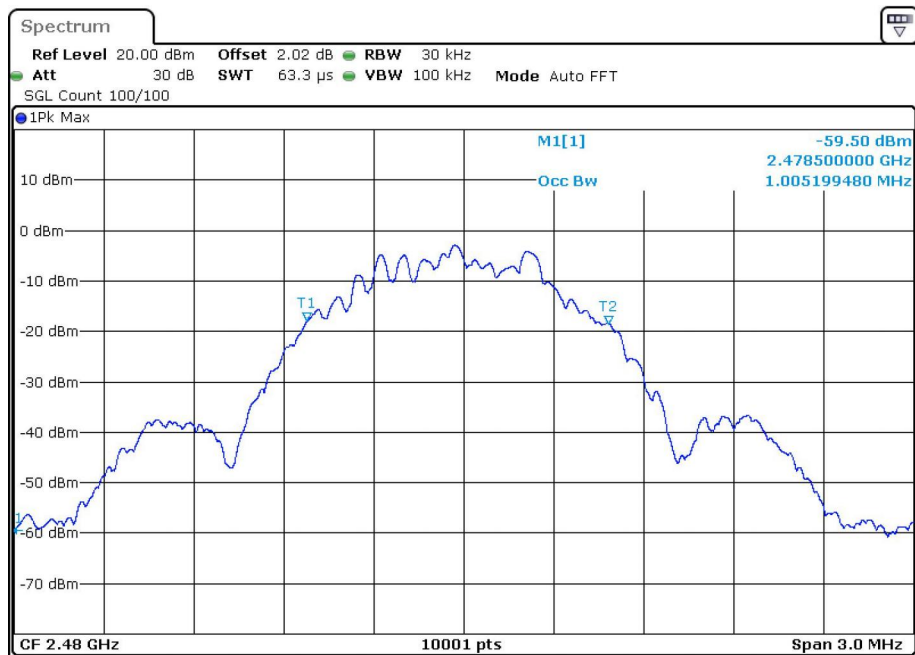


OBW BLE 1M 2480MHz

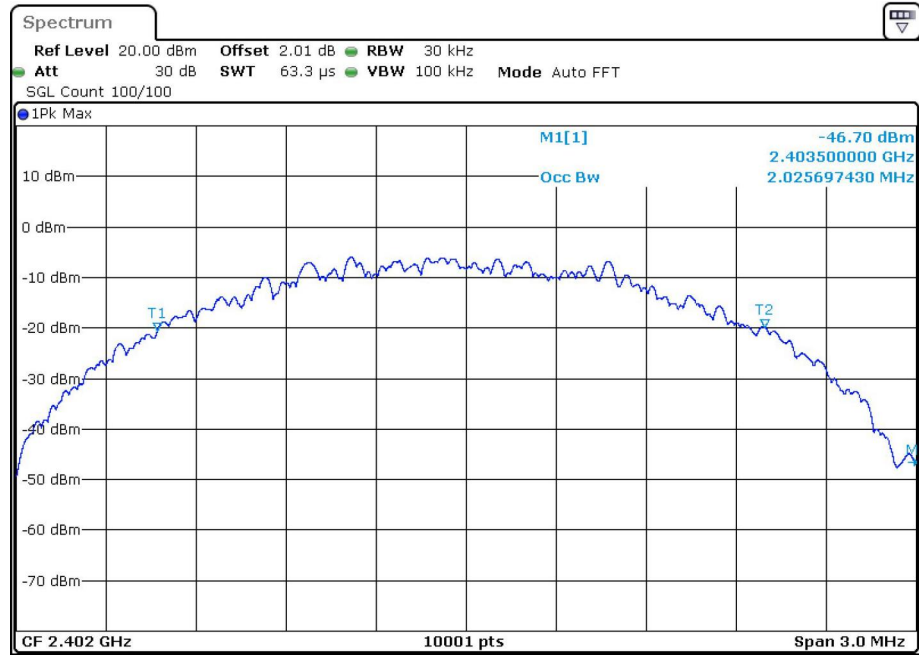

OBW BLE 2M 2402MHz

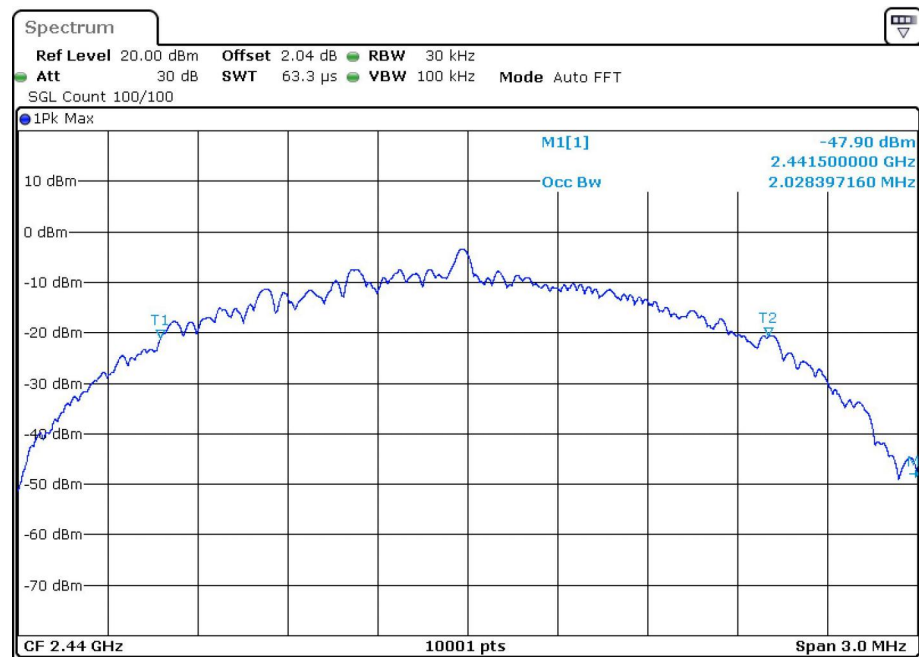

OBW BLE 2M 2440MHz

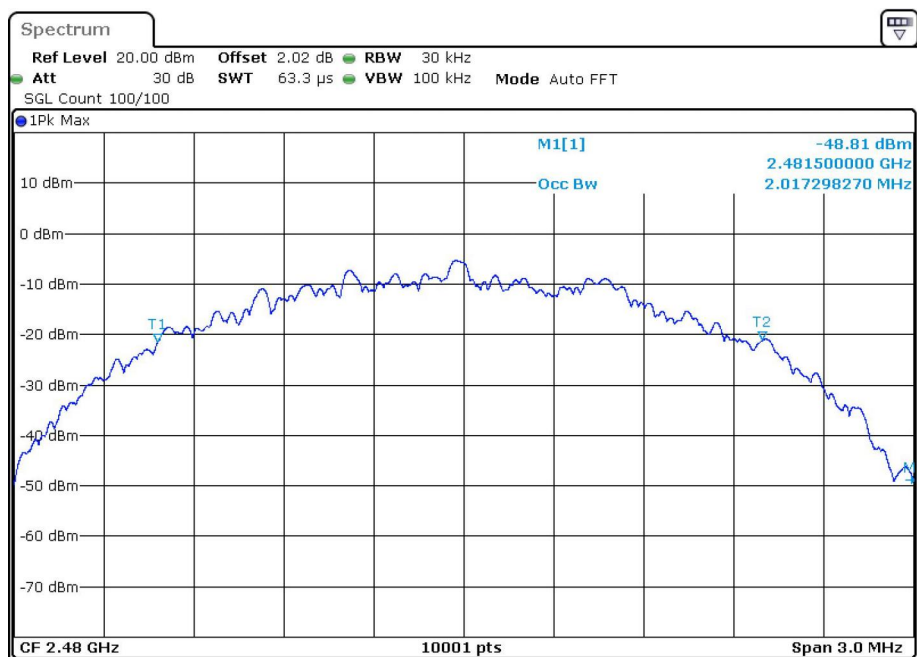

OBW BLE 2M 2480MHz

The unit does meet the FCC requirements.

5.4 Maximum Peak Output Power

Test Requirement: FCC Part 15 C section 15.247

(b)(3) For systems using digital modulation in the 902-928 MHz,


2400-2483.5 MHz and 5725-5850 MHz bands: 1 Watt.

Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b) (1), (b) (2), and (b) (3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

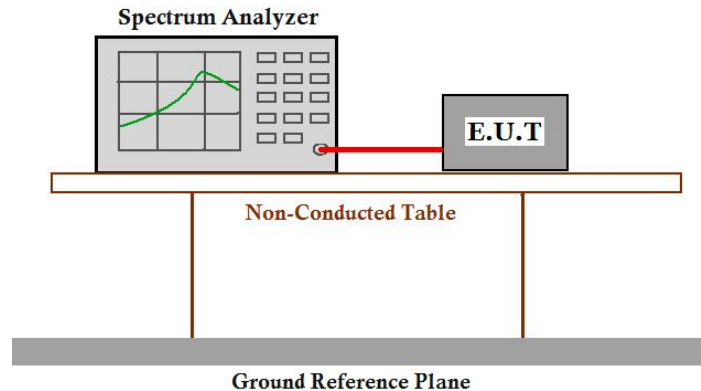


Test Procedure:


1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable from the antenna port to the spectrum.
2. Set the RBW $\geq$ DTS bandwidth
3. Set VBW $\geq 3 \times$ RBW
4. Set span $\geq 3 \times$ RBW.
5. Sweep time = auto.
6. Detector = peak.
7. Trace mode = max hold.
8. Allow trace to fully stabilize
9. Use peak marker function to determine the peak amplitude level

Test Data:


Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	1.173	30	Pass
BLE 1M	2440	0.977	30	Pass
BLE 1M	2480	0.448	30	Pass
BLE 2M	2402	2.299	30	Pass
BLE 2M	2440	0.939	30	Pass
BLE 2M	2480	0.475	30	Pass

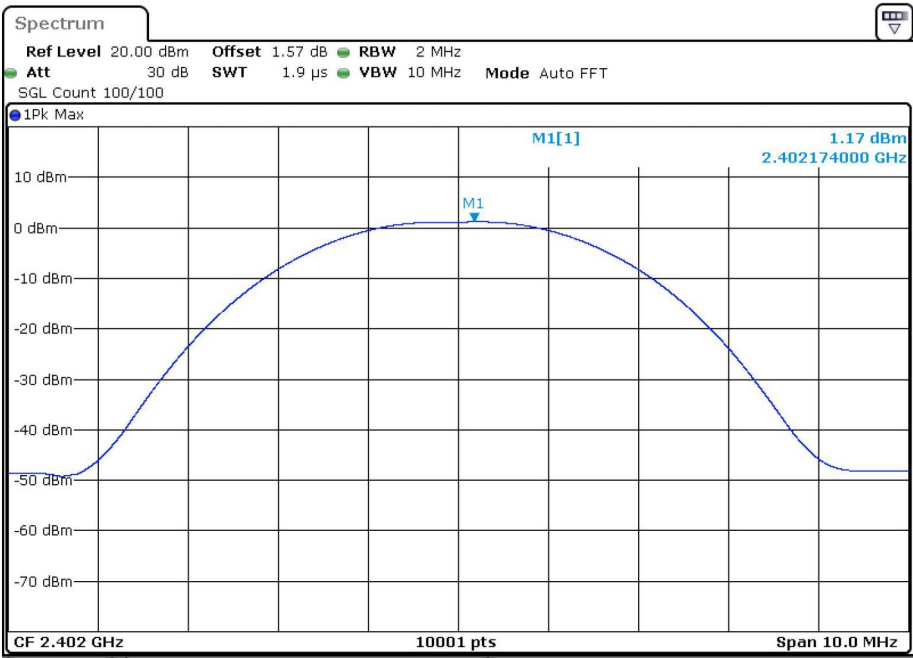


Power BLE 1M 2402MHz

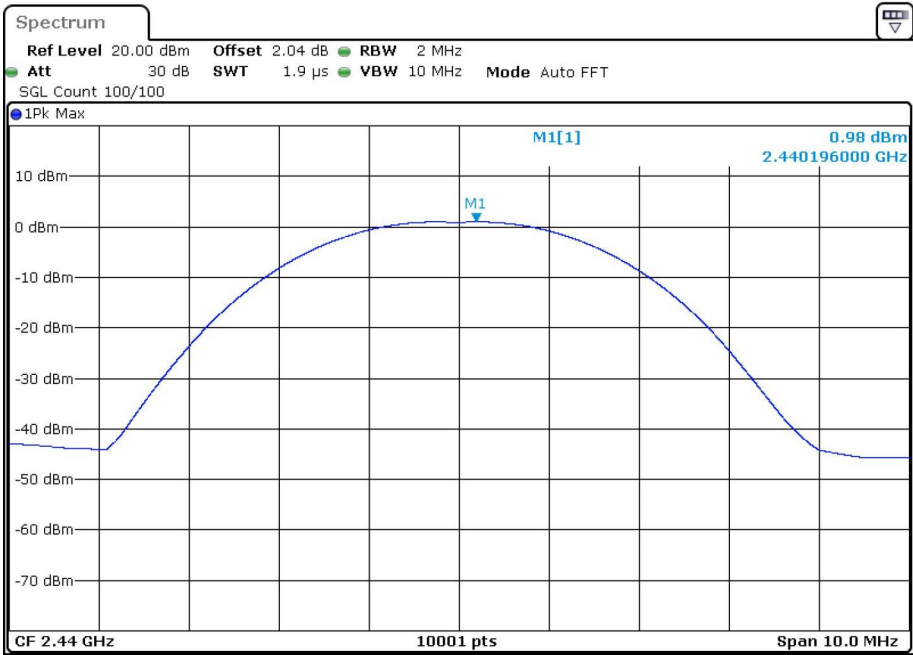


Power BLE 1M 2440MHz

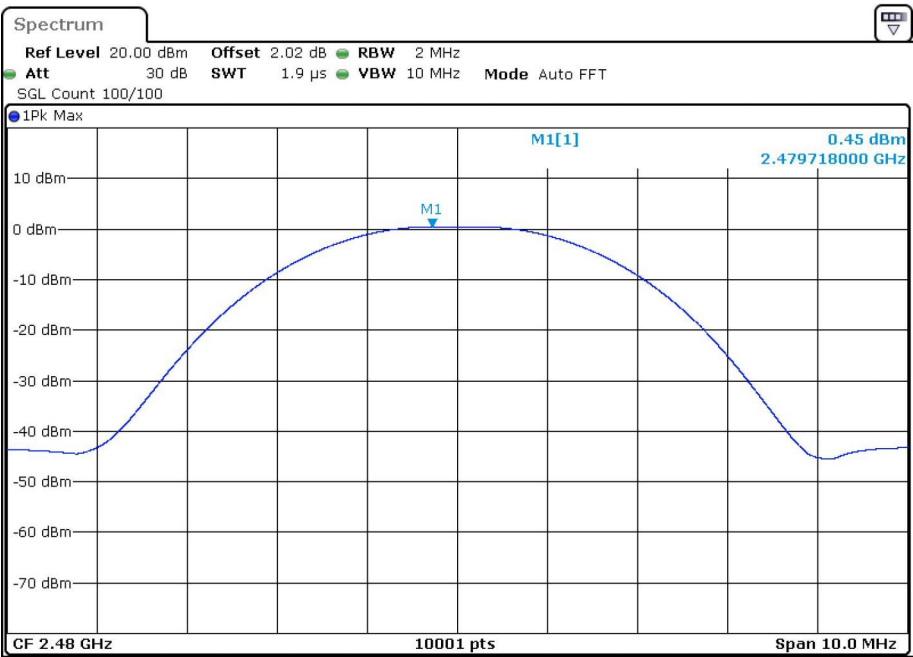


Power BLE 1M 2480MHz

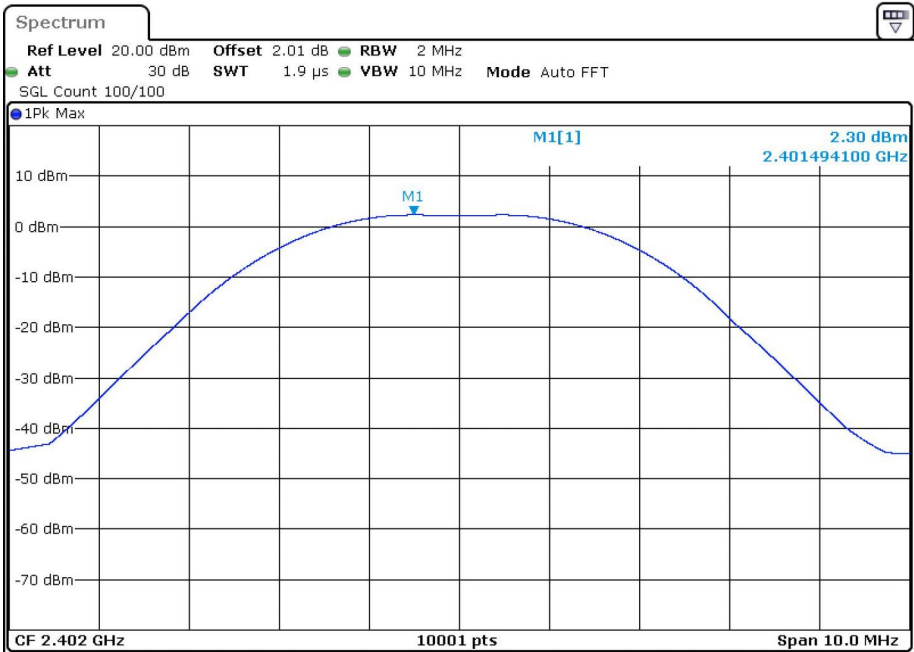

Power BLE 2M 2402MHz

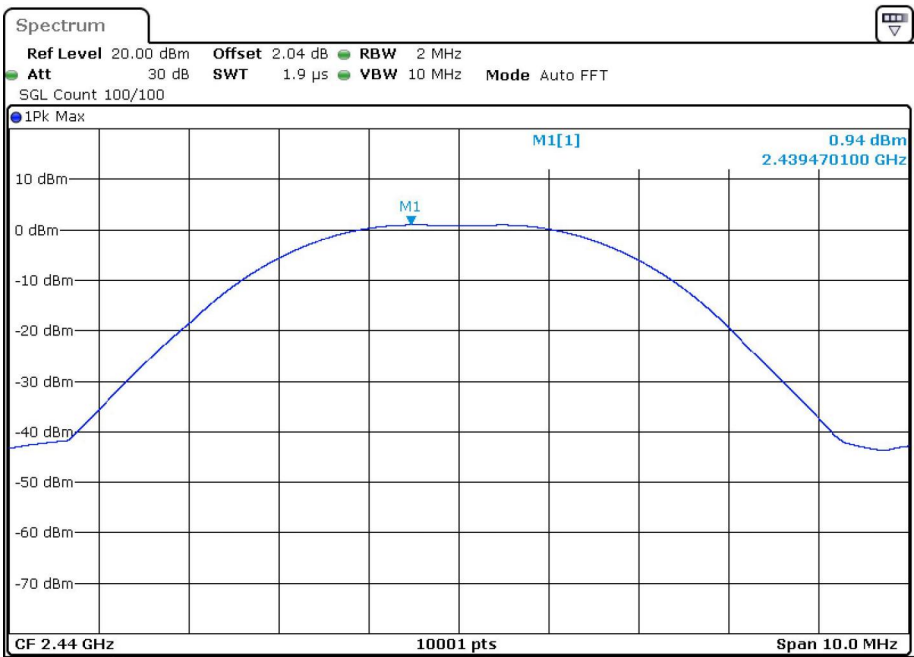

Power BLE 2M 2440MHz

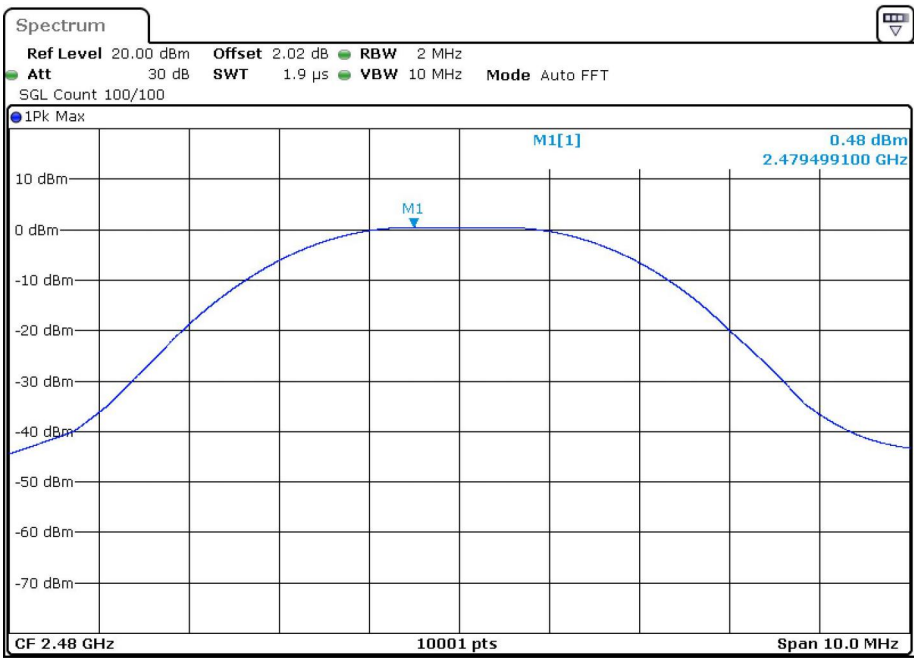


Power BLE 2M 2480MHz

The unit does meet the FCC requirements.

5.5 Peak Power Spectral Density

- Test Requirement: FCC Part 15 C section 15.247
(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
- Test Method: ANSI C63.10:2013
- Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channel and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
- Test Configuration:

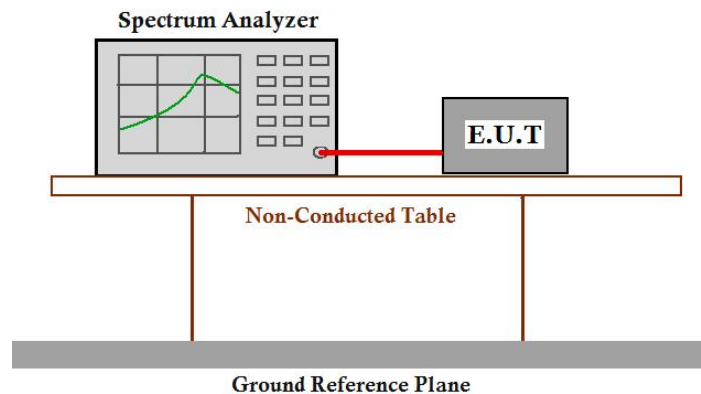

Test Procedure:

Remove the antenna from the EUT and then connect a low attention attenuation RF cable from the antenna port to the spectrum analyzer or power meter.

- a) Set analyzer centre frequency to DTS channel centre frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


Measure the Power Spectral Density of the test frequency with special test status.

Repeat until all the test status is investigated.


Report the worst case.

Test result:


Mode	Frequency (MHz)	Max PSD (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	0.105	8	Pass
BLE 1M	2440	0.325	8	Pass
BLE 1M	2480	0.258	8	Pass
BLE 2M	2402	1.62	8	Pass
BLE 2M	2440	-0.455	8	Pass
BLE 2M	2480	-0.873	8	Pass

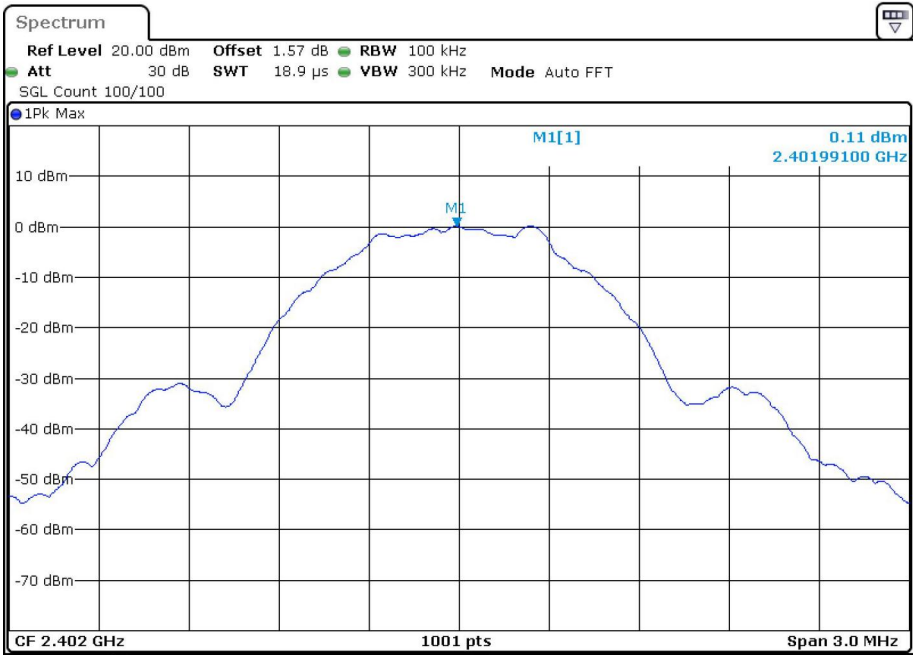


PSD BLE 1M 2402MHz

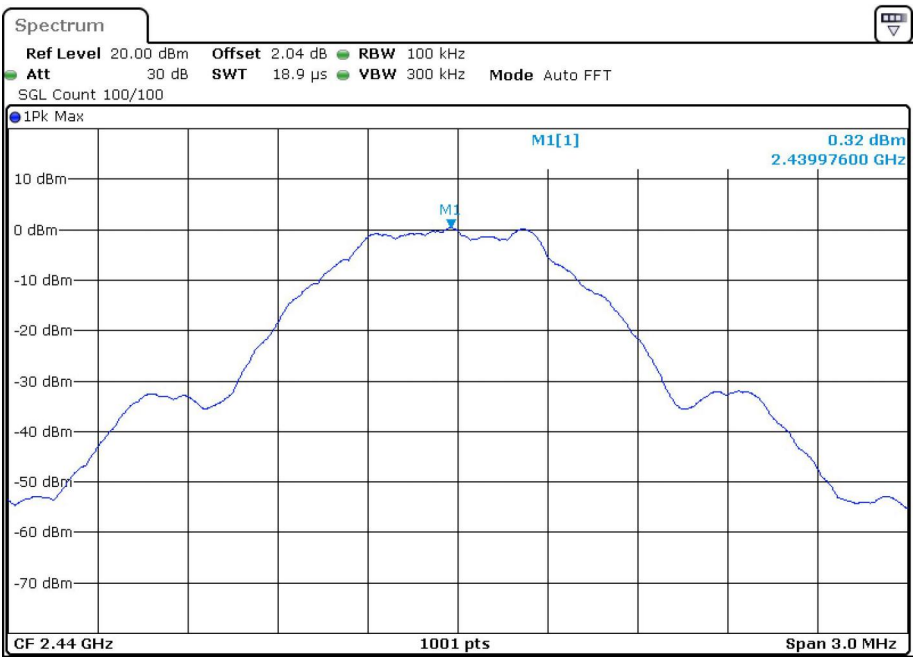


PSD BLE 1M 2440MHz

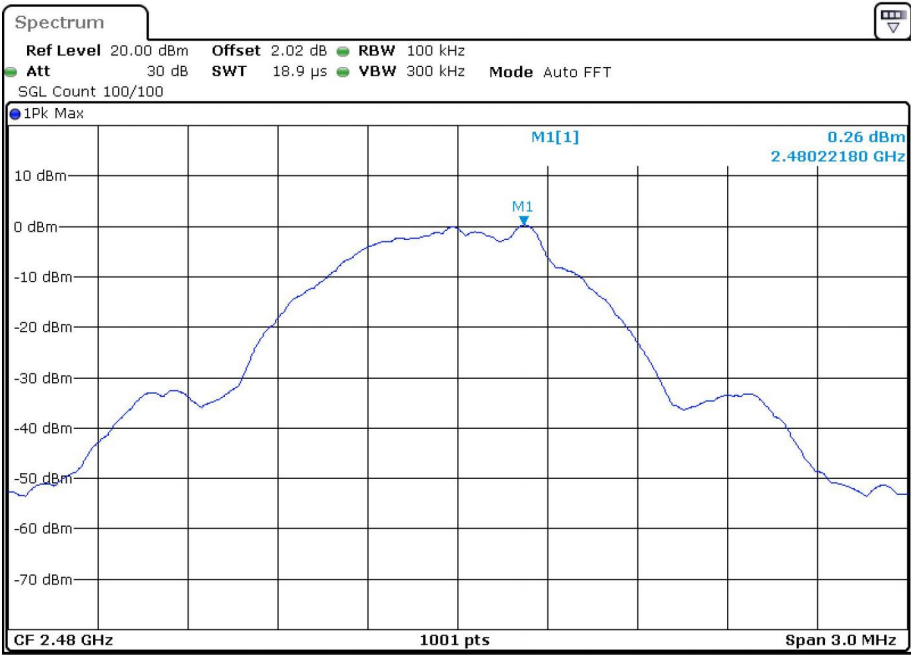


PSD BLE 1M 2480MHz

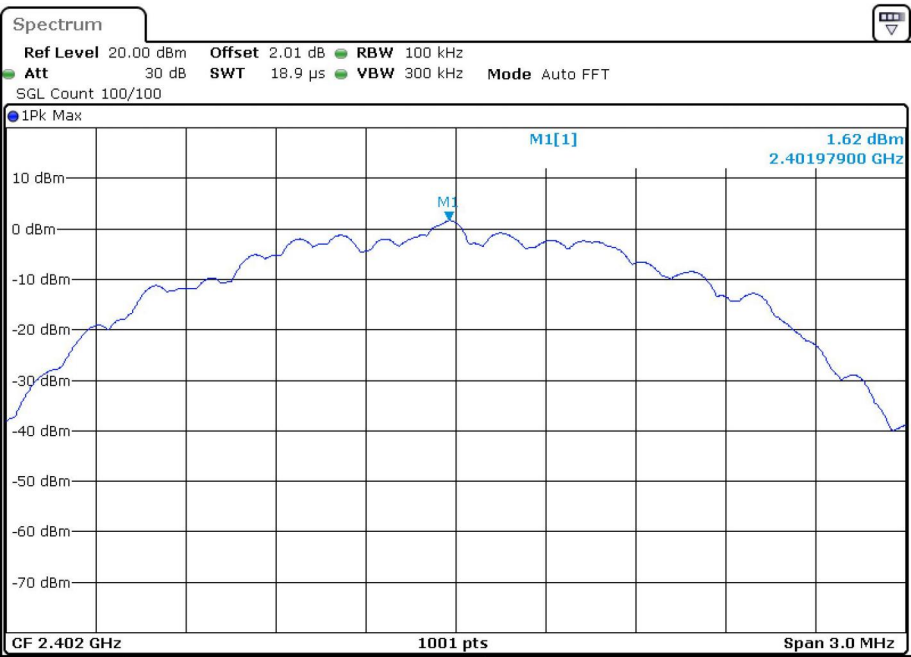

PSD BLE 2M 2402MHz

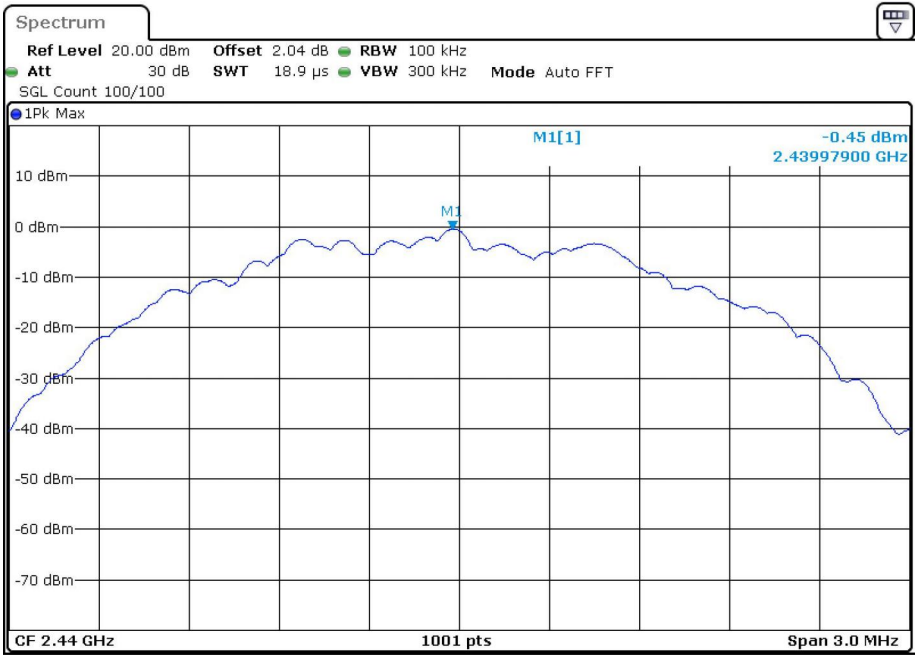

PSD BLE 2M 2440MHz

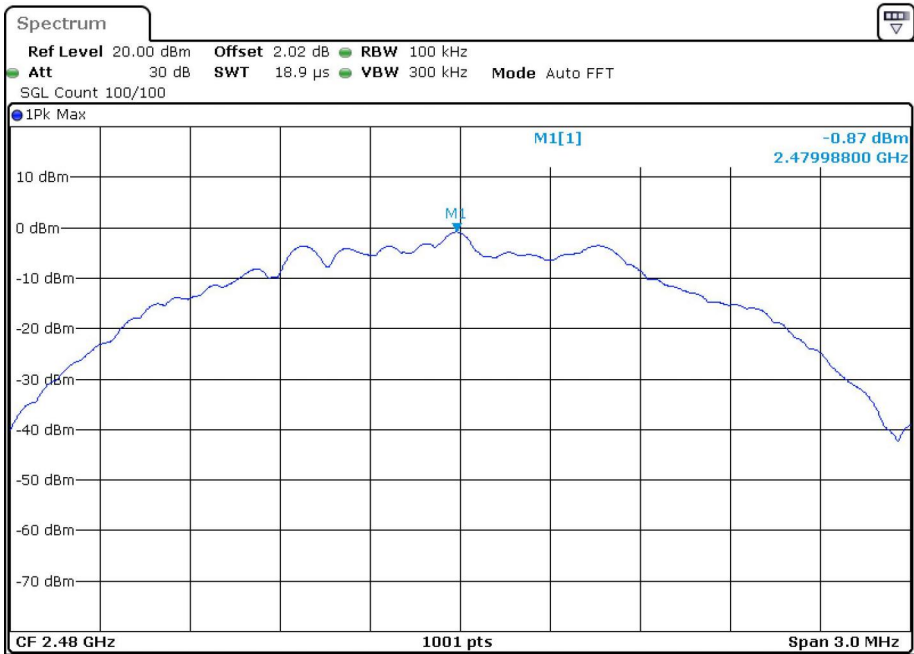

PSD BLE 2M 2480MHz

The unit does meet the FCC requirements.

5.6 Conducted Spurious Emissions


Test Requirement: FCC Part 15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channel and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

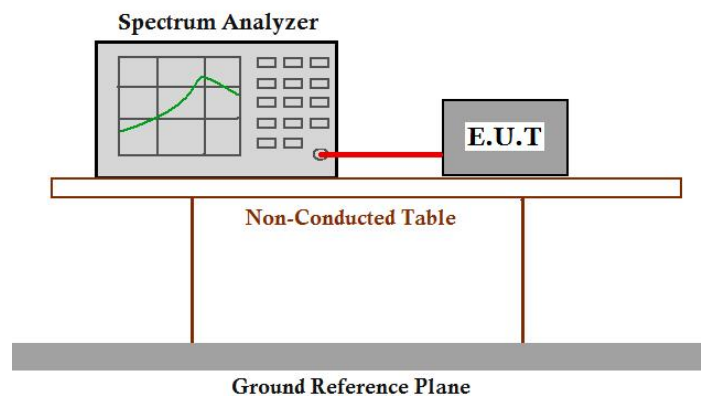


Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer: RBW=100 KHz, VBW = 300KHz. Sweep = auto; Detector Function = Peak. Trace = Max Hold, Scan up through 10th harmonic.
3. Measure the Conducted Spurious Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worst case.

Test Data:


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-50.53	-20	Pass
BLE 1M	2440	-48.54	-20	Pass
BLE 1M	2480	-49.08	-20	Pass
BLE 2M	2402	-51.05	-20	Pass
BLE 2M	2440	-48.91	-20	Pass
BLE 2M	2480	-48.02	-20	Pass

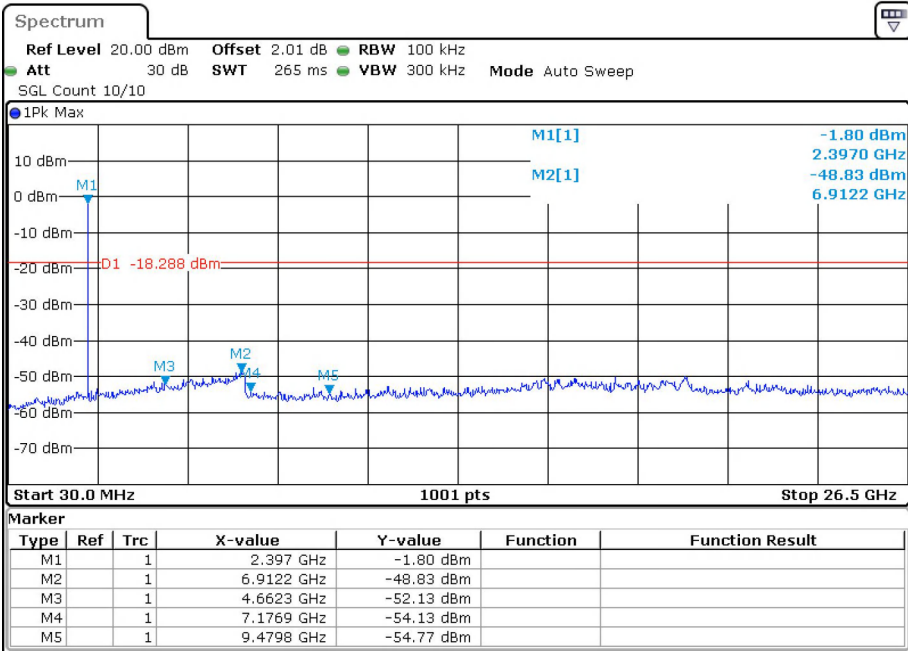


Tx. Spurious BLE 1M 2402MHz Emission

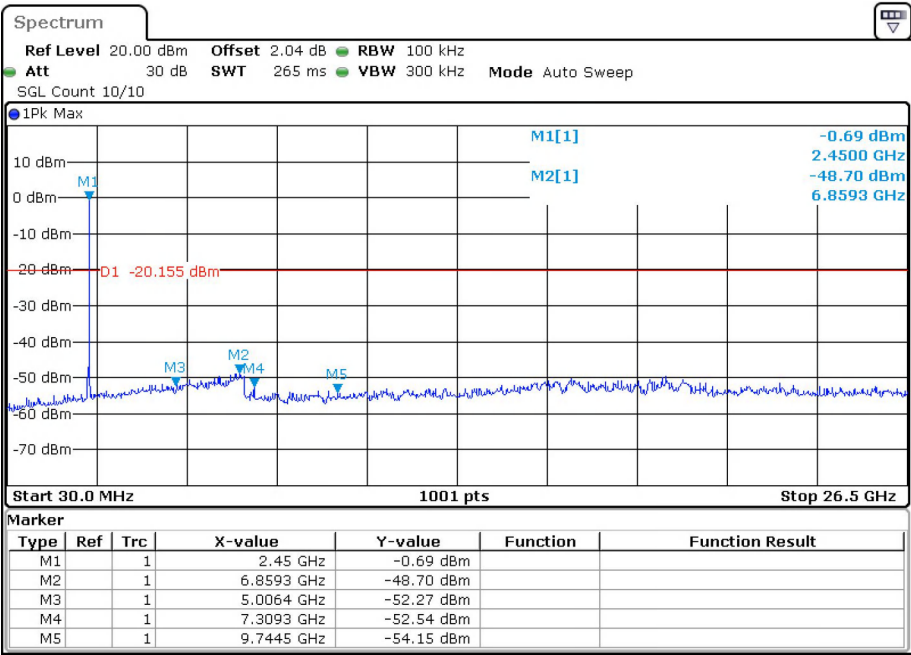


Tx. Spurious BLE 1M 2440MHz Emission

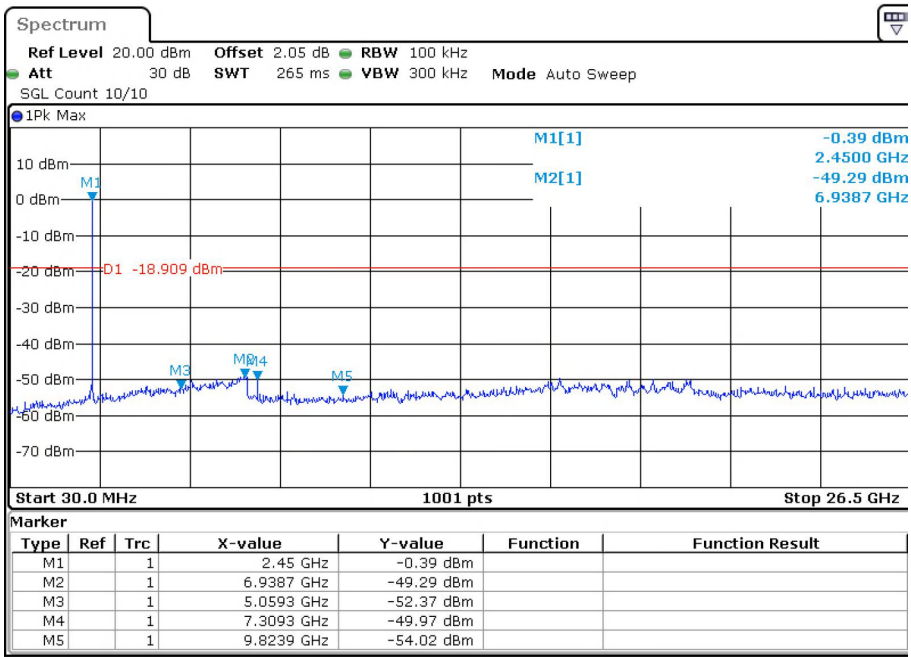


Tx. Spurious BLE 1M 2480MHz Emission

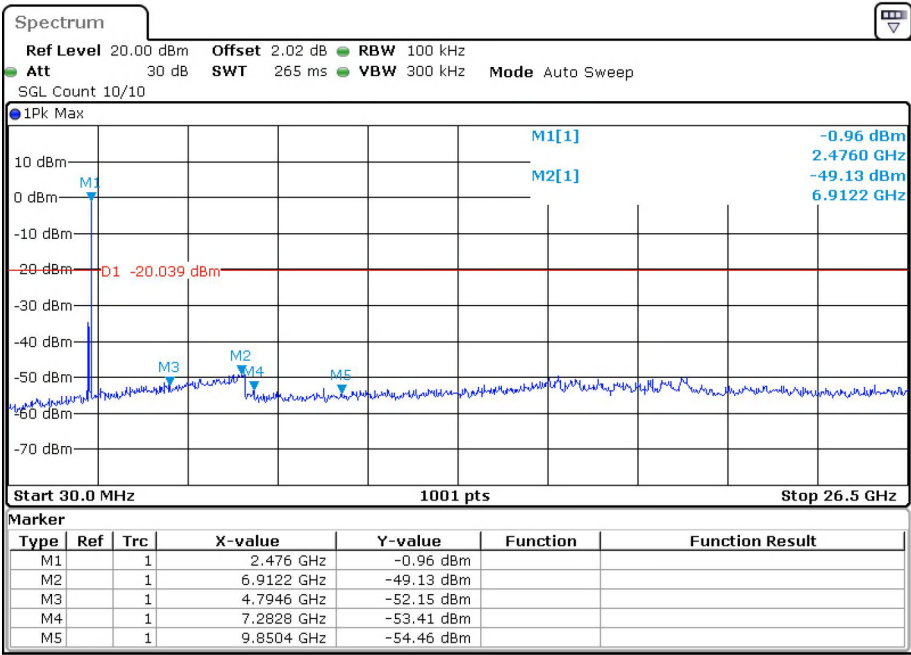

Tx. Spurious BLE 2M 2402MHz Emission

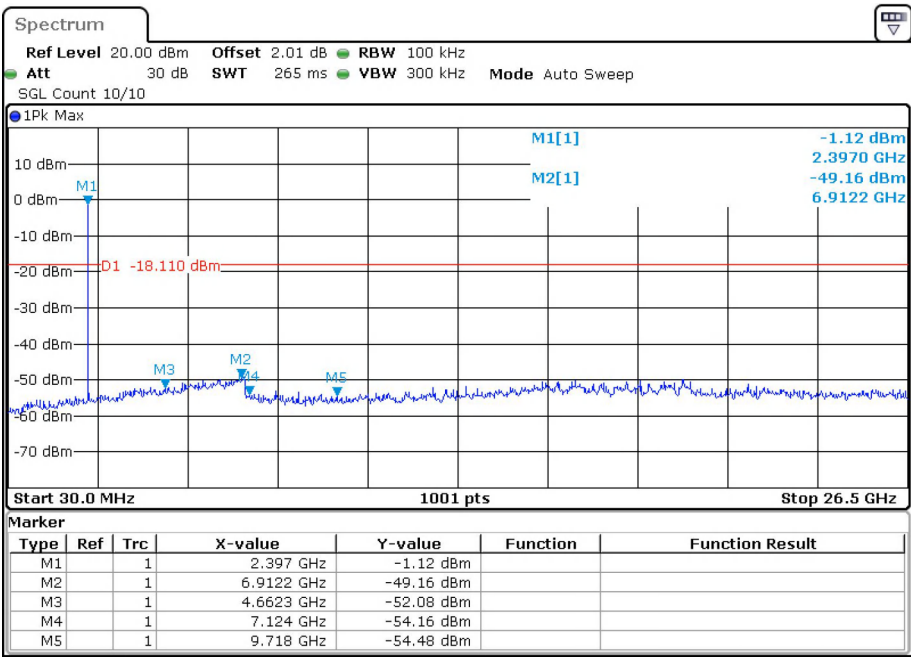

Tx. Spurious BLE 2M 2440MHz Emission

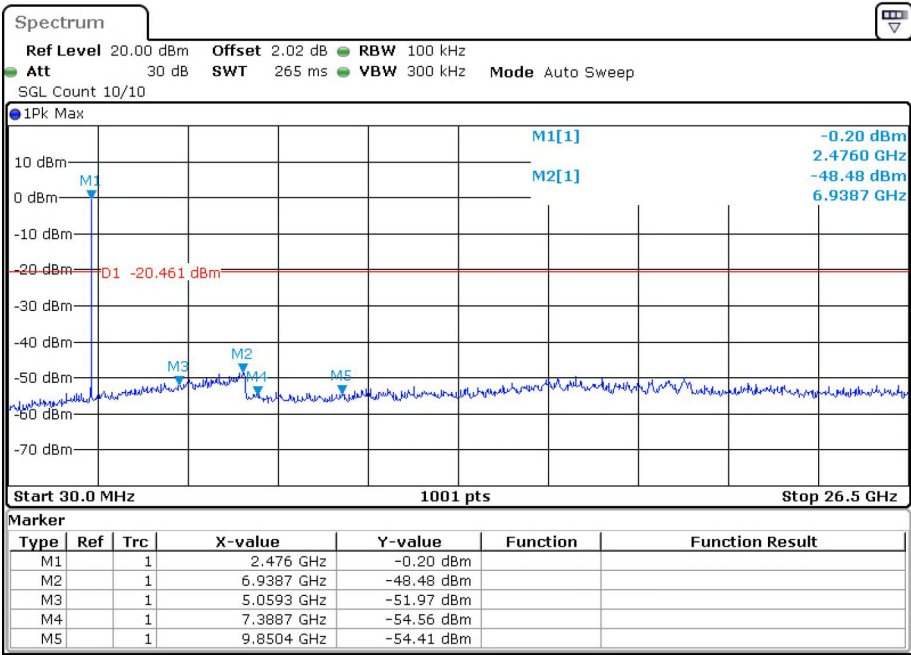

Tx. Spurious BLE 2M 2480MHz Emission

Note: This line in the plots is a reference line for the 20dB down limit, not the limit.


The results do meet the FCC requirements.

5.7 Radiated Spurious Emissions


Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.
Test Method:	ANSI C63.10:2013
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Detector: For PK value:	RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9kHz for < 30 MHz VBW = 10 Hz Sweep = auto Detector function = peak Trace = max hold
15.209 Limit:	40.0 dB μ V/m between 30 MHz & 88 MHz 43.5 dB μ V/m between 88 MHz & 216 MHz 46.0 dB μ V/m between 216 MHz & 960 MHz 54.0 dB μ V/m above 960 MHz

Test Configuration:


- 1) 9kHz to 30MHz emissions:

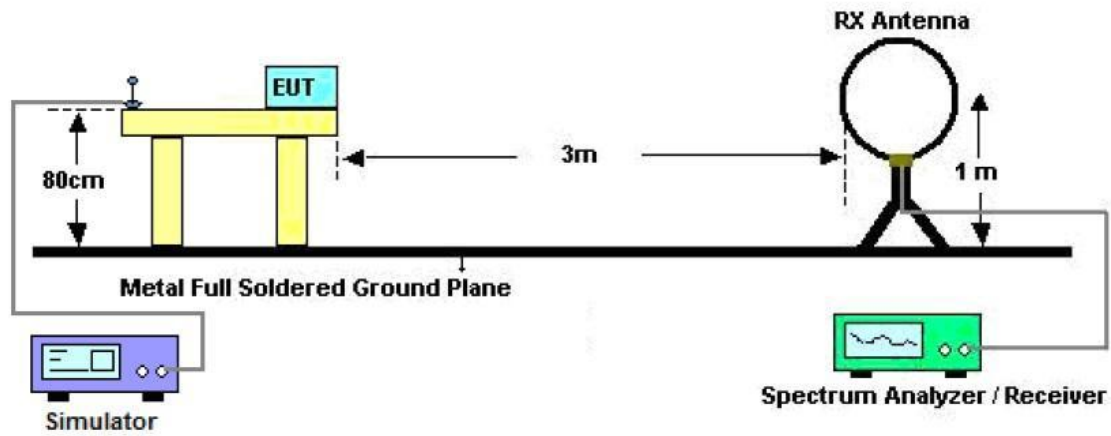

- 2) 30 MHz to 1 GHz emissions:

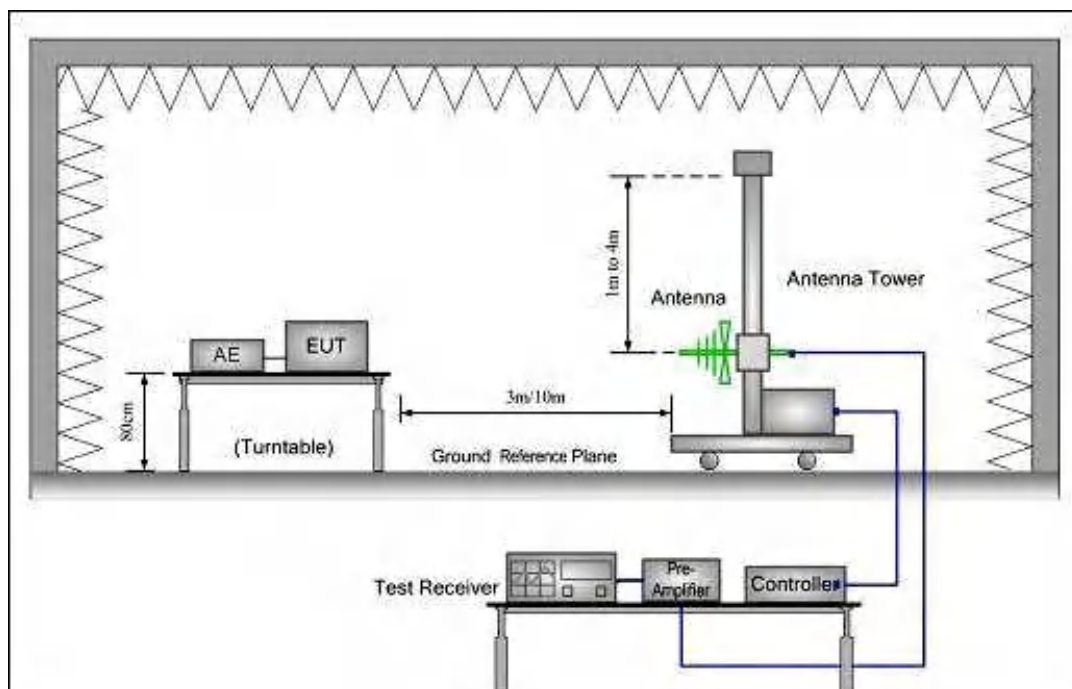

3) 1 GHz to 40 GHz emissions:

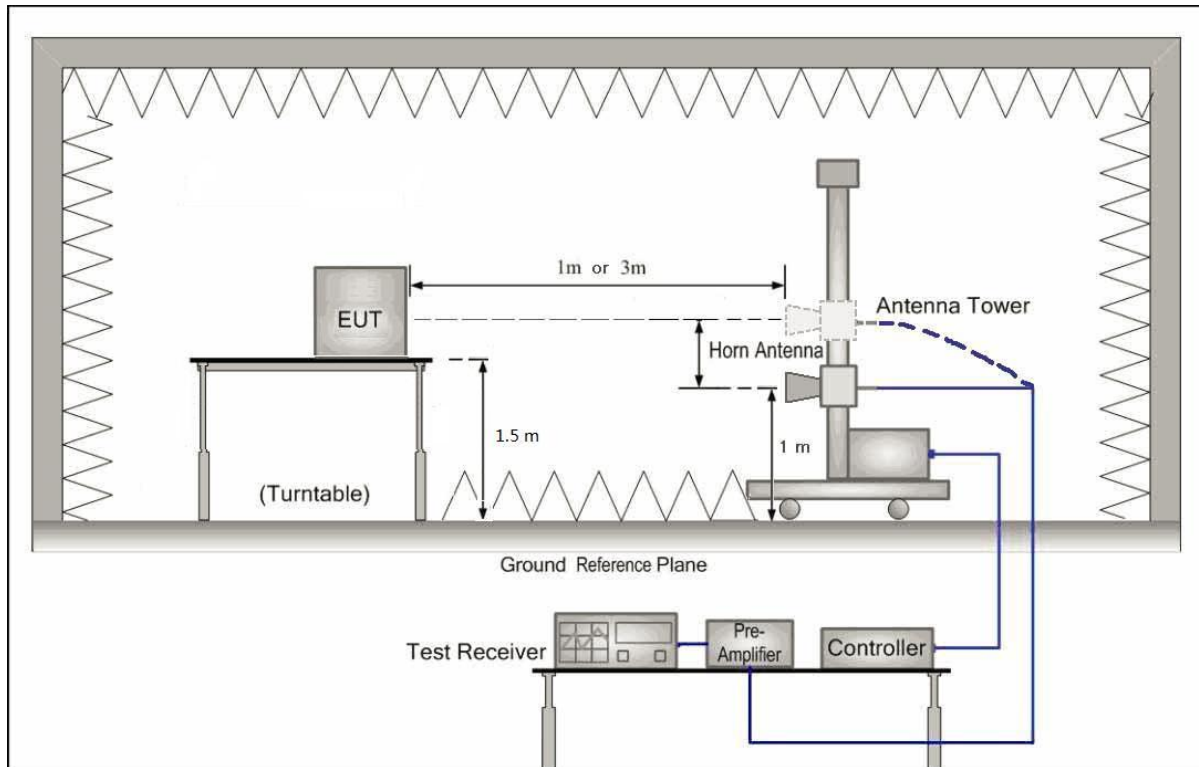

Test Procedure: (1) The receiver was scanned from 0.009MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only. The worst case emissions were reported.

(2) Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

(3) Pre-test under all modes below 1GHz, choose the worst case mode record On the report.

5.7.1 Harmonic and other spurious emissions

9 kHz~30MHz Test result

The Low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report


30 MHz~1 GHz Spurious Emissions.

Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBμV/m)

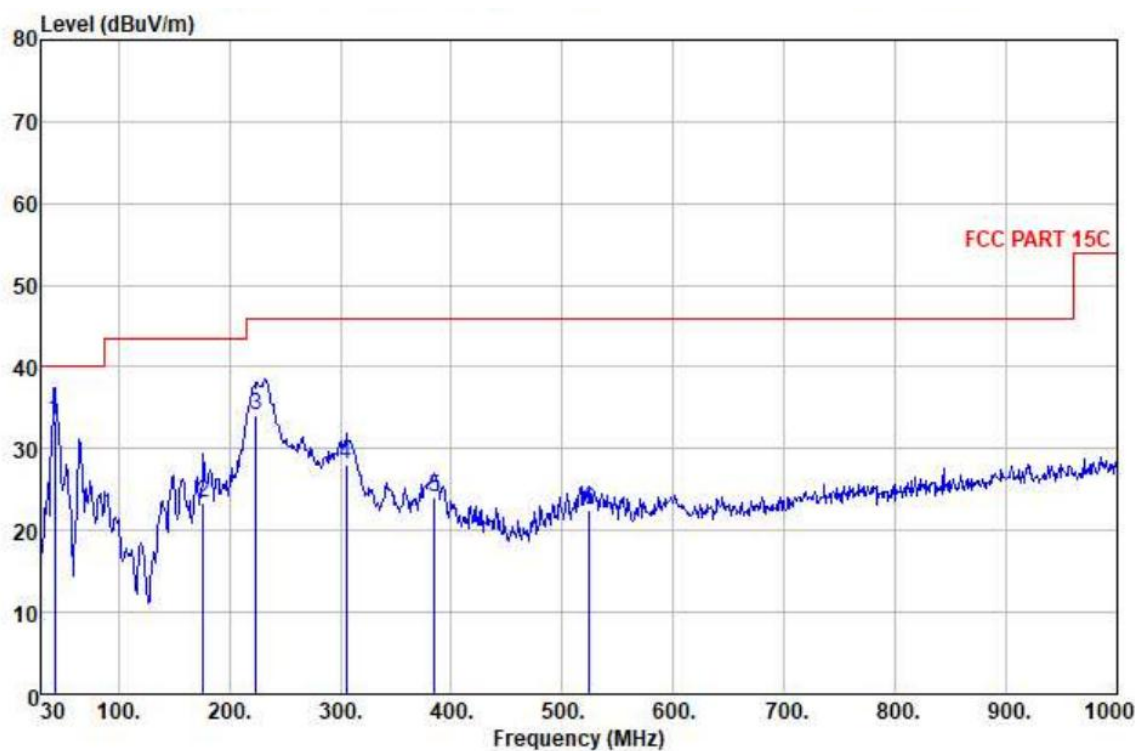

Quasi-peak measurement


No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	42.610	47.43	13.53	0.74	28.31	33.39	40.00	-6.61	HORIZONTAL	QP
2	176.470	40.48	9.32	1.59	28.04	23.35	43.50	-20.15	HORIZONTAL	QP
3	224.000	48.72	11.33	1.81	27.68	34.18	46.00	-11.82	HORIZONTAL	QP
4	305.480	39.98	13.43	2.14	27.58	27.97	46.00	-18.03	HORIZONTAL	QP
5	385.020	31.64	15.26	2.40	28.32	23.98	46.00	-22.02	HORIZONTAL	QP
6	524.700	30.76	17.47	2.85	28.60	22.48	46.00	-23.52	HORIZONTAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Vertical:

Peak scan

Level (dBμV/m)

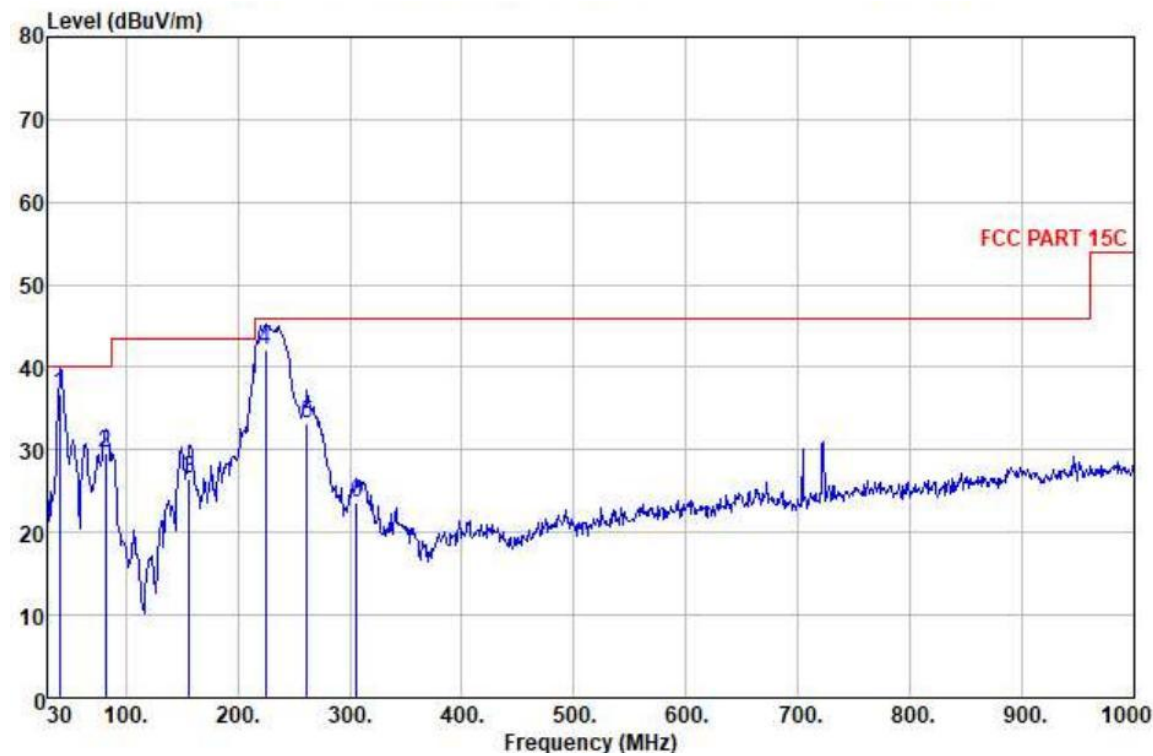

Quasi-peak measurement

No.	Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBμV/m	Limit Line dBμV/m	Over Limit dB	Pol/Phase	Remark
1	40.670	49.04	15.22	0.72	28.16	36.82	40.00	-3.18	VERTICAL	QP
2	82.380	48.93	7.80	1.06	28.17	29.62	40.00	-10.38	VERTICAL	QP
3	157.070	45.45	7.91	1.50	28.24	26.62	43.50	-16.88	VERTICAL	QP
4	224.970	56.64	11.40	1.82	27.65	42.21	46.00	-3.79	VERTICAL	QP
5	261.830	45.64	13.15	1.98	27.53	33.24	46.00	-12.76	VERTICAL	QP
6	306.450	35.50	13.45	2.15	27.57	23.53	46.00	-22.47	VERTICAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor


Spurious emissions above 1GHz

Test at low Channel in transmitting status

Horizontal:

Peak scan

Level (dBμV/m)

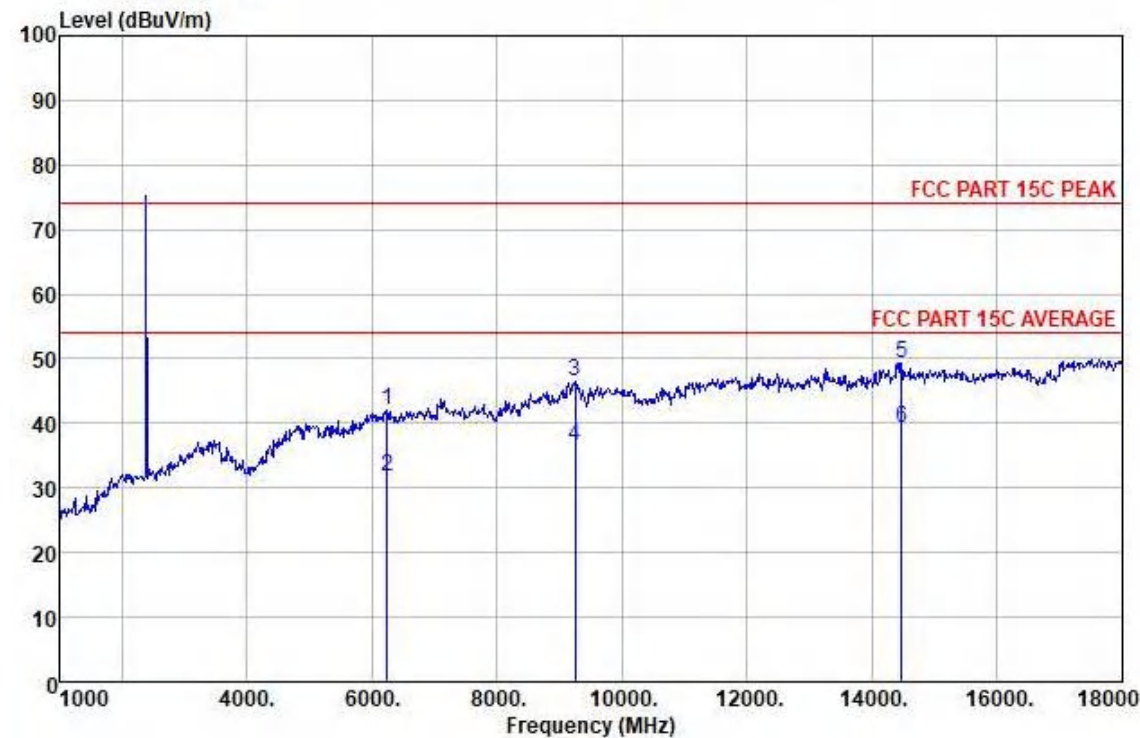

Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBμV/m	Limit Line dBμV/m	Over Limit dB	Pol/Phase	Remark
6236.000	22.67	35.76	11.15	27.40	42.18	74.00	-31.82	HORIZONTAL	Peak
6236.000	12.30	35.76	11.15	27.40	31.81	74.00	-42.19	HORIZONTAL	Average
9245.000	20.69	38.80	11.11	27.18	46.12	74.00	-27.88	HORIZONTAL	Peak
9245.000	10.81	38.80	11.11	27.18	36.54	74.00	-37.46	HORIZONTAL	Average
14464.000	17.44	39.66	18.38	26.16	49.32	74.00	-24.68	HORIZONTAL	Peak
14464.000	7.45	39.66	18.38	26.16	39.33	74.00	-34.67	HORIZONTAL	Average


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Vertical:

Peak scan

Level (dBµV/m)

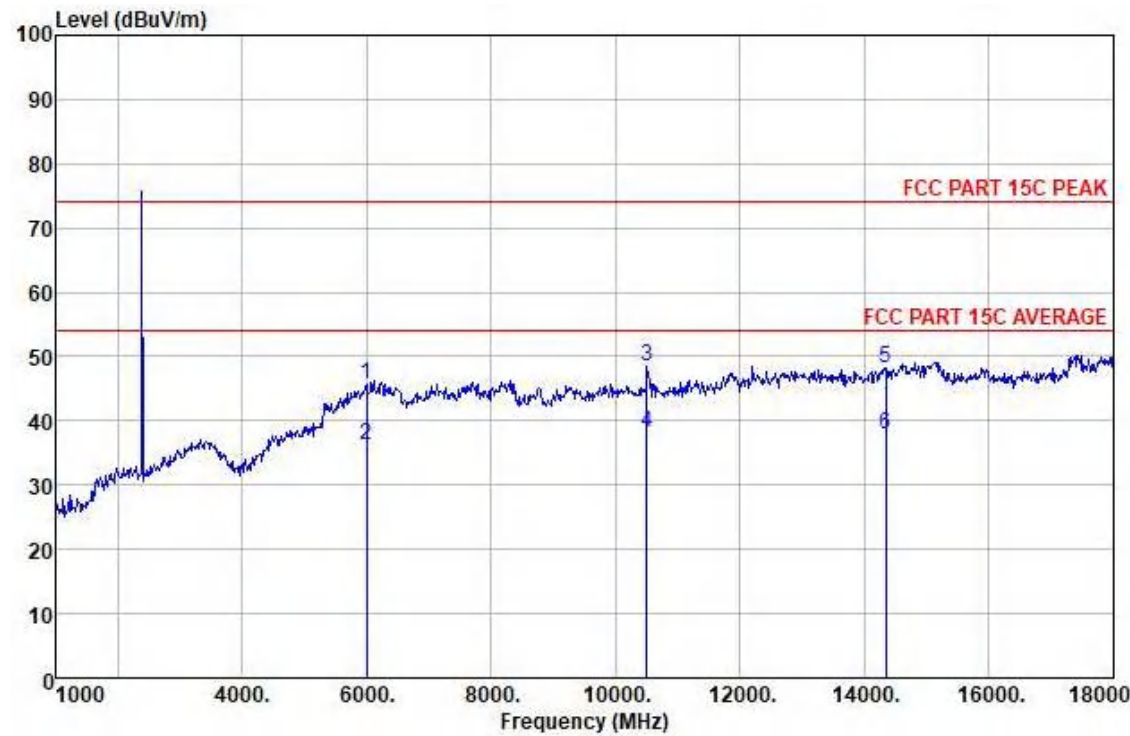

Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit		
	dBuV	dB	dB	dB		dBuV/m	dB		
5998.000	26.33	35.99	10.90	27.42	45.80	74.00	-28.20	VERTICAL	Peak
5998.000	16.61	35.99	10.90	27.42	36.08	74.00	-37.92	VERTICAL	Average
10503.000	21.85	38.60	15.07	27.07	48.15	74.00	-25.55	VERTICAL	Peak
10503.000	11.60	38.60	15.07	27.07	38.20	74.00	-35.80	VERTICAL	Average
14345.000	16.67	39.55	18.27	26.17	48.32	74.00	-25.68	VERTICAL	Peak
14345.000	6.14	39.55	18.27	26.17	37.79	74.00	-36.21	VERTICAL	Average


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Test at Middle Channel in transmitting status Horizontal:

Peak scan

Level (dBμV/m)

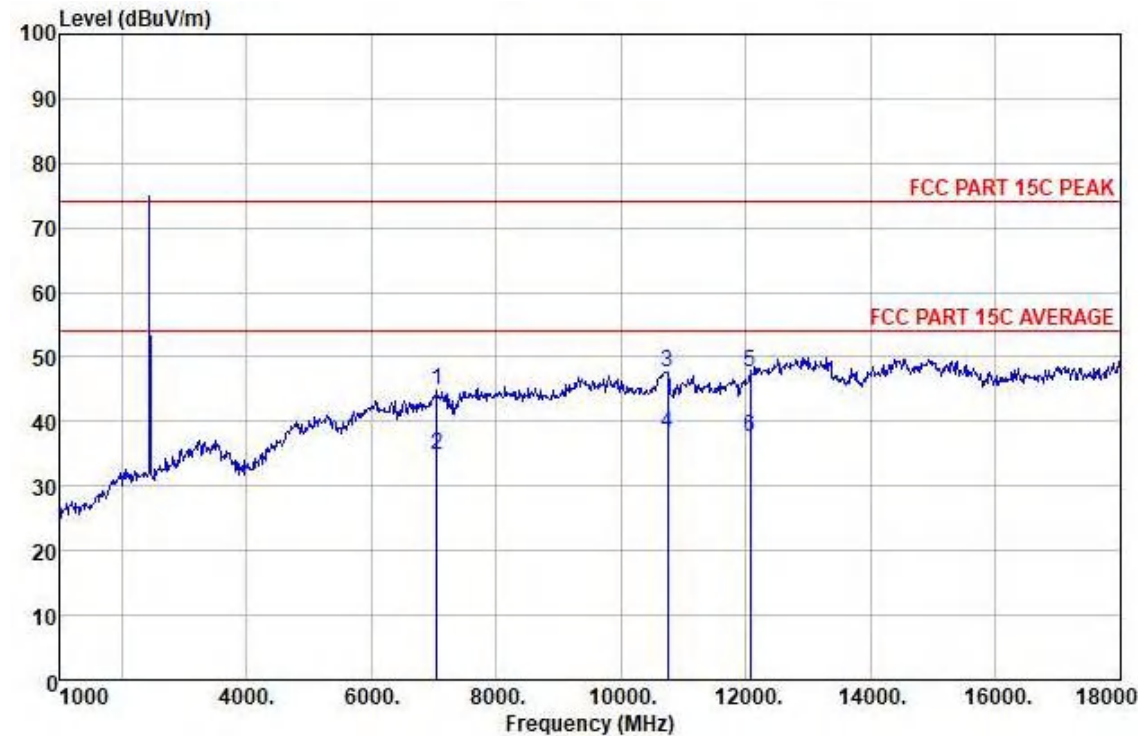

Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
MHz	Level	Factor	Loss	Factor		Line	Limit		
	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB		
7052.000	23.77	36.48	11.98	27.34	44.89	74.00	-29.11	HORIZONTAL	Peak
7052.000	13.70	36.48	11.98	27.34	34.82	74.00	-39.18	HORIZONTAL	Average
10741.000	20.49	38.89	15.32	27.05	47.65	74.00	-26.35	HORIZONTAL	Peak
10741.000	10.90	38.89	15.32	27.05	38.06	74.00	-35.94	HORIZONTAL	Average
12067.000	18.51	39.59	16.42	26.82	47.70	74.00	-26.30	HORIZONTAL	Peak
12067.000	8.51	39.59	16.42	26.82	37.70	74.00	-36.30	HORIZONTAL	Average


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Vertical:

Peak scan

Level (dBµV/m)

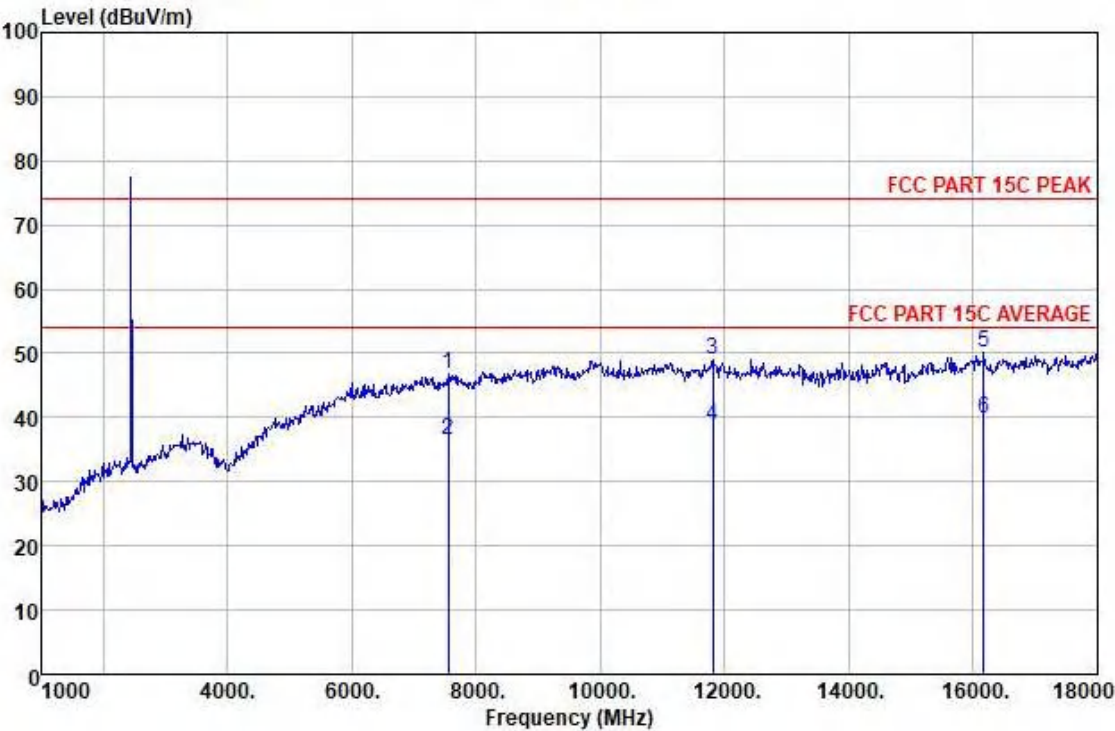

Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit		
	dBuV	dB	dB	dB		dBuV/m	dB		
7545.000	24.51	37.18	12.46	27.32	46.86	74.00	-27.14	VERTICAL	Peak
7545.000	14.28	37.18	12.46	27.32	36.60	74.00	-37.40	VERTICAL	Average
11812.000	19.99	39.60	16.21	26.89	48.91	74.00	-25.09	VERTICAL	Peak
11812.000	9.77	39.60	16.21	26.89	38.69	74.00	-35.31	VERTICAL	Average
16164.000	16.37	39.76	19.67	25.80	50.00	74.00	-24.00	VERTICAL	Peak
16164.000	6.11	39.76	19.67	25.80	39.74	74.00	-34.26	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor


Note: The emission above limit is fundamental emission, which is not subject to the limit.

Test at high Channel in transmitting status

Horizontal:

Peak scan

Level (dBμV/m)

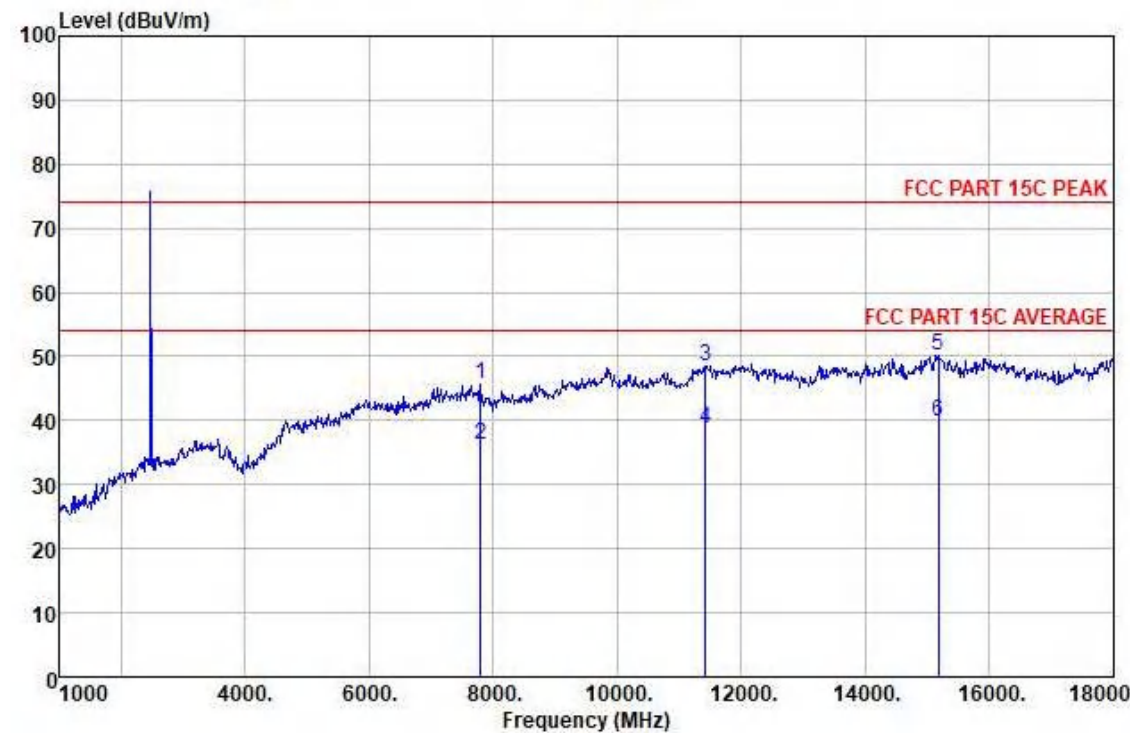

Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamplifier Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
7800.000	23.22	37.08	12.71	27.31	45.70	74.00	-28.30	HORIZONTAL	Peak
7800.000	13.81	37.08	12.71	27.31	36.29	74.00	-37.71	HORIZONTAL	Average
11421.000	20.05	39.54	15.89	26.98	48.50	74.00	-25.50	HORIZONTAL	Peak
11421.000	10.34	39.54	15.89	26.98	38.79	74.00	-35.21	HORIZONTAL	Average
15178.000	17.16	39.85	18.88	26.04	50.15	74.00	-23.85	HORIZONTAL	Peak
15178.000	7.18	39.85	18.88	26.04	39.87	74.00	-34.13	HORIZONTAL	Average


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Vertical:

Peak scan

Level (dBµV/m)

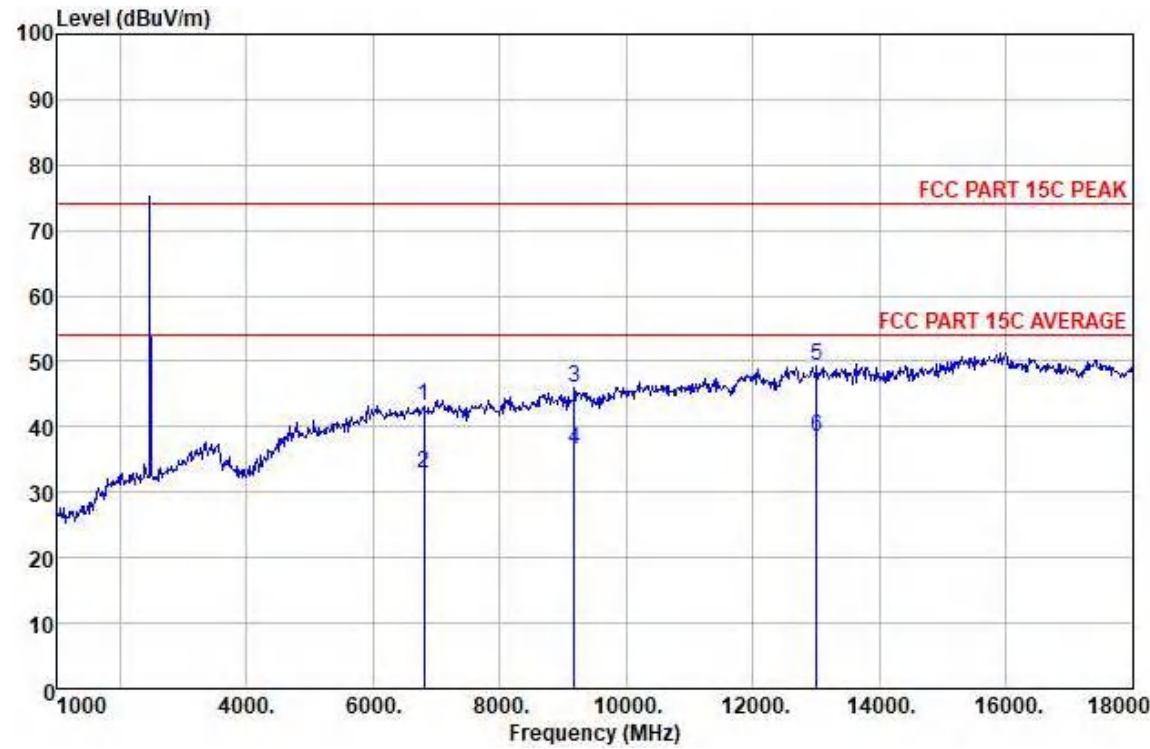

Frèq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
MHz	Level	Factor	Loss	Factor	dBµV/m	Line	Limit		
	dBµV	dB	dB	dB		dBµV/m	dB		
6797.000	22.83	36.03	11.72	27.35	13.23	74.00	-30.77	VERTICAL	Peak
6797.000	12.49	36.03	11.72	27.35	32.89	74.00	-41.11	VERTICAL	Average
9177.000	20.36	38.80	14.05	27.19	16.02	74.00	-27.98	VERTICAL	Peak
9177.000	10.78	38.80	14.05	27.19	36.44	74.00	-37.56	VERTICAL	Average
13002.000	17.93	40.70	17.18	26.48	19.33	74.00	-24.67	VERTICAL	Peak
13002.000	7.17	40.70	17.18	26.48	38.57	74.00	-35.13	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

Remark:

- 1) .For this intentional radiator operates below 25 GHz. The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 3rd harmonic.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.

5.8 Radiated Emissions which fall in the restricted bands

Test Requirement:	FCC Part 15 C section 15.247 (d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10:2013
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	40.0 dB μ V/m between 30MHz & 88MHz; 43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz; 54.0 dB μ V/m above 960MHz.
Detector:	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10Hz Sweep = auto Detector function = peak Trace = max hold

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section. Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	
13.36 - 13.41	322 - 335.4		

Test Result:


Frequency (MHz)	Reading Level (dB μ V/m)	Correct (dB/m)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna polarization	Detector
Low Channel							
2310.000	32.12	6.54	36.02	74.00	-37.98	H	PK
2310.000	21.62	6.54	27.22	54.00	-26.78	H	AV
2390.000	31.88	6.61	36.86	74.00	-37.14	V	PK
2390.000	20.54	6.61	24.81	54.00	-29.19	V	AV
High Channel							
2483.500	31.87	6.70	37.02	74.00	-36.98	H	PK
2483.500	20.34	6.70	24.23	54.00	-29.77	H	AV
2500.000	32.77	6.72	38.03	74.00	-35.97	V	PK
2500.000	21.32	6.72	25.40	54.00	-28.60	V	AV

Remark: No any other emission which falls in restricted bands can be detected and be reported.

Test result: The unit does meet the FCC requirements.

5.9 Band Edges Requirement

Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.
Frequency Band:	2400 MHz to 2483.5 MHz
Test Method:	ANSI C63.10:2013
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	

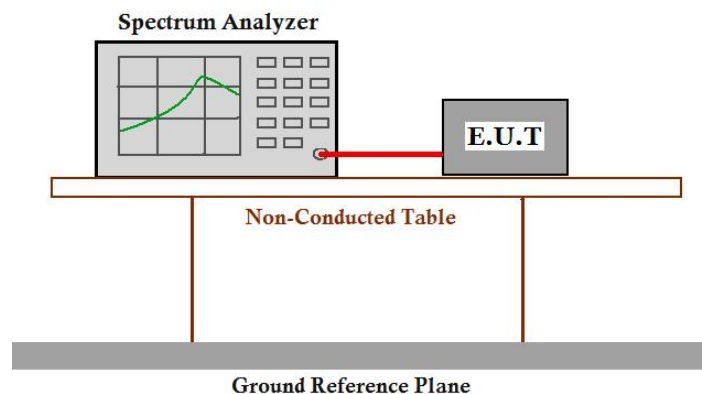


Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set RBW=100 kHz, VBW=300 KHz, suitable frequency span including 1000 kHz bandwidth from band edge.
3. Measure the Conducted Spurious Emissions and Radiated Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse.


Test result with plots as follows:

The band edges was measured and recorded Result:
The Lower Edges attenuated more than 20dB.
The Upper Edges attenuated more than 20dB.


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-55.81	-20	Pass
BLE 1M	2480	-53.63	-20	Pass
BLE 2M	2402	-52.39	-20	Pass
BLE 2M	2480	-52.22	-20	Pass

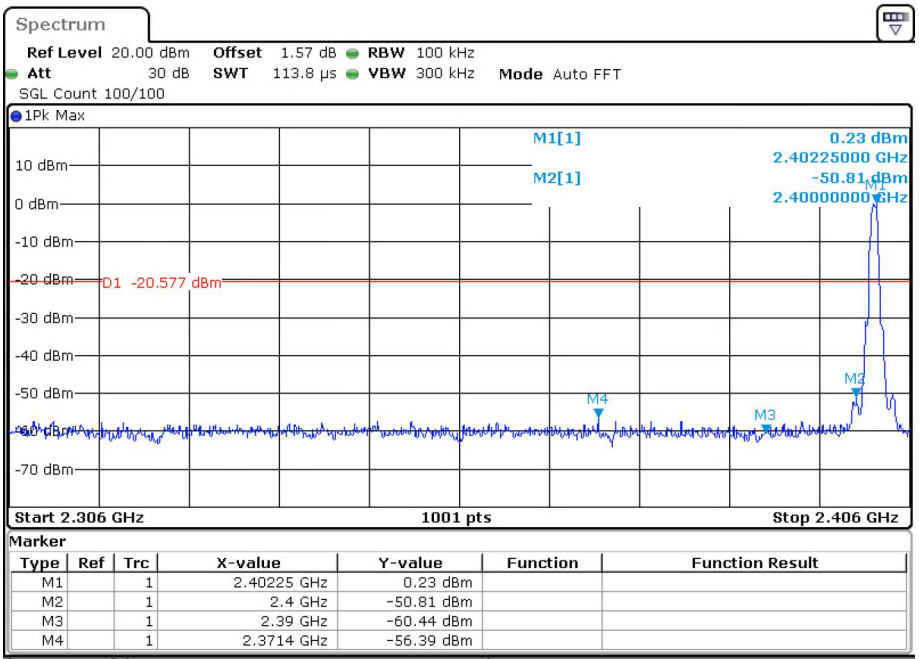


Band Edge BLE 1M 2402MHz Emission

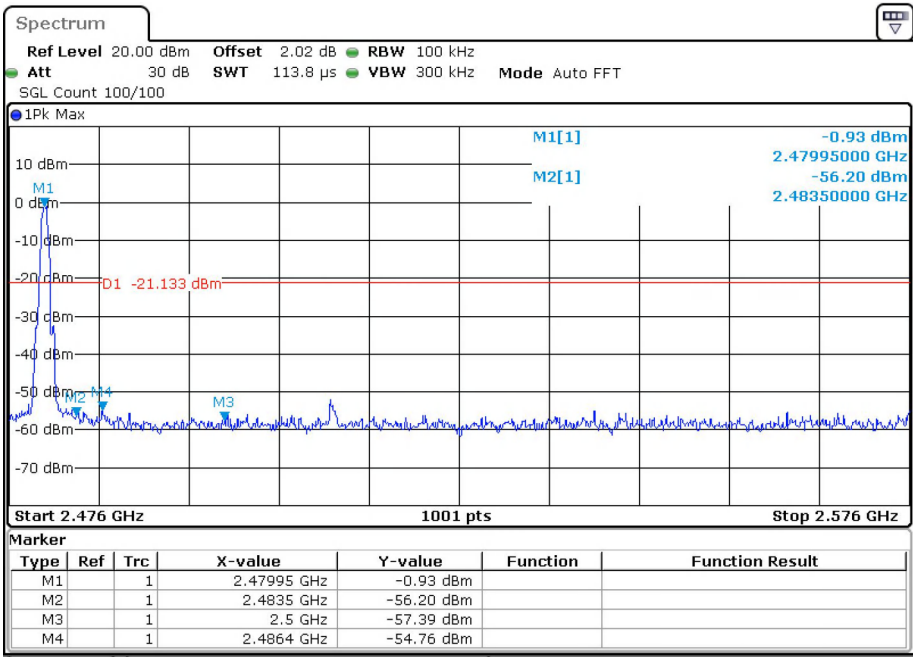

Band Edge BLE 1M 2480MHz Emission

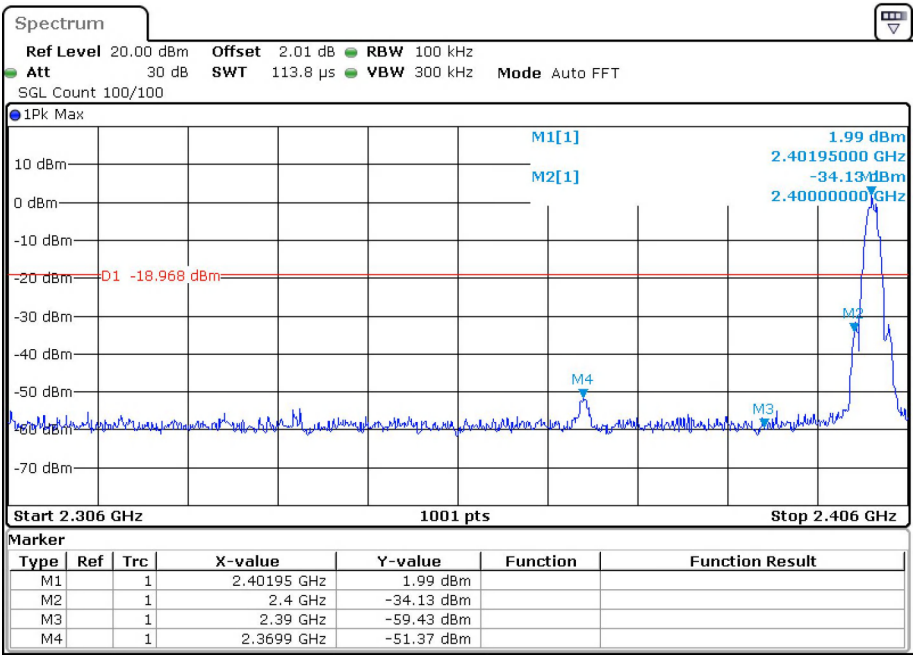

Band Edge BLE 2M 2402MHz Emission

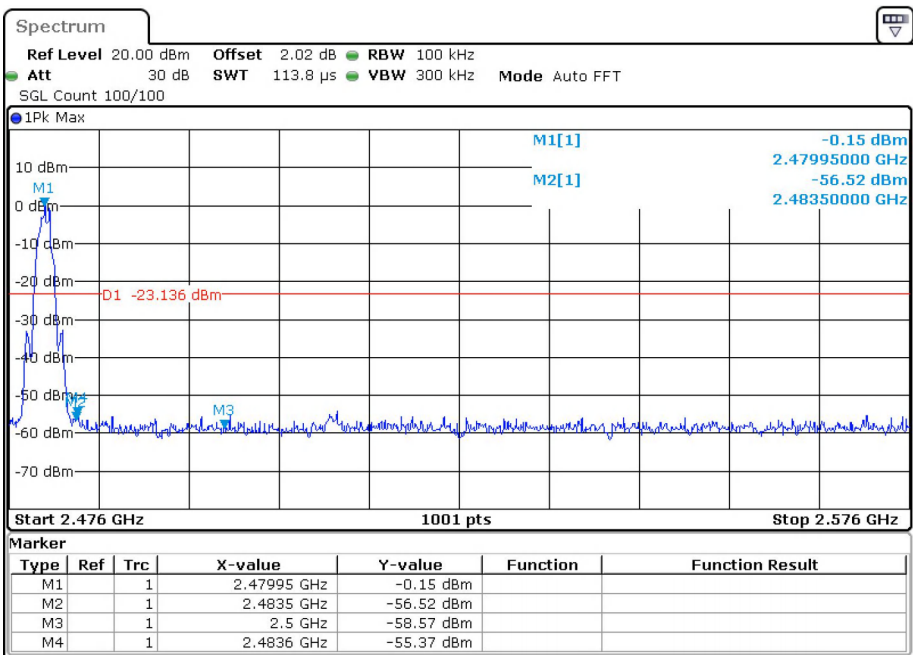

Band Edge BLE 2M 2480MHz Emission

Note: This line in the plots is a reference line for the 20dB down limit, not the limit.

Test result: The unit does meet the FCC requirements.

5.10 Conducted Emissions at Mains Terminals 150 kHz to 30MHz

Test Requirement: FCC Part 15 C section 15.207

Test Voltage: 120V~ 60Hz

Test Method: ANSI C63.10:2013 Clause 6.2

Frequency Range: 150 kHz to 30 MHz

Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)

Test Limit


Limits for conducted disturbance at the mains ports of class B

Frequency Range	Class B Limit dB(μV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

EUT Operation:

Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture).

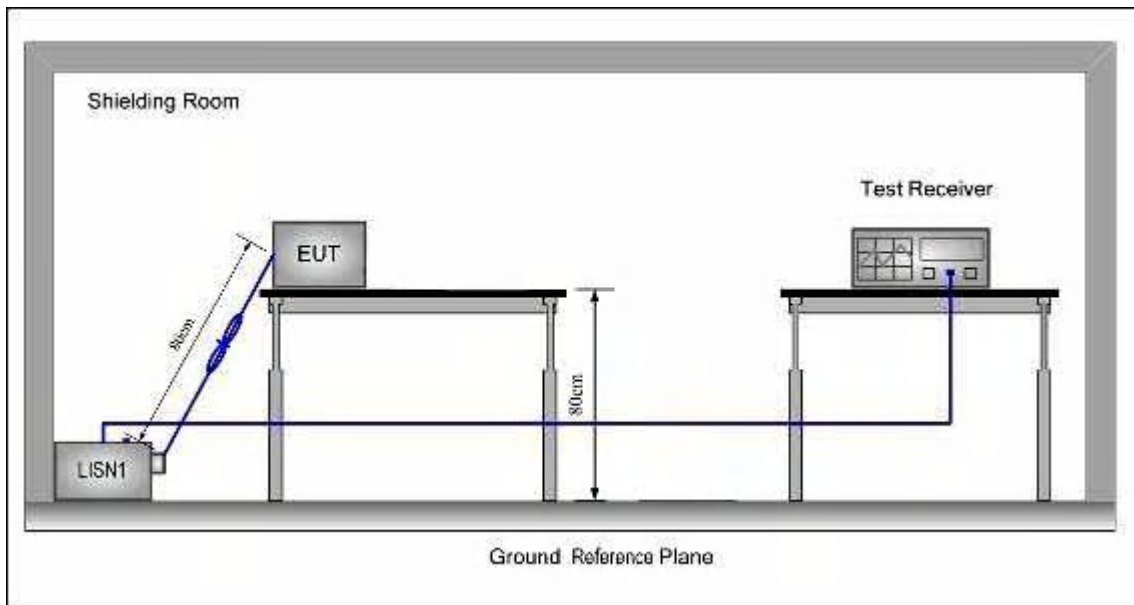Test Configuration:**Test procedure:**

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

5.10.1 Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.

The following Quasi-Peak and Average measurements were performed on the EUT Live Line

Peak Scan:

Level (dBμV)

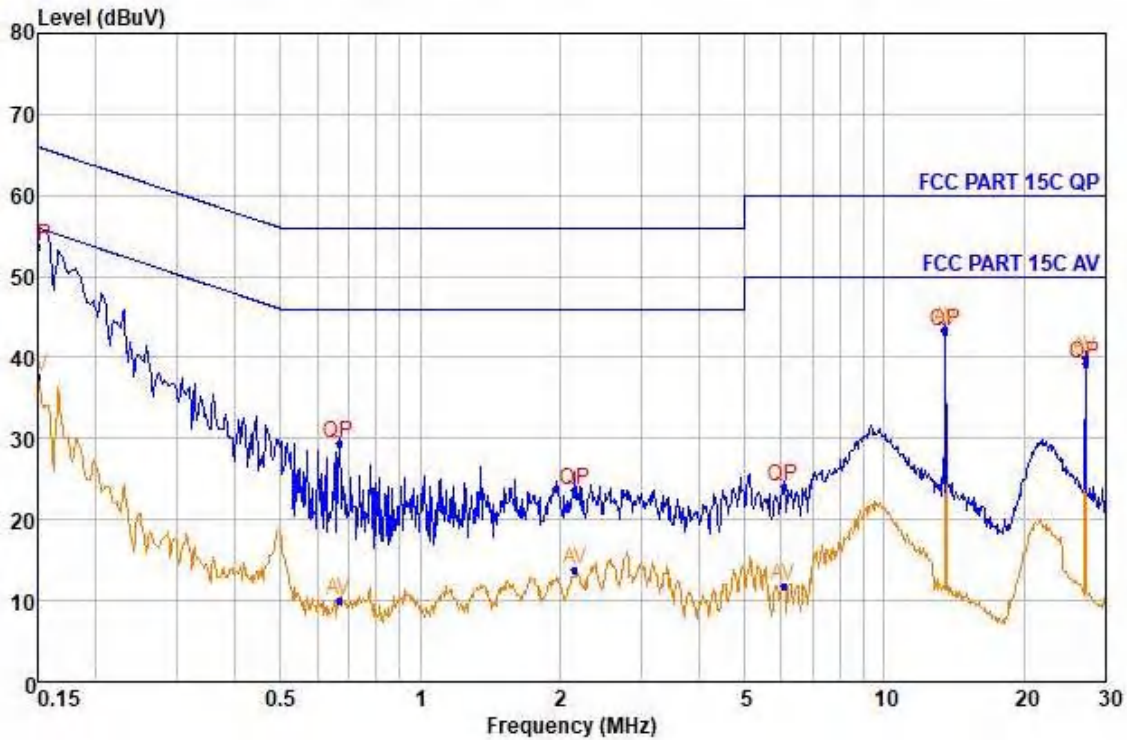

Quasi-peak and Average measurement


NO.	Freq MHz	Level dBμV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBμV	Margin dB
1	0.150	53.62	QP	9.70	0.20	66.00	-12.38
2	0.150	37.60	Average	9.70	0.20	56.00	-18.10
3	0.668	29.51	QP	9.70	0.28	56.00	-26.49
4	0.668	9.99	Average	9.70	0.28	46.00	-36.01
5	2.155	23.69	QP	9.65	0.35	56.00	-32.31
6	2.155	13.71	Average	9.65	0.35	46.00	-32.26
7	6.056	23.99	QP	9.66	0.41	60.00	-36.01
8	6.056	11.78	Average	9.66	0.41	50.00	-38.22
9	13.551	43.22	QP	9.69	0.46	60.00	-16.78
10	13.551	13.11	Average	9.69	0.46	50.00	-6.59
11	27.127	39.19	QP	9.66	0.49	60.00	-20.81
12	27.127	39.80	Average	9.66	0.49	50.00	-10.20

Level=Read Level + LISN Factor + Cable Loss

Neutral Line:

Peak Scan:

Level (dB μ V)

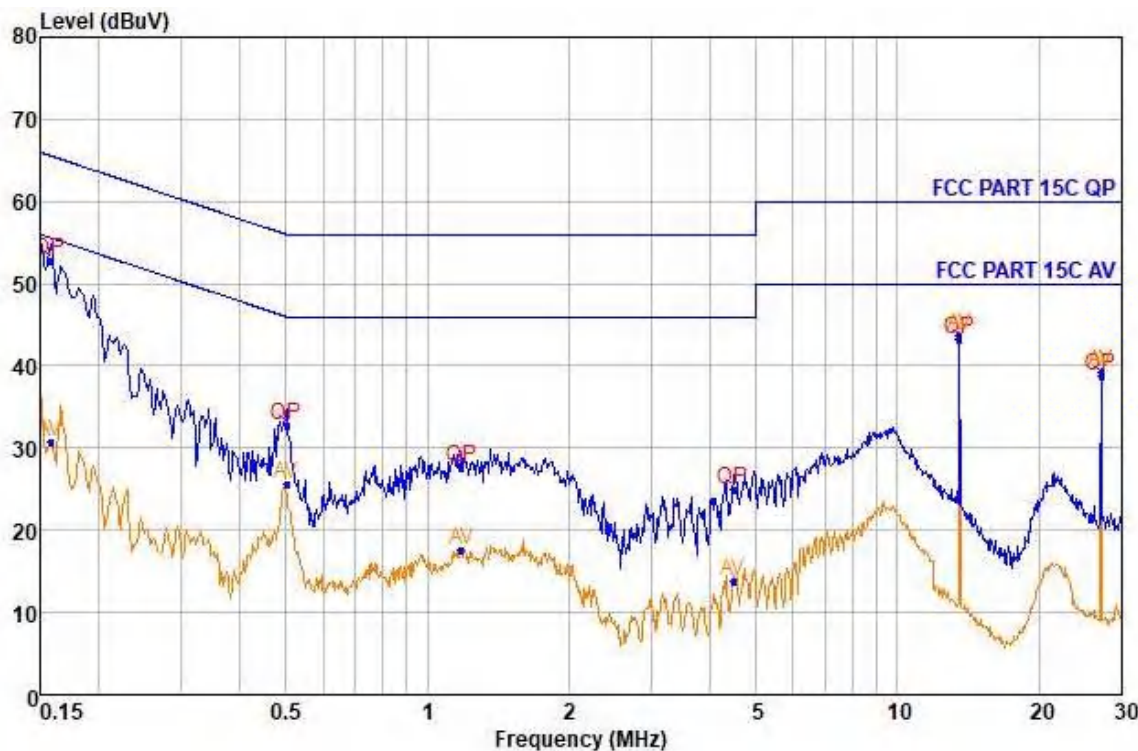

Quasi-peak and Average measurement

NO.	Freq MHz	Level dBuV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBuV	Margin dB
1	0.158	52.74	QP	9.70	0.20	65.56	-12.82
2	0.158	30.74	Average	9.70	0.20	55.56	-24.82
3	0.502	32.72	QP	9.67	0.27	56.00	-23.28
4	0.502	25.72	Average	9.67	0.27	46.00	-20.28
5	1.184	27.57	QP	9.63	0.32	56.00	-28.43
6	1.184	17.57	Average	9.63	0.32	46.00	-28.43
7	1.478	24.85	QP	9.62	0.39	56.00	-31.15
8	1.478	13.85	Average	9.62	0.39	46.00	-32.15
9	13.551	43.14	QP	9.63	0.46	60.00	-16.86
10	13.551	43.60	Average	9.63	0.46	50.00	-6.40
11	27.127	38.68	QP	9.63	0.49	60.00	-21.32
12	27.127	39.11	Average	9.63	0.49	50.00	-10.89

Level=Read Level + LISN Factor + Cable Loss

-- End of test report --