

## TEST REPORT

**Product** : Portable computer  
**Trade mark** : N/A  
**Model/Type reference** : VIGOBOOK G1, VIGOBOOK G3, VIGOBOOK G5, VIGOBOOK G7, VIGOBOOK G9  
**Serial Number** : N/A  
**Report Number** : EED32Q81407202  
**FCC ID** : 2BK7AT156A240100001  
**Date of Issue** : Sep. 30, 2024  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS

Prepared for:

**Shenzhen Yuehe Intelligent Technology Co., Ltd.**  
**4F B, Building 2, Phase 3, Huangtian Yangbei Industrial Zone, Huangtian**  
**Community, Hangcheng Street, Baoan District, Shenzhen**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**

**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Compiled by:

Frazer. Li

Reviewed by:

Tom Chen

Approved by:

Aaron Ma

Date:

Sep. 30, 2024



Check No.: 4837090924

## 1 Contents

	Page
<b>1 CONTENTS .....</b>	<b>2</b>
<b>2 VERSION .....</b>	<b>3</b>
<b>3 TEST SUMMARY .....</b>	<b>4</b>
<b>4 GENERAL INFORMATION .....</b>	<b>5</b>
4.1 CLIENT INFORMATION .....	5
4.2 GENERAL DESCRIPTION OF EUT .....	5
4.3 TEST CONFIGURATION .....	7
4.4 TEST ENVIRONMENT .....	8
4.5 DESCRIPTION OF SUPPORT UNITS .....	8
<b>5 TEST RESULTS AND MEASUREMENT DATA .....</b>	<b>13</b>
5.1 ANTENNA REQUIREMENT .....	13
5.2 AC POWER LINE CONDUCTED EMISSIONS .....	14
5.3 MAXIMUM CONDUCTED OUTPUT POWER .....	18
5.4 20DB EMISSION BANDWIDTH .....	19
5.5 CARRIER FREQUENCY SEPARATION .....	20
5.6 NUMBER OF HOPPING CHANNEL .....	21
5.7 TIME OF OCCUPANCY .....	22
5.8 BAND EDGE MEASUREMENTS .....	23
5.9 CONDUCTED SPURIOUS EMISSIONS .....	24
5.10 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....	25
5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS .....	27
<b>6 APPENDIX A .....</b>	<b>63</b>
<b>7 PHOTOGRAPHS OF TEST SETUP .....</b>	<b>64</b>
<b>8 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS .....</b>	<b>66</b>

## 2 Version

Version No.	Date	Description
00	Sep. 30, 2024	Original

### 3 Test Summary

Test Item	Test Requirement	Result
<b>Antenna Requirement</b>	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15, Subpart C Section 15.207	PASS
<b>Maximum Conducted Output Power</b>	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	PASS
<b>20dB Emission Bandwidth</b>	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	PASS
<b>Carrier Frequency Separation</b>	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	PASS
<b>Number of Hopping Channels</b>	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	PASS
<b>Time of Occupancy</b>	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15, Subpart C Section 15.247(b)(4)	PASS
<b>Band Edge Measurements</b>	47 CFR Part 15, Subpart C Section 15.247(d)	PASS
<b>Conducted Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.247(d)	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15, Subpart C Section 15.205/15.209	PASS
<b>Restricted bands around fundamental frequency</b>	47 CFR Part 15, Subpart C Section 15.205/15.209	PASS

#### Remark:

Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

Model No.:VIGOBOOK G1,VIGOBOOK G3 VIGOBOOK G5,VIGOBOOK G7,VIGOBOOK G9

Only the model VIGOBOOK G7 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with only differences in these models are the model names. All other features are identical. These differences do not impact the product's safety or electromagnetic compatibility performance. The different models, voltage, current, and power specifications are solely intended to differentiate between various sales markets.

## 4 General Information

### 4.1 Client Information

Applicant:	Shenzhen Yuehe Intelligent Technology Co., Ltd.
Address of Applicant:	4F B, Building 2, Phase 3, Huangtian Yangbei Industrial Zone, Huangtian Community, Hangcheng Street, Baoan District, Shenzhen
Manufacturer:	Shenzhen Yuehe Intelligent Technology Co., Ltd.
Address of Manufacturer:	4F B, Building 2, Phase 3, Huangtian Yangbei Industrial Zone, Huangtian Community, Hangcheng Street, Baoan District, Shenzhen
Factory:	Shenzhen Yuehe Intelligent Technology Co., Ltd.
Address of Factory:	4F B, Building 2, Phase 3, Huangtian Yangbei Industrial Zone, Huangtian Community, Hangcheng Street, Baoan District, Shenzhen

### 4.2 General Description of EUT

Product Name:	Portable computer	
Model No.:	VIGOBOOK G1,VIGOBOOK G3 VIGOBOOK G5, VIGOBOOK G7,VIGOBOOK G9	
Test Model No.:	VIGOBOOK G7	
Trade Mark:	N/A	
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location	
Operation Frequency:	2402MHz~2480MHz	
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)	
Modulation Type:	GFSK, π/4DQPSK, 8DPSK	
Number of Channel:	79	
Hopping Channel Type:	Adaptive Frequency Hopping systems	
Antenna Type:	Internal Antenna	
Antenna Gain:	1.45dBi;	
Power Supply:	Adapter:	Model:JHD-AP048U-190237BA-A Input:100-240V~50/60Hz,1.2A Output:19V,2370mA
Test Voltage:	DC 19V	
Sample Received Date:	Sep. 09, 2024	
Sample tested Date:	Sep. 09, 2024 to Sep. 24, 2024	

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

### 4.3 Test Configuration

<b>EUT Test Software Settings:</b>		
Test Software:	MPtoolkit.exe (manufacturer declare )	
EUT Power Grade:	Default (Power level is built-in set parameters and cannot be changed and selected)	
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.		
Mode	Channel	Frequency(MHz)
DH1/DH3/DH5	CH0	2402
	CH39	2441
	CH78	2480
2DH1/2DH3/2DH5	CH0	2402
	CH39	2441
	CH78	2480
3DH1/3DH3/3DH5	CH0	2402
	CH39	2441
	CH78	2480

#### 4.4 Test Environment

<b>Operating Environment:</b>	
<b>Radiated Spurious Emissions:</b>	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
<b>Conducted Emissions:</b>	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
<b>RF Conducted:</b>	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

#### 4.5 Description of Support Units

The EUT has been tested independently.

#### 4.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

#### 4.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

## 4.8 Equipment List

BT/WIFI/SRD RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Communication test set	R&S	CMW500	107929	06-26-2024	06-25-2025
Signal Generator	R&S	SMBV100A	1407.6004K02-262149-CV	09-02-2024	09-01-2025
Spectrum Analyzer	R&S	FSV40	101200	07-18-2024	07-17-2025
RF control unit(power unit)	MWRF-test	MW100-RFCB	MW220620CTI-42	06-25-2024	06-24-2025
High-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	11/12/2023	12/10/2024
Temperature/Humidity Indicator	biaozhi	HM10	1804186	05-29-2024	05-28-2025
BT&WI-FI Automatic test software	MWRF-test	MTS 8310	V2.0.0.0	---	---
Spectrum Analyzer	R&S	FSV3044	101509	01/17/2024	01/16/2025

Conducted Emissions Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-18-2024	04-17-2025
LISN	R&S	ENV216	100098	09-19-2024	09-18-2025
Capacitive voltage probe	Schwarzbeck	CVP 9222C	00124	06-18-2024	06-17-2025
ISN	TESEQ	ISN T800	30297	12-14-2023	12-13-2024
Barometer	Changchun	DYM3	1188	---	---
Temperature/Humidity Indicator	Defu	TH128	---	04-25-2024	04-24-2025
Test software	Fara	EZ-EMC	EMC-CON 3A1.1	---	---

3M Semi/full-anechoic Chamber(2#)					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-22-2022	05-21-2025
Receiver	R&S	ESCI7	100938-003	09-07-2024	09-06-2025
Spectrum Analyzer	R&S	FSV40	101200	07-18-2024	07-17-2025
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-16-2024	04-15-2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-18-2024	05-17-2025
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-16-2024	04-15-2025
Horn Antenna	A.H.SYSTEMS	SAS-574	374	07-02-2023	07-01-2026
Preamplifier	Agilent	11909A	12-1	03-22-2024	03-21-2025
Preamplifier	EMCI	EMC051845SE	980380	12-14-2023	12-13-2024
Preamplifier	CD	PAP-1840-60	6041.6042	06-19-2024	06-18-2025
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2024	01-08-2027
Receiver	Keysight	N9038A	MY57290136	01-09-2024	01-08-2025
Spectrum Analyzer	Keysight	N9020B	MY57111112	01-29-2024	01-28-2025
Spectrum Analyzer	Keysight	N9030B	MY57140871	01-23-2024	01-22-2025
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-28-2024	04-27-2025
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-16-2024	04-15-2025
Horn Antenna	ETS-LINDGREN	3117	57407	07-03-2024	07-02-2025
Preamplifier	EMCI	EMC001330	980563	03-08-2024	03-07-2025
Preamplifier	Tonscend	TAP-011858	AP21B806112	07-18-2024	07-17-2025
Preamplifier	Tonscend	EMC051845SE	980380	12-14-2023	12-13-2024
Communication test set	R&S	CMW500	102898	12-14-2023	12-13-2024
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-07-2024	04-06-2025
RSE Automatic test software	JS Tonscend	JS36-RSE	V4.0.0.0	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement


<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
<b>EUT Antenna:</b>	Please see Internal photos
The antenna is PCB antenna. The best case gain of the antenna is 1.45dBi;	

## 5.2 AC Power Line Conducted Emissions

	equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation at the lowest channel is the worst case. Only the worst case is recorded in the report.
Test Results:	Pass

### Measurement Data


Live line:

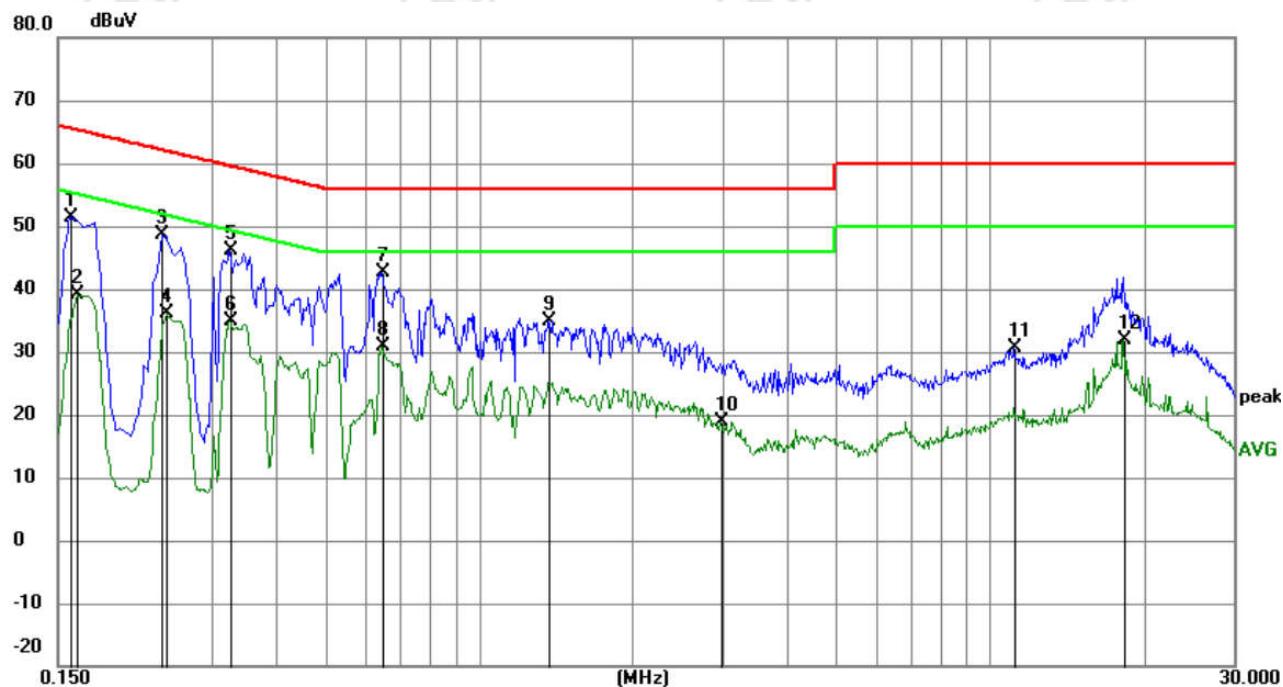


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1590	41.62	9.85	51.47	65.52	-14.05	QP	
2		0.1635	29.21	9.85	39.06	55.28	-16.22	AVG	
3		0.2400	38.89	9.74	48.63	62.10	-13.47	QP	
4		0.2445	26.32	9.72	36.04	51.94	-15.90	AVG	
5	*	0.3255	36.62	9.60	46.22	59.57	-13.35	QP	
6		0.3255	25.34	9.60	34.94	49.57	-14.63	AVG	
7		0.6450	32.74	9.77	42.51	56.00	-13.49	QP	
8		0.6450	21.11	9.77	30.88	46.00	-15.12	AVG	
9		1.3695	25.19	9.74	34.93	56.00	-21.07	QP	
10		2.9670	9.07	9.78	18.85	46.00	-27.15	AVG	
11		11.1435	20.68	9.83	30.51	60.00	-29.49	QP	
12		18.2400	21.80	9.97	31.77	50.00	-18.23	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

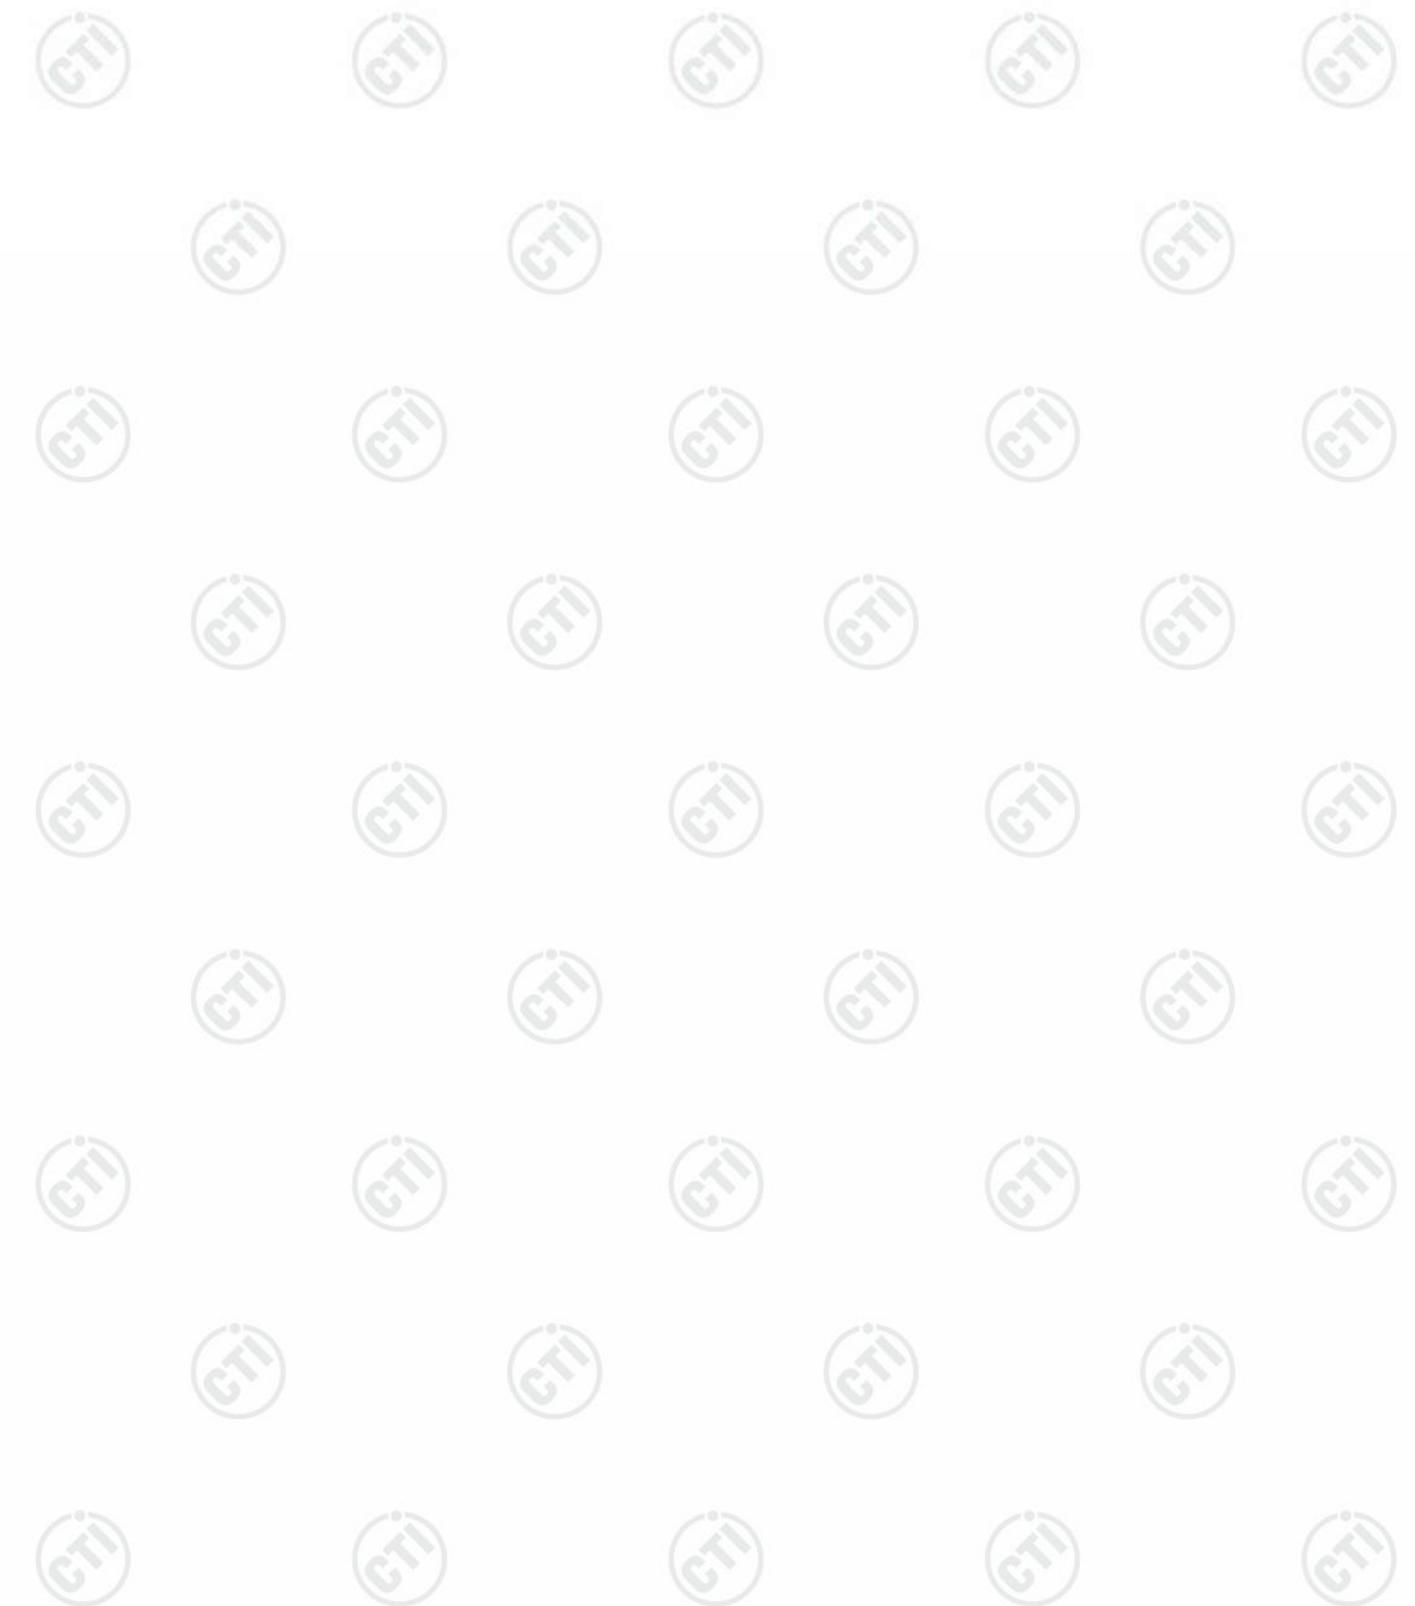

Neutral line:

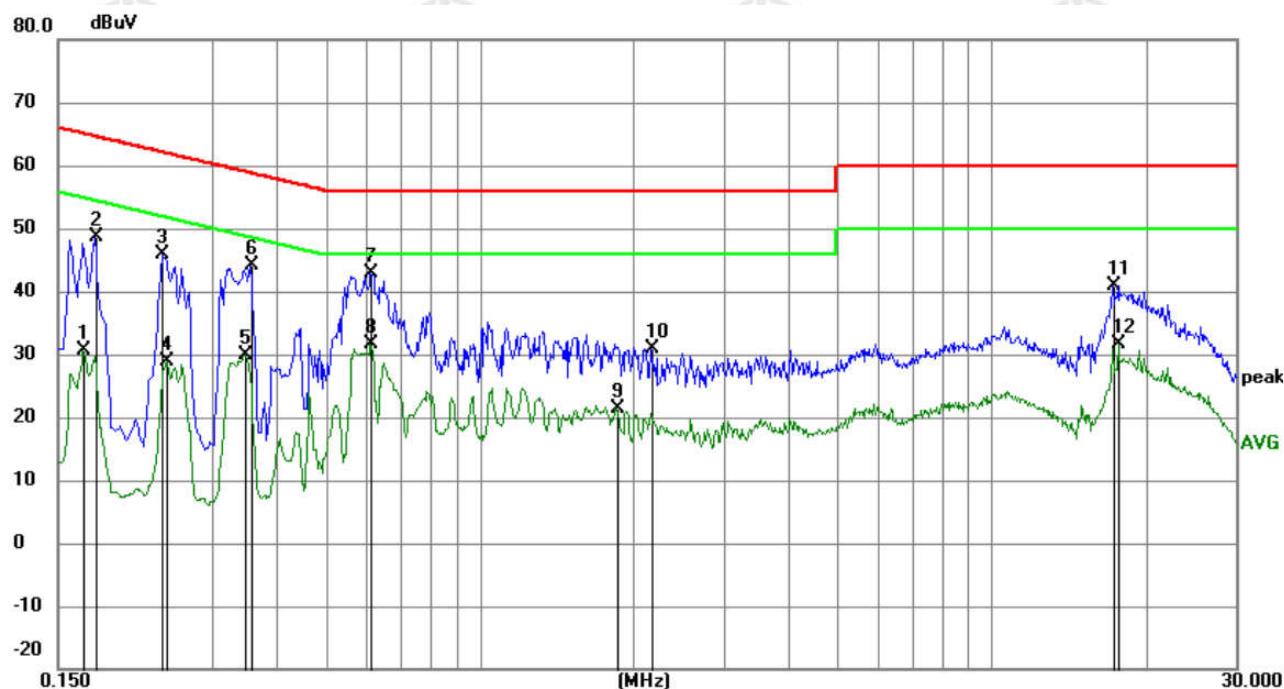


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1680	20.69	9.85	30.54	55.06	-24.52	AVG	
2		0.1770	38.73	9.86	48.59	64.63	-16.04	QP	
3		0.2400	36.14	9.74	45.88	62.10	-16.22	QP	
4		0.2445	19.27	9.72	28.99	51.94	-22.95	AVG	
5		0.3480	20.15	9.66	29.81	49.01	-19.20	AVG	
6		0.3570	34.47	9.68	44.15	58.80	-14.65	QP	
7	*	0.6134	33.23	9.65	42.88	56.00	-13.12	QP	
8		0.6134	21.86	9.65	31.51	46.00	-14.49	AVG	
9		1.8510	11.62	9.75	21.37	46.00	-24.63	AVG	
10		2.1660	21.24	9.75	30.99	56.00	-25.01	QP	
11		17.2500	31.00	9.94	40.94	60.00	-19.06	QP	
12		17.6955	21.67	9.95	31.62	50.00	-18.38	AVG	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


### 5.3 Maximum Conducted Output Power

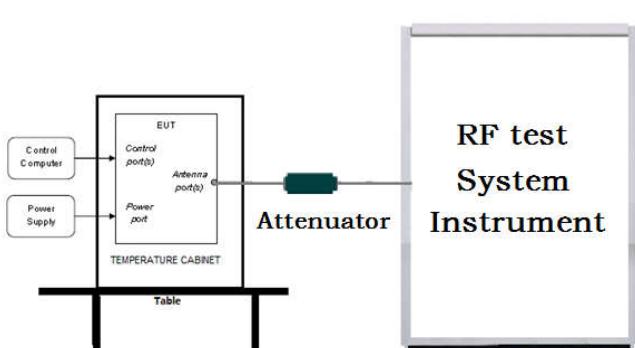Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>The diagram illustrates the test setup. On the left, a 'Control Computer' and a 'Power Supply' are connected to a 'EUT' (Equipment Under Test) which is placed inside a 'TEMPERATURE CABINET'. The 'EUT' has a 'Control port(s)' and a 'Power port'. An 'Antenna port(s)' is connected to an 'Attenuator', which is then connected to an 'RF test System Instrument'. The entire setup is on a 'Table'.</p> <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<p>Use the following spectrum analyzer settings:</p> <p>Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel</p> <p>RBW &gt; the 20 dB bandwidth of the emission being measured <math>VBW \geq RBW</math></p> <p>Sweep = auto</p> <p>Detector function = peak</p> <p>Trace = max hold</p> <p>Allow the trace to stabilize.</p> <p>Use the marker-to-peak function to set the marker to the peak of the emission.</p>
Limit:	21dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Refer to Appendix A


## 5.4 20dB Emission Bandwidth

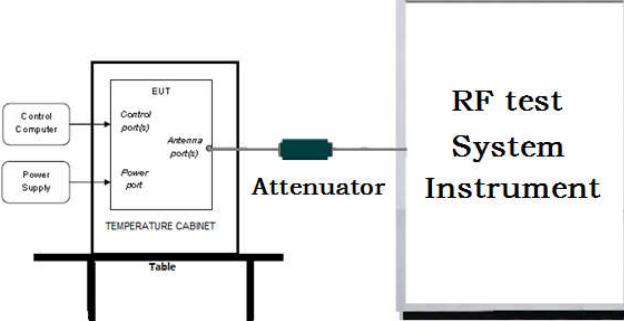Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; <math>1\% \leq RBW \leq 5\%</math> of the 20 dB bandwidth; <math>VBW \geq 3RBW</math>; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>4. Measure and record the results in the test report.</li> </ol>
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Refer to Appendix A


## 5.5 Carrier Frequency Separation

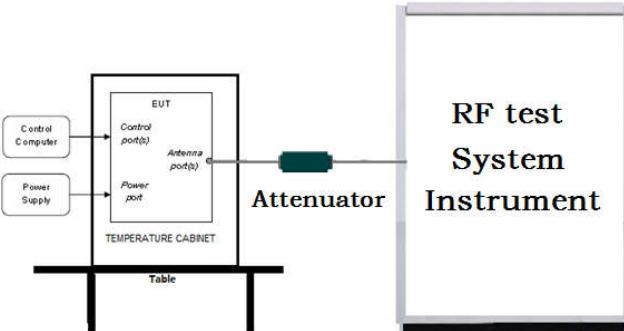Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Enable the EUT hopping function.</li> <li>4. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report.</li> </ol>
Limit:	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Refer to Appendix A


## 5.6 Number of Hopping Channel

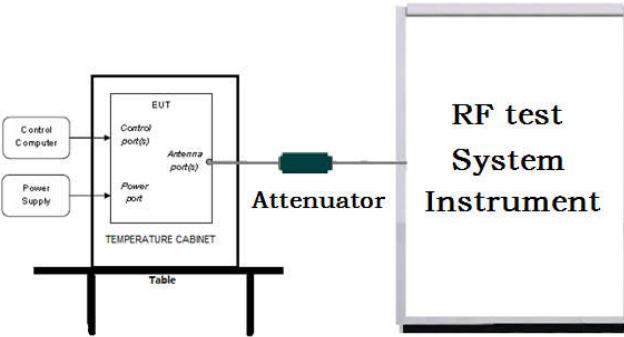Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Enable the EUT hopping function.</li> <li>4. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; <math>VBW \geq RBW</math>; Sweep= auto; Detector function = peak; Trace = max hold.</li> <li>5. The number of hopping frequency used is defined as the number of total channel.</li> <li>6. Record the measurement data in report.</li> </ol>
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Hopping transmitting with all kind of modulation
Test Results:	Refer to Appendix A


## 5.7 Time of Occupancy

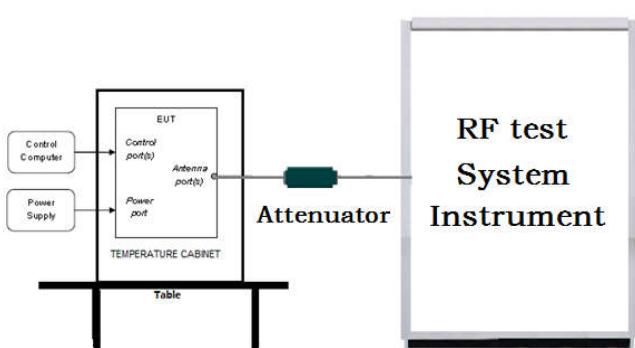Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Enable the EUT hopping function.</li> <li>4. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be <math>\leq</math> channel spacing and where possible RBW should be set <math>\gg 1 / T</math>, where T is the expected dwell time per channel; <math>VBW \geq RBW</math>; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.</li> <li>5. Measure and record the results in the test report.</li> </ol>
Limit:	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Test Results:	Refer to Appendix A


## 5.8 Band edge Measurements

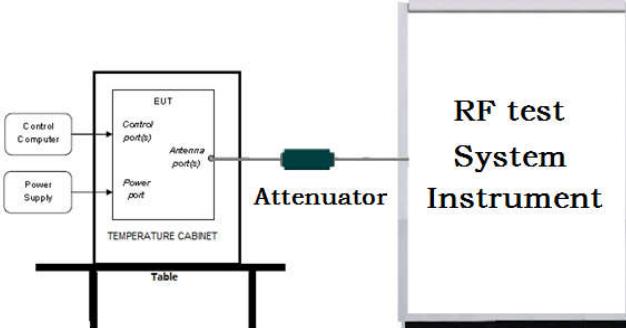Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>1. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>2. Set RBW = 100 kHz, VBW = 300 kHz (<math>\geq</math>RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.</li> <li>3. Enable hopping function of the EUT and then repeat step 2 and 3.</li> <li>4. Measure and record the results in the test report.</li> </ol>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Refer to Appendix A

## 5.9 Conducted Spurious Emissions

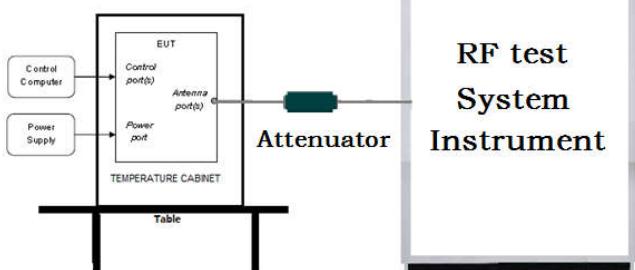Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW.</li> <li>4. Measure and record the results in the test report.</li> <li>5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</li> </ol>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Refer to Appendix A

## 5.10 Pseudorandom Frequency Hopping Sequence

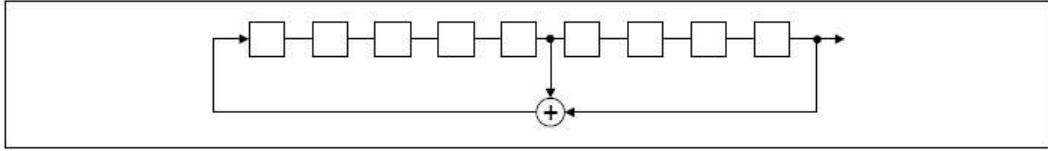Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:																						
	<p>The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p> <p>Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.</p> <p>The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.</p>																						
<b>Compliance for section 15.247(a)(1)</b>																							
<p>According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> <li>Number of shift register stages: 9</li> <li>Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>Longest sequence of zeros: 8 (non-inverted signal)</li> </ul>  <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <table border="1"> <tr> <td>20</td> <td>62</td> <td>46</td> <td>77</td> <td>7</td> <td>64</td> <td>8</td> <td>73</td> <td>16</td> <td>75</td> <td>1</td> </tr> <tr> <td> </td> </tr> </table> <p>Each frequency used equally on the average by each transmitter.</p> <p>According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.</p>		20	62	46	77	7	64	8	73	16	75	1											
20	62	46	77	7	64	8	73	16	75	1													
<b>Compliance for section 15.247(g)</b>																							
<p>According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom</p>																							

hopping frequency system.

**Compliance for section 15.247(h)**


According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinate with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



### 5.11 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Peak	100 kHz	300kHz	Peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

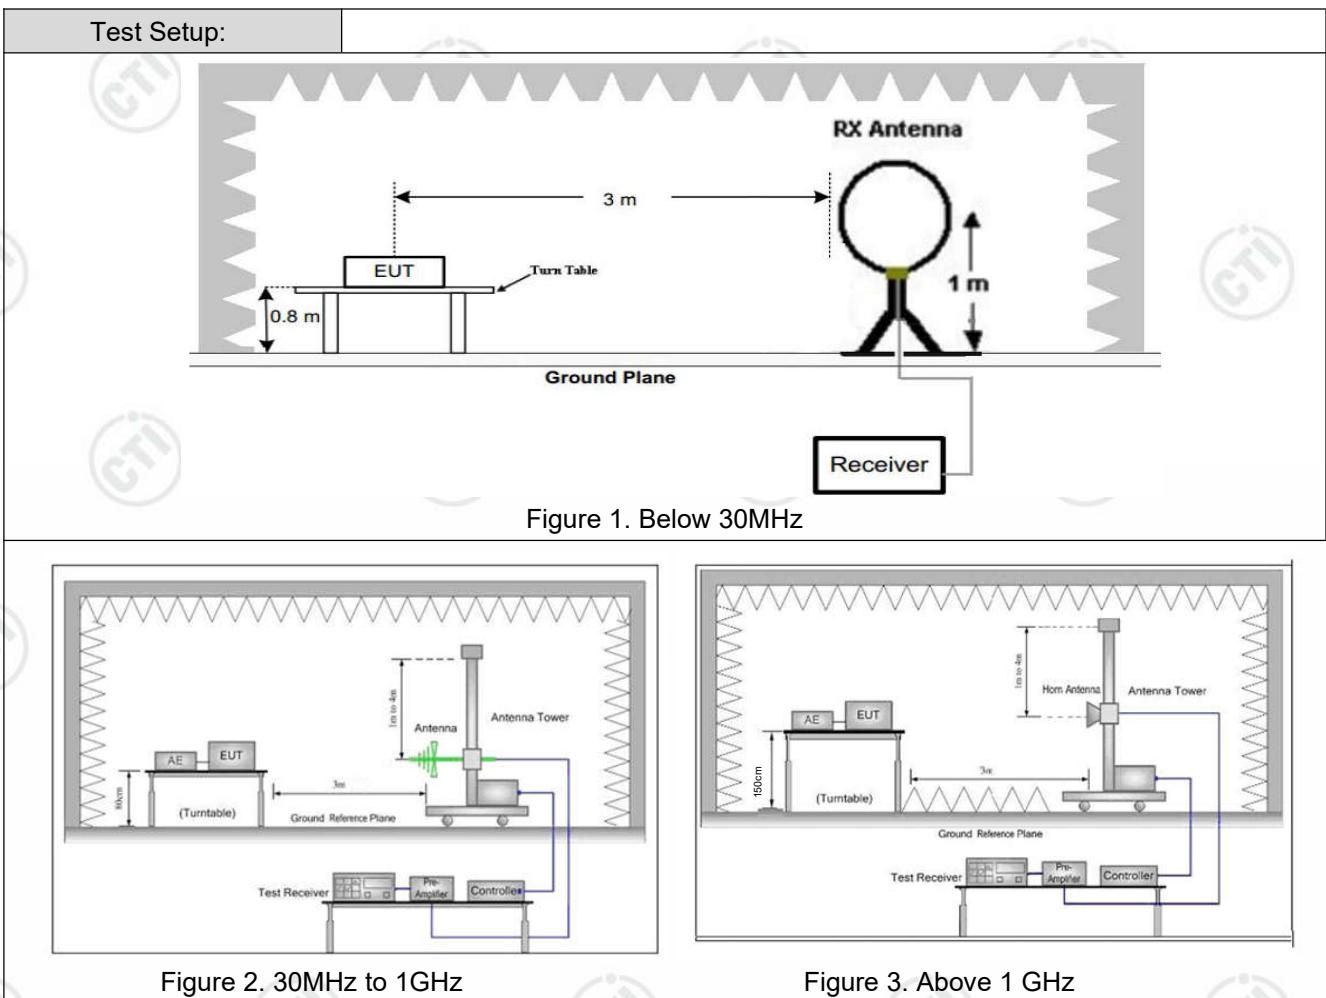


Test Procedure:


- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
Note: For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the

	<p>measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode, For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Results:	Pass

**Radiated Spurious Emission below 1GHz:**


During the test, the Radiated Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of DH5 for GFSK was recorded in the report.

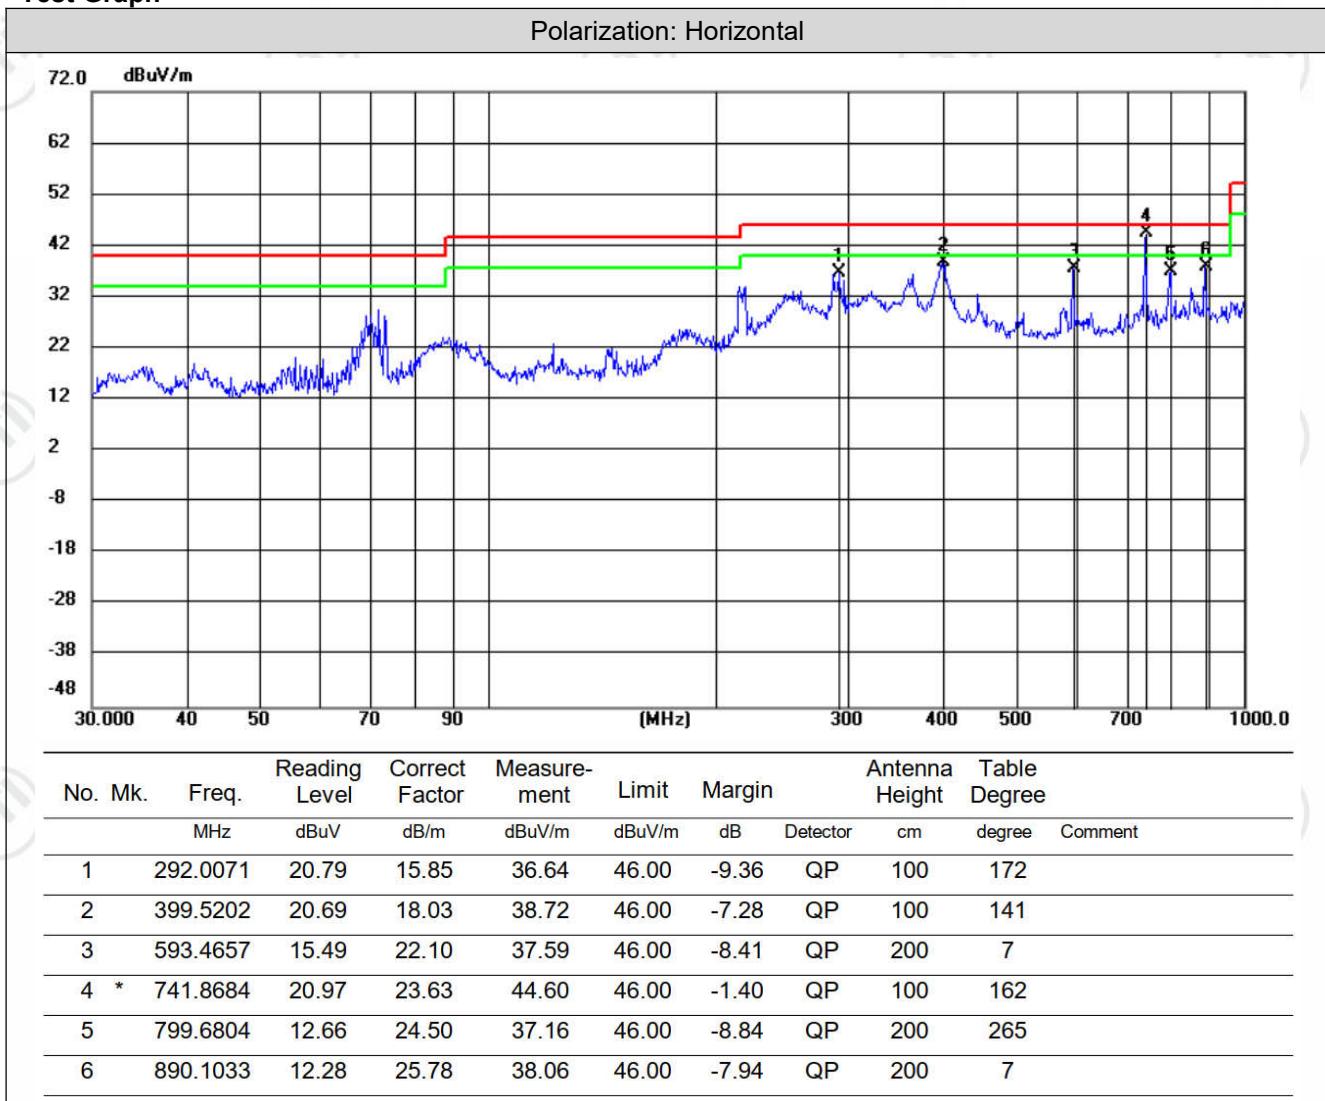**Test Graph**

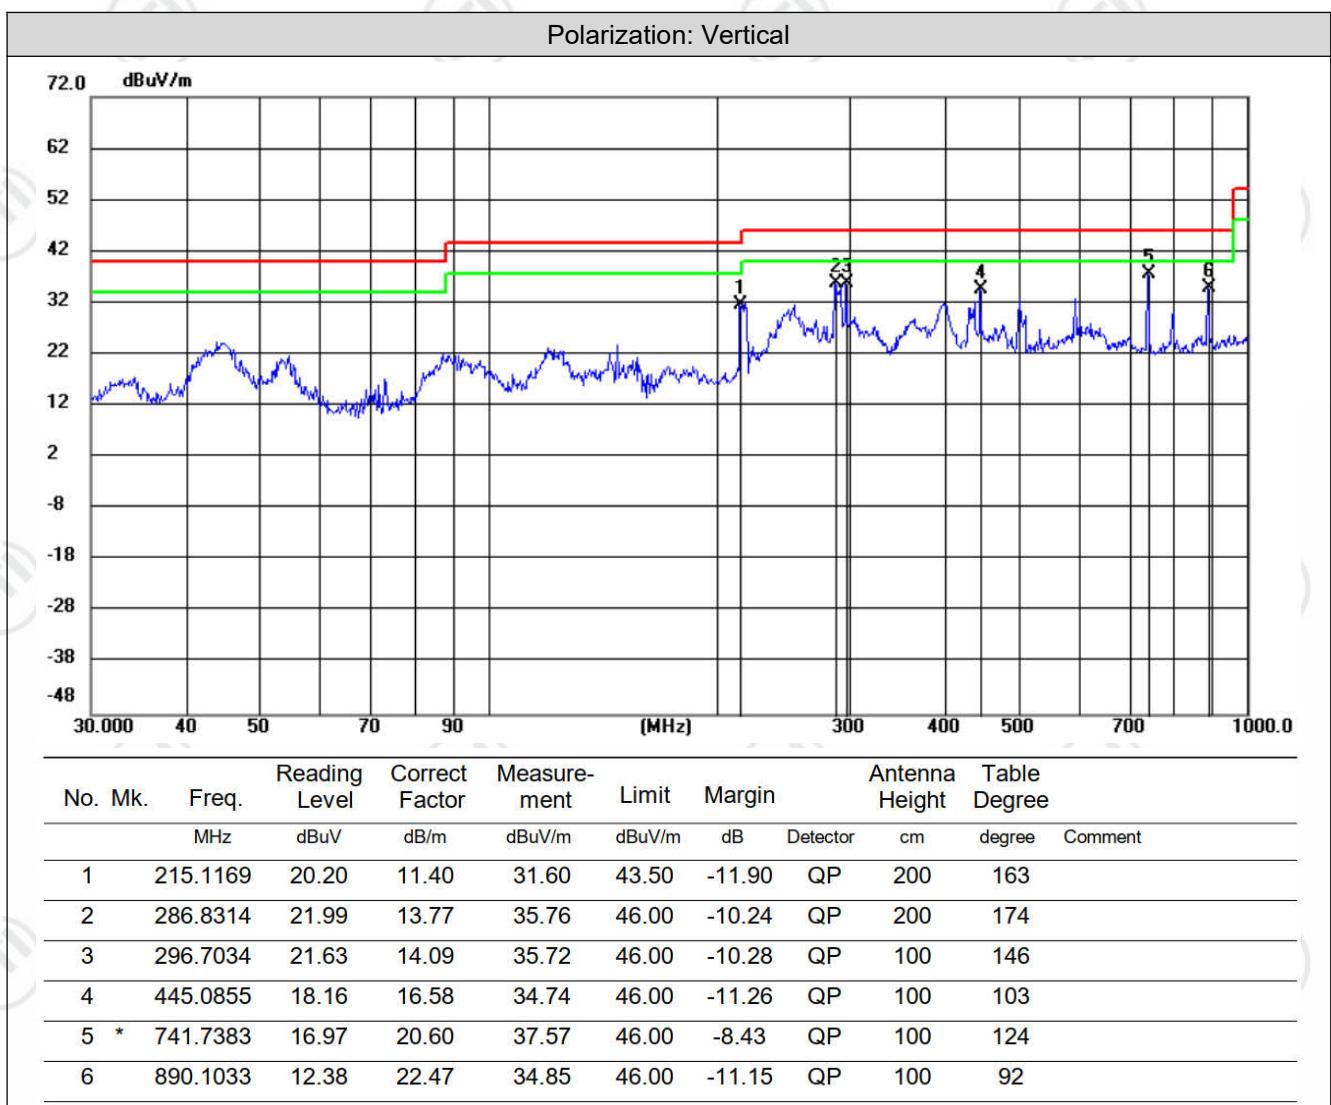

**Radiated Spurious Emission above 1GHz:**

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		

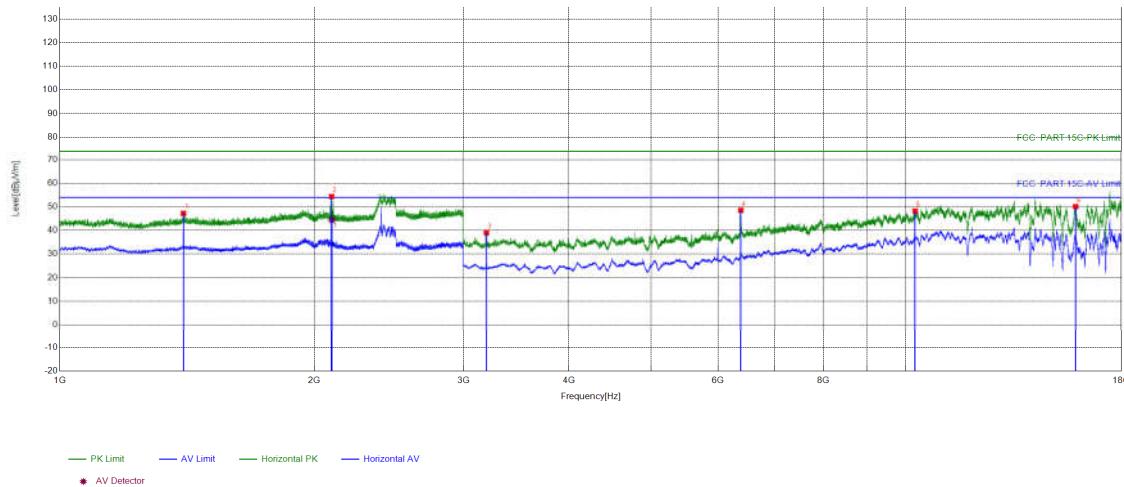**Test Graph**


Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1400.04	8.43	38.82	47.25	74.00	26.75	PASS	Horizontal	PK
2	2095.9096	10.45	43.93	54.38	74.00	19.62	PASS	Horizontal	PK
3	3195.013	-18.47	57.46	38.99	74.00	35.01	PASS	Horizontal	PK
4	6386.2257	-6.88	55.45	48.57	74.00	25.43	PASS	Horizontal	PK
5	10266.4844	4.55	43.69	48.24	74.00	25.76	PASS	Horizontal	PK
6	15891.8595	10.16	39.96	50.12	74.00	23.88	PASS	Horizontal	PK

Final Data List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	
1	2098.134	10.45	34.04	44.49	54.00	9.51	PASS	Horizontal	



Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

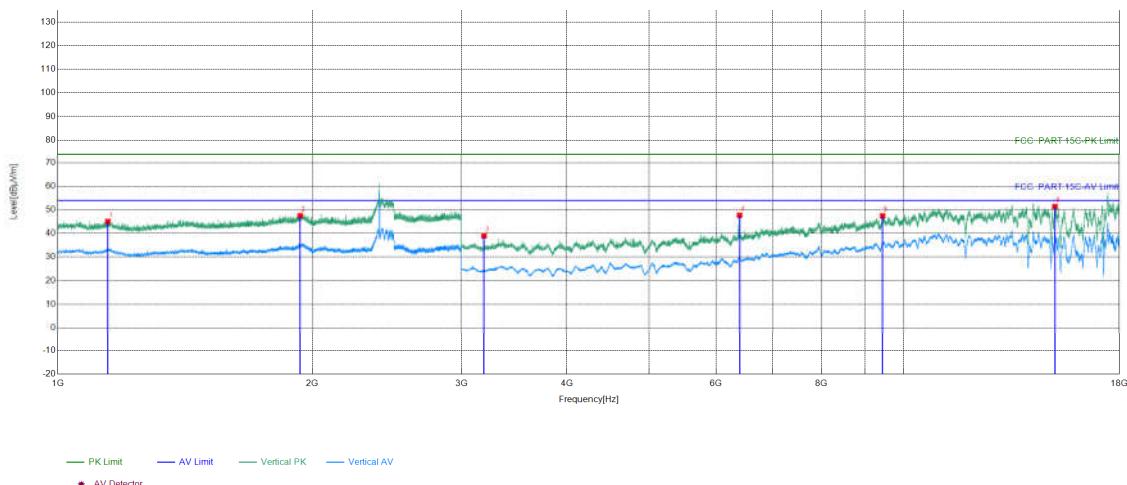

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1146.0146	7.60	37.50	45.10	74.00	28.90	PASS	Vertical	PK
2	1935.2935	11.94	35.61	47.55	74.00	26.45	PASS	Vertical	PK
3	3191.0127	-18.52	57.47	38.95	74.00	35.05	PASS	Vertical	PK
4	6399.2266	-6.31	54.04	47.73	74.00	26.27	PASS	Vertical	PK
5	9446.4298	3.41	44.05	47.46	74.00	26.54	PASS	Vertical	PK
6	15102.8069	12.55	38.86	51.41	74.00	22.59	PASS	Vertical	PK

Test_Mode	GFSK Transmitting	Test_Frequency	2441MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


### Test Graph

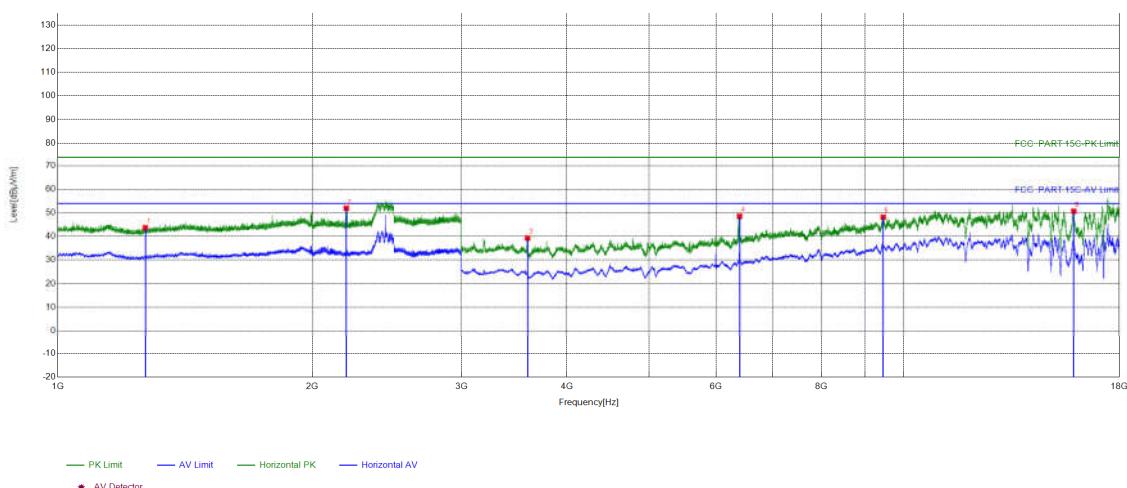

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1269.2269	6.43	37.28	43.71	74.00	30.29	PASS	Horizontal	PK
2	2193.5194	9.86	42.11	51.97	74.00	22.03	PASS	Horizontal	PK
3	3593.0395	-17.77	57.09	39.32	74.00	34.68	PASS	Horizontal	PK
4	6399.2266	-6.31	54.89	48.58	74.00	25.42	PASS	Horizontal	PK
5	9462.4308	3.47	44.70	48.17	74.00	25.83	PASS	Horizontal	PK
6	15894.8597	10.26	40.44	50.70	74.00	23.30	PASS	Horizontal	PK

Test_Mode	GFSK Transmitting	Test_Frequency	2441MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

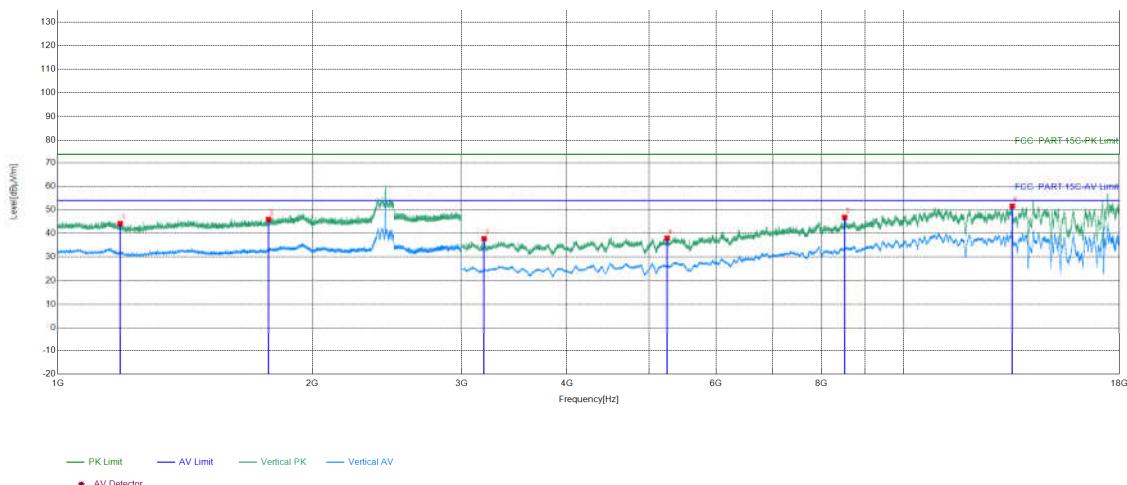

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1185.2185	6.55	37.59	44.14	74.00	29.86	PASS	Vertical	PK
2	1775.2775	9.40	36.55	45.95	74.00	28.05	PASS	Vertical	PK
3	3192.0128	-18.50	56.27	37.77	74.00	36.23	PASS	Vertical	PK
4	5254.1503	-11.26	49.28	38.02	74.00	35.98	PASS	Vertical	PK
5	8519.368	-0.69	47.51	46.82	74.00	27.18	PASS	Vertical	PK
6	13445.6964	11.19	40.39	51.58	74.00	22.42	PASS	Vertical	PK

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


### Test Graph

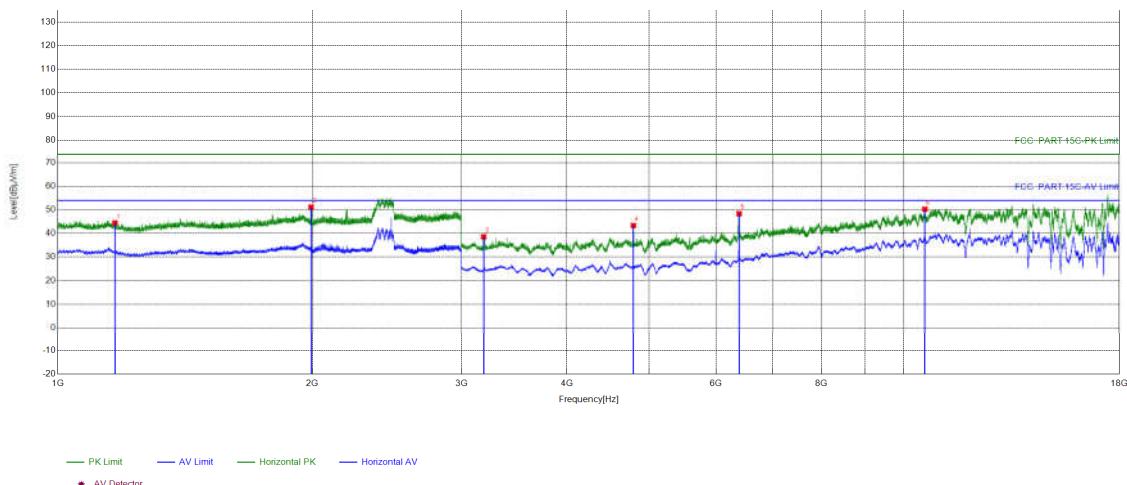

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1168.6169	7.11	37.36	44.47	74.00	29.53	PASS	Horizontal	PK
2	1992.8993	9.83	41.35	51.18	74.00	22.82	PASS	Horizontal	PK
3	3188.0125	-18.55	57.15	38.60	74.00	35.40	PASS	Horizontal	PK
4	4793.1195	-12.70	56.07	43.37	74.00	30.63	PASS	Horizontal	PK
5	6392.2261	-6.62	54.99	48.37	74.00	25.63	PASS	Horizontal	PK
6	10600.5067	7.01	43.26	50.27	74.00	23.73	PASS	Horizontal	PK

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


### Test Graph

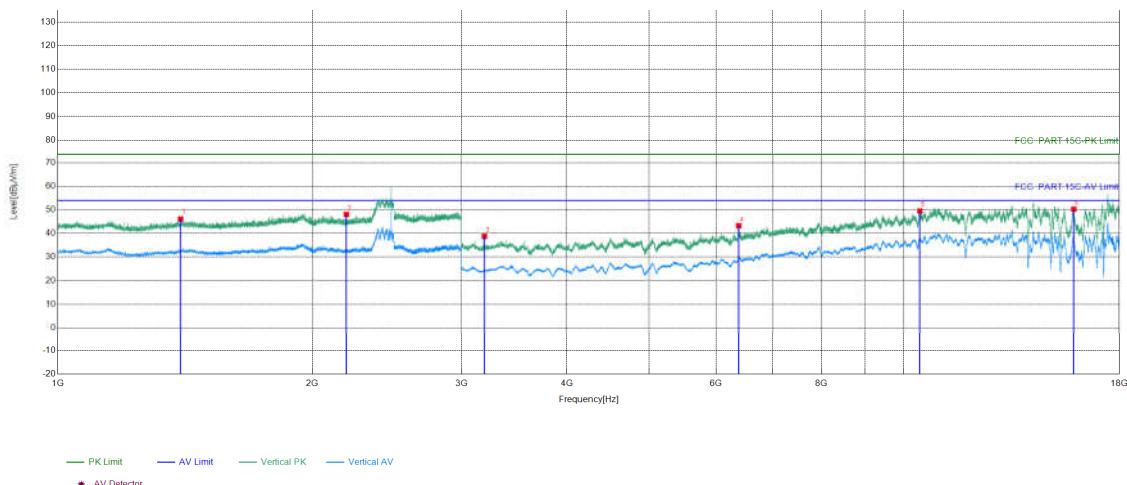

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1397.0397	8.39	37.74	46.13	74.00	27.87	PASS	Vertical	PK
2	2193.9194	9.85	38.22	48.07	74.00	25.93	PASS	Vertical	PK
3	3195.013	-18.47	57.30	38.83	74.00	35.17	PASS	Vertical	PK
4	6384.2256	-6.96	50.27	43.31	74.00	30.69	PASS	Vertical	PK
5	10456.4971	6.02	43.51	49.53	74.00	24.47	PASS	Vertical	PK
6	15896.8598	10.32	39.98	50.30	74.00	23.70	PASS	Vertical	PK

Test_Mode	π/4DQPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


### Test Graph

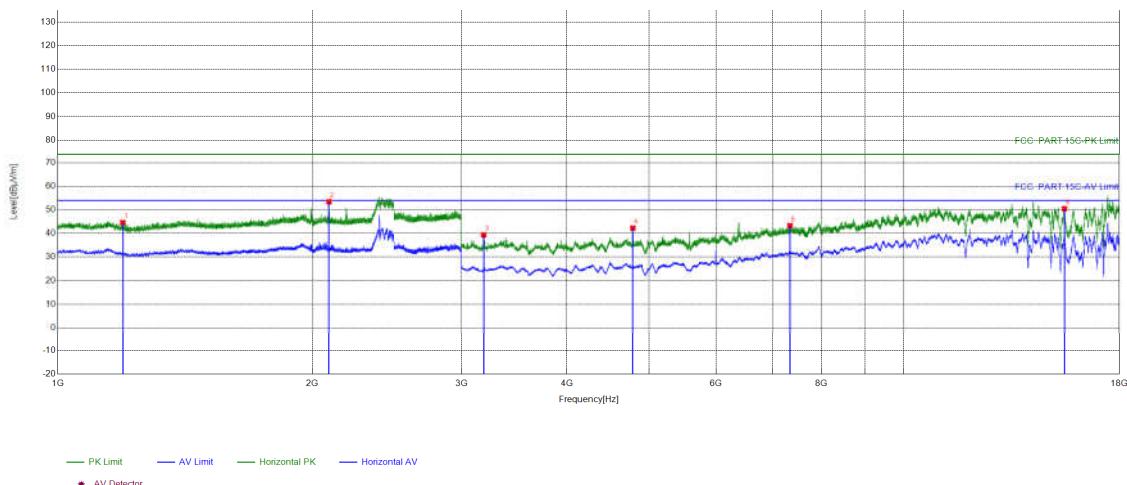

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1193.4193	6.28	38.33	44.61	74.00	29.39	PASS	Horizontal	PK
2	2092.7093	10.48	42.98	53.46	74.00	20.54	PASS	Horizontal	PK
3	3188.0125	-18.55	57.94	39.39	74.00	34.61	PASS	Horizontal	PK
4	4785.119	-12.65	54.91	42.26	74.00	31.74	PASS	Horizontal	PK
5	7341.2894	-3.74	47.06	43.32	74.00	30.68	PASS	Horizontal	PK
6	15497.8332	10.99	39.50	50.49	74.00	23.51	PASS	Horizontal	PK

Test_Mode	π/4DQPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

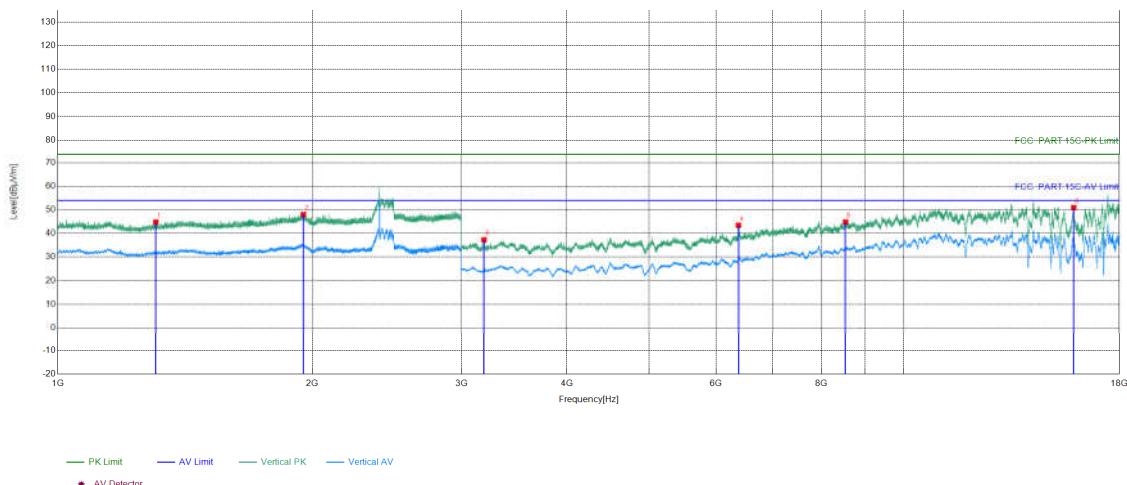

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1305.8306	7.22	37.60	44.82	74.00	29.18	PASS	Vertical	PK
2	1951.8952	12.27	35.78	48.05	74.00	25.95	PASS	Vertical	PK
3	3191.0127	-18.52	55.82	37.30	74.00	36.70	PASS	Vertical	PK
4	6380.2253	-7.13	50.63	43.50	74.00	30.50	PASS	Vertical	PK
5	8539.3693	-0.37	45.19	44.82	74.00	29.18	PASS	Vertical	PK
6	15893.8596	10.22	40.74	50.96	74.00	23.04	PASS	Vertical	PK

Test_Mode	π/4DQPSK Transmitting	Test_Frequency	2441MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

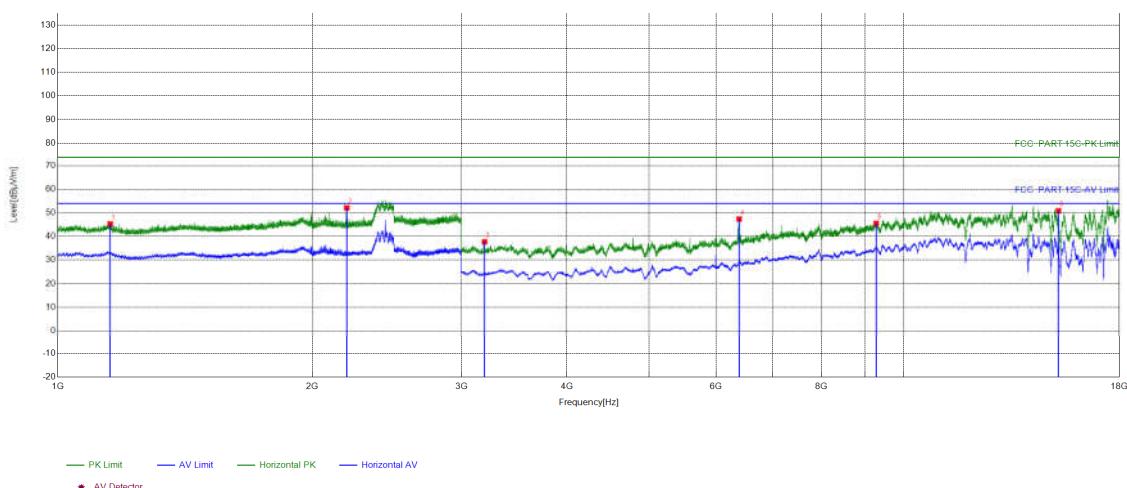

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1153.4153	7.62	37.70	45.32	74.00	28.68	PASS	Horizontal	PK
2	2196.1196	9.83	42.30	52.13	74.00	21.87	PASS	Horizontal	PK
3	3196.0131	-18.47	56.20	37.73	74.00	36.27	PASS	Horizontal	PK
4	6391.2261	-6.66	54.08	47.42	74.00	26.58	PASS	Horizontal	PK
5	9282.4188	2.21	43.35	45.56	74.00	28.44	PASS	Horizontal	PK
6	15247.8165	13.63	37.26	50.89	74.00	23.11	PASS	Horizontal	PK

Test_Mode	π/4DQPSK Transmitting	Test_Frequency	2441MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

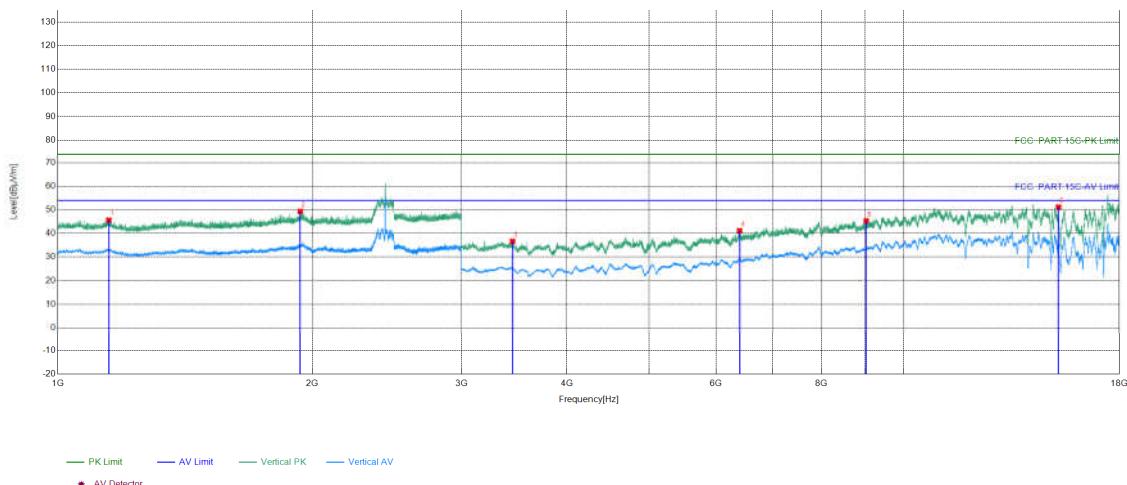

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1148.8149	7.69	37.95	45.64	74.00	28.36	PASS	Vertical	PK
2	1935.0935	11.94	37.43	49.37	74.00	24.63	PASS	Vertical	PK
3	3449.0299	-16.55	53.22	36.67	74.00	37.33	PASS	Vertical	PK
4	6399.2266	-6.31	47.47	41.16	74.00	32.84	PASS	Vertical	PK
5	9034.4023	0.83	44.53	45.36	74.00	28.64	PASS	Vertical	PK
6	15250.8167	13.62	37.56	51.18	74.00	22.82	PASS	Vertical	PK

Test_Mode	π/4DQPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		

### Test Graph

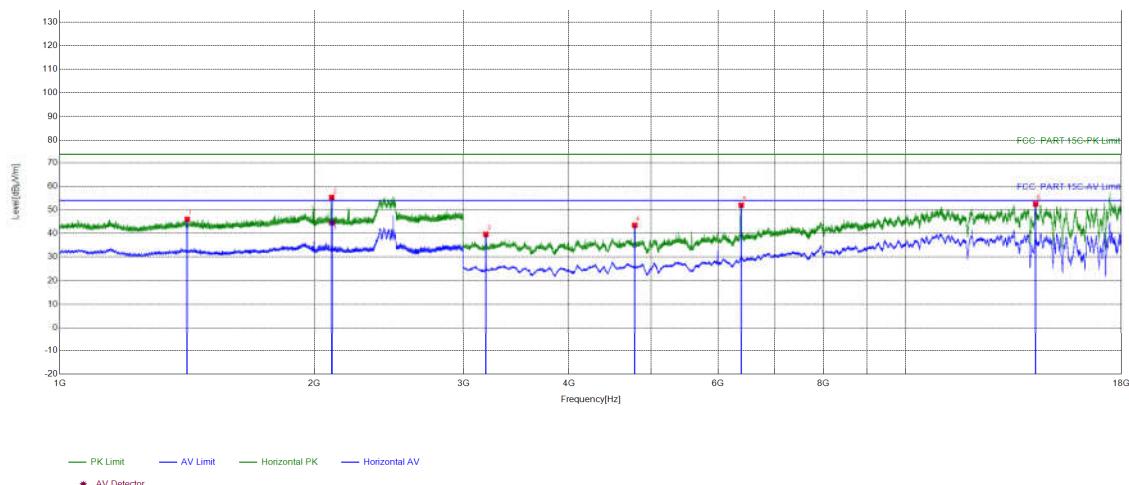


Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1415.0415	8.39	37.60	45.99	74.00	28.01	PASS	Horizontal	PK
2	2096.5097	10.45	44.85	55.30	74.00	18.70	PASS	Horizontal	PK
3	3190.0127	-18.53	58.16	39.63	74.00	34.37	PASS	Horizontal	PK
4	4784.1189	-12.64	56.10	43.46	74.00	30.54	PASS	Horizontal	PK
5	6393.2262	-6.58	58.55	51.97	74.00	22.03	PASS	Horizontal	PK
6	14251.7501	14.95	37.50	52.45	74.00	21.55	PASS	Horizontal	PK

Final Data List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	
1	2098.889	10.45	34.08	44.53	54.00	9.47	PASS	Horizontal	

Test_Mode	π/4DQPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

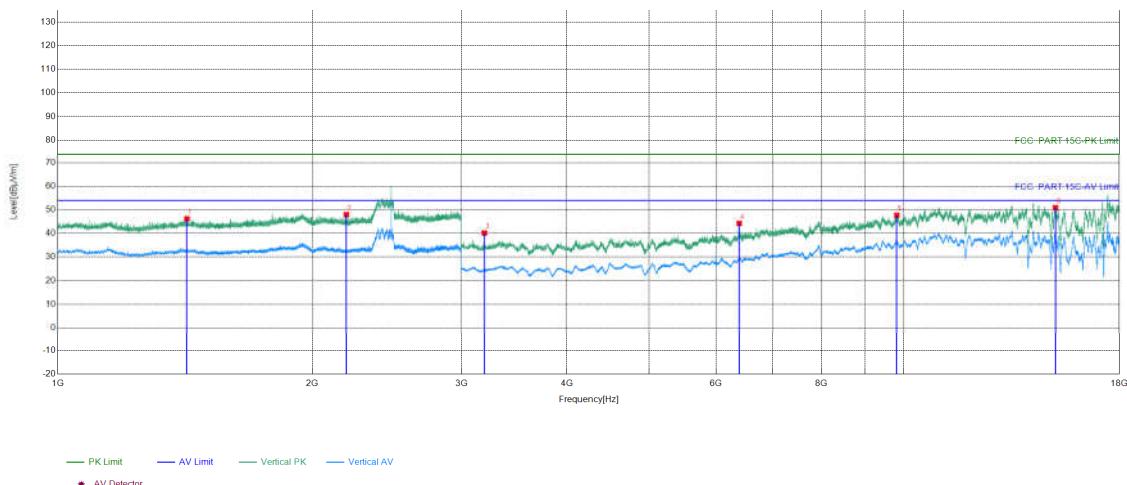

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1421.4421	8.38	37.86	46.24	74.00	27.76	PASS	Vertical	PK
2	2193.7194	9.86	38.13	47.99	74.00	26.01	PASS	Vertical	PK
3	3194.0129	-18.48	58.69	40.21	74.00	33.79	PASS	Vertical	PK
4	6393.2262	-6.58	50.87	44.29	74.00	29.71	PASS	Vertical	PK
5	9818.4546	4.39	43.32	47.71	74.00	26.29	PASS	Vertical	PK
6	15122.8082	12.11	38.81	50.92	74.00	23.08	PASS	Vertical	PK

Test_Mode	8DPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

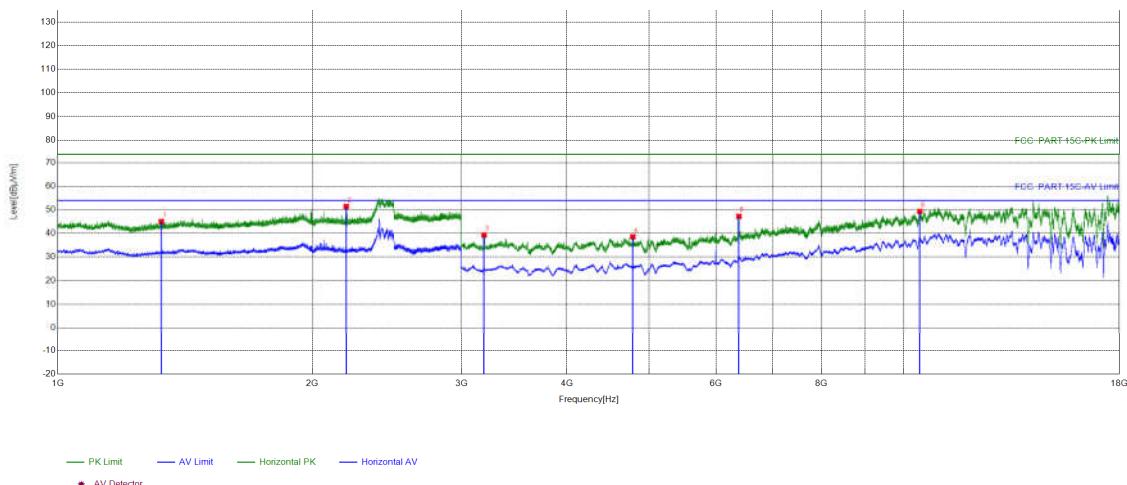

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1325.8326	7.48	37.59	45.07	74.00	28.93	PASS	Horizontal	PK
2	2192.9193	9.87	41.56	51.43	74.00	22.57	PASS	Horizontal	PK
3	3191.0127	-18.52	57.88	39.36	74.00	34.64	PASS	Horizontal	PK
4	4785.119	-12.65	51.22	38.57	74.00	35.43	PASS	Horizontal	PK
5	6388.2259	-6.79	54.05	47.26	74.00	26.74	PASS	Horizontal	PK
6	10452.4968	6.07	43.28	49.35	74.00	24.65	PASS	Horizontal	PK

Test_Mode	8DPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

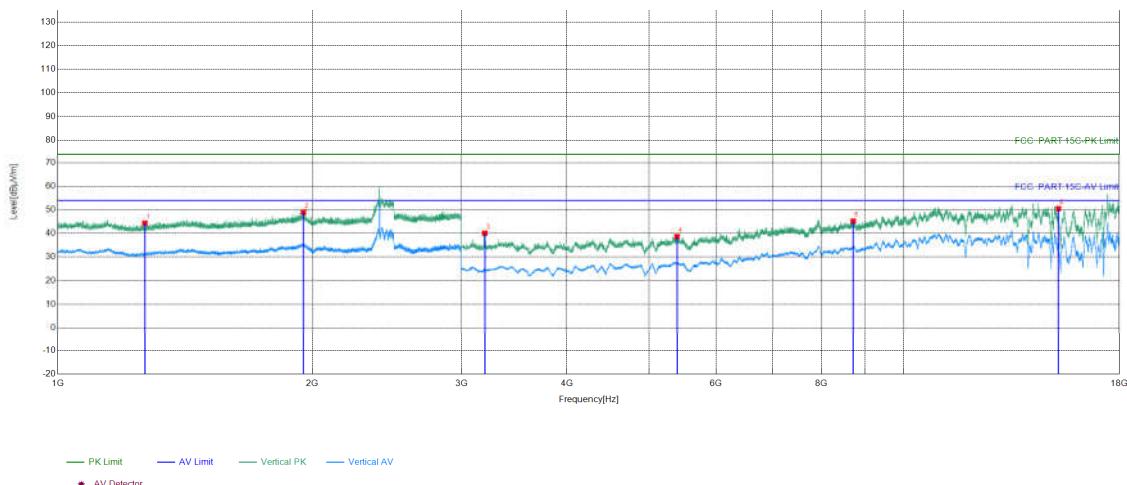

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1267.6268	6.40	37.98	44.38	74.00	29.62	PASS	Vertical	PK
2	1951.8952	12.27	36.70	48.97	74.00	25.03	PASS	Vertical	PK
3	3198.0132	-18.45	58.57	40.12	74.00	33.88	PASS	Vertical	PK
4	5397.1598	-10.38	49.09	38.71	74.00	35.29	PASS	Vertical	PK
5	8720.3814	-0.15	45.40	45.25	74.00	28.75	PASS	Vertical	PK
6	15249.8167	13.78	36.75	50.53	74.00	23.47	PASS	Vertical	PK

Test_Mode	8DPSK Transmitting	Test_Frequency	2441MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

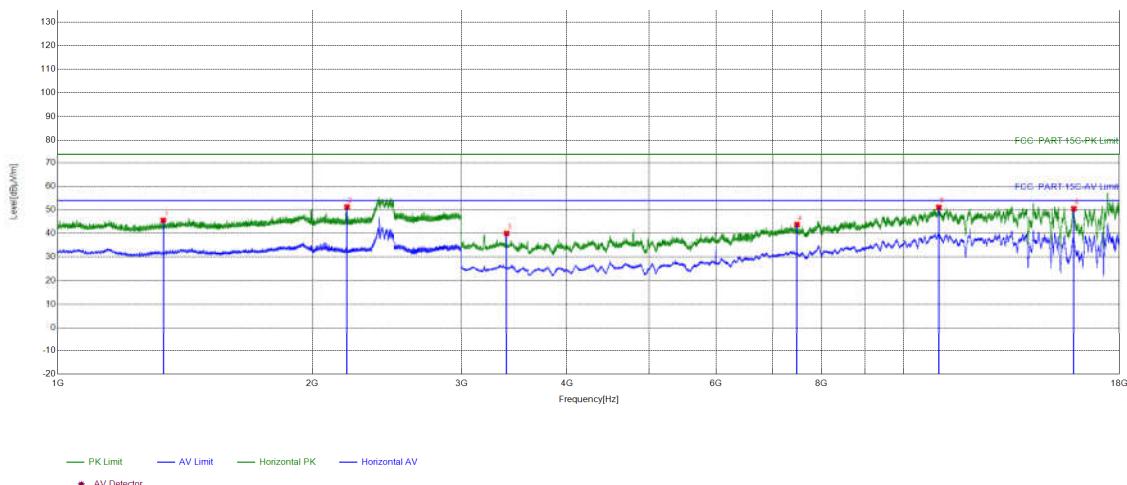

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1332.8333	7.57	38.02	45.59	74.00	28.41	PASS	Horizontal	PK
2	2198.3198	9.79	41.44	51.23	74.00	22.77	PASS	Horizontal	PK
3	3393.0262	-17.26	57.27	40.01	74.00	33.99	PASS	Horizontal	PK
4	7483.2989	-3.80	47.61	43.81	74.00	30.19	PASS	Horizontal	PK
5	11009.534	7.12	43.99	51.11	74.00	22.89	PASS	Horizontal	PK
6	15898.8599	10.38	40.12	50.50	74.00	23.50	PASS	Horizontal	PK

Test_Mode	8DPSK Transmitting	Test_Frequency	2441MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

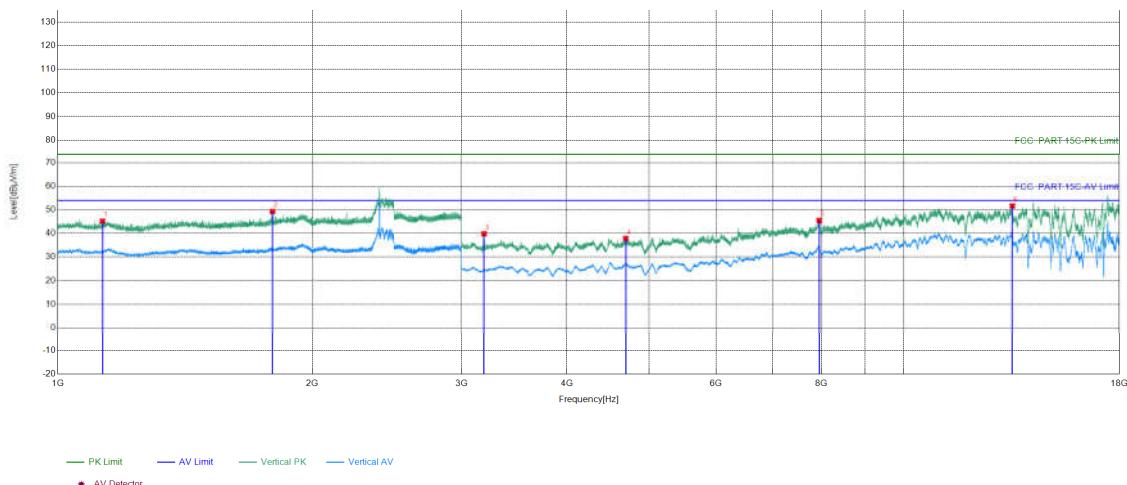

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1129.613	7.07	38.13	45.20	74.00	28.80	PASS	Vertical	PK
2	1794.2794	9.73	39.61	49.34	74.00	24.66	PASS	Vertical	PK
3	3191.0127	-18.52	58.38	39.86	74.00	34.14	PASS	Vertical	PK
4	4694.1129	-11.64	49.51	37.87	74.00	36.13	PASS	Vertical	PK
5	7948.3299	-0.09	45.61	45.52	74.00	28.48	PASS	Vertical	PK
6	13448.6966	11.28	40.36	51.64	74.00	22.36	PASS	Vertical	PK

Test_Mode	8DPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

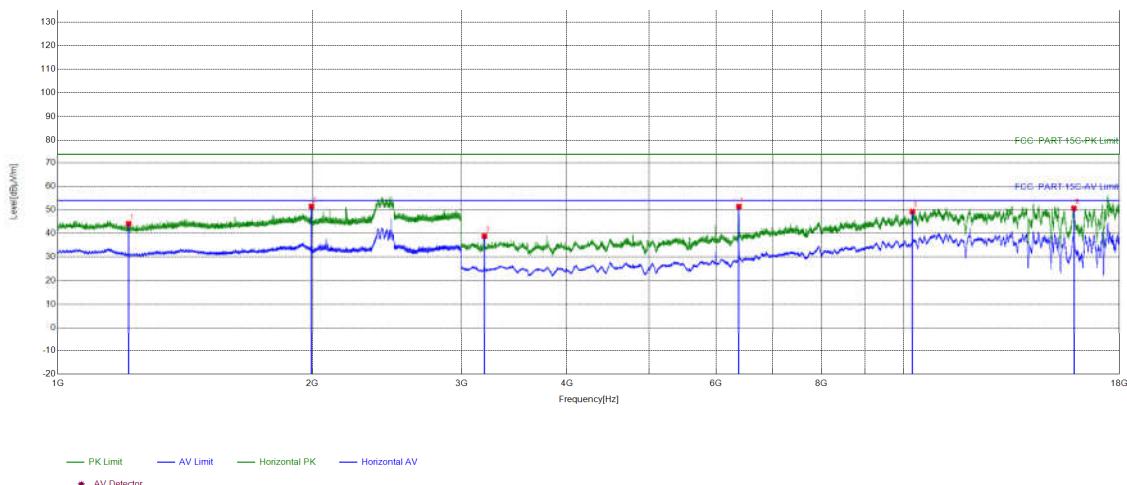

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1212.6213	6.04	38.06	44.10	74.00	29.90	PASS	Horizontal	PK
2	1994.8995	9.71	41.79	51.50	74.00	22.50	PASS	Horizontal	PK
3	3195.013	-18.47	57.34	38.87	74.00	35.13	PASS	Horizontal	PK
4	6388.2259	-6.79	58.22	51.43	74.00	22.57	PASS	Horizontal	PK
5	10246.4831	4.10	45.18	49.28	74.00	24.72	PASS	Horizontal	PK
6	15902.8602	10.19	40.47	50.66	74.00	23.34	PASS	Horizontal	PK

Test_Mode	8DPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		

### Test Graph

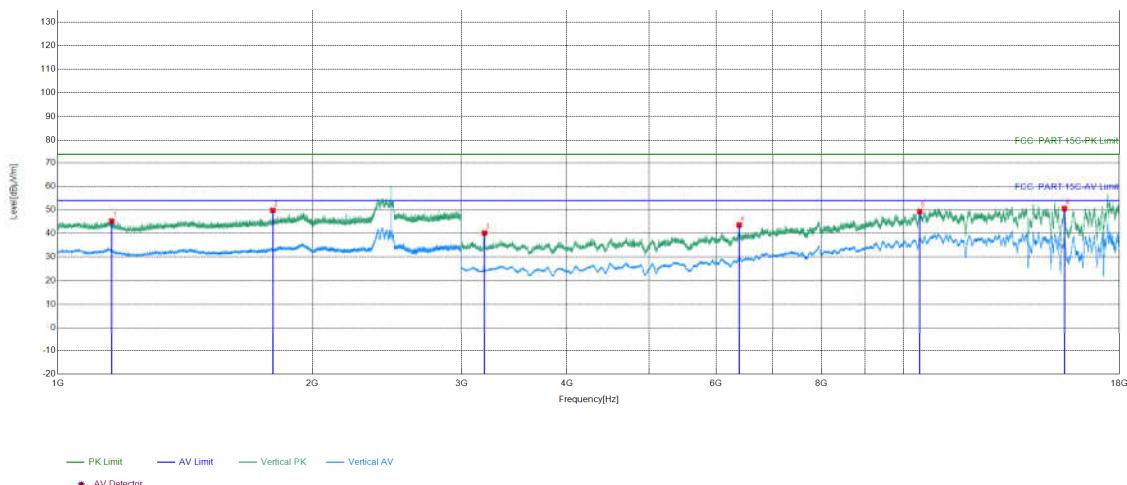

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1158.2158	7.46	37.79	45.25	74.00	28.75	PASS	Vertical	PK
2	1795.6796	9.75	40.04	49.79	74.00	24.21	PASS	Vertical	PK
3	3196.0131	-18.47	58.65	40.18	74.00	33.82	PASS	Vertical	PK
4	6393.2262	-6.58	50.15	43.57	74.00	30.43	PASS	Vertical	PK
5	10451.4968	6.08	43.24	49.32	74.00	24.68	PASS	Vertical	PK
6	15498.8333	11.04	39.51	50.55	74.00	23.45	PASS	Vertical	PK

#### Remark:


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

## Restricted bands:

### Test plot as follows:

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		

### Test Graph

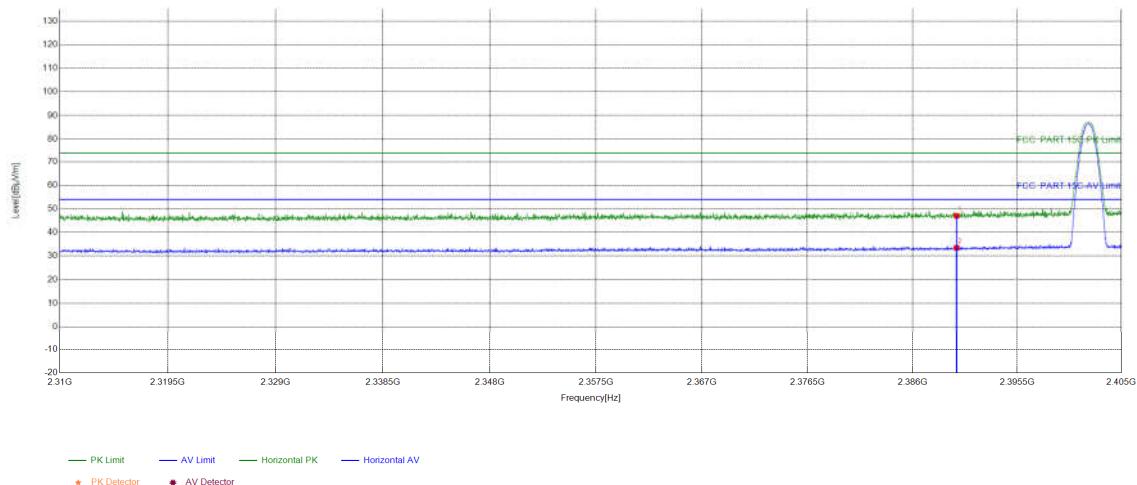


### Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	11.29	35.76	47.05	74.00	26.95	PASS	Horizontal	PK
2	2390	11.29	22.19	33.48	54.00	20.52	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

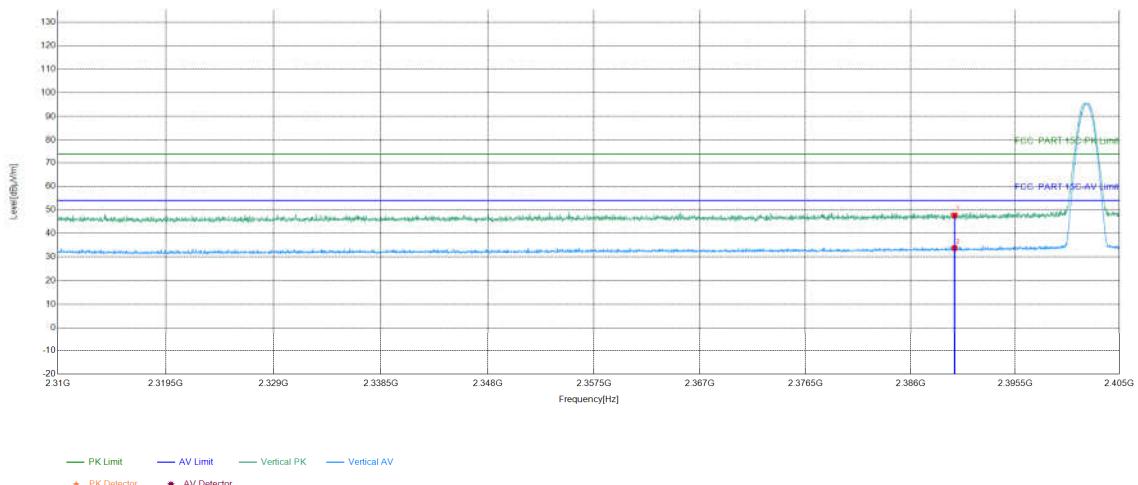

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	11.29	36.39	47.68	74.00	26.32	PASS	Vertical	PK
2	2390	11.29	22.50	33.79	54.00	20.21	PASS	Vertical	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

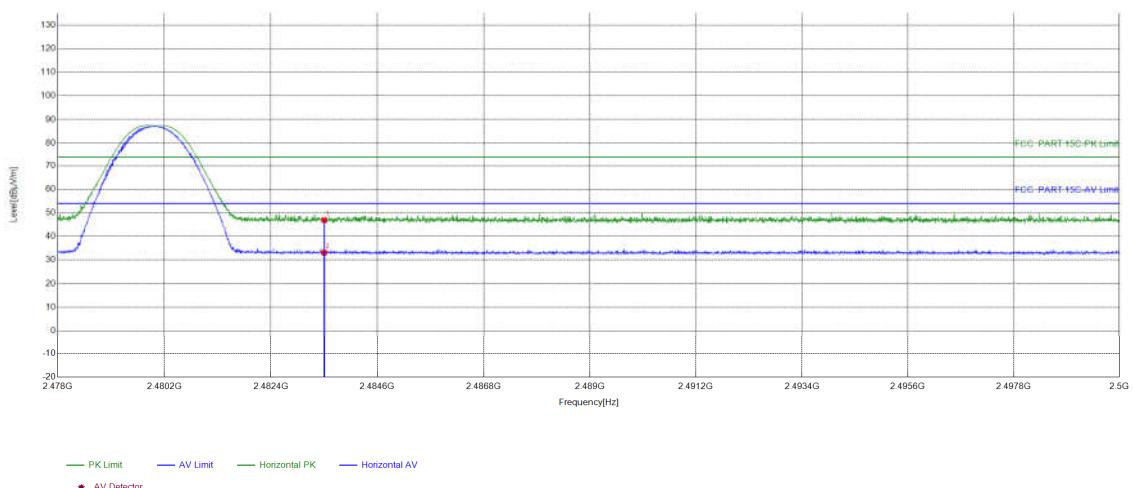

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	11.32	35.63	46.95	74.00	27.05	PASS	Horizontal	PK
2	2483.5	11.32	21.78	33.10	54.00	20.90	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

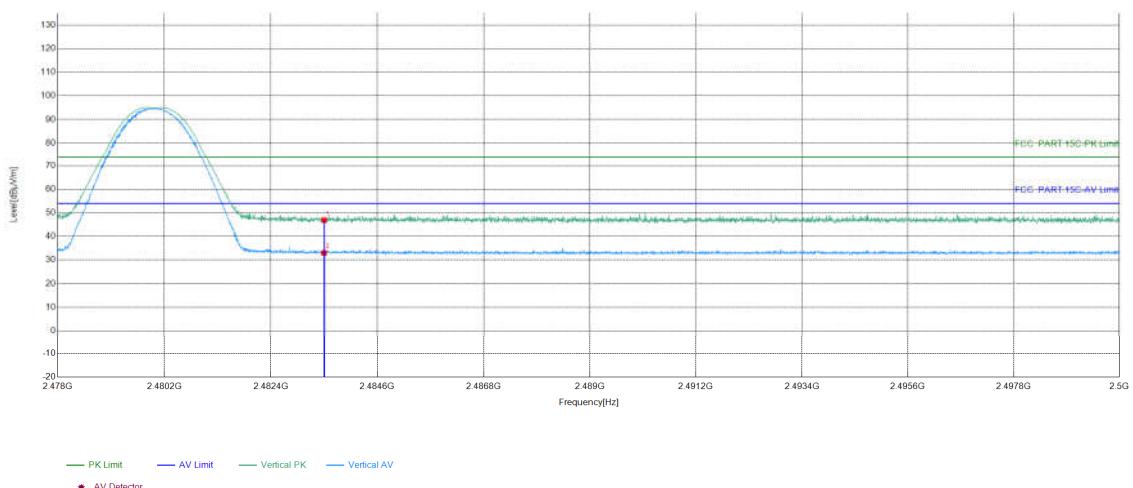

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	11.32	35.60	46.92	74.00	27.08	PASS	Vertical	PK
2	2483.5	11.32	21.67	32.99	54.00	21.01	PASS	Vertical	AV

Test_Mode	π/4DQPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

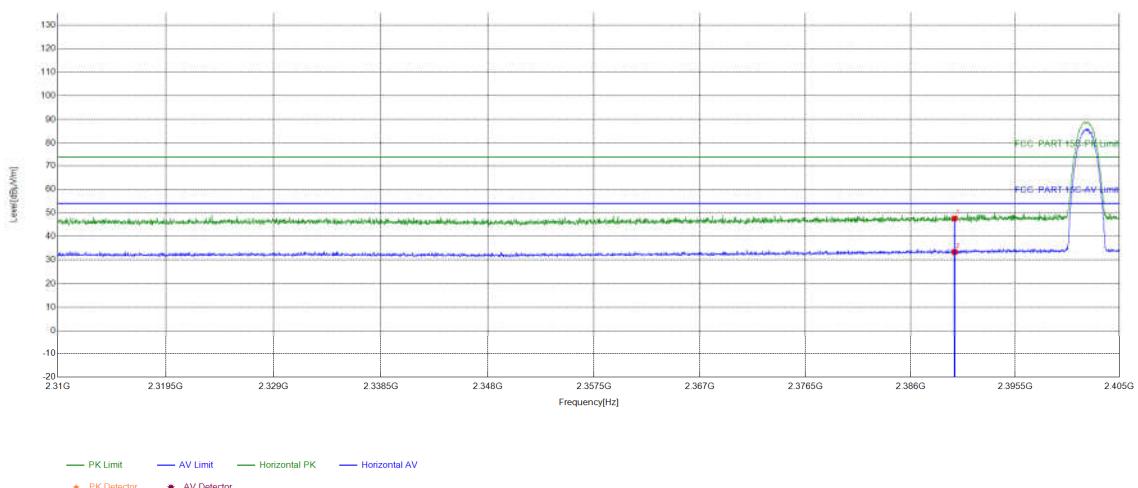

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	11.29	36.34	47.63	74.00	26.37	PASS	Horizontal	PK
2	2390	11.29	22.10	33.39	54.00	20.61	PASS	Horizontal	AV

Test_Mode	π/4DQPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

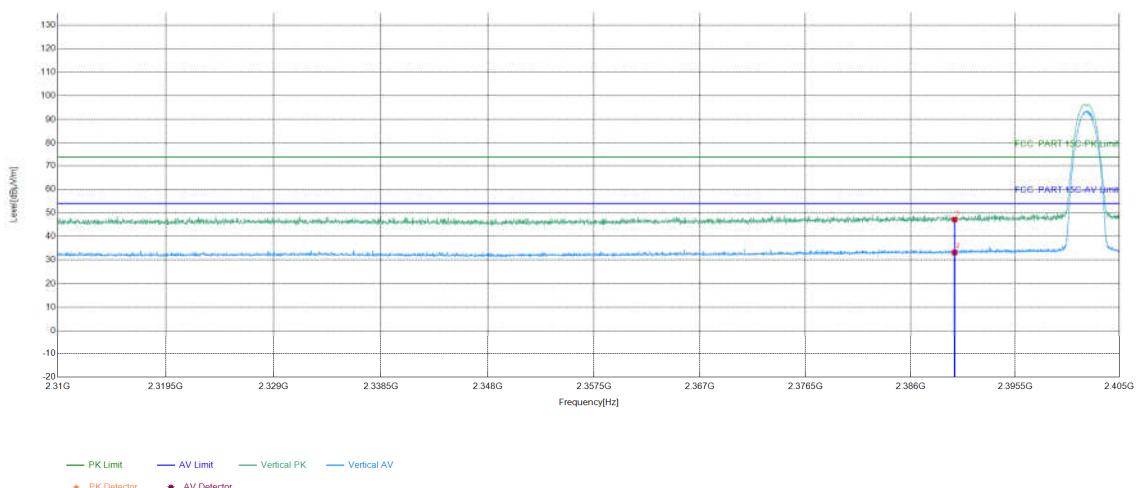

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	11.29	35.90	47.19	74.00	26.81	PASS	Vertical	PK
2	2390	11.29	21.91	33.20	54.00	20.80	PASS	Vertical	AV

Test_Mode	π/4DQPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

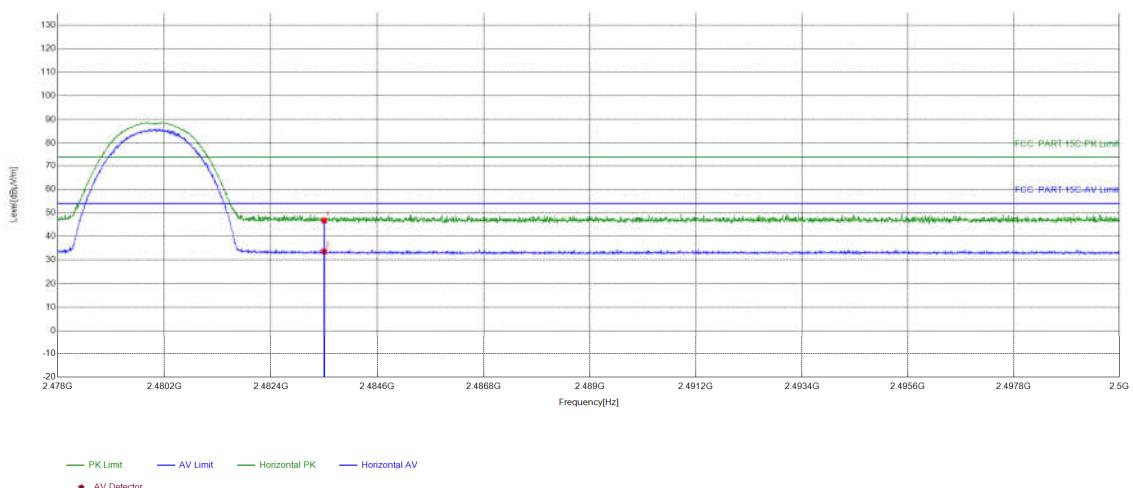

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	11.32	35.40	46.72	74.00	27.28	PASS	Horizontal	PK
2	2483.5	11.32	22.29	33.61	54.00	20.39	PASS	Horizontal	AV

Test_Mode	π/4DQPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

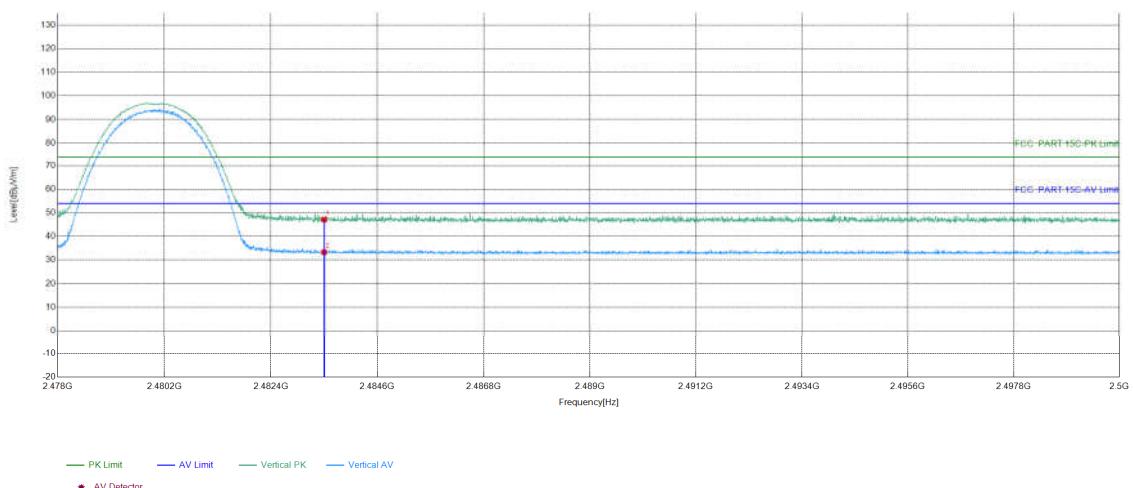

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	11.32	35.87	47.19	74.00	26.81	PASS	Vertical	PK
2	2483.5	11.32	22.01	33.33	54.00	20.67	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

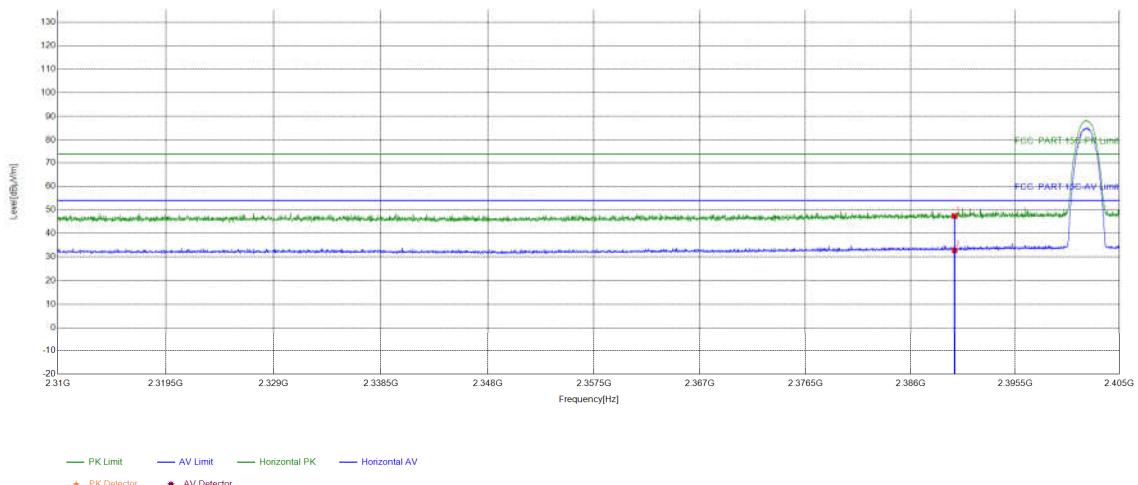

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2390	11.29	36.10	47.39	74.00	26.61	PASS	Horizontal	PK
2	2390	11.29	21.54	32.83	54.00	21.17	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

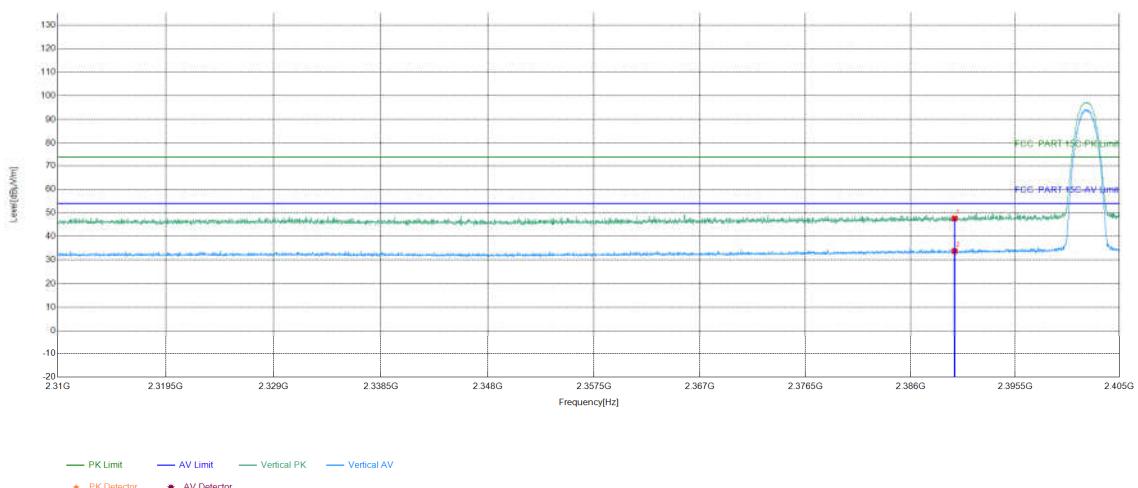

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2390	11.29	36.34	47.63	74.00	26.37	PASS	Vertical	PK
2	2390	11.29	22.53	33.82	54.00	20.18	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		


## Test Graph

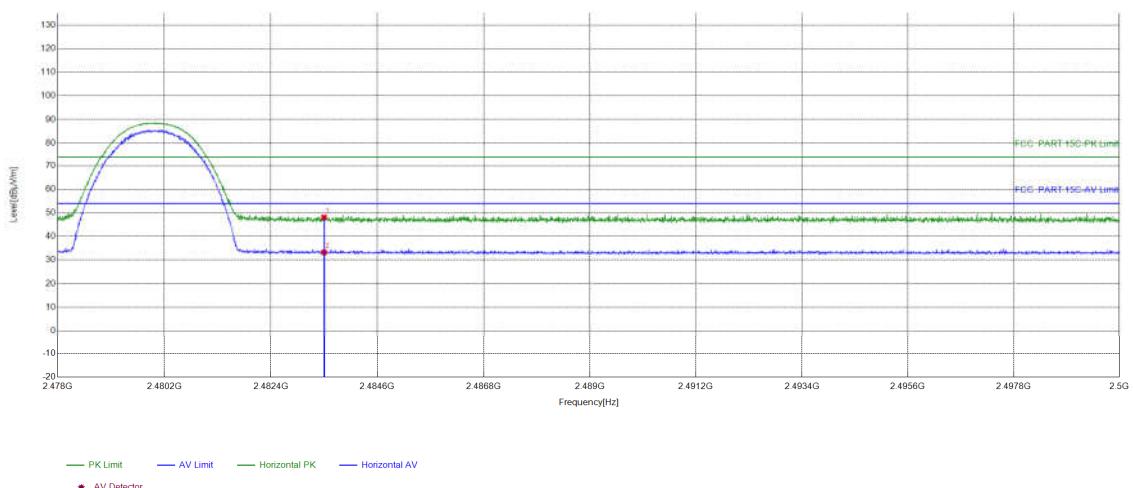

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	11.32	36.78	48.10	74.00	25.90	PASS	Horizontal	PK
2	2483.5	11.32	21.95	33.27	54.00	20.73	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	Aiden.wang	Test_Date	2024\09\18
Remark	\		

## Test Graph

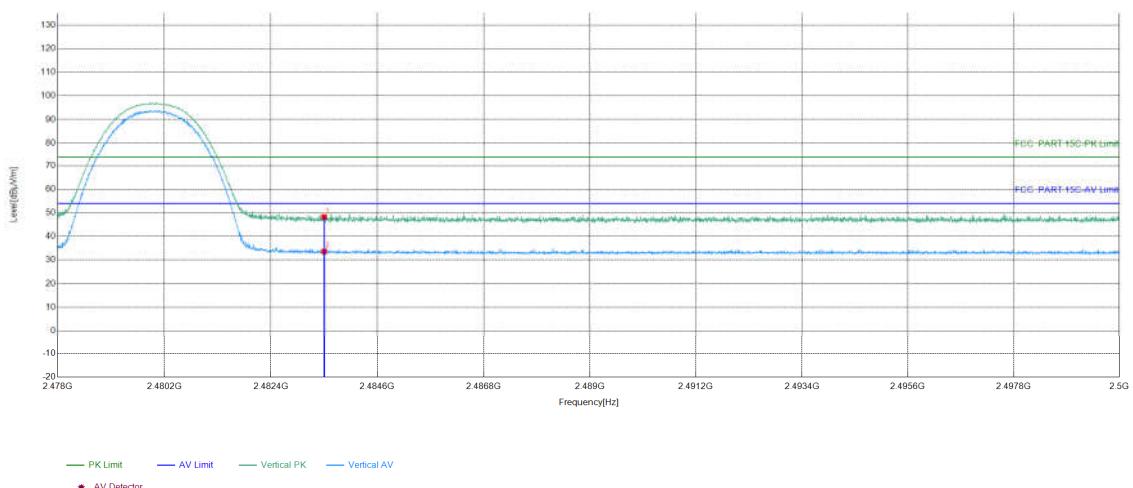

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	11.32	36.97	48.29	74.00	25.71	PASS	Vertical	PK
2	2483.5	11.32	22.28	33.60	54.00	20.40	PASS	Vertical	AV

### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

## 6 Appendix A

Refer to Appendix: Bluetooth Classic of EED32Q81407201

## 8 PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No.EED32Q81407201 for EUT external and internal photos.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

\*\*\* End of Report \*\*\*

