



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01



TEST REPORT FOR 2.4G TESTING

Report No.: PBJ-NQN2411050314RF01

Product Name: Battery Radio Frequency Module

Product Model: BRFM


Brand Name: YFVE

Applicant: Yanfeng Visteon Automotive Electronics Co.,Ltd.

Manufacturer: Yanfeng Visteon Automotive Electronics Co.,Ltd.

Specification: FCC Part 15 Subpart C (2023)

FCC ID: 2BK7C-BRFM

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Jun. 27, 2024	Date: Jun. 27, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

CONTENTS

1. GENERAL INFORMATION.....	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT' S DETAILS	2
1.4 MANUFACTURER' S DETAILS	2
1.5 TEST ENVIRONMENT	3
2 DESCRIPTION OF THE DEVICE UNDER TEST.....	3
2.1FINAL EQUIPMENT BUILD STATUS.....	3
2.2DESCRIPTION OF TEST MODES	4
2.3 DUTY CYCLE OF TEST SIGNAL.....	5
2.4 EUT OPERATING CONDITIONS.....	5
2.5 SUPPORT EQUIPMENT	6
3 REFERENCE SPECIFICATION	6
4 KEY TO NOTES AND RESULT CODES.....	6
5 RESULT SUMMARY	7
6 TEST RESULT	8
6.1 6DB BANDWIDTH.....	8
6.2 TRANSMITTER OUTPUT POWER	9
6.3 TRANSMITTER POWER SPECTRAL DENSITY.....	10
6.4 CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	11
6.5 BAND-EDGE MEASUREMENT	12
6.6 SPURIOUS RADIATED EMISSIONS	13
6.7 AC POWER LINE CONDUCTED EMISSION	18
7 MEASUREMENT UNCERTAINTIES	20
8 TEST EQUIPMENTS	21
APPENDIX A – TEST DATA OF CONDUCTED EMISSION.....	22
2.4G	22
1 DUTY CYCLE AND ANTENNA GAIN	22
2 EIRP	23
3 OCCUPIED BANDWIDTH	24
4 TRANSMITTER POWER SPECTRAL DENSITY	26
5 CONDUCTED OUT OF BAND EMISSION MEASUREMENT	27
6 BAND EDGE MEASUREMENT	27
APPENDIX B – TEST DATA OF RADIATED EMISSION.....	28



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of BV 7Layers Communications Technology (Shenzhen) Co., Ltd. The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	BV 7Layers Communications Technology (Shenzhen) Co., Ltd
Address:	Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China
City:	Shenzhen
Country or Region:	P.R.China
Tel:	+86 755 8869 6566
Fax:	+86 755 8869 6577
Email:	customerservice.sw@bureauveritas.com
Designation Number:	CN1171
Registration number:	525120

1.3 Applicant's details

Company:	Yanfeng Visteon Automotive Electronics Co.,Ltd.
Address:	300# Minolta Road Songjiang County
City:	Shanghai
Country or Region:	China
Contacted person:	Chen Jia
Tel:	15365082940
Email:	uchej536@yanfeng.com

1.4 Manufacturer's details

Company:	Yanfeng Visteon Automotive Electronics Co.,Ltd.
Address:	300# Minolta Road Songjiang County
City:	Shanghai
Country or Region:	China
Contacted person:	Chen Jia
Tel:	15365082940
Email:	uchej536@yanfeng.com



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

1.5 Test Environment

Date of Receipt of test sample:	2024/4/30
Testing Start Date:	2024/4/30
Testing End Date:	2024/6/27

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	40
Maximum Extreme	85	---
Minimum Extreme	-40	---

Normal Supply Voltage (V d.c.):	5.5
Maximum Extreme Supply Voltage (V d.c.):	5.6
Minimum Extreme Supply Voltage (V d.c.):	5.2

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Range:	2.410GHz~2.475GHz
Number of Channel:	13
Modulation Type:	GFSK
Power Supply:	DC supply
Software Revision:	ADI 2.0.4
Hardware Revision:	PWB25585A10
SN or Sample:	L640000075/Sample1#
Antenna type:	Refer to Note
Antenna connector:	Refer to Note



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

Antenna requirement (FCC Part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT is permanently attached.
- There are no provisions for connection to an external antenna.

Note: The antenna provides to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency band	Antenna type	Connector Type
N/A	N/A	0.7dBi	2410MHz~2475MHz	passive antenna	N/A

The antenna gain is provided by the customer and involved in the calculation and influence of the test results. Our laboratory takes the value declared by the customer as the criterion, and the customer is responsible for the antenna gain value. Manufacturers ensure that their designs will not be modified by the user or third party's arbitrary antenna parameters and performance.

2.2 Description of Test Modes

Operation Frequency List 2.4G Band:

Ch no.	frequcny	Ch no.	frequcny	Ch no.	frequcny
1	2410	6	2435	11	2465
2	2415	7	2445	12	2470
3	2420	8	2450	13	2475
4	2425	9	2455		
5	2430	10	2460		

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE < 1G	PLC	APCM	
GFSK	✓	✓	✓	✓	-

Where

RE \geq 1G: Radiated Emission above 1GHz

RE < 1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 13	7	GFSK	1

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 13	7	GFSK	1

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 13	7	GFSK	1

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 13	7	GFSK	1

2.3 Duty Cycle of Test Signal

Duty cycle of test signal is < 98 %, duty factor shall be considered.

Modulation Type	Duty Cycle	Correction factor(dB)
GFSK	100.00%	0.00

2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:N/A

3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC Part15 Subpart C	2023	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 v05r02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

5 RESULT SUMMARY

No.	Test case	Reference	Verdict	Test Lab
1	6dB Bandwidth	15.247(a)(2)	Pass	A
2	Transmitter Output Power	15.247(b)(3))	Pass	A
3	Transmitter Power Spectral Density	15.247(e))	Pass	A
4	Conducted Out of band emission measurement	15.247(d)	Pass	A
5	Band-edge	15.247(d)	Pass	A
6	Antenna requirement	15.203	Pass(refer to section 2.1)	A
7	Spurious Radiated Emissions	15.205/15.209/15.247(d)	Pass	A
8	AC Power line Conducted Emission	15.207	Pass	A

Lab A:

BV 7Layers Communications Technology (Shenzhen) Co. Ltd

Lab Address:

Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District
Shenzhen, Guangdong, People's Republic of China

Accredited Test Lab Cert 3939.01

The FCC Site Registration No. is 525120; The Designation No. is CN1171.



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

6 TEST RESULT

6.1 6dB Bandwidth

6.1.1 Test limit

Part15.247 (a) (2)

The minimum permissible 6dB bandwidth is 500 kHz

6.1.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2


KDB 558074 D01 v05r02 – Section 8.2

6.1.3 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

6.1.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.1.5 Test result

The test results are shown in Appendix A.



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

6.2 Transmitter Output Power

6.2.1 Test limit

Part15.247 (b) (3)

The maximum permissible conducted output power is 1 Watt.

6.2.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3

ANSI C63.10-2013 – Section 11.9.2.2.4

KDB 558074 D01 v05r02 – Section 8.3.1.3

6.2.3 Test Settings

Peak Power Measurement


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.2.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

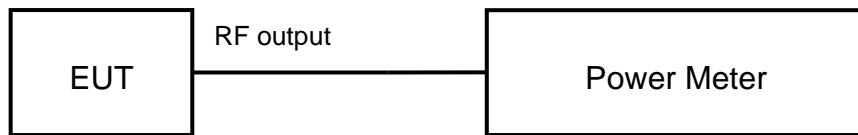

6.2.5 Test result

The test results are shown in Appendix A.



6.3 Transmitter Power Spectral Density

6.3.1 Test limit

Part15.247 (e)

The maximum permissible power spectral density is 8.0dBm in any 3 kHz band.

6.3.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD


KDB 558074 D01 v05r02 – Section 8.4

6.3.3 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.3.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

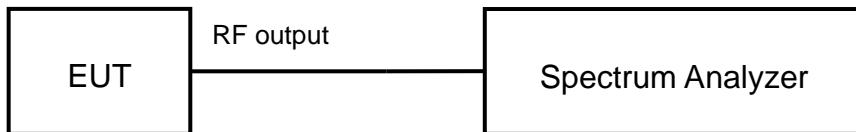

6.3.5 Test result

The test results are shown in Appendix A.



6.4 Conducted Out of band emission measurement

6.4.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.4.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.5

6.4.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 MHz
- c) Set the RBW = 100 kHz.
- d) Set the VBW ≥ 300 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

6.4.4 Test Settings

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW ≥ 300 kHz.
- d) Detector = peak.
- e) Set span to encompass the spectrum to be examined
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

6.4.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

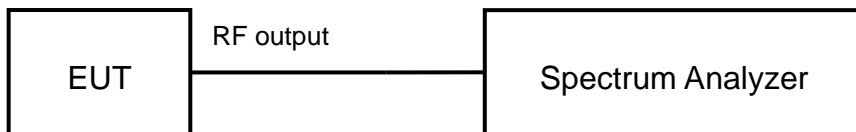

6.4.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

6.5 Band-edge measurement

6.5.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.5.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

6.5.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 MHz
- c) Set the RBW = 100 kHz.
- d) Set the VBW ≥ 300 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

6.5.4 Test Settings

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW ≥ 300 kHz.
- d) Detector = peak.
- e) Set span to encompass the spectrum to be examined
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

6.5.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.5.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

6.6 Spurious Radiated Emissions

6.6.1 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.6.2 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [μV/m]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB μ V/m) = 20 log (Limit (μV/m)/1μV/m)

Frequency [MHz]	Detector	Unit (dB μ V/m)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

6.6.3 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05r02– Section 12.2.7

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

2. Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.6.4 Test Settings

Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)

Frequency	Detector
<1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table


Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz

3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize




6.6.5 Test Setup

For Radiated emission below 30MHz

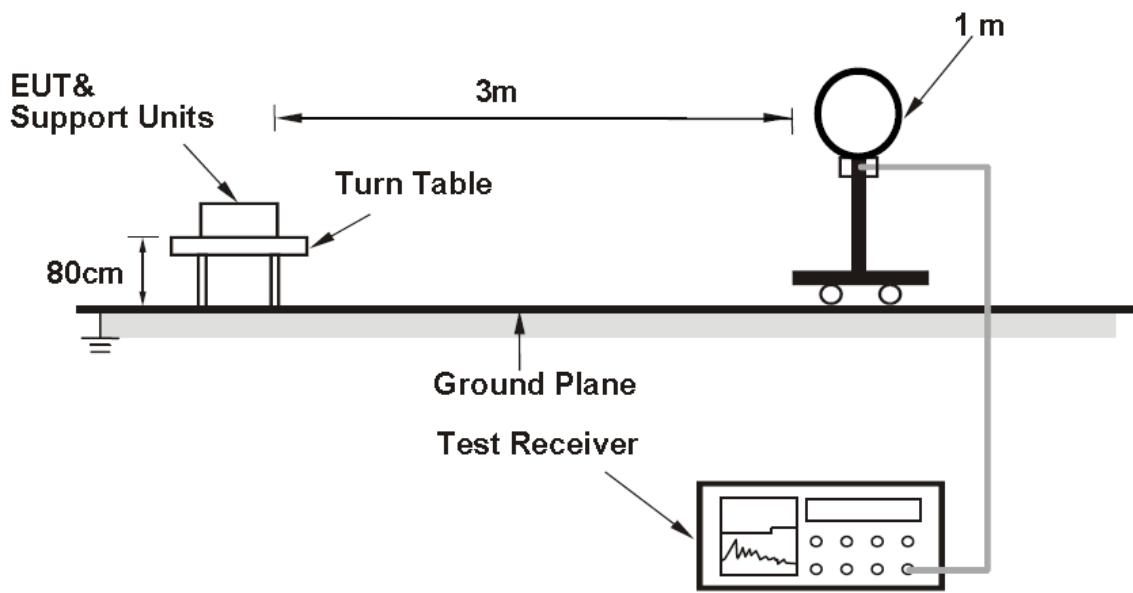


For Radiated emission 30MHz to 1GHz

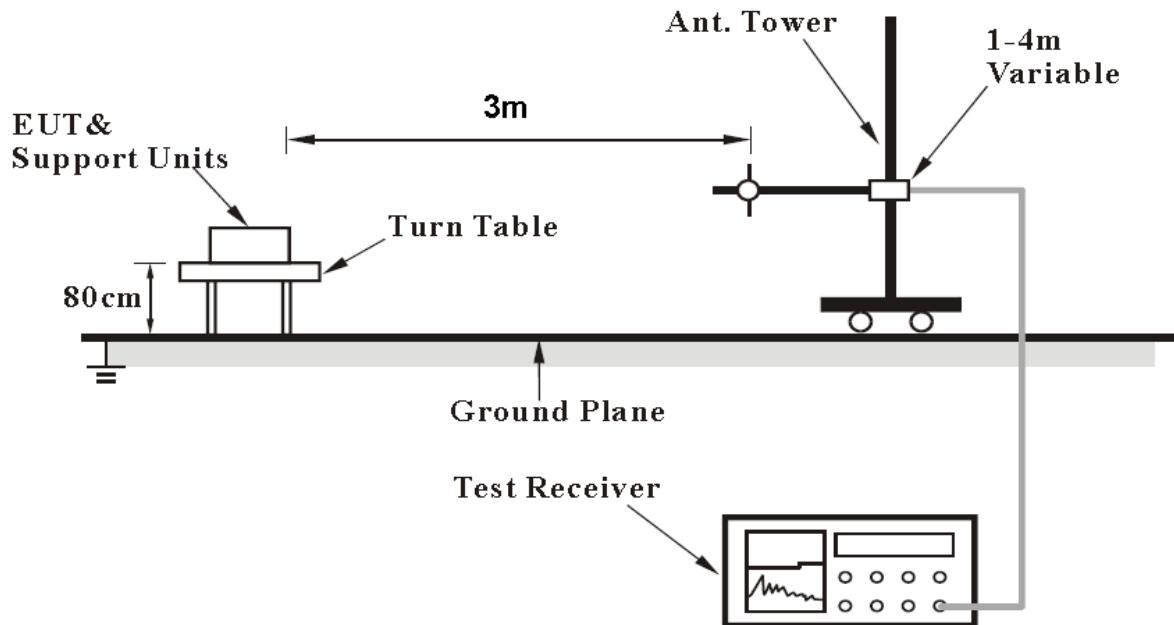



For Radiated emission above 1GHz

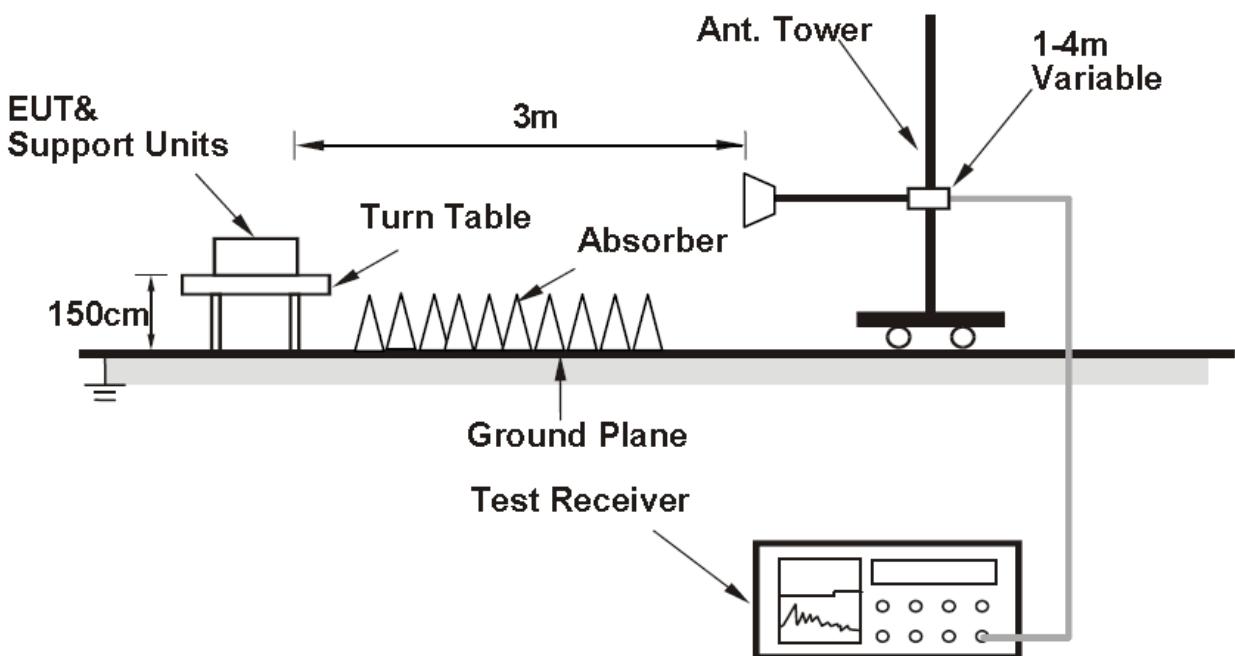

6.6.6 Test result

The test results are shown in Appendix B.



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

6.7 AC Power line Conducted Emission

6.7.1 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
0.15-0.5 0.5-5 5-30	Quasi-peak	Average
	66 to 56 *	56 to 46 *
	56	46
	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.7.2 Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.


The EUT shall test under the power AC120V/60Hz.



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

6.7.3 Test Setup

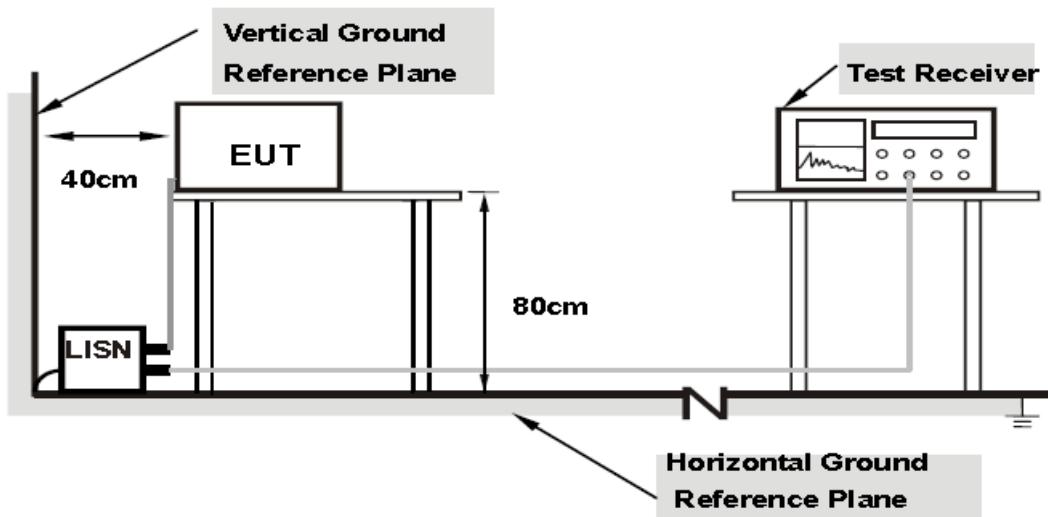

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.4 Test result

The test results are shown in AppendixB.



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
6dB Bandwidth	3kHz	
Peak power output	0.67dB	
Transmitter Power Spectral Density	0.75dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB
Spurious Radiated Emissions	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer / FSV	ROHDE & SCHWARZ	101065	2024.06.21	2025.06.20
2.	Signal Analyzer / N9020A	Agilent	MY48010771	2024.03.06	2025.03.05
3.	Bluetooth Test Set / MT8852B	Anritsu	1329003	2024.06.21	2025.06.20
4.	Power Divider / 11667A	HP	19632	2024.06.21	2025.06.20
5.	Signal Generator / SMBV100A	R&S	260910	2024.06.21	2025.06.20
6.	Power Meter E4416A	Agilent	MY52370013	2024.03.06	2025.03.05
7.	Power Sensor E9323A	Agilent	MY52150008	2024.03.06	2025.03.05
8.	Temperature chamber / SH241	ESPEC	92013758	2024.06.21	2025.06.20
9.	Fully-Anechoic Chamber / 12.65mx8.03mx7.50m	FRANKONIA	----	----	----
10.	Semi-Anechoic/Chamber / 23.18mx16.88mx9.60m	FRANKONIA	---	----	----
11.	Turn table Diameter:1m	FRANKONIA	----	----	----
12.	Turn table Diameter:5m	FRANKONIA	----	----	----
13.	Antenna master FAC(MA4.0)	MATURO	----	----	----
14.	Antenna master SAC(MA4.0)	MATURO	----	----	----
15.	Shielding room / 9.080mx5.255mx3.525m	FRANKONIA	----	----	----
16.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2024.06.21	2025.06.20
17.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2024.06.21	2025.06.20
18.	Ultra log antenna / HL562	R&S	100016	2024.06.21	2025.06.20
19.	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2024.06.21	2025.06.20
20.	EMI test receiver / ESI 40	R&S	100015	2024.06.21	2025.06.20
21.	EMI test receiver / ESCS30	R&S	100029	2024.06.21	2025.06.20
22.	Receive antenna / HL562	R&S	100167	2024.06.21	2025.06.20
23.	AMN / ENV216	R&S	3560.6550.12	2024.06.21	2025.06.20
24.	WLAN AP WIA3300-20 (FCC ID: 2AHKT-WIA3300-20)	SKSpruce	8152017060700339	---	---
25.	Notebook E470c	Lenovo	PF10UZW7	---	---
26.	Loop Antenna	R&S	100340	2023.08.21	2024.08.20
27.	FCC auto test system / RT9200BW-2	Radiosky	V2.05	/	/
28.	EMI test software / EMC32	R&S	V10.20.01	/	/



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

APPENDIX A – TEST DATA OF CONDUCTED EMISSION


2.4G

1 Duty Cycle and Antenna Gain

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK	2410	Fig.1	100.00%	0.00	0.70

Note: Correction Factor=10*log(1/Duty Cycle)

Test Mode: GFSK (2.4G)

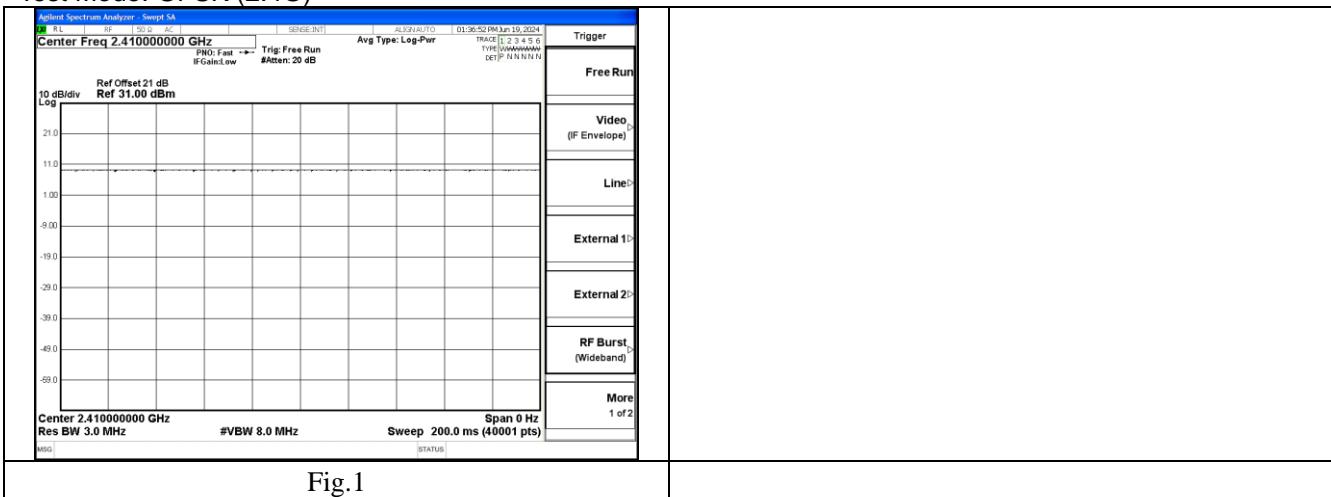



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

2 EIRP

Conducted Power

Modulation type	Conducted Peak Power(dBm)		
	2410MHz	2445MHz	2475MHz
GFSK	9.14	9.13	9.53

Modulation type	Conducted Average Power(dBm)		
	2410MHz	2445MHz	2475MHz
GFSK	9.06	9.05	9.33

EIRP

Modulation type	Peak EIRP(dBm)		
	2410MHz	2445MHz	2475MHz
GFSK	9.84	9.83	10.23

Modulation type	Average EIRP(dBm)		
	2410MHz	2445MHz	2475MHz
GFSK	9.76	9.75	10.03


EIRP (dBm)=Conducted Power(dBm)+Antenna Gain(dBi)




3 Occupied Bandwidth

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
GFSK	2410	1393.9
GFSK	2445	1338.9
GFSK	2475	1341.7

Test Mode: GFSK (2.4G)

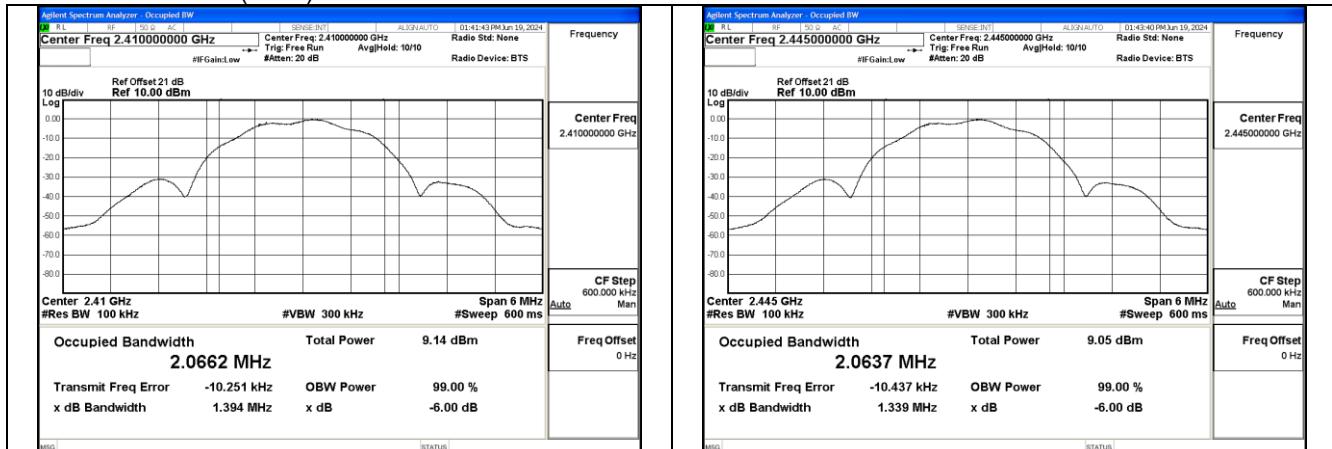




Test Mode:GFSK 2410MHz

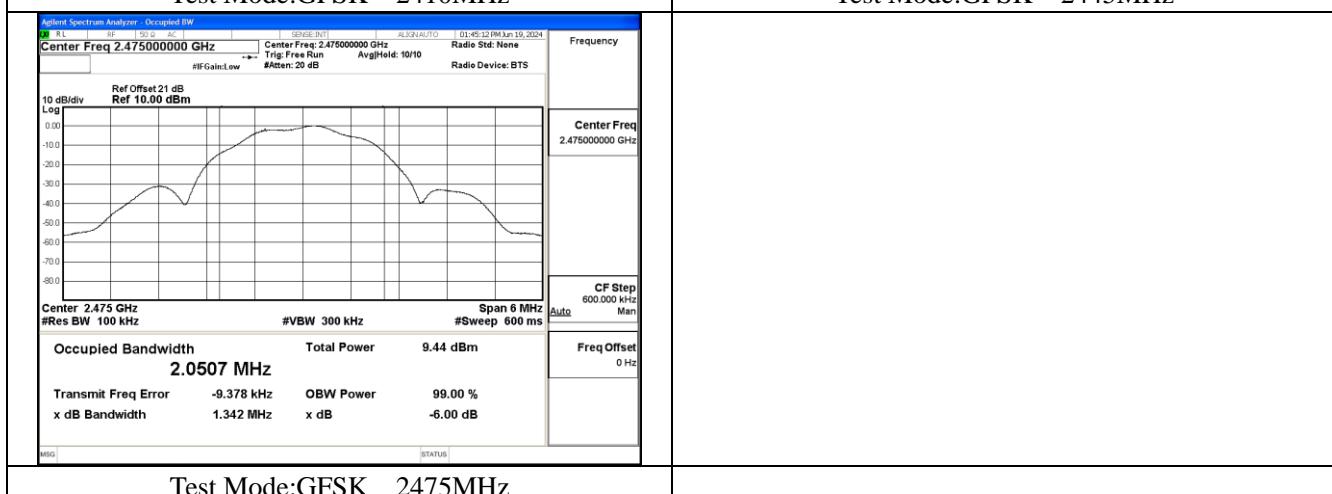

Test Mode:GFSK 2475MHz

**BUREAU
VERITAS****Test Report No.: PBJ-NQN2411050314RF01****99% Bandwidth**

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK	2410	2056.9
GFSK	2445	2051.8
GFSK	2475	2037.6

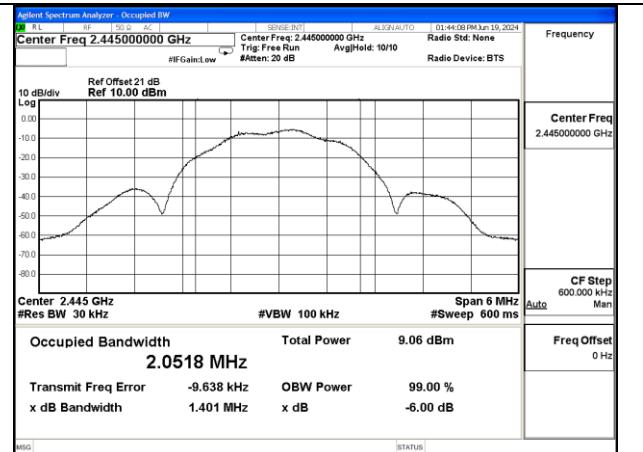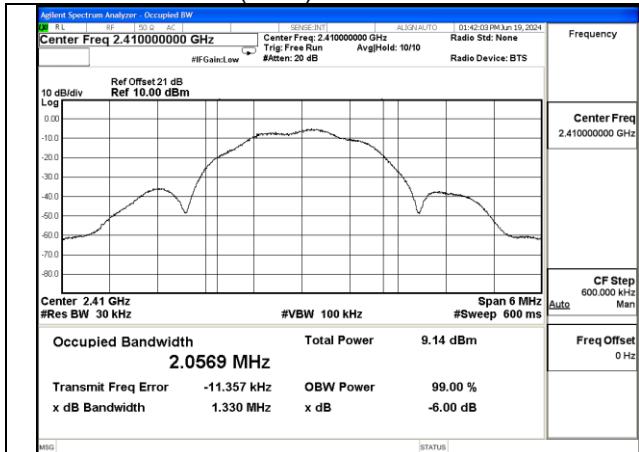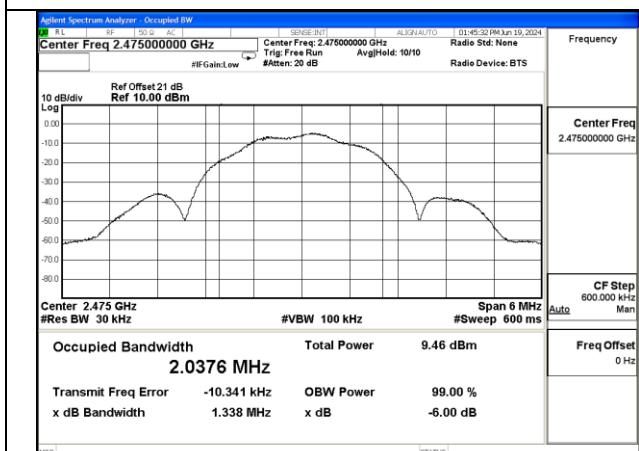
Test Mode: GFSK (2.4G)**Test Mode:GFSK 2410MHz****Test Mode:GFSK 2475MHz****Test Mode:GFSK 2445MHz**



4 Transmitter Power Spectral Density


Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
GFSK	2410	0	-5.8
GFSK	2445	19	-6.7
GFSK	2475	2	-6.5

Test Mode: GFSK (2.4G)

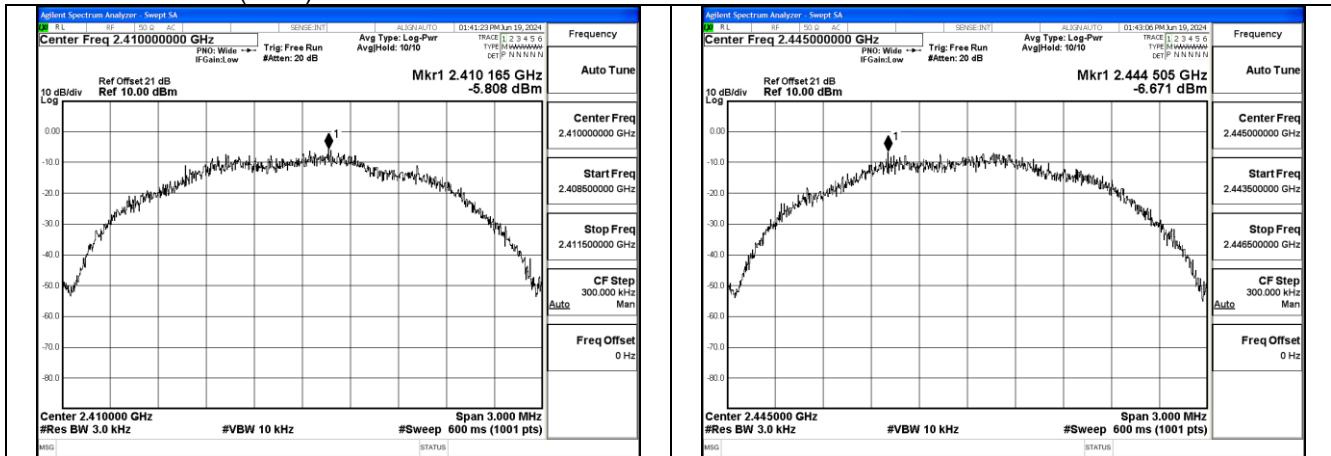

Test Mode:GFSK 2410MHz

Test Mode:GFSK 2440MHz

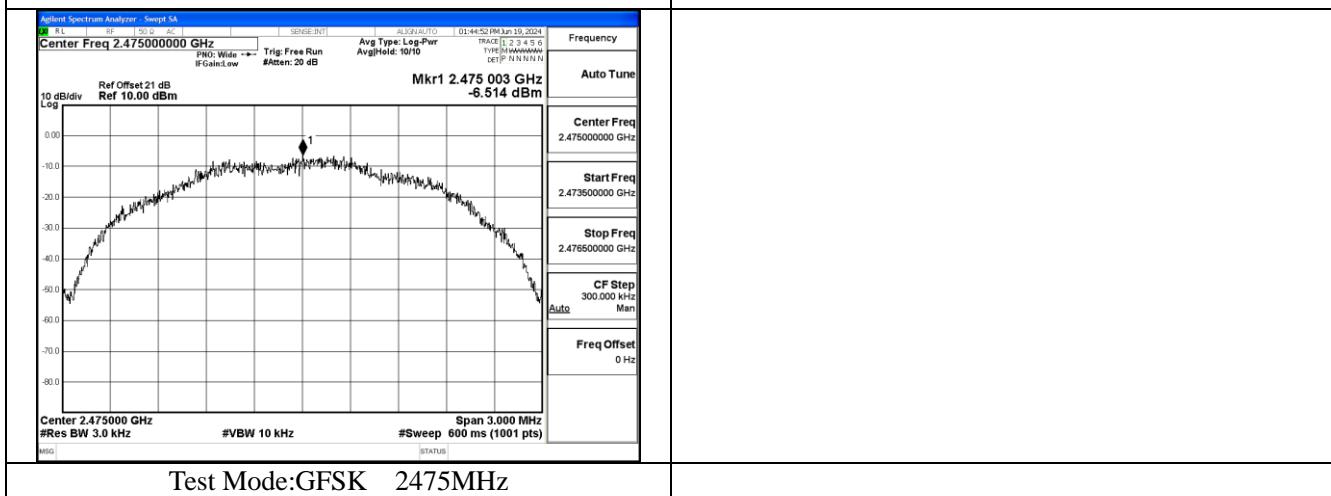


Test Mode:GFSK 2475MHz

BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01


5 Conducted Out of band emission measurement

Test Mode: GFSK (2.4G)

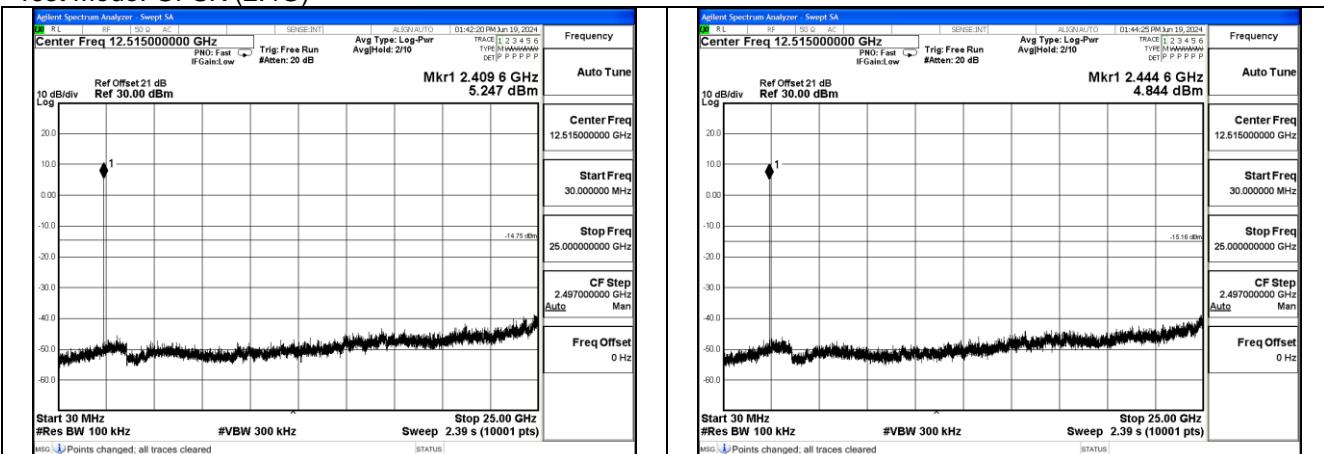

Test Mode:GFSK 2410MHz


Test Mode:GFSK 2445MHz

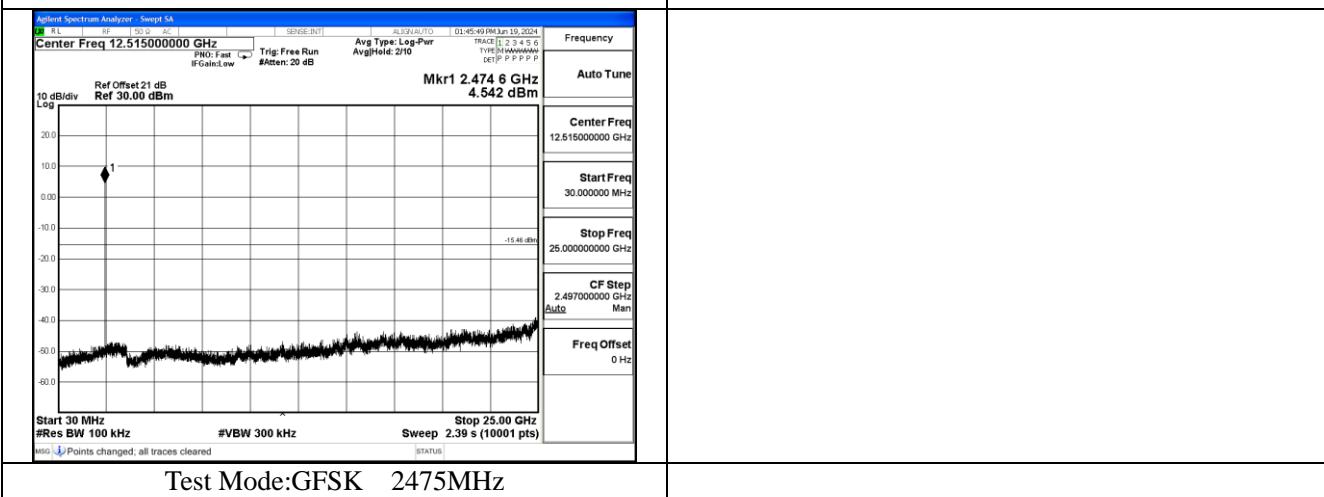

Test Mode:GFSK 2475MHz

6 Band Edge measurement

Test Mode: GFSK (2.4G)

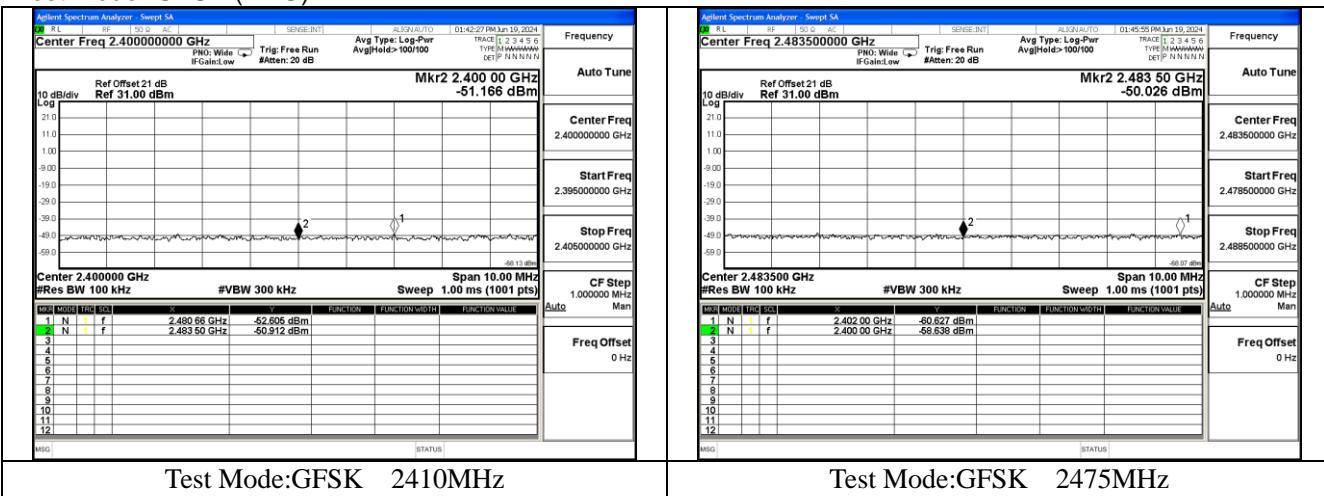

Test Mode:GFSK 2410MHz

Test Mode:GFSK 2475MHz



BUREAU
VERITAS


Test Report No.: PBJ-NQN2411050314RF01

APPENDIX B – TEST DATA OF RADIATED EMISSION

Note: The worst channel results are reflected in the report.

Note: The scanned graph represents the maximum of both horizontal and vertical polarizations and is not a single horizontal or vertical polarization scan.


Radiated Emission Band Edge

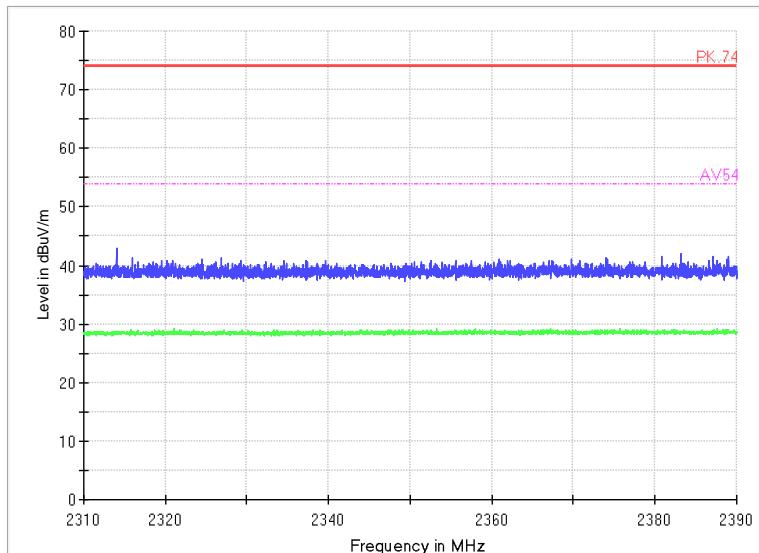

Radiated Emission Band Edge
Carrier frequency (MHz):2410

Test Mode: GFSK

Polarization: V

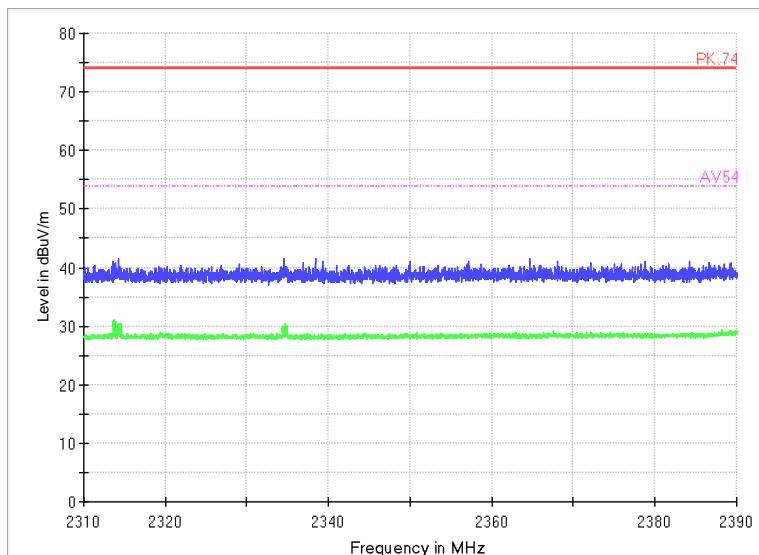

Radiated Emission Band Edge
Carrier frequency (MHz):2410




BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

Test Mode: GFSK


Polarization: H

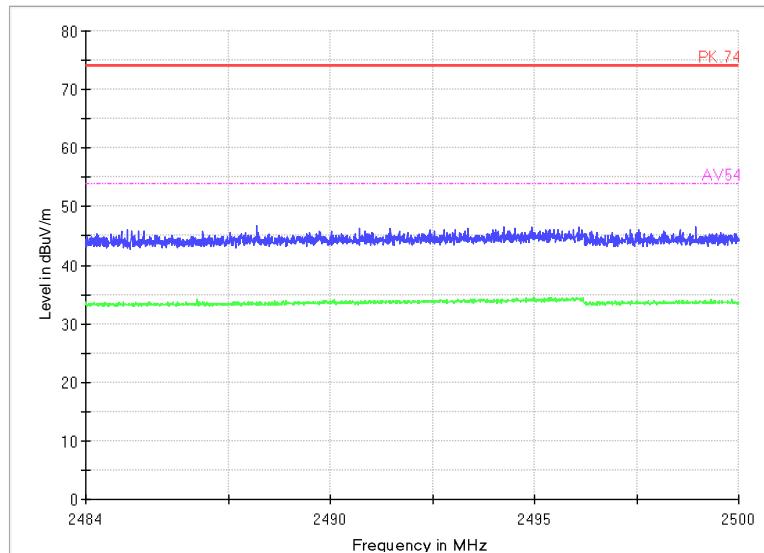

Radiated Emission Band Edge
Carrier frequency (MHz):2475

Test Mode: GFSK

Polarization: V

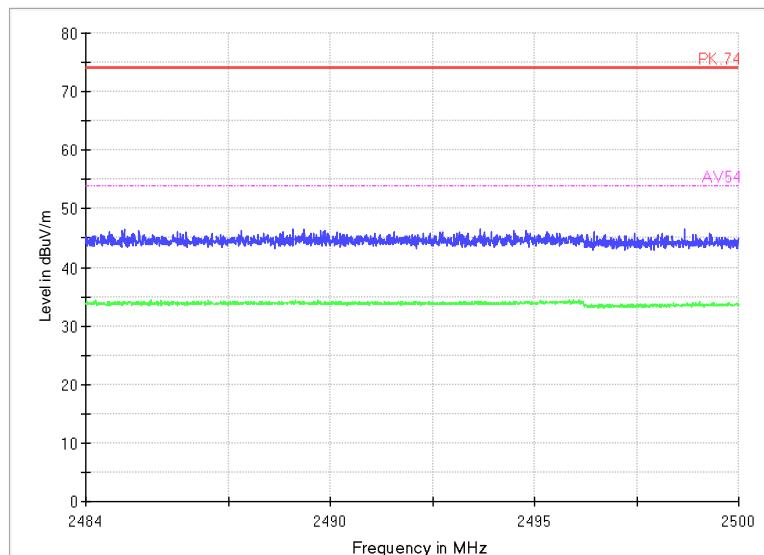

Radiated Emission Band Edge
Carrier frequency (MHz):2475

Test Mode: GFSK

Polarization: H



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

Sample Calculations

After comparison, the worst case attitude is EUT lay down.

Determining Spurious Emissions Levels

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

Result = $P_{mea} + A_{Rpl}$

Sample calculation: $(5.62 \text{ dBpV/m}) = (26.12 \text{ dBuV}) + (-20.5 \text{ dB/m})$, the corresponding frequency is 31.067MHz.

For GFSK

Carrier frequency (MHz): 2410

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
31.067	5.62	-20.5	26.12	Vertical	40	34.38
57.1115	5.55	-19.3	24.85	Vertical	40	34.45
99.9855	13.95	-19.1	33.05	Vertical	43.5	29.55
199.9925	15.13	-19.3	34.43	Vertical	43.5	28.37
548.9985	12.33	-9.8	22.13	Vertical	46	33.67
947.3775	17.85	-3.2	21.05	Vertical	46	28.15

Carrier frequency (MHz): 2445

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
33.9285	5.97	-20	25.97	Vertical	40	34.03
58.13	5.79	-19.5	25.29	Vertical	40	34.21
99.9855	13.96	-19.1	33.06	Vertical	43.5	29.54
199.9925	15.11	-19.3	34.41	Vertical	43.5	28.39
544.003	12.56	-9.9	22.46	Vertical	46	33.44
946.2135	17.85	-3.3	21.15	Vertical	46	28.15

Carrier frequency (MHz): 2475


Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
45.52	6.42	-18.8	25.22	Vertical	40	33.58
58.13	5.85	-19.5	25.35	Vertical	40	34.15
99.9855	13.98	-19.1	33.08	Vertical	43.5	29.52
199.9925	15.09	-19.3	34.39	Vertical	43.5	28.41
520.2865	12.09	-10.5	22.59	Vertical	46	33.91
949.56	17.87	-3.2	21.07	Vertical	46	28.13



BUREAU
VERITAS


Test Report No.: PBJ-NQN2411050314RF01

Full Spectrum

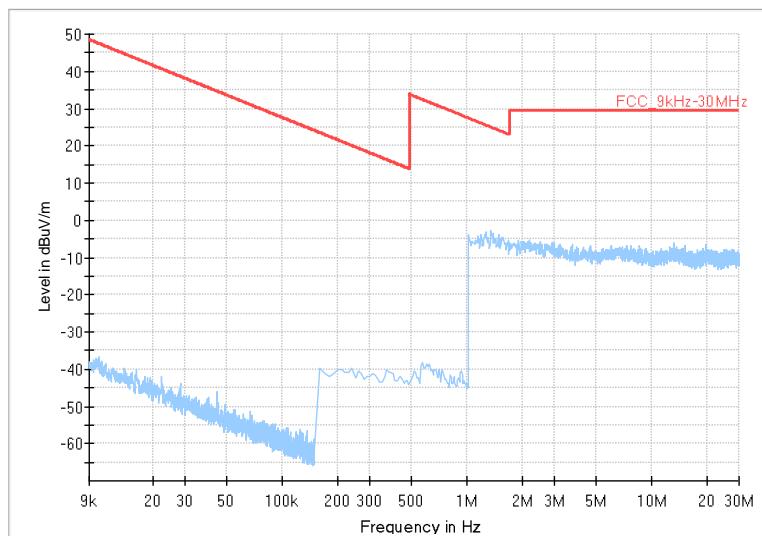

Carrier frequency (MHz): 2410

Full Spectrum

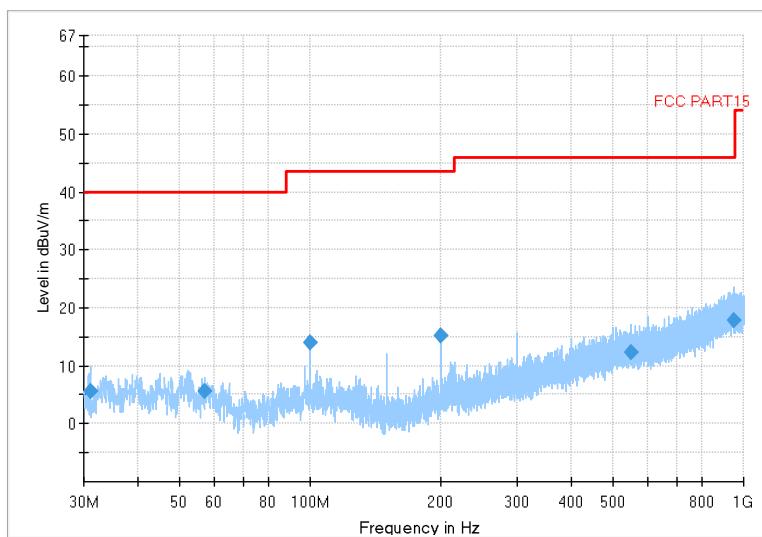




BUREAU
VERITAS


Test Report No.: PBJ-NQN2411050314RF01

Full Spectrum

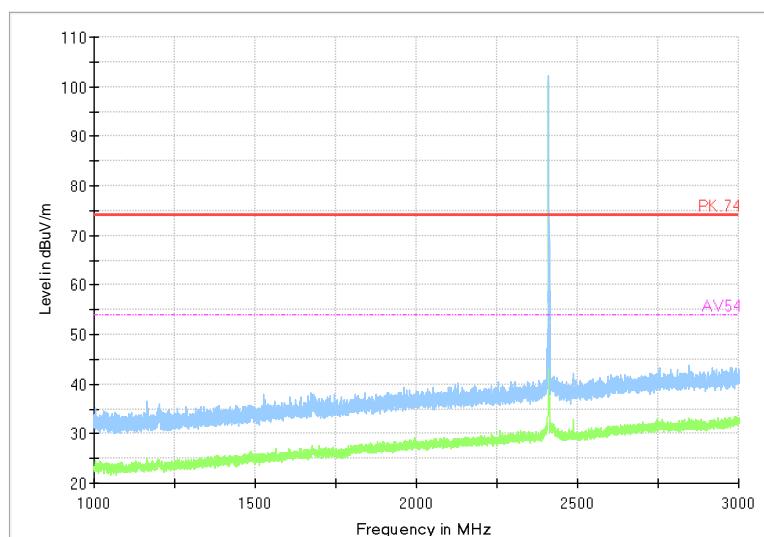

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

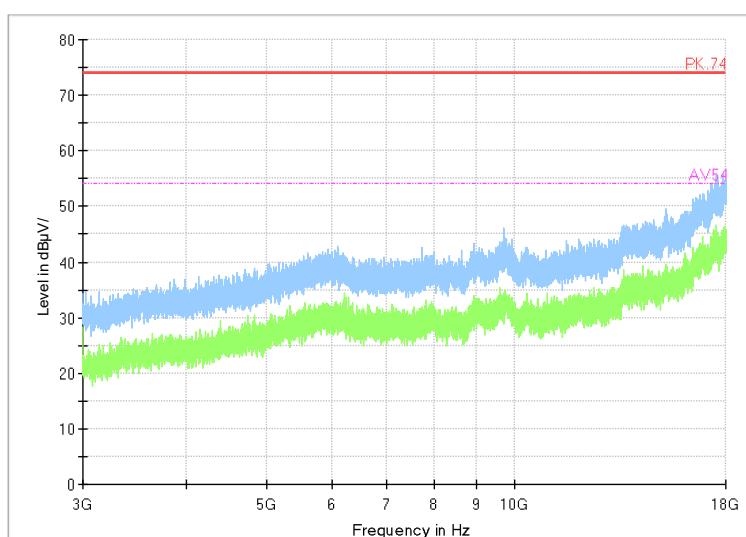


Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

Full Spectrum

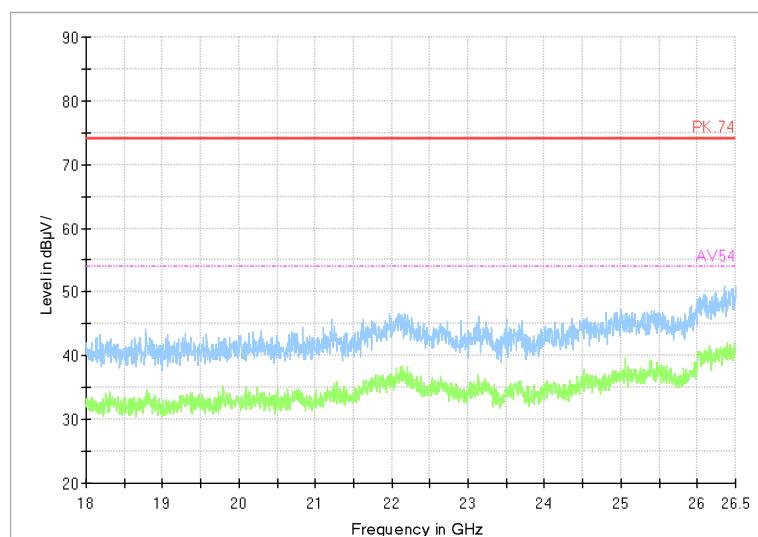


Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: GFSK

Carrier frequency (MHz): 2445

Full Spectrum

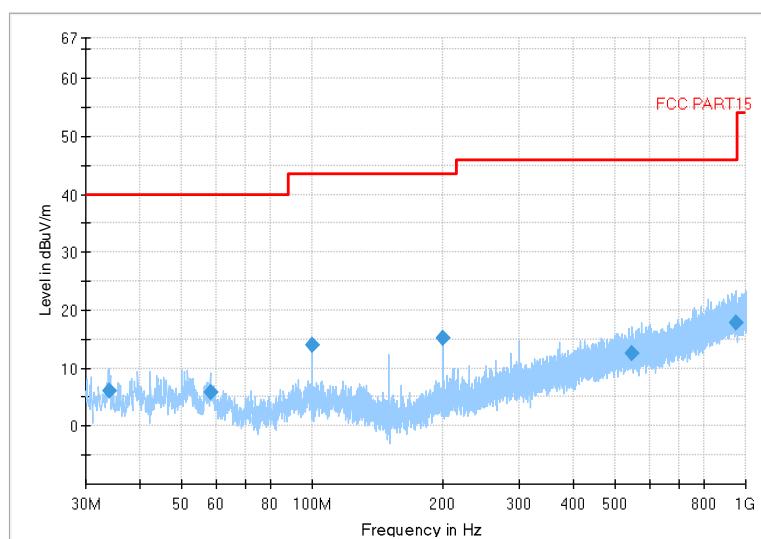

Frequency Range: 30MHz-1GHz

Detector:QP mode


Modulation type: GFSK




BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

Full Spectrum

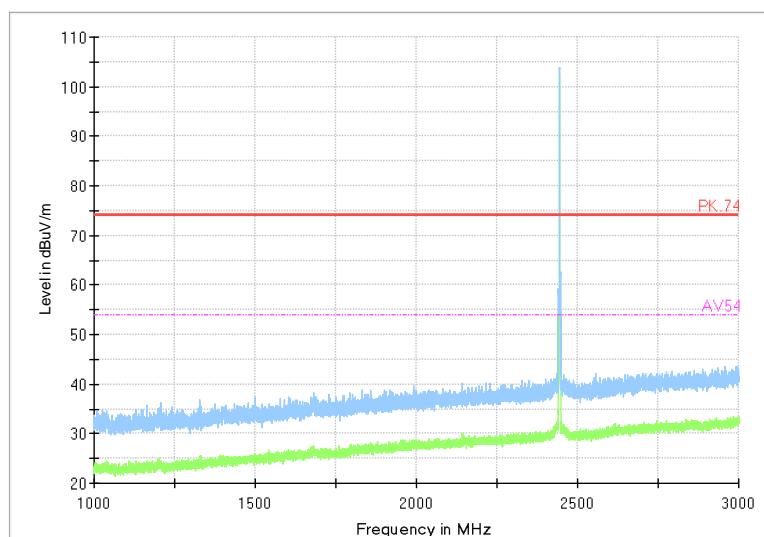

Full Spectrum

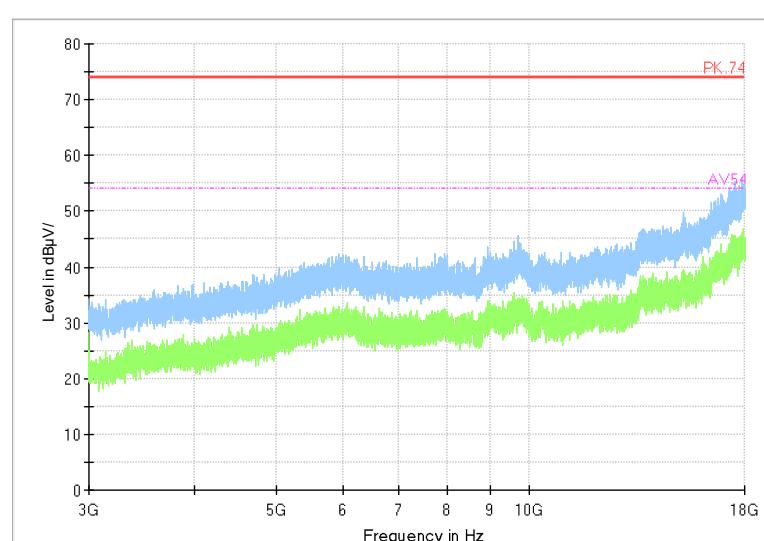




BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01


Full Spectrum

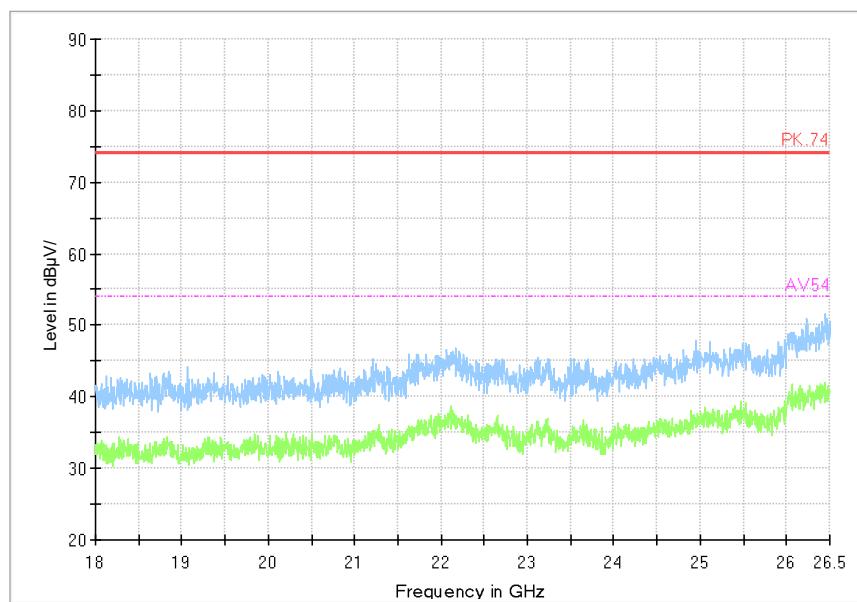

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Carrier frequency (MHz):2475

Full Spectrum

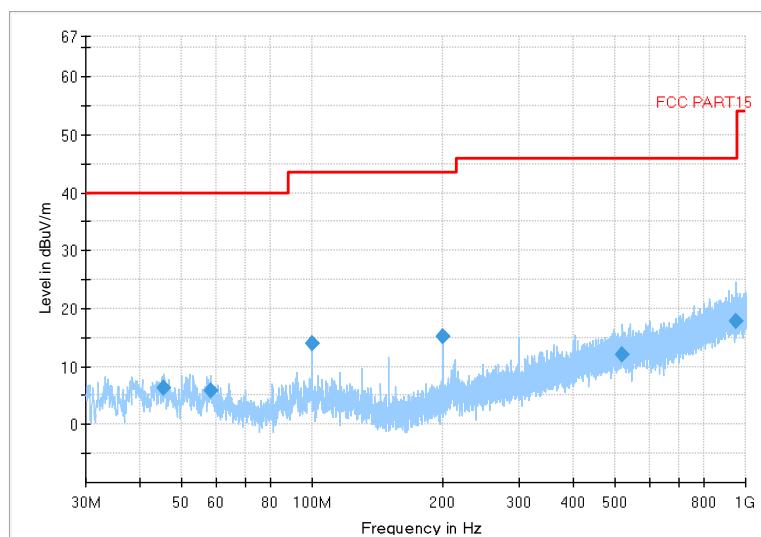


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: GFSK



BUREAU
VERITAS


Test Report No.: PBJ-NQN2411050314RF01

Full Spectrum

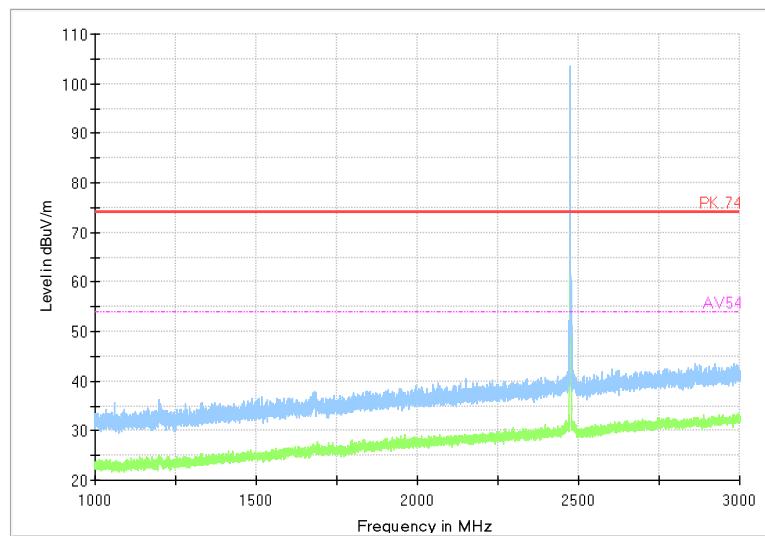

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

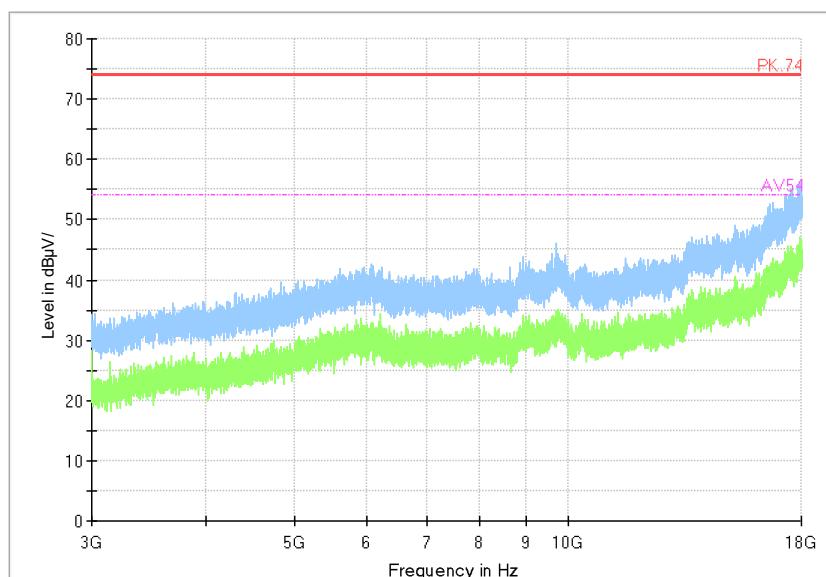


Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK



BUREAU
VERITAS

Test Report No.: PBJ-NQN2411050314RF01

Full Spectrum

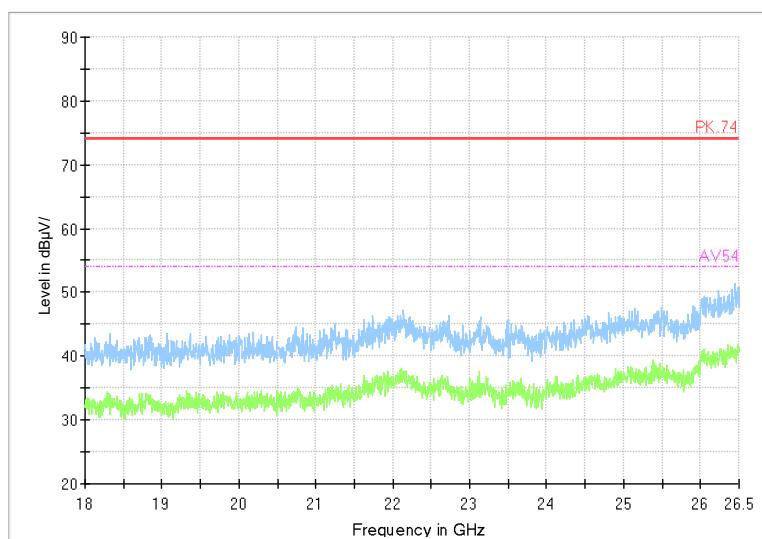

---End of Test Report---