

# FCC RADIO TEST REPORT

## FCC ID: 2BK8UCB20RDNAR1

**Product:** ConBox2020RD

**Trade Mark:** Lear

**Model No.:** CB20RDNAR1

**Family Model:** N/A

**Report No.:** S24080903001002

**Issue Date:** Sep. 21, 2024

**Prepared for**

Lear Corporation Engineering GmbH

Industriestrasse 48, Kronach, Germany, 96317

**Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.  
1/F, Building E, Fenda Science Park, Sanwei Community,  
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China  
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090  
Website: <http://www.ntek.org.cn>

## TABLE OF CONTENTS

<b>1</b>	<b>TEST RESULT CERTIFICATION</b>	<b>3</b>
<b>2</b>	<b>SUMMARY OF TEST RESULTS</b>	<b>4</b>
<b>3</b>	<b>FACILITIES AND ACCREDITATIONS</b>	<b>5</b>
3.1	FACILITIES	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
3.3	MEASUREMENT UNCERTAINTY	5
<b>4</b>	<b>GENERAL DESCRIPTION OF EUT</b>	<b>6</b>
<b>5</b>	<b>DESCRIPTION OF TEST MODES</b>	<b>8</b>
<b>6</b>	<b>SETUP OF EQUIPMENT UNDER TEST</b>	<b>10</b>
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	10
6.2	SUPPORT EQUIPMENT	11
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS	12
<b>7</b>	<b>TEST REQUIREMENTS</b>	<b>13</b>
7.1	CONDUCTED EMISSIONS TEST	13
7.2	RADIATED SPURIOUS EMISSION	15
7.3	6DB BANDWIDTH	37
7.4	DUTY CYCLE	39
7.5	MAXIMUM OUTPUT POWER	40
7.6	POWER SPECTRAL DENSITY	42
7.7	CONDUCTED BAND EDGE MEASUREMENT	44
7.8	SPURIOUS RF CONDUCTED EMISSIONS	46
7.9	ANTENNA APPLICATION	47

## 1 TEST RESULT CERTIFICATION

Applicant's name .....	Lear Corporation Engineering GmbH
Address .....	Industriestrasse 48, Kronach, Germany, 96317
Manufacturer's Name .....	Lear Corporation Engineering GmbH
Address .....	Industriestrasse 48, Kronach, Germany, 96317
Product description	
Product name .....	ConBox2020RD
Trade Mark .....	Lear
Model and/or type reference .....	CB20RDNAR1
Family Model .....	N/A
Test Sample number .....	S240809030001
Date (s) of performance of tests..	Aug. 11, 2024 ~ Sep. 21, 2024


Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J	
FCC 47 CFR Part 15, Subpart C	
ANSI C63.10-2013	Complied
KDB 558074 D01 15.247 Meas Guidance v05r02	

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Prepared :   
By : Mary Hu  
(Project Engineer)

Reviewed :   
By : Aaron Cheng  
(Supervisor)

Approved :   
By : Alex Li  
(Manager)

**2 SUMMARY OF TEST RESULTS****FCC Part15 (15.247), Subpart C**

Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	N/A	
15.247 (a)(2)	6dB Bandwidth	**PASS	
15.247 (b)	Maximum Output Power	**PASS	
15.209 (a) 15.205 (a)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	**PASS	
15.247 (d)	Band Edge Emission	**PASS	
15.247 (d)	Spurious RF Conducted Emission	**PASS	
15.203	Antenna Requirement	PASS	

**Remark:**

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. \*\*The maximum conducted power is verified to be the same. The conducted signal test data may be re-used. Please check FCC ID: XPYJODYW374 (Report No.: MDE\_UBLOX\_2220\_FCC\_03)

### 3 FACILITIES AND ACCREDITATIONS

#### 3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1&5/F, Building C, 1&2/F, Building E, Fenda Science Park, Sanwei Community, Hangcheng Street, Baoan District, Shenzhen, Guangdong, China.

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.10 and CISPR Publication 22.

#### 3.2 LABORATORY ACCREDITATIONS AND LISTINGS

##### Site Description

CNAS-Lab.	: The Certificate Registration Number is L5516.
IC-Registration	The Certificate Registration Number is 9270A. CAB identifier:CN0074
FCC- Accredited	Test Firm Registration Number: 463705. Designation Number: CN1184
A2LA-Lab.	The Certificate Registration Number is 4298.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).
Name of Firm	: Shenzhen NTEK Testing Technology Co., Ltd.
Site Location	: 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District Shenzhen, Guangdong, China

#### 3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.1\text{dB}$
2	RF power, conducted	$\pm 0.9\text{dB}$
3	Spurious emissions, conducted	$\pm 2.2\text{dB}$
4	All emissions, radiated(<1G)	$\pm 5.2\text{dB}$
5	All emissions, radiated(>1G)	$\pm 5.1\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$
8	Occupied bandwidth	$\pm 3.7\%$

#### 4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	ConBox2020RD
Trade Mark	Lear
FCC ID	2BK8UCB20RDNAR1
Model No.	CB20RDNAR1
Family Model	N/A
Model Difference	N/A
Operating Frequency	2412-2462MHz for 802.11b/g/11n(HT20)/11ax(HE20); 2422-2452MHz for 802.11n(HT40)/11ax(HE40);
Modulation	802.11b: DSSS; 802.11g/n/ax: OFDM;
Number of Channels	11 channels for 802.11b/g/11n(HT20)/11ax(HE20); 7 channels for 802.11n(HT40)/11ax(HE40);
Antenna Type	External Antenna (5B4.035.510)
Antenna Gain	3dBi
Adapter	N/A
Battery	Typical Capacity: DC 3.2V, 1.1Ah, 3.52Wh Rated Capacity: DC 3.6V, 1.05Ah, 3.36Wh
Power supply	DC 12V
HW Version	H04
SW Version	0340

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

## Revision History

## 5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0; 802.11ax (HE20): MCS0; 802.11ax (HE40): MCS0) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

Frequency and Channel list for 802.11b/g/n (HT20/HT40)/ ax(HE20/HE40):

Channel	Frequency(MHz)
1	2412
2	2417
...	...
5	2432
6	2437
...	...
10	2457
11	2462

Note:  $fc = 2412\text{MHz} + (k-1) \times 5\text{MHz}$   $k=1$  to 11

## Test Mode:


Test Items	Mode	Data Rate	Channel	Ant
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	6	1
	11g/BPSK	-	-	-
	11n HT20	-	-	-
	11n HT40			
	11ax HE20			
	11ax HE40	-	-	-
Power Spectral Density	11b/CCK	-	-	-
	11g/BPSK	-	-	-
	11n HT20	-	-	-
	11n HT40	-	-	-
	11ax HE20	-	-	-
	11ax HE40	-	-	-
6dB Spectrum Bandwidth	11b/CCK	-	-	-
	11g/BPSK	-	-	-
	11n HT20	-	-	-
	11n HT40	-	-	-
	11ax HE20	-	-	-
	11ax HE40	-	-	-
Radiated Emissions Below 1GHz	11b/CCK	1 Mbps	6	1
Radiated Emissions Above 1GHz	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
	11ax HE20	MCS0	1/6/11	1
	11ax HE40	MCS0	3/6/9	1
Band Edge Emissions	11b/CCK	1 Mbps	1/11	1
	11g/BPSK	6 Mbps	1/11	1
	11n HT20	MCS0	1/11	1
	11n HT40	MCS0	3/9	1
	11ax HE20	MCS0	1/11	1
	11ax HE40	MCS0	3/9	1

Power setting					
Mode	CH01 (2412MHz)	CH03 (2422MHz)	CH06 (2437MHz)	CH09 (2452MHz)	CH11 (2462MHz)
802.11b	19	-	21	-	16
802.11g	14	-	17	-	13
802.11n(HT20)	14	-	17	-	12
802.11n(HT40)	-	13	13	12	-
802.11ax(HE20)	13	-	17	-	12
802.11ax(HE40)	-	13	13	12	-

## 6 SETUP OF EQUIPMENT UNDER TEST


### 6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

For Radiated Test Cases

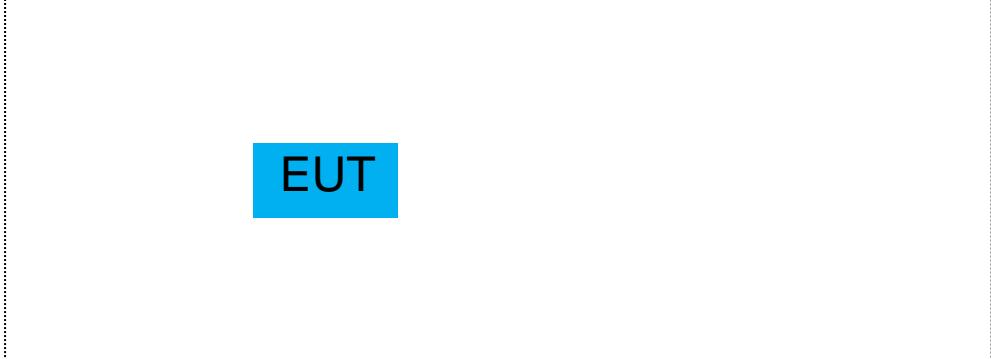

EUT

For Conducted Test Cases

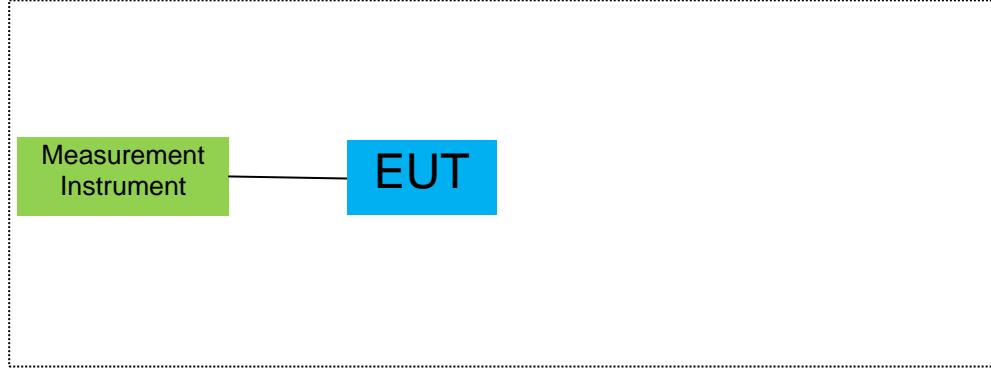

Measurement  
Instrument

EUT

## 6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	RF Cable***	Yes	NO	54cm
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

### Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".
- (4) "\*\*\*\*" RF Cable is between the module and the antenna, that's part of the EUT. Provided by the applicant.

### 6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

#### Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	N9020A	MY53280244	2024.04.26	2025.04.25	1 year
2	Spectrum Analyzer	R&S	FSV40	101417	2024.04.26	2025.04.25	1 year
3	Test Receiver	R&S	ESPI7	101318	2024.03.12	2025.03.11	1 year
4	Active Loop Antenna	SCHWARZBECK	FMZB 1519 B	055	2024.05.17	2027.05.16	3 year
5	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	586	2024.05.12	2025.05.11	1 year
6	Broadband Horn Antenna	SCHWARZBECK	BBHA 9120 D	2816	2024.05.18	2027.05.17	3 year
7	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2024.05.12	2027.05.11	3 year
8	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
9	Pre-Amplifier	EMC	EMC051835 SE	980246	2024.01.23	2025.01.22	1 year
10	Low Noise Amplifier	B&Z	BZ-P540-550 850-452727	16476-11729	2024.02.03	2025.02.02	1 year
11	Pre-Amplifier	Sonoma	310N	186604	2024.04.25	2025.04.24	1 year
12	Power sensor	MWRFtest	MW100-PD	MW2021043	2023.12.19	2024.12.18	1 year
13	Filter	TRILTHIC	2400MHz	29	2024.04.26	2027.04.25	3 year
14	RF Control Unit	MWRFtest	MW100-RFC B	MW230608N TEK-43	N/A	N/A	N/A

Note: Each piece of equipment is scheduled for calibration once a year except the Aux Equipment & Test Cable which is scheduled for calibration every 2 or 3 years.

#### Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFtest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	Radiated Test
3	raditeq	RadiMation	2023.1.3	Radiated Test

## 7 TEST REQUIREMENTS

### 7.1 CONDUCTED EMISSIONS TEST

#### 7.1.1 Applicable Standard

According to FCC Part 15.207(a)

#### 7.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. \*Decreases with the logarithm of the frequency  
 2. The lower limit shall apply at the transition frequencies  
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.1.4 Test Configuration

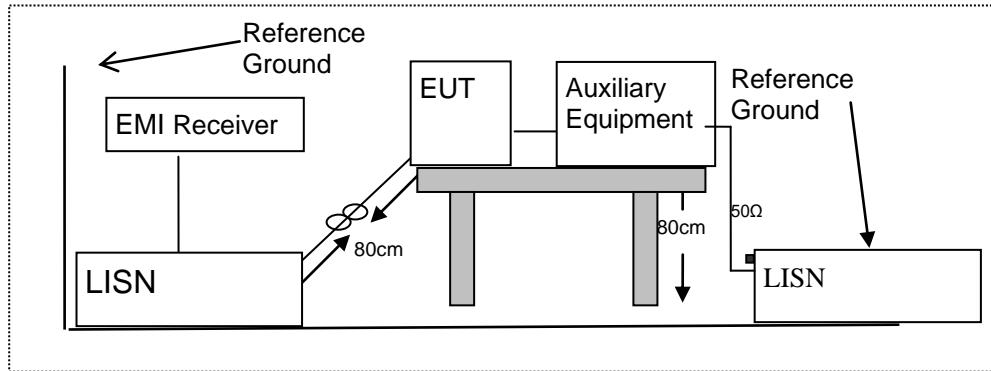

#### 7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 7.1.6 Test Results

EUT:	ConBox2020RD	Model Name :	CB20RDNAR1
Temperature:	N/A	Relative Humidity:	N/A
Pressure:	N/A	Phase :	L
Test Voltage :	N/A	Test Mode:	N/A

Not Applicable

EUT:	ConBox2020RD	Model Name :	CB20RDNAR1
Temperature:	N/A	Relative Humidity:	N/A
Pressure:	N/A	Phase :	N
Test Voltage :	N/A	Test Mode:	N/A

Not Applicable

## 7.2 RADIATED SPURIOUS EMISSION

### 7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

### 7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).  
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	13.36-13.41	322-335.4	3.6-4.4
0.495-0.505	16.42-16.423	399.9-410	4.5-5.15
2.1735-2.1905	16.69475-16.69525	608-614	5.35-5.46
4.125-4.128	16.80425-16.80475	960-1240	7.25-7.75
4.17725-4.17775	25.5-25.67	1300-1427	8.025-8.5
4.20725-4.20775	37.5-38.25	1435-1626.5	9.0-9.2
6.215-6.218	73-74.6	1645.5-1646.5	9.3-9.5
6.26775-6.26825	74.8-75.2	1660-1710	10.6-12.7
6.31175-6.31225	108-121.94	1718.8-1722.2	13.25-13.4
8.291-8.294	123-138	2200-2300	14.47-14.5
8.362-8.366	149.9-150.05	2310-2390	15.35-16.2
8.37625-8.38675	156.52475-156.52525	2483.5-2500	17.7-21.4
8.41425-8.41475	156.7-156.9	2690-2900	22.01-23.12
12.29-12.293	162.0125-167.17	3260-3267	23.6-24.0
12.51975-12.52025	167.72-173.2	3332-3339	31.2-31.8
12.57675-12.57725	240-285	3345.8-3358	36.43-36.5
			(2)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength ( $\mu$ V/m)	Field Strength ( $\text{dB}\mu$ V/m)	Measurement Distance
0.09~0.490	2400/F(KHz)	20 log ( $\mu$ V/m)	300
0.490~1.705	24000/F(KHz)	20 log ( $\mu$ V/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

#### Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B ( $\text{dB}\mu$ V/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in  $\text{dB}\mu$ V/m=20 log ( $\mu$ V/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits( $\text{dB}\mu$ V) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits( $\text{dB}\mu$ V) + distance extrapolation factor.

### 7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

### 7.2.4 Test Configuration


#### (a) For radiated emissions below 30MHz

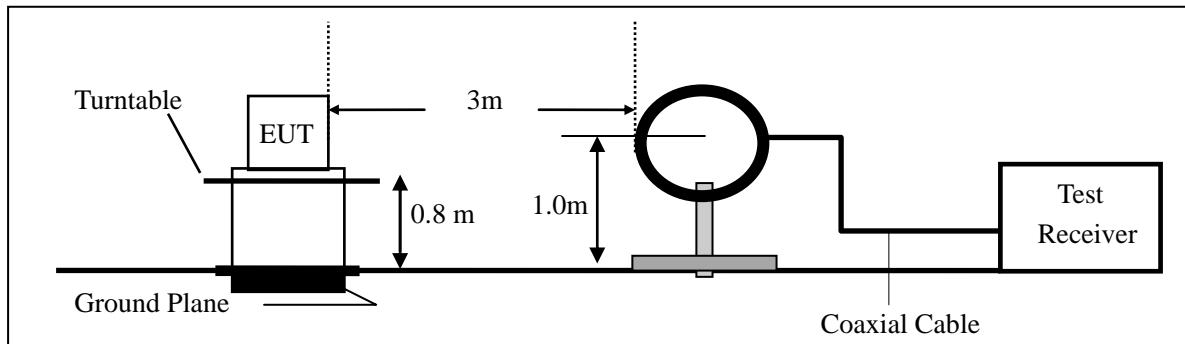

#### (b) For radiated emissions from 30MHz to 1000MHz

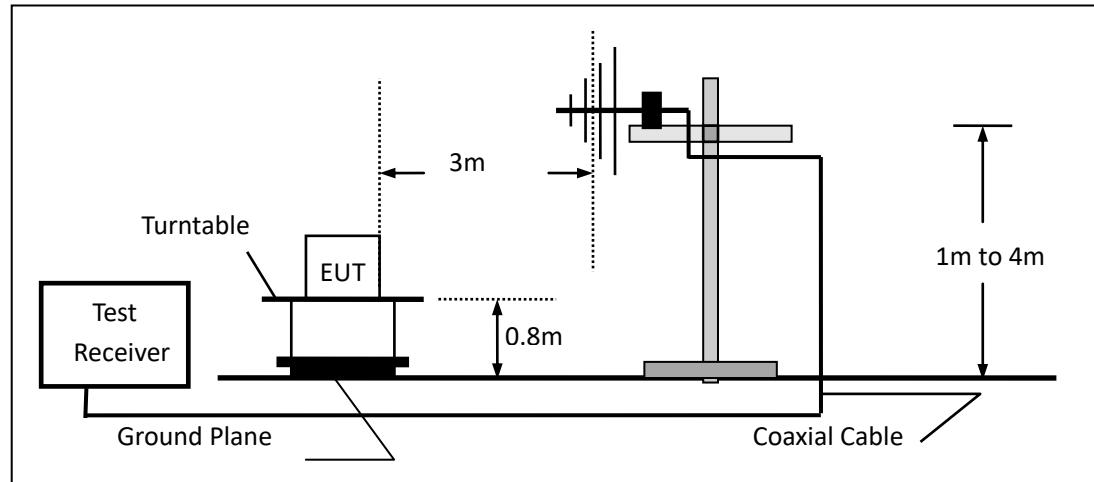

#### (c) For radiated emissions above 1000MHz

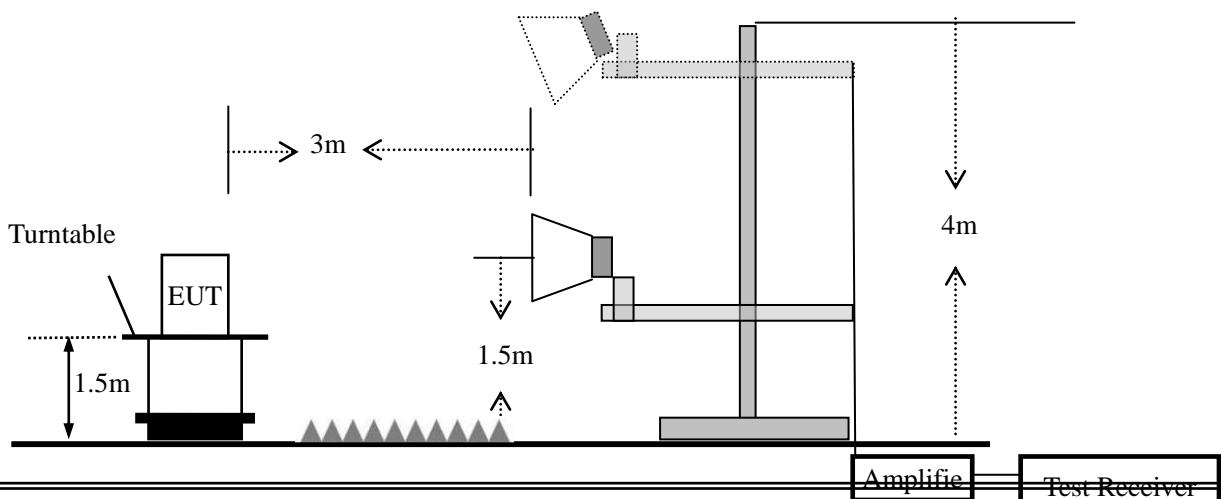

### 7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 3MHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz and frequencies above 1GHz,
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

For peak measurement:

Set RBW=120 kHz for  $f < 1$  GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;  
Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz

For average measurement:

VBW = 10 Hz, when duty cycle is no less than 98 percent.

VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of

operation.

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =  $10 \times \lg(100 \text{ [kHz]}/\text{narrower RBW [kHz]})$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

### 7.2.6 Test Results

#### ■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	ConBox2020RD	Model No.:	CB20RDNAR1
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b	Test By:	Mary Hu

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

■ Spurious Emission below 1GHz (30MHz to 1GHz)


All the modulation modes have been tested, and the worst result was report as below:

EUT:	ConBox2020RD	Model Name :	CB20RDNAR1
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Test Mode:	802.11b CH06
Test Voltage :	DC 12V		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	31.2892	8.66	16.61	25.27	40.00	-14.73	QP
V	63.9827	8.25	17.83	26.08	40.00	-13.92	QP
V	136.4598	21.11	14.29	35.40	43.50	-8.10	QP
V	192.4183	10.09	17.26	27.35	43.50	-16.15	QP
V	208.5801	8.91	17.75	26.66	43.50	-16.84	QP
V	952.0937	5.23	30.66	35.89	46.00	-10.11	QP

**Remark:**


Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit

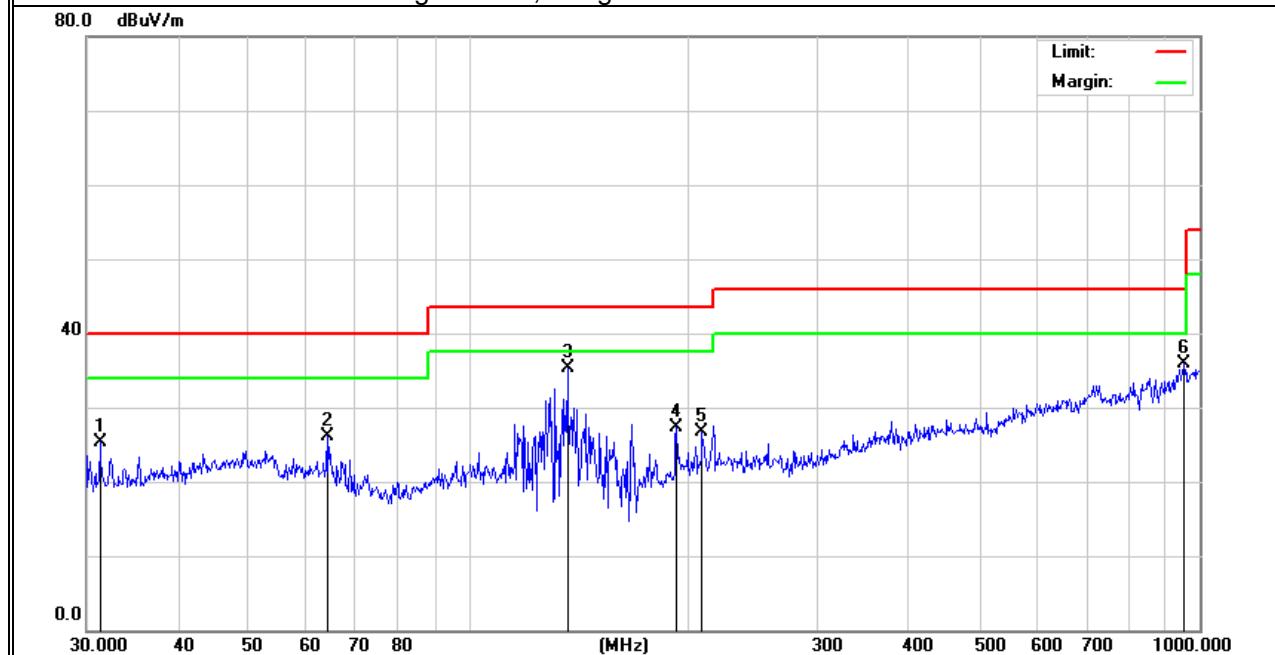

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	39.7146	6.50	18.35	24.85	40.00	-15.15	QP
H	256.5210	9.08	18.71	27.79	46.00	-18.21	QP
H	300.3672	13.82	20.21	34.03	46.00	-11.97	QP
H	336.0350	9.40	21.18	30.58	46.00	-15.42	QP
H	804.6027	5.86	29.07	34.93	46.00	-11.07	QP
H	948.7608	6.06	30.63	36.69	46.00	-9.31	QP

**Remark:**

Emission Level = Meter Reading + Factor, Margin= Emission Level- Limit

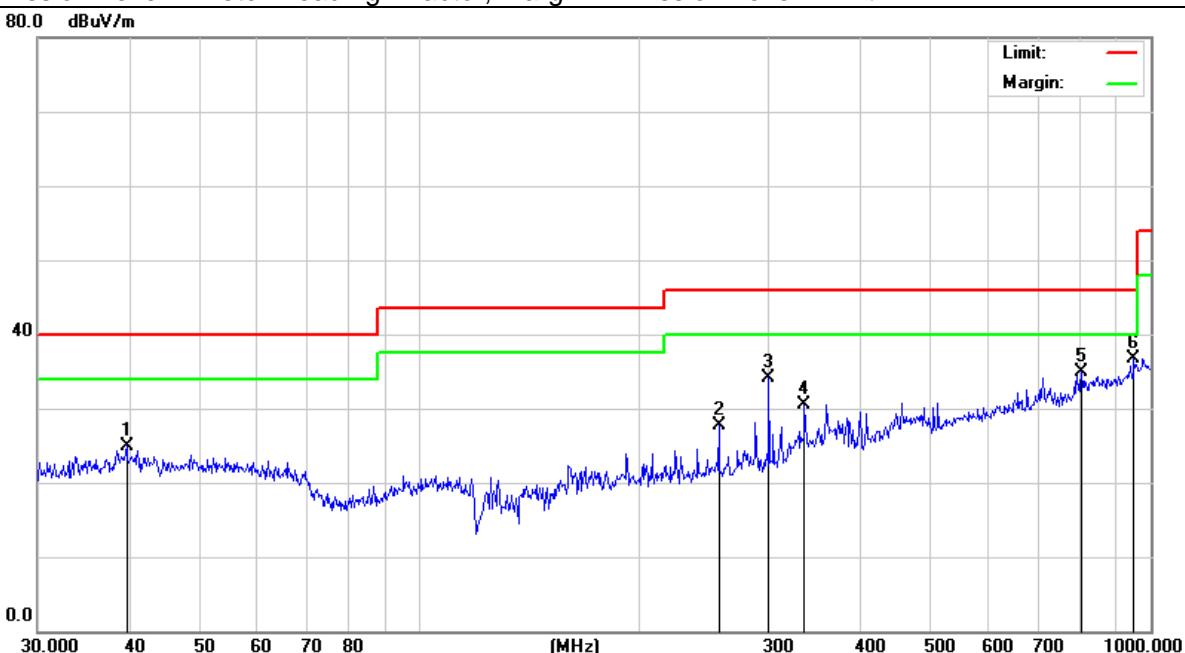


## ■ Spurious Emission Above 1GHz (1GHz to 26.5GHz)

EUT:	ConBox2020RD	Model No.:	CB20RDNAR1
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n(HT20, HT40)/ax(HE20, HE40)	Test By:	Mary Hu

All the modulation modes have been tested, and the worst result was report as below:

## [1 GHz-18 GHz]/Horizontal RSE WLAN 2.4G 802.11b 2412MHz


Start Frequency	Stop Frequency	Step Width	Meas. Time	IF Bandwidth	Detectors
1 GHz	18 GHz	Fixed step count: 40001 steps per Band	Auto [120 ms]	1 MHz	PK, AV

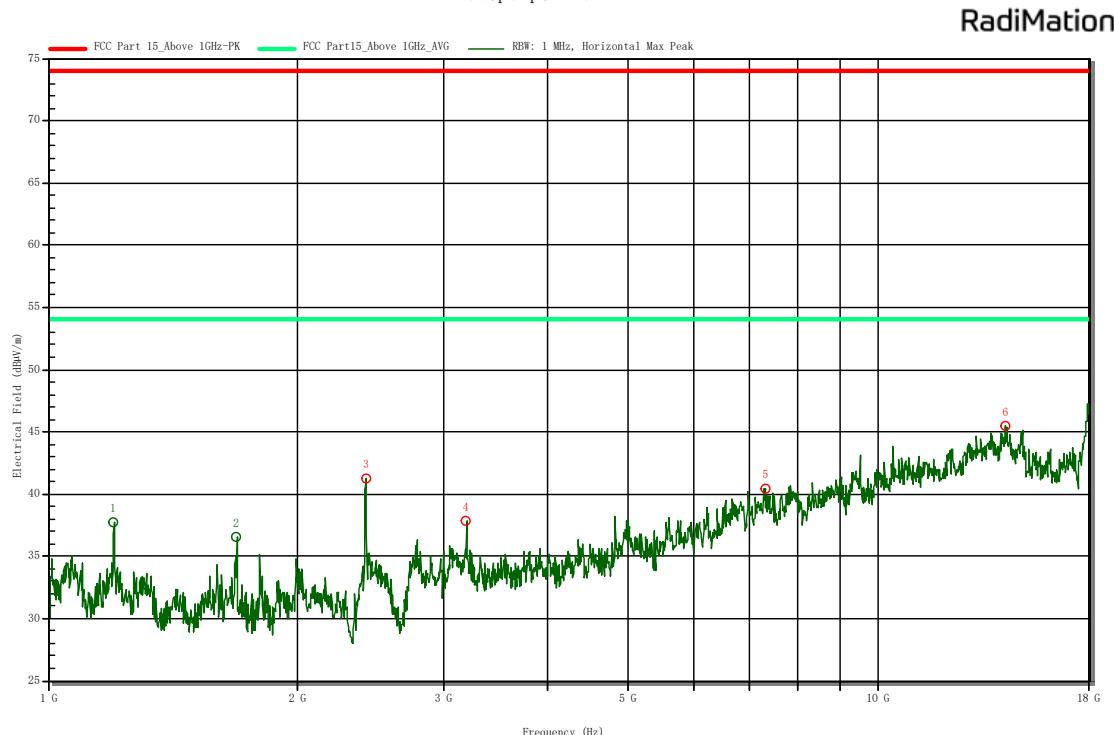

Frequency (MHz)	Peak (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Difference (dB)	Status
1200.175	37.8	74	-36.2	Pass
1687.65	36.6	74	-37.4	Pass
2414.4	41.2	74	-32.8	Pass
3190.45	37.8	74	-36.2	Pass
7312.525	40.5	74	-33.5	Pass
14245.125	45.5	74	-28.5	Pass

## [1 GHz-18 GHz]/Vertical RSE WLAN 2.4G 802.11b 2412MHz


Start Frequency	Stop Frequency	Step Width	Meas. Time	IF Bandwidth	Detectors
1 GHz	18 GHz	Fixed step count: 40001 steps per Band	Auto [120 ms]	1 MHz	PK, AV

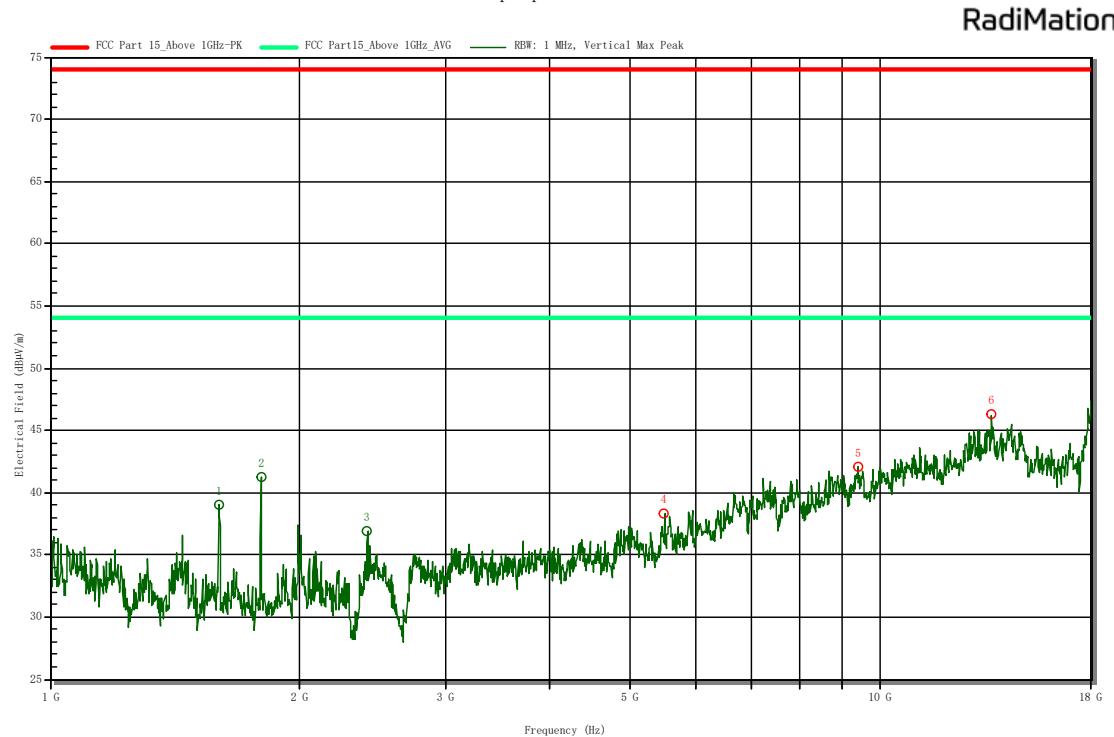

Frequency (MHz)	Peak (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Difference (dB)	Status
1596.275	39	74	-35.0	Pass
1795.6	41.3	74	-32.7	Pass
2412.7	36.9	74	-37.1	Pass
5493.95	38.4	74	-35.6	Pass
9414.575	42.1	74	-31.9	Pass
13634.825	46.2	74	-27.8	Pass

## [1 GHz-18 GHz]/Vertical RSE WLAN 2.4G 802.11b 2442MHz


Start Frequency	Stop Frequency	Step Width	Meas. Time	IF Bandwidth	Detectors
1 GHz	18 GHz	Fixed step count: 40001 steps per Band	Auto [120 ms]	1 MHz	PK, AV

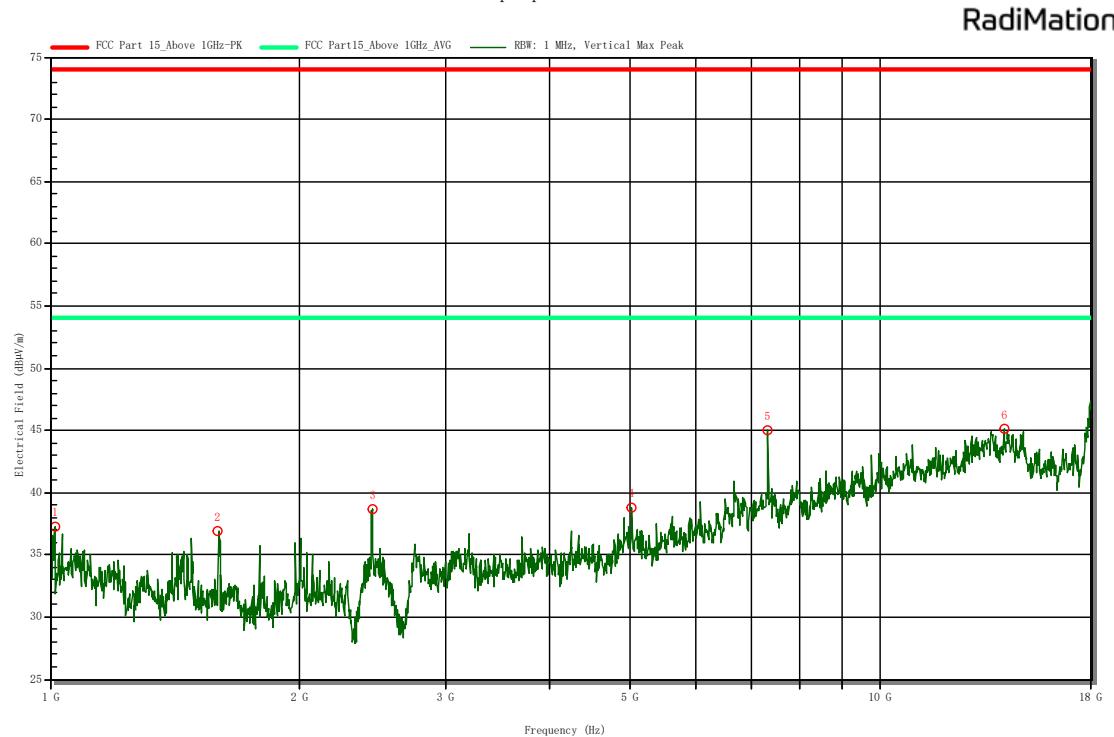

Frequency (MHz)	Peak (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Difference (dB)	Status
1012.325	37.2	74	-36.8	Pass
1594.15	36.9	74	-37.1	Pass
2443.3	38.7	74	-35.3	Pass
5022.625	38.8	74	-35.2	Pass
7324	45.1	74	-28.9	Pass
14112.525	45.1	74	-28.9	Pass

## [1 GHz-18 GHz]/Horizontal RSE WLAN 2.4G 802.11b 2442MHz


Start Frequency	Stop Frequency	Step Width	Meas. Time	IF Bandwidth	Detectors
1 GHz	18 GHz	Fixed step count: 40001 steps per Band	Auto [120 ms]	1 MHz	PK, AV

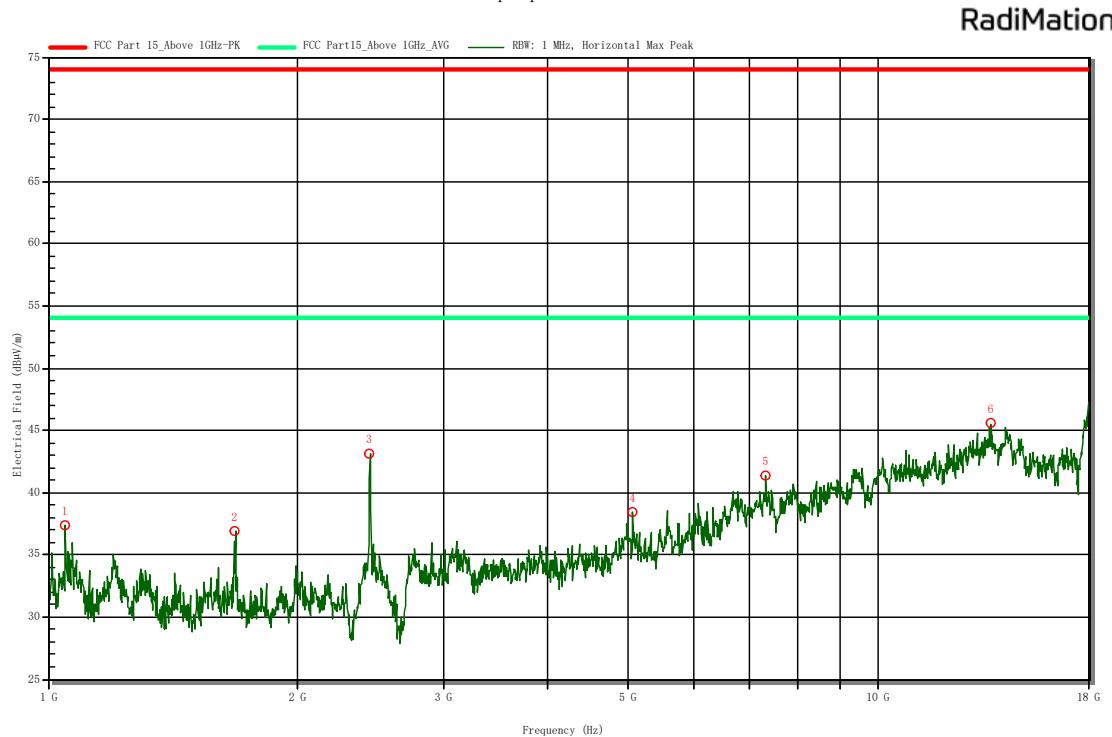

Frequency (MHz)	Peak (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Difference (dB)	Status
1048.45	37.4	74	-36.6	Pass
1681.275	36.9	74	-37.1	Pass
2441.175	43.1	74	-30.9	Pass
5067.675	38.5	74	-35.5	Pass
7325.275	41.4	74	-32.6	Pass
13687.95	45.5	74	-28.5	Pass

## [1 GHz-18 GHz]/Horizontal RSE WLAN 2.4G 802.11b 2462MHz


Start Frequency	Stop Frequency	Step Width	Meas. Time	IF Bandwidth	Detectors
1 GHz	18 GHz	Fixed step count: 40001 steps per Band	Auto [120 ms]	1 MHz	PK, AV

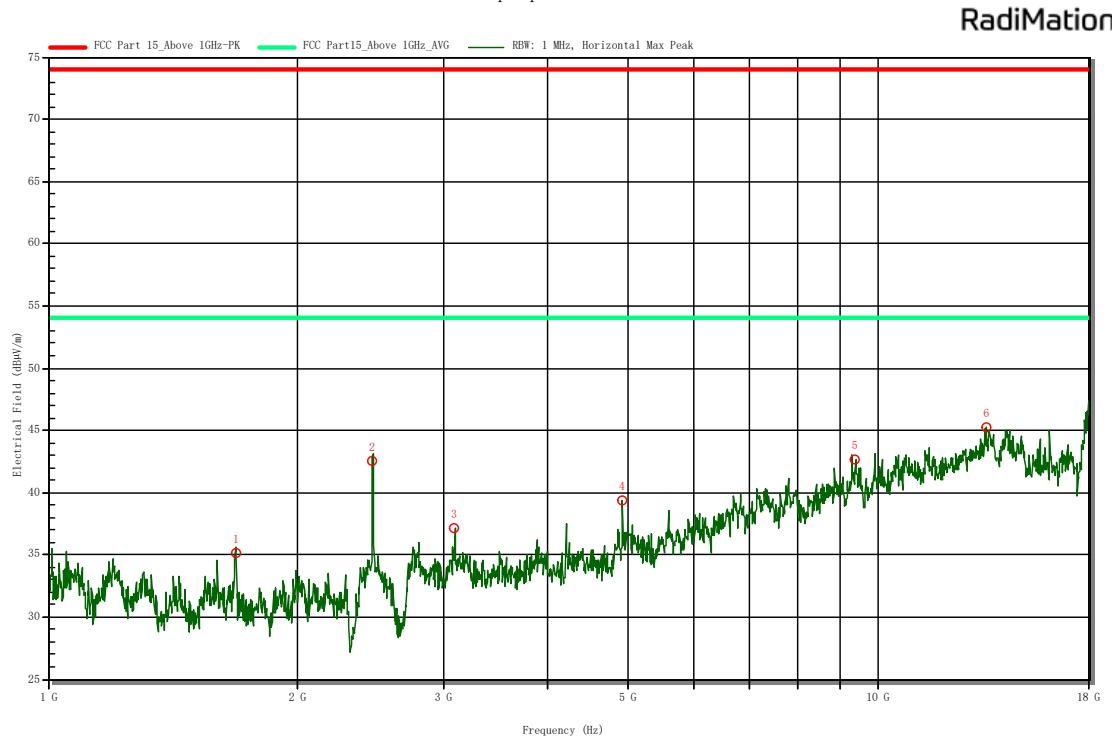

Frequency (MHz)	Peak (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Difference (dB)	Status
1683.825	35.1	74	-38.9	Pass
2461.575	42.6	74	-31.4	Pass
3090.575	37.2	74	-36.8	Pass
4924.025	39.4	74	-34.6	Pass
9400.975	42.7	74	-31.3	Pass
13510.3	45.3	74	-28.7	Pass

## [1 GHz-18 GHz]/Vertical RSE WLAN 2.4G 802.11b 2462MHz


Start Frequency	Stop Frequency	Step Width	Meas. Time	IF Bandwidth	Detectors
1 GHz	18 GHz	Fixed step count: 40001 steps per Band	Auto [120 ms]	1 MHz	PK, AV

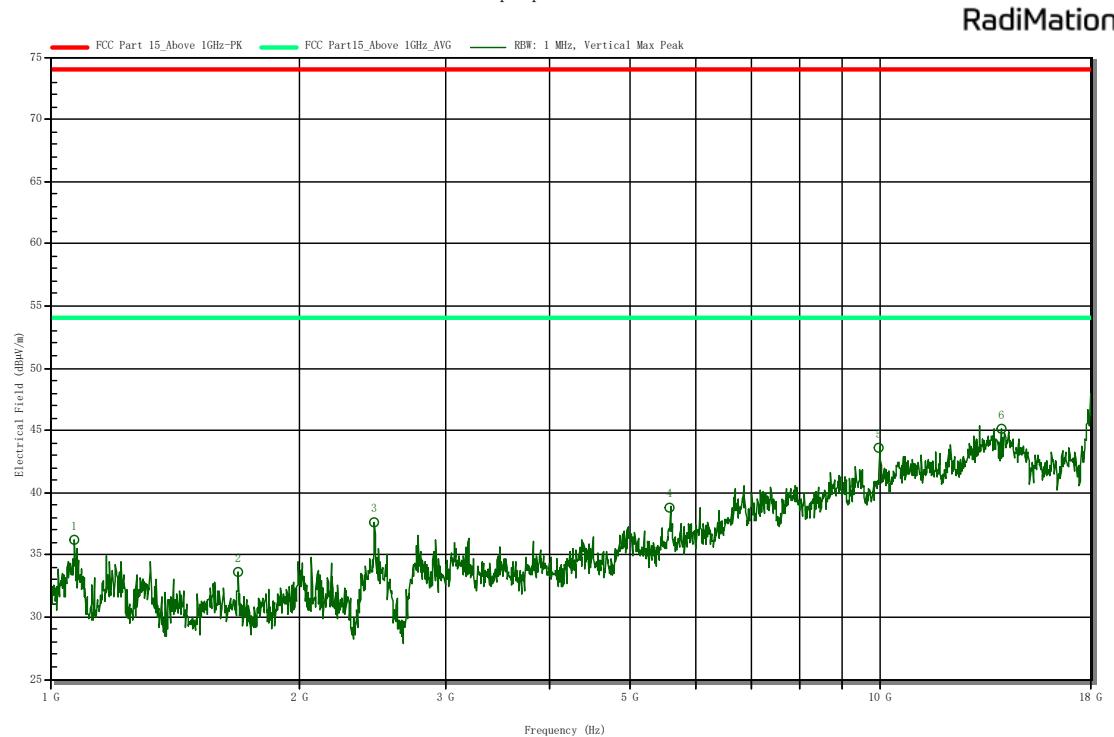

Frequency (MHz)	Peak (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Difference (dB)	Status
1068.85	36.2	74	-37.8	Pass
1686.375	33.7	74	-40.3	Pass
2459.025	37.7	74	-36.3	Pass
5585.325	38.8	74	-35.2	Pass
9989.175	43.7	74	-30.3	Pass
13995.65	45.2	74	-28.8	Pass

## [18 GHz-26.5 GHz]/Horizontal RSE WLAN 2.4G 802.11b 2412MHz


Start Frequency	Stop Frequency	Step Width	Meas. Time	IF Bandwidth	Detectors
18 GHz	26.5 GHz	Fixed step count: 40001 steps per Band	Auto [120 ms]	1 MHz	PK, AV

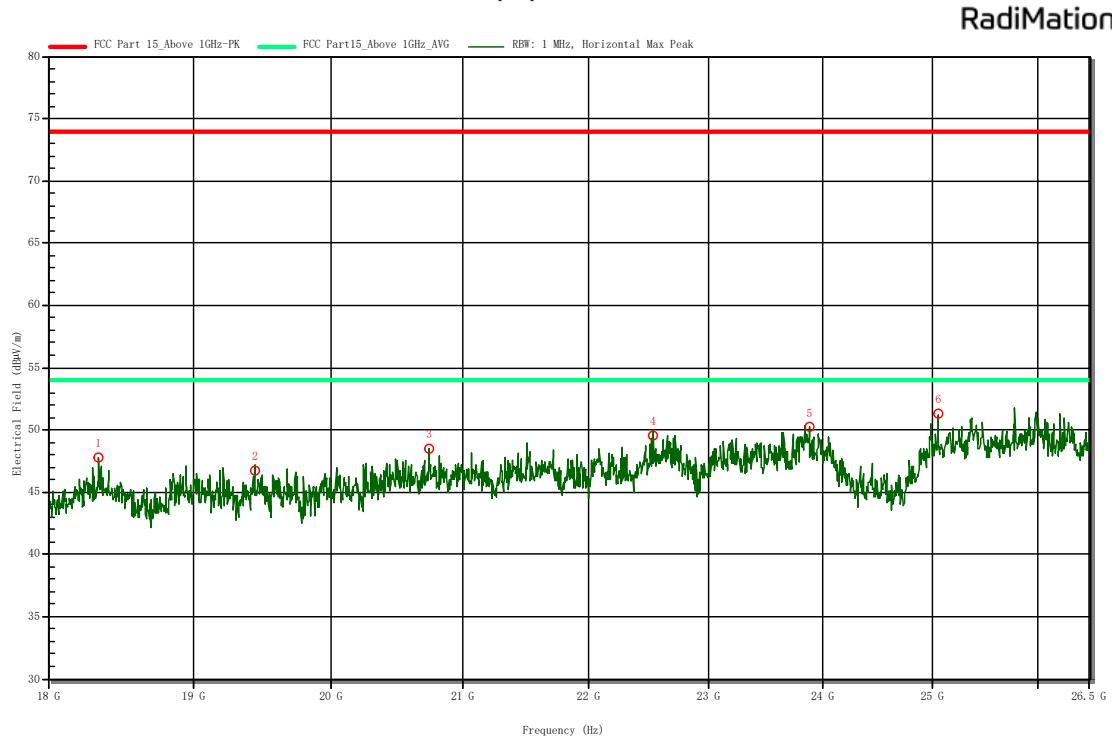

Frequency (MHz)	Peak (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Difference (dB)	Status
18340.85	47.8	74	-26.2	Pass
19434.375	46.8	74	-27.2	Pass
20732.325	48.5	74	-25.5	Pass
22534.963	49.5	74	-24.5	Pass
23877.963	50.3	74	-23.7	Pass
25047.35	51.3	74	-22.7	Pass

## [18 GHz-26.5 GHz]/Horizontal RSE WLAN 2.4G 802.11b 2442MHz

Start Frequency	Stop Frequency	Step Width	Meas. Time	IF Bandwidth	Detectors
18 GHz	26.5 GHz	Fixed step count: 40001 steps per Band	Auto [120 ms]	1 MHz	PK, AV

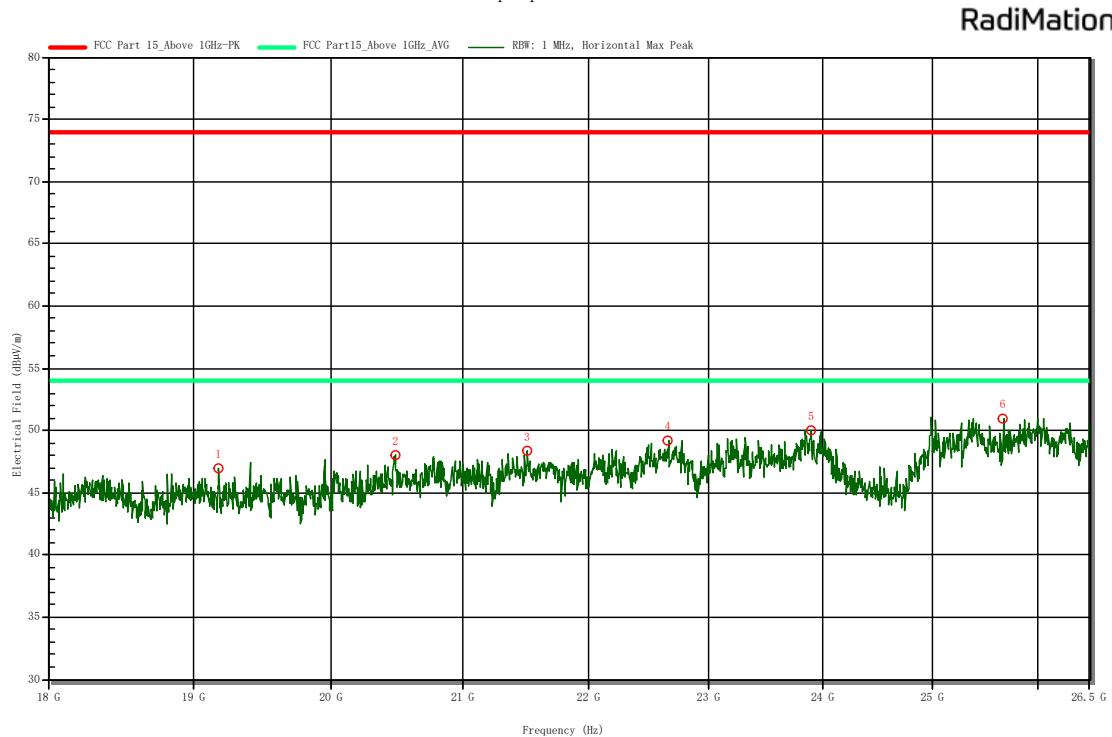


Frequency (MHz)	Peak (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Difference (dB)	Status
19179.375	47	74	-27.0	Pass
20475.2	48	74	-26.0	Pass
21506.038	48.4	74	-25.6	Pass
22661.613	49.2	74	-24.8	Pass
23896.663	50	74	-24.0	Pass
25663.813	50.9	74	-23.1	Pass

## [18 GHz-26.5 GHz]/Horizontal RSE WLAN 2.4G 802.11b 2462MHz

Start Frequency	Stop Frequency	Step Width	Meas. Time	IF Bandwidth	Detectors
18 GHz	26.5 GHz	Fixed step count: 40001 steps per Band	Auto [120 ms]	1 MHz	PK, AV


RadiMation

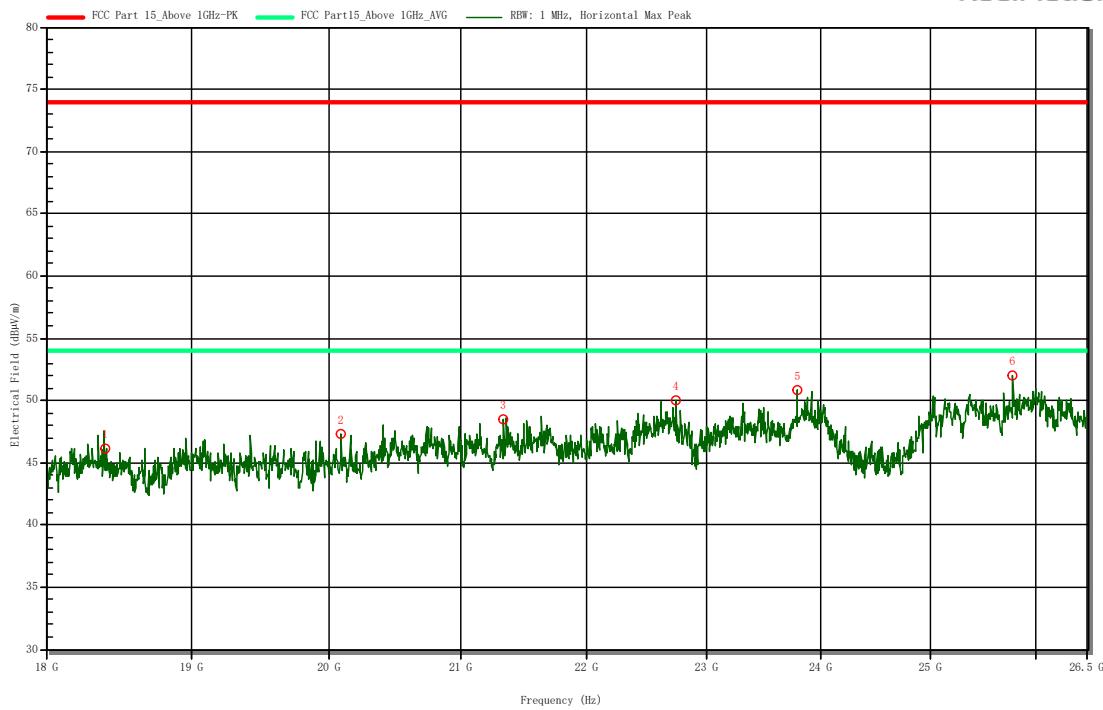

Frequency (MHz)	Peak (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Difference (dB)	Status
18403.538	46.1	74	-27.9	Pass
20084.2	47.3	74	-26.7	Pass
21333.275	48.5	74	-25.5	Pass
22744.063	50.1	74	-23.9	Pass
23789.138	50.8	74	-23.2	Pass
25770.7	52.1	74	-21.9	Pass

## [18 GHz-26.5 GHz]/Vertical RSE WLAN 2.4G 802.11b 2412MHz

Start Frequency	Stop Frequency	Step Width	Meas. Time	IF Bandwidth	Detectors
18 GHz	26.5 GHz	Fixed step count: 40001 steps per Band	Auto [120 ms]	1 MHz	PK, AV

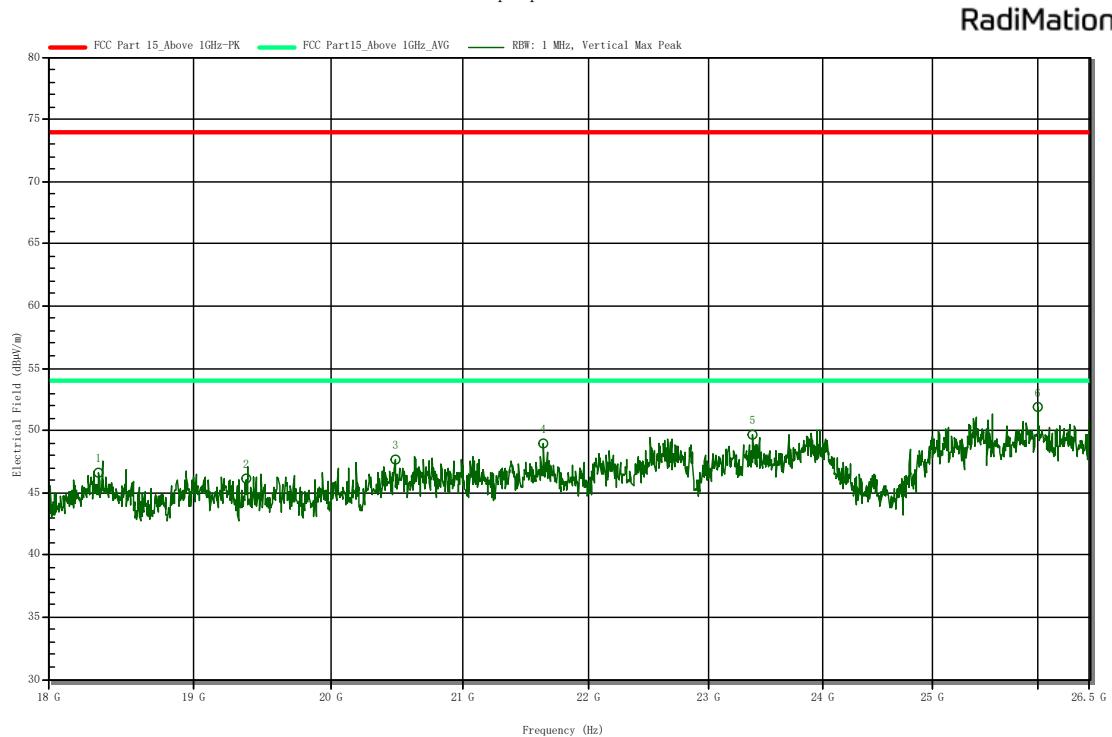


Frequency (MHz)	Peak (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Difference (dB)	Status
18342.975	46.6	74	-27.4	Pass
19378.913	46.2	74	-27.8	Pass
20473.713	47.7	74	-26.3	Pass
21634.6	49	74	-25.0	Pass
23384.538	49.6	74	-24.4	Pass
25989.363	51.9	74	-22.1	Pass

## [18 GHz-26.5 GHz]/Vertical RSE WLAN 2.4G 802.11b 2442MHz

Start Frequency	Stop Frequency	Step Width	Meas. Time	IF Bandwidth	Detectors
18 GHz	26.5 GHz	Fixed step count: 40001 steps per Band	Auto [120 ms]	1 MHz	PK, AV


RadiMation

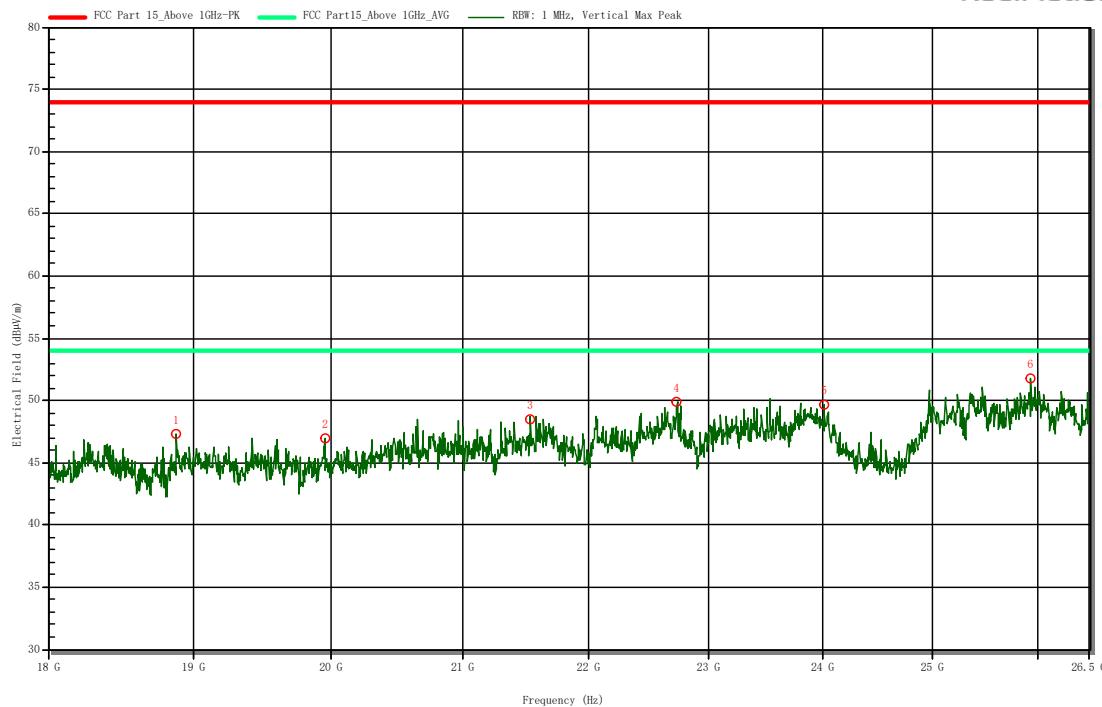

Frequency (MHz)	Peak (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Difference (dB)	Status
18880.175	47.4	74	-26.6	Pass
19946.925	47	74	-27.0	Pass
21528.988	48.5	74	-25.5	Pass
22735.138	49.9	74	-24.1	Pass
24010.35	49.6	74	-24.4	Pass
25924.763	51.7	74	-22.3	Pass

## [18 GHz-26.5 GHz]/Vertical RSE WLAN 2.4G 802.11b 2462MHz

Start Frequency	Stop Frequency	Step Width	Meas. Time	IF Bandwidth	Detectors
18 GHz	26.5 GHz	Fixed step count: 40001 steps per Band	Auto [120 ms]	1 MHz	PK, AV

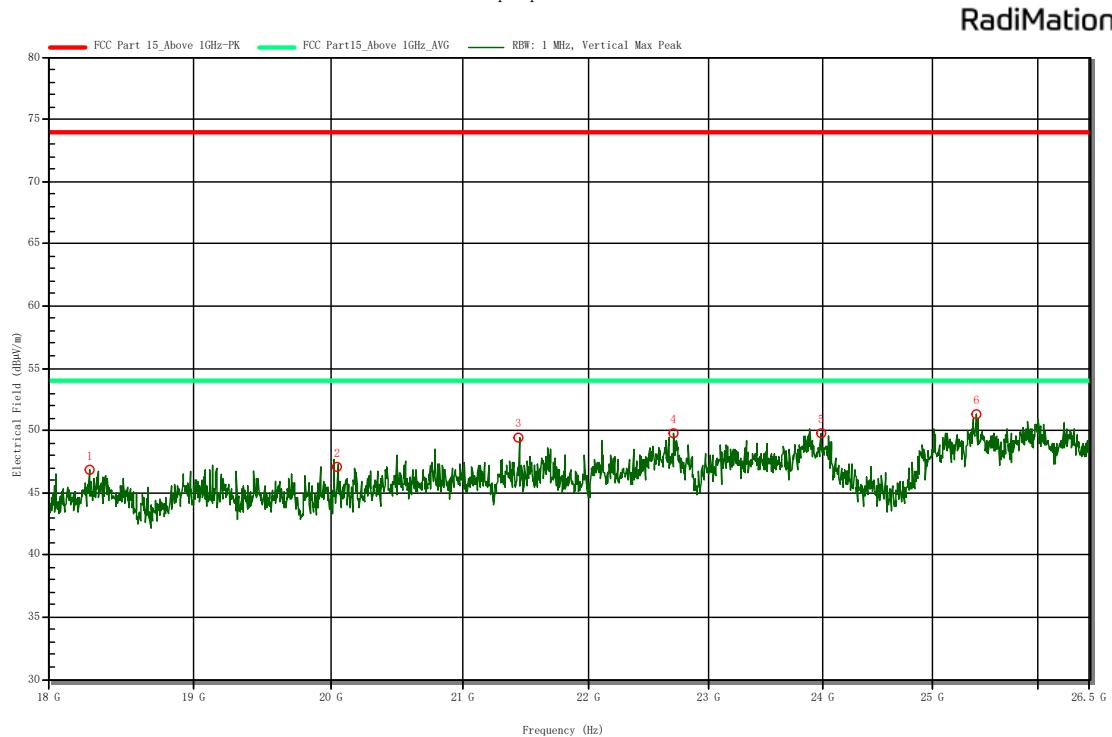

Frequency (MHz)	Peak (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Peak Difference (dB)	Status
18280.925	46.9	74	-27.1	Pass
20043.4	47.1	74	-26.9	Pass
21438.675	49.4	74	-24.6	Pass
22707.513	49.8	74	-24.2	Pass
23980.6	49.7	74	-24.3	Pass
25406.9	51.3	74	-22.7	Pass

## Note:

- (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
- (2) Other emissions are attenuated more than 20dB below the permissible limits, so it does not record in the report.
- (3)"802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

- Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz  
All the modulation modes have been tested, and the worst result was report as below:


EUT:	ConBox2020RD	Model Name :	CB20RDNAR1
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Test Mode:	802.11b CH01
Test Voltage :	DC 12V		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	2390.000	53.98	-5.41	48.57	74.00	-25.43	peak
V	2390.000	44.36	-5.41	38.95	54.00	-15.05	AVG

---

**Remark:**


Emission Level = Meter Reading + Factor. Margin = Emission Level - Limit

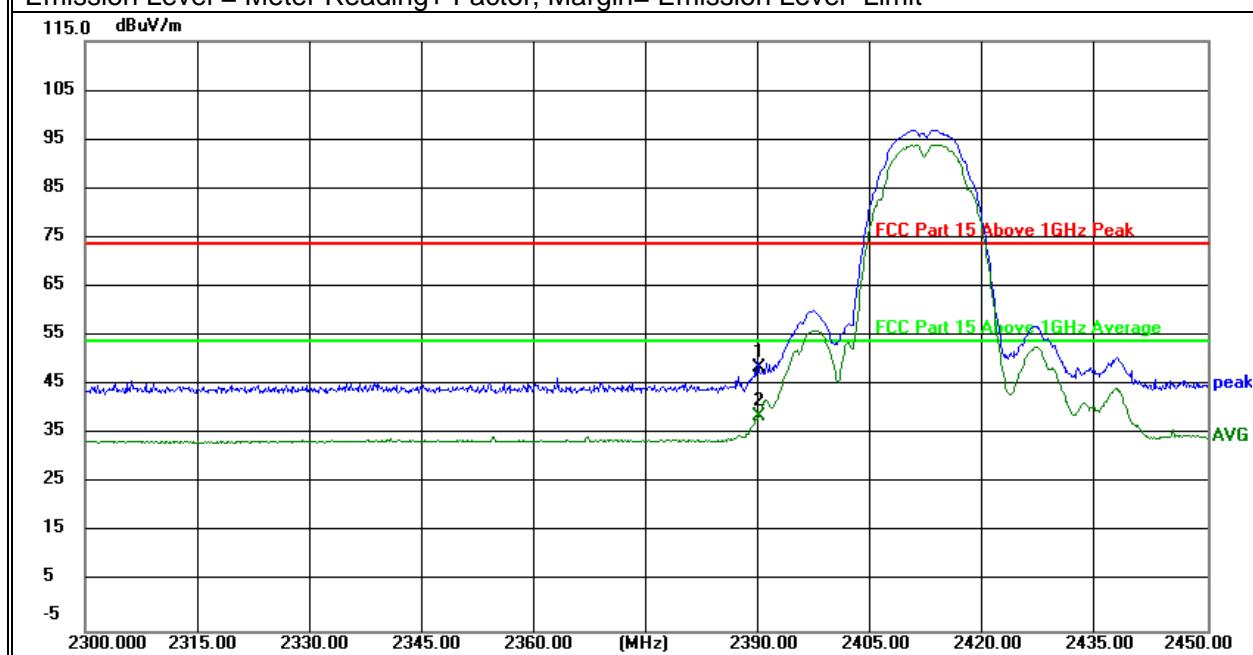

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2390.000	61.05	-5.41	55.64	74.00	-18.36	peak
H	2390.000	54.34	-5.41	48.93	54.00	-5.07	AVG

**Remark:**

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit

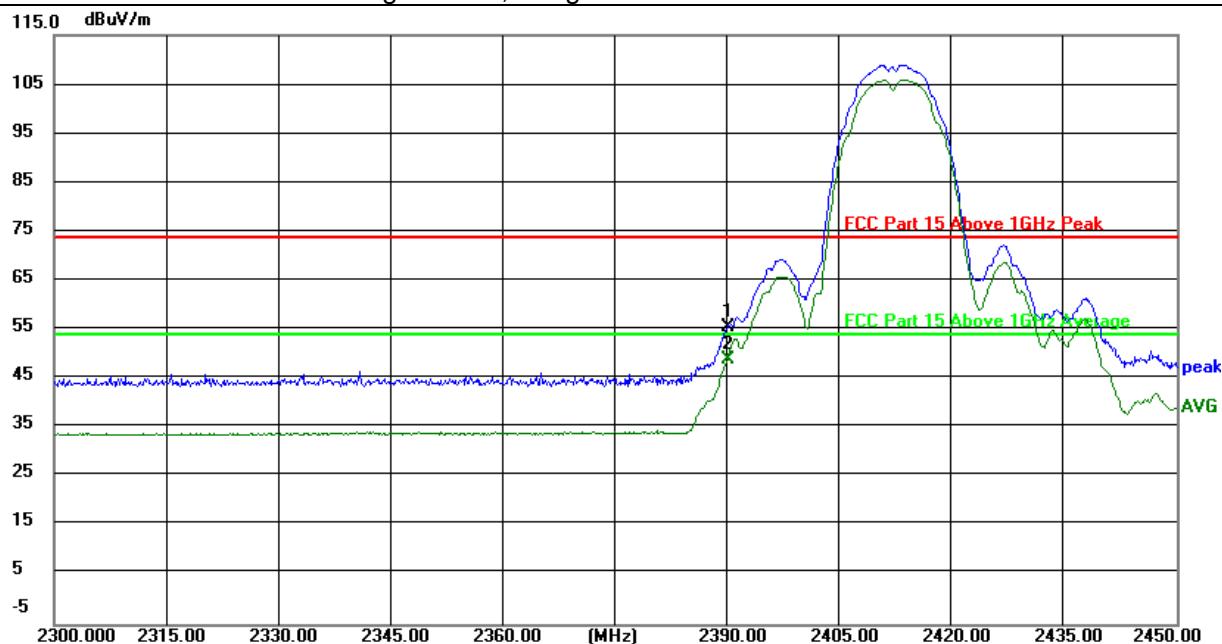


EUT:	ConBox2020RD	Model Name :	CB20RDNAR1
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Test Mode:	802.11b CH11
Test Voltage :	DC 12V		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	2483.500	53.52	-5.05	48.47	74.00	-25.53	peak
V	2483.500	48.88	-5.05	43.83	54.00	-10.17	AVG
V	2487.600	55.23	-5.04	50.19	74.00	-23.81	peak
V	2487.600	47.80	-5.04	42.76	54.00	-11.24	AVG

**Remark:**


Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit

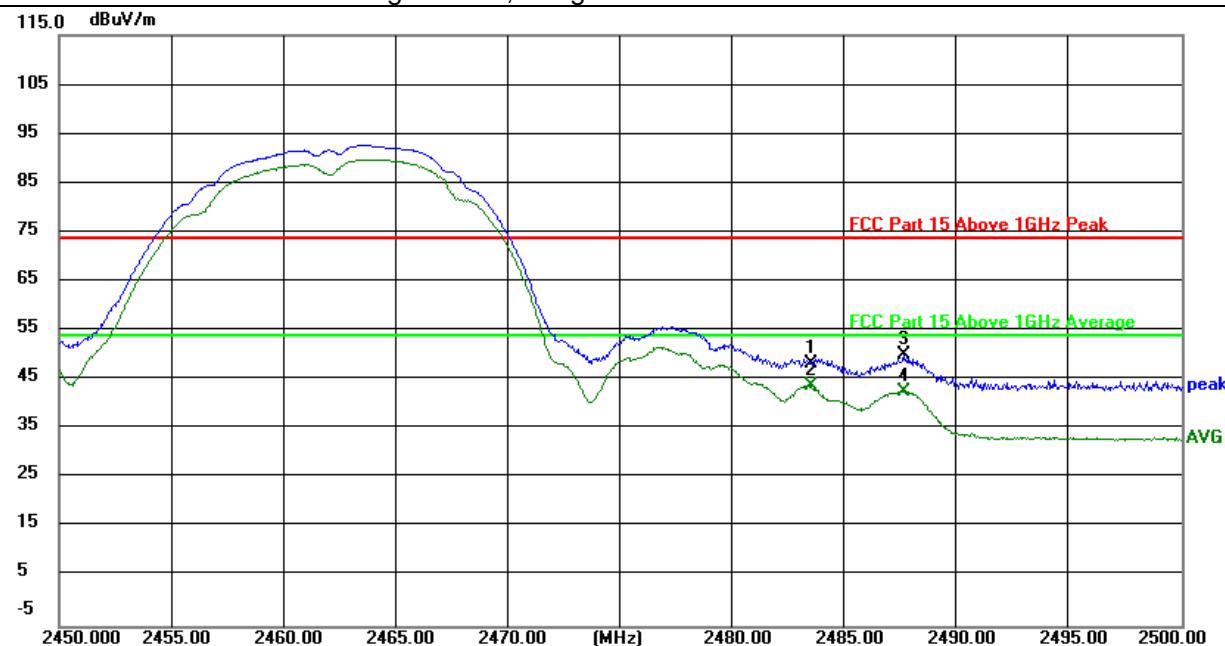

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2483.500	57.81	-5.05	52.76	74.00	-21.24	peak
H	2483.500	54.76	-5.05	49.71	54.00	-4.29	AVG
H	2487.800	54.86	-5.04	49.82	54.00	-4.18	AVG
H	2487.850	59.39	-5.04	54.35	74.00	-19.65	peak

**Remark:**

Emission Level = Meter Reading + Factor, Margin = Emission Level - Limit

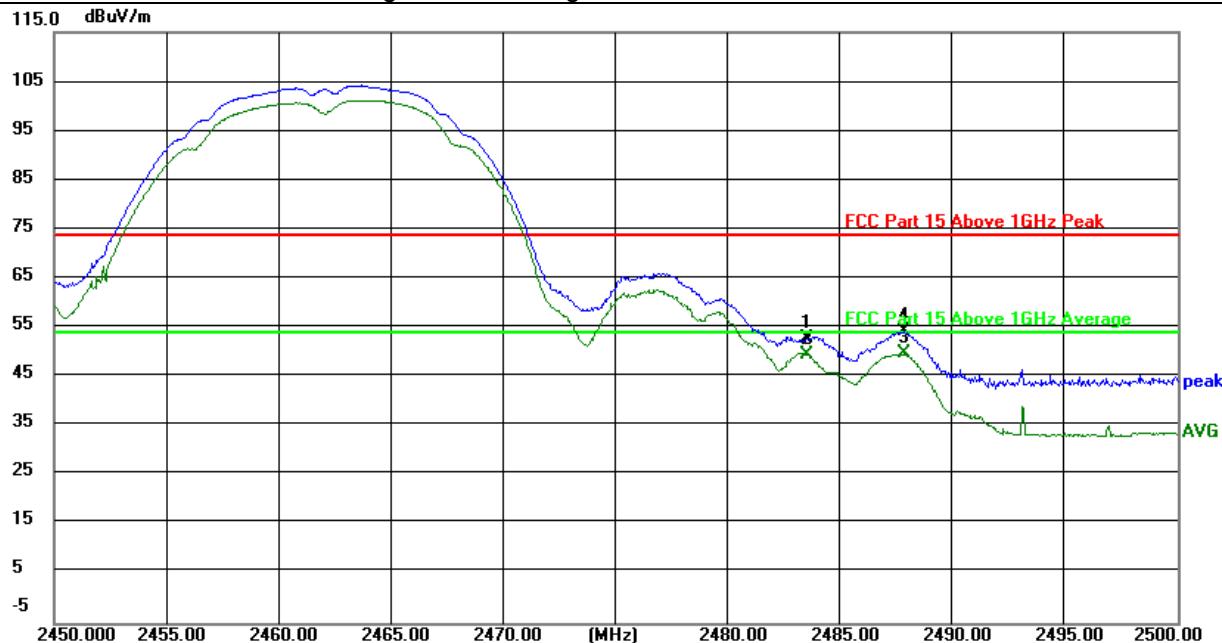

Note: 1. "802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record. s  
 2. Other emissions are attenuated more than 20dB below the permissible limits, so it does not record in the report.

### 7.3 6DB BANDWIDTH

#### 7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.2.

#### 7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

#### 7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

#### 7.3.5 Test Procedure

The testing follows Subclause 11.8 of ANSI C63.10.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

VBW  $\geq$  3\*RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 7.3.6 Test Results

EUT:	ConBox2020RD	Model No.:	CB20RDNAR1
Temperature:	N/A	Relative Humidity:	N/A
Test Mode:	N/A	Test By:	N/A

Please check FCC ID: XPYJODYW374 (Report No.: MDE\_UBLOX\_2220\_FCC\_03)

## 7.4 DUTY CYCLE

### 7.4.1 Applicable Standard

According to KDB 558074 D01 15.247 Meas Guidance v05r02 Section 6.

### 7.4.2 Conformance Limit

No limit requirement.

### 7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.4.5 Test Procedure

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
  - 1) Set the center frequency of the instrument to the center frequency of the transmission.
  - 2) Set  $RBW \geq OBW$  if possible; otherwise, set  $RBW$  to the largest available value.
  - 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
  - 4) The zero-span measurement method shall not be used unless both  $RBW$  and  $VBW$  are  $> 50/T$  and the number of sweep points across duration  $T$  exceeds 100. (For example, if  $VBW$  and/or  $RBW$  are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

Measure  $T_{total}$  and  $T_{on}$

Calculate Duty Cycle =  $T_{on} / T_{total}$

### 7.4.6 Test Results

EUT:	ConBox2020RD	Model No.:	CB20RDNAR1
Temperature:	N/A	Relative Humidity:	N/A
Test Mode:	N/A	Test By:	N/A

Please check FCC ID: XPYJODYW374 (Report No.: MDE\_UBLOX\_2220\_FCC\_03)

## 7.5 MAXIMUM OUTPUT POWER

### 7.5.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.3.2.3.

### 7.5.2 Conformance Limit


The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 7.5.3 Measuring Instruments

The following table is the setting of the power meter.

Power meter parameter	Setting
Detector	PK

### 7.5.4 Test Setup

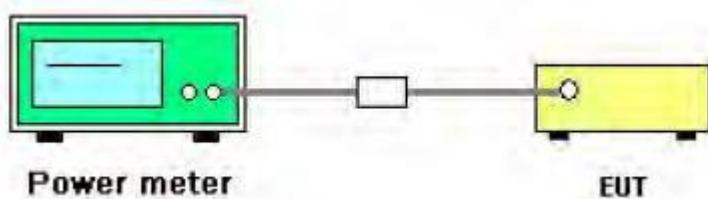

### 7.5.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.9.1.3 of ANSI C63.10

### 7.5.6 EUT operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 7.5.7 Test Results

EUT:	ConBox2020RD	Model No.:	CB20RDNAR1
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b	Test By:	Mary Hu

Condition	Mode	Frequency (MHz)	Verified Host Conducted Power (dBm)	Original Module Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2437	19.65	20.6	30	Pass

The maximum conducted power is verified to be the same. The conducted signal test data may be re-used.  
Please check FCC ID: XPYJODYW374 (Report No.: MDE\_UBLOX\_2220\_FCC\_03)

## 7.6 POWER SPECTRAL DENSITY

### 7.6.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.4.

### 7.6.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.6.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.10.2 of ANSI C63.10

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 * \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 7.6.6 Test Results

EUT:	ConBox2020RD	Model No.:	CB20RDNAR1
Temperature:	N/A	Relative Humidity:	N/A
Test Mode:	N/A	Test By:	N/A

Please check FCC ID: XPYJODYW374 (Report No.: MDE\_UBLOX\_2220\_FCC\_03)

## 7.7 CONDUCTED BAND EDGE MEASUREMENT

### 7.7.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.

### 7.7.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.7.5 Test Procedure

The testing follows FCC KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

### 7.7.6 Test Results

EUT:	ConBox2020RD	Model No.:	CB20RDNAR1
Temperature:	N/A	Relative Humidity:	N/A
Test Mode:	N/A	Test By:	N/A

Please check FCC ID: XPYJODYW374 (Report No.: MDE\_UBLOX\_2220\_FCC\_03)

## 7.8 SPURIOUS RF CONDUCTED EMISSIONS

### 7.8.1 Conformance Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### 7.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.8.3 Test Setup

Please refer to Section 6.1 of this test report.

### 7.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.

### 7.8.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

Please check FCC ID: XPYJODYW374 (Report No.: MDE\_UBLOX\_2220\_FCC\_03)

## 7.9 ANTENNA APPLICATION

### 7.9.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.9.2 Result

The EUT antenna is permanent attached External Antenna (Gain: 3dBi). It comply with the standard requirement.

END OF REPORT