


Product specification

Quick Reference Date


	Antenna module on the system board	
Frequenc Range	2400 ~ 2500MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr - loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	6 0.2 %	
Gain (dBi)	1.9 (PEAK Gain XZ-plane)	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	V ertical & Horizontal	
V . S .W . R	< 1.4	
Antenna name	On-board antennas	
Model	On-board antennas	

Shenzhen Xinhong Precision Circuit Co., Ltd
Building 216, Building A, Dormitory Building, Yuhe Road, Fourth Industrial Zone, Gonghe Road, Gonghe Community, Shajing Street, Bao'an District, Shenzhen
All the technical data and information contained herein are subject to change without prior notice


Antenna Layout & module on the system board

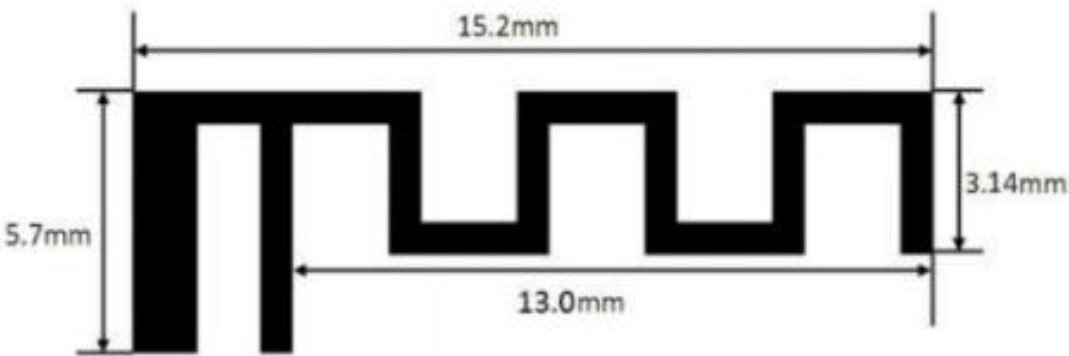


Return Loss

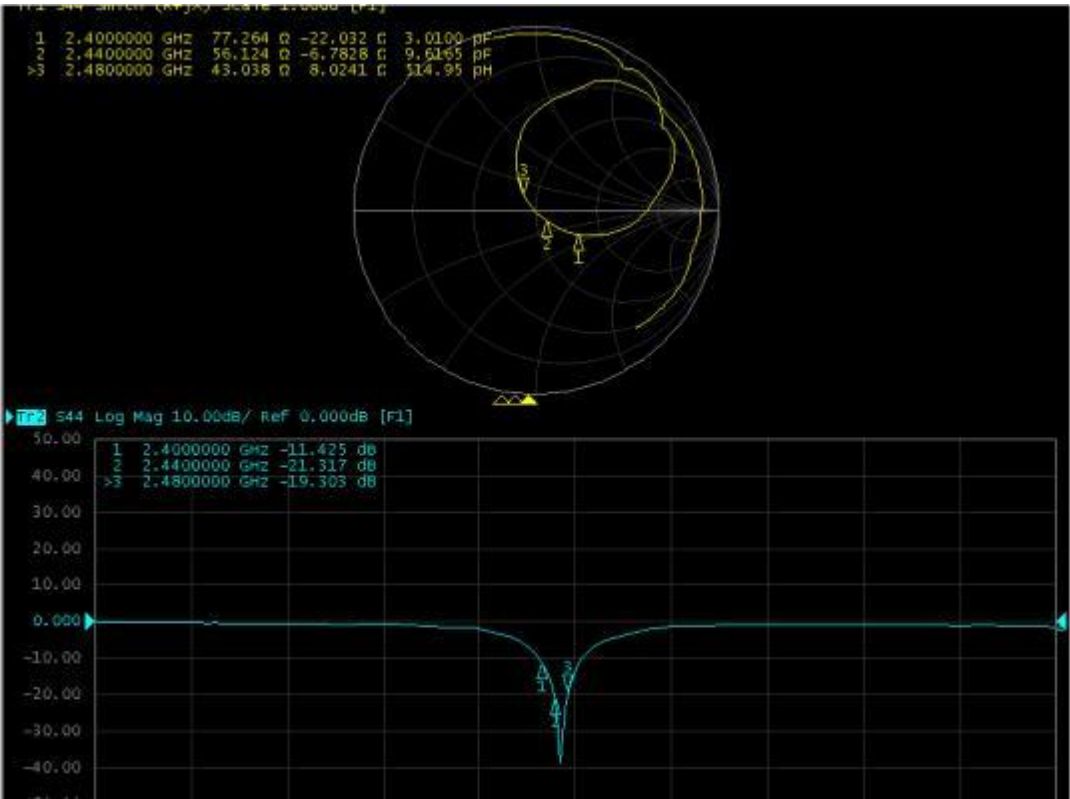


The Environment of Antenna Radiation Pattern

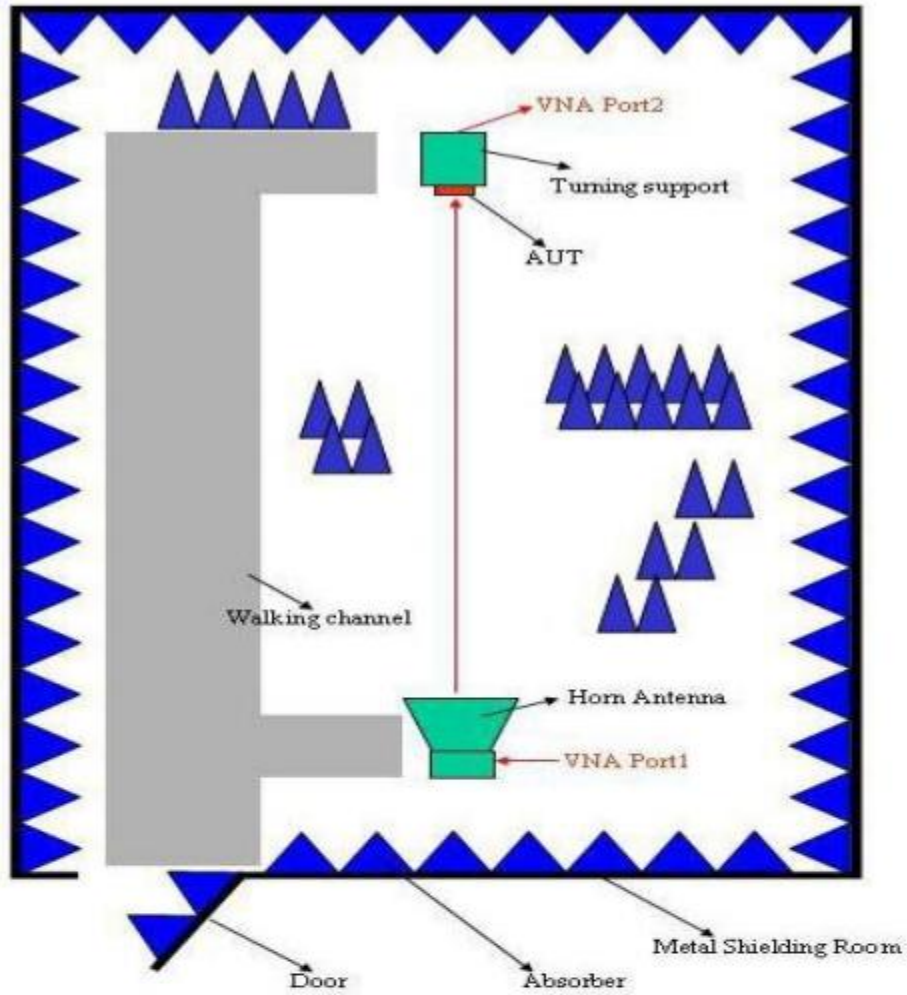


3D radiation pattern diagram

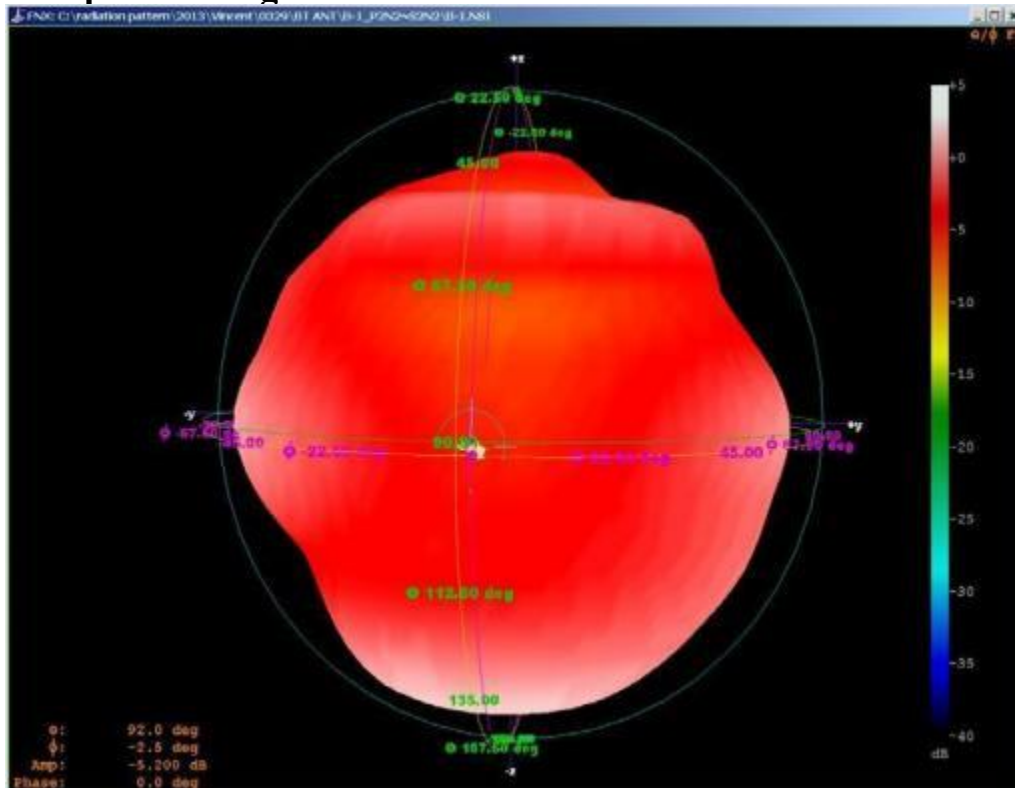


XY-plane

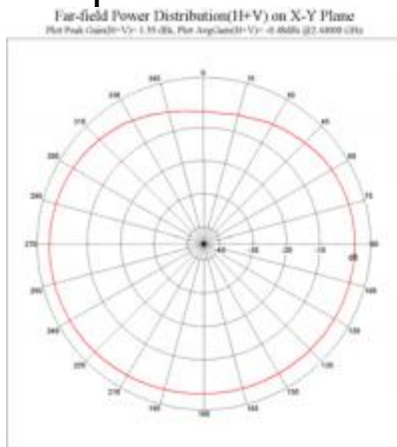

XZ-plane

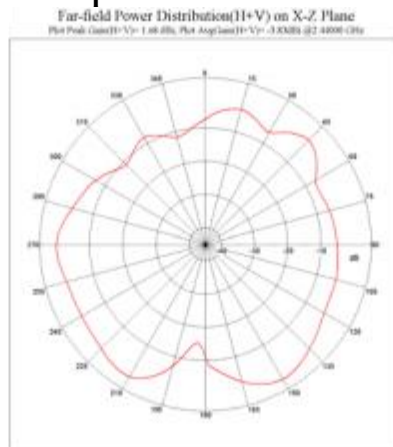

YZ-plane

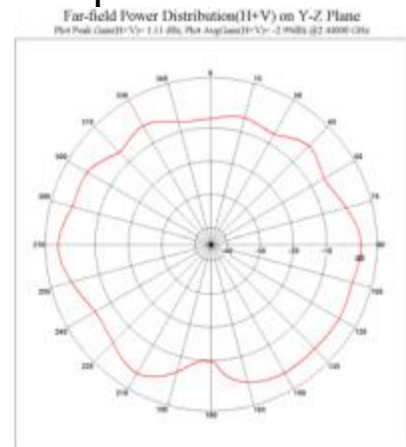

Antenna Gain

Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.2	-0.5	1.9	-3.6	1.1	-3.0	6 0.2 %

