



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

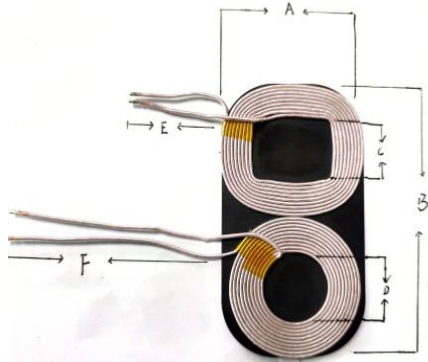

2. SCHEMATICS:



A	B	C	E	F	F	H	
46±0.5	83±0.5	17.5±0.5	25±3	69±3	60±3	3.8Max	

3.WINDING:

1.1

STE	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
	1 S-F	Silk-covered wire 0.08*105mm 2UEW	9TS (Ref)		
N1	2 S-F	Silk-covered wire 0.08*105mm 2UEW	10TS (Ref)		

4.EL

ITE	L1	L2	DCR	°C	HI-POT
TES	Coil and diskette	Coil and diskette	S-F	Nrmal state	
T	100KHz,0.25V	100KHz,0.25V	AT 25°C		
SPE	6.5uH±10%	6.5uH±10%	50mΩ Max	80°C	

5.BI

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	Silk-covered wire	Silk-covered wire 0.08*105	NANJINGJINNINGCO,LTD	
2	Lead-free tin strip	Lead-free tin strip	QIAODO	
3	Magnetic sheet	∅ 83*46 Manganese zinc hard disk with L slot	TAIYI CO.,LTD	
4	glue	Yellow gum 9999	LIANCHENG CO.,LTD	
5	High-temperature adhesive paper	8mm Wide high temperature adhesive paper	CUDAK CO.,LTD	

Manufacturer: HRSW ELECTRONICS CO.,LTD		PART NO	
Address: No. 48 Guanlanhuan Guanzhong Road, Longhua District, Shenzhen		TITLE	83*46Double coil left out square + round 25 length/69long 6.5UH
DRAWN BY	CHECKED BY	APPROVED BY	
Weihua He	Xiaohong Wei	Xiaohong Wei	