



TEST REPORT

Product Name: Phone watch
FCC ID: 2BKAY-8688
Trademark: N/A
Model Number: 8688, 8686, 8988, 8588, M01, M02, M03, M04, M05, M06, M07, M08, M09, M10, Y13, Y14, Y15, Y16, Y17, Y18, Y19, Y20, DF55, DF56, DF58, DF59, DF60, DF61, DF62, DF63, DF64, DF65, DF66, DF67, DF68, DF69, DF70, DF89, DF90, DF91, DF92, DF93, DF94, DF95, DF96, DF97, DF98, DF99
Prepared For: Shenzhen Zhimei Technology Co., Ltd
Address: Room 1106, 11th Floor, Zhenhua Times Square, No. 21, Heping Road, Qinghua Community, Longhua Street, Longhua District, Shenzhen
Manufacturer: Shenzhen Zhimei Technology Co., Ltd
Address: Room 1106, 11th Floor, Zhenhua Times Square, No. 21, Heping Road, Qinghua Community, Longhua Street, Longhua District, Shenzhen
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jun. 20, 2024
Sample tested Date: Jun. 20, 2024 to Jul. 19, 2024
Issue Date: Jul. 19, 2024
Report No.: CTB240719043RF
Test Standards: FCC Part 22H & 24E
Test Results: PASS
Remark: This is GSM radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. RF OUTPUT POWER	12
6.1 Standard Applicable	12
6.2 Test Procedure	12
6.3 Environmental Conditions	12
6.4 Summary of Test Results/Plots	13
7. PEAK-TO-AVERAGE RATIO(PAR) OF TRANSMITTER	16
7.1 Standard Applicable	16
7.2 Test Procedure	16
7.3 Environmental Conditions	16
7.4 Summary of Test Results	17
8. EMISSION BANDWIDTH	19
8.1 Standard Applicable	19
8.2 Test Procedure	19
8.3 Environmental Conditions	19
8.4 Summary of Test Results/Plots	20
9. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	27
9.1 Standard Applicable	27
9.2 Test Procedure	27
9.3 Environmental Conditions	27
9.4 Summary of Test Results/Plots	27
10. SPURIOUS RADIATED EMISSIONS	40
10.1 Standard Applicable	40
10.2 Test Procedure	40
10.3 Environmental Conditions	40
10.4 Summary of Test Results/Plots	41
11. FREQUENCY STABILITY	43
11.1 Standard Applicable	43
11.2 Test Procedure	43



11.3	Environmental Conditions	43
11.4	Summary of Test Results/Plots	44
12.	EUT TEST PHOTO	49

(Note: N/A means not applicable)



1. **VERSION**

Report No.	Issue Date	Description	Approved
CTB240719043RF	Jul. 19, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

FCC Rules	Description of Test Item	Result
§1.1307, §2.1091	RF Exposure	Compliant
§22.913 (a), §24.232 (c)	RF Output Power	Compliant
§24.51	Peak-to-average Ratio(PAR) of Transmitter	Compliant
§22.917 (b), §24.238 (b)	Emission Bandwidth	Compliant
§22.917 (a), §24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§22.917 (a), §24.238 (a)	Spurious Radiation Emissions	Compliant
§22.917 (a), §24.238 (a)	Out of Band Emissions	Compliant
§22.355, §24.235	Frequency Stability	Compliant

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Receiver Reference Sensitivity level	1.9dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63℃
frequency	1×10 ⁻⁷

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	8688, 8686, 8988, 8588, M01, M02, M03, M04, M05, M06, M07, M08, M09, M10, Y13, Y14, Y15, Y16, Y17, Y18, Y19, Y20, DF55, DF56, DF58, DF59, DF60, DF61, DF62, DF63, DF64, DF65, DF66, DF67, DF68, DF69, DF70, DF89, DF90, DF91, DF92, DF93, DF94, DF95, DF96, DF97, DF98, DF99
Model Description:	All the model are the same circuit and RF module, only the model name, wirstband and color are different. Test sample model: 8688
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Max. RF output power:	WCDMA Band 2: 22.40dBm, WCDMA Band 5: 22.74dBm
Type of Modulation:	GMSK, BPSK
Antenna installation:	Internal antenna
Antenna Gain:	WCDMA Band 2: 1.73dBi WCDMA Band 5: 2.21dBi
Ratings:	DC 5V charging from adapter DC 3.8V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
1.	Adapter	JIYIN	JY-05100C	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538
Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.			

4.5 Test Mode

Test Mode List		
Test Mode	Description	Remark
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 2	Low, Middle, High Channels
TM11	HSDPA Band 2	Low, Middle, High Channels
TM12	HSUPA Band 2	Low, Middle, High Channels

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.8V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28



22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28

6. RF OUTPUT POWER


6.1 Standard Applicable

According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

6.2 Test Procedure

Conducted output power test method:



Radiated power test method:

- 1.The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
- 2.The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
- 3.The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- 4.Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

6.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	1010 mbar

6.4 Summary of Test Results/Plots

Max. Radiated Power

ERP For WCDMA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	21.85	1.5	0	H	1.5	-2.21	18.14	38.45
826.4	22.12	1.5	0	V	1.5	-2.21	18.41	38.45
Middle Channel								
836.6	21.99	1.5	0	H	1.5	-2.21	18.28	38.45
836.6	21.97	1.5	0	V	1.5	-2.21	18.26	38.45
High Channel								
846.6	21.84	1.5	0	H	1.5	-2.21	18.13	38.45
846.6	22.31	1.5	0	V	1.5	-2.21	18.60	38.45

ERP For HSDPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	22.12	1.5	0	H	1.5	-2.21	18.41	38.45
826.4	21.99	1.5	0	V	1.5	-2.21	18.28	38.45
Middle Channel								
836.6	21.54	1.5	0	H	1.5	-2.21	17.83	38.45
836.6	21.74	1.5	0	V	1.5	-2.21	18.03	38.45
High Channel								
846.6	21.93	1.5	0	H	1.5	-2.21	18.22	38.45
846.6	21.37	1.5	0	V	1.5	-2.21	17.66	38.45

ERP For HSUPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	22.07	1.5	0	H	1.5	-2.21	18.36	38.45
826.4	22.04	1.5	0	V	1.5	-2.21	18.33	38.45
Middle Channel								
836.6	20.81	1.5	0	H	1.5	-2.21	17.10	38.45
836.6	20.97	1.5	0	V	1.5	-2.21	17.26	38.45
High Channel								
846.6	20.88	1.5	0	H	1.5	-2.21	17.17	38.45
846.6	21.07	1.5	0	V	1.5	-2.21	17.36	38.45



EIRP For WCDMA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	21.89	1.5	0	H	1.9	1.73	21.72	33
1852.4	21.88	1.5	0	V	1.9	1.73	21.71	33
Middle Channel								
1880	22.33	1.5	0	H	1.9	1.73	22.16	33
1880	21.56	1.5	0	V	1.9	1.73	21.39	33
High Channel								
1907.6	22.89	1.5	0	H	1.9	1.73	22.72	33
1907.6	21.97	1.5	0	V	1.9	1.73	21.80	33

EIRP For HSDPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	21.00	1.5	0	H	1.9	1.73	20.83	33
1852.4	20.90	1.5	0	V	1.9	1.73	20.73	33
Middle Channel								
1880	20.78	1.5	0	H	1.9	1.73	20.61	33
1880	21.01	1.5	0	V	1.9	1.73	20.84	33
High Channel								
1907.6	21.98	1.5	0	H	1.9	1.73	21.81	33
1907.6	21.68	1.5	0	V	1.9	1.73	21.51	33

EIRP For HSUPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	22.66	1.5	0	H	1.9	1.73	22.49	33
1852.4	21.28	1.5	0	V	1.9	1.73	21.11	33
Middle Channel								
1880	22.21	1.5	0	H	1.9	1.73	22.04	33
1880	20.87	1.5	0	V	1.9	1.73	20.70	33
High Channel								
1880	22.21	1.5	0	H	1.9	1.73	22.04	33
1880	20.87	1.5	0	V	1.9	1.73	20.70	33

Note: Result = Substitute - Cable loss + Antenna Gain

**Max. Conducted Output Power**

For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
WCDMA	Low Channel	826.4	22.20	38.45
	Middle Channel	836.6	22.48	38.45
	High Channel	846.6	22.74	38.45
HSDPA	Low Channel	826.4	22.34	38.45
	Middle Channel	836.6	22.07	38.45
	High Channel	846.6	21.98	38.45
HSUPA	Low Channel	826.4	22.32	38.45
	Middle Channel	836.6	21.73	38.45
	High Channel	846.6	21.80	38.45

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
WCDMA	Low Channel	1852.4	22.22	33.00
	Middle Channel	1880.0	22.35	33.00
	High Channel	1907.6	22.40	33.00
HSDPA	Low Channel	1852.4	21.89	33.00
	Middle Channel	1880.0	21.75	33.00
	High Channel	1907.6	21.50	33.00
HSUPA	Low Channel	1852.4	21.75	33.00
	Middle Channel	1880.0	21.31	33.00
	High Channel	1907.6	21.34	33.00

7. PEAK-TO-AVERAGE RATIO(PAR) OF TRANSMITTER


7.1 Standard Applicable

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.

Test Configuration for the emission bandwidth testing:

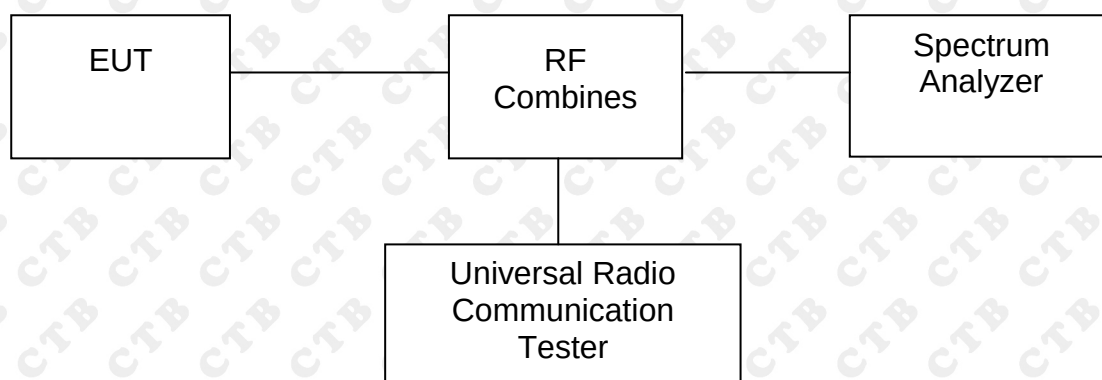

7.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	1010 mbar

7.4 Summary of Test Results


Only the worst case was selected to record
For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	4182	836.4	3.12	13
HSDPA	4182	836.4	4.48	13
HSUPA	4182	836.4	4.24	13

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	2.93	13
HSDPA	9400	1852.4	4.49	13
HSUPA	9400	1852.4	4.08	13

WCDMA:

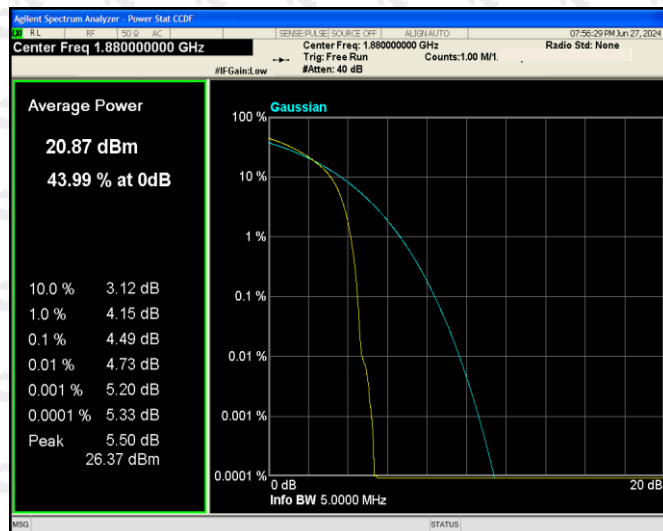

8. EMISSION BANDWIDTH

8.1 Standard Applicable


According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

8.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

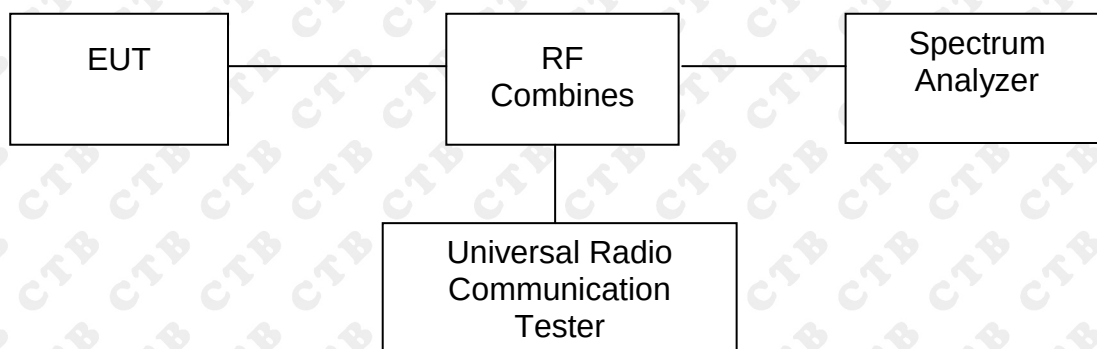

8.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	1010 mbar

8.4 Summary of Test Results/Plots


For Band 5

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
WCDMA	4132	826.4	4130.591	4648.509
	4183	836.6	4162.280	4656.191
	4233	846.6	4156.902	4669.226
HSDPA	4132	826.4	4169.584	4666.444
	4183	836.6	4166.475	4647.954
	4233	846.6	4154.517	4663.362
HSUPA	4132	826.4	4176.166	4658.988
	4183	836.6	4136.102	4643.723
	4233	846.6	4142.738	4695.687


For Band 2

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
WCDMA	9262	1852.4	4152.154	4663.927
	9400	1880.0	4151.926	4655.658
	9538	1907.6	4159.544	4652.722
HSDPA	9262	1852.4	4134.814	4663.863
	9400	1880.0	4163.879	4671.912
	9538	1907.6	4165.684	4672.437
HSUPA	9262	1852.4	4172.746	4662.853
	9400	1880.0	4162.662	4696.368
	9538	1907.6	4144.651	4677.807


For Cellular Band
For Band V

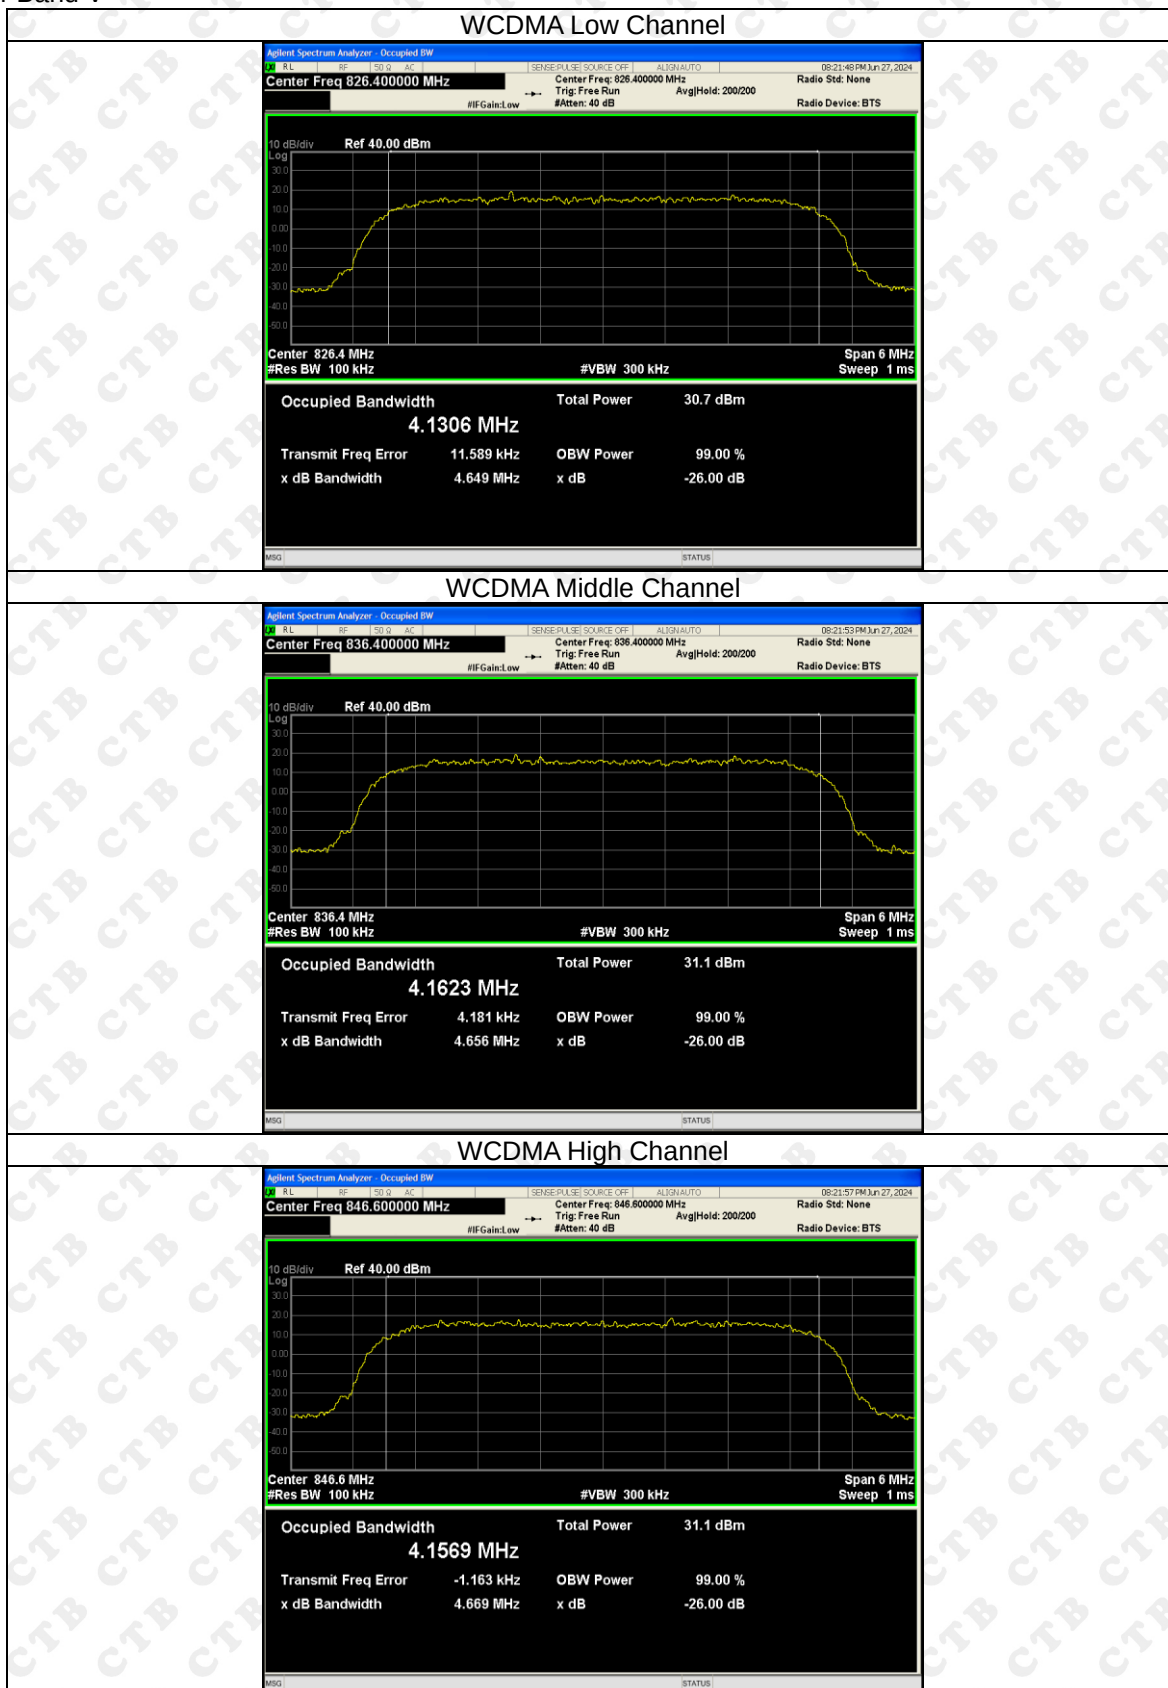


HSDPA Low Channel

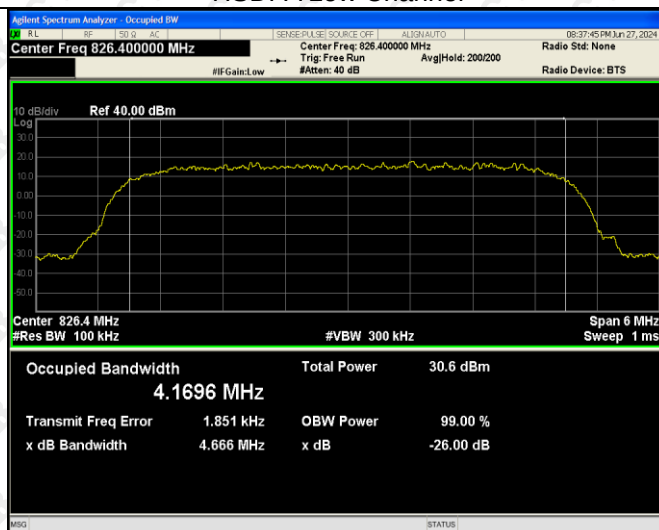


HSDPA Middle Channel

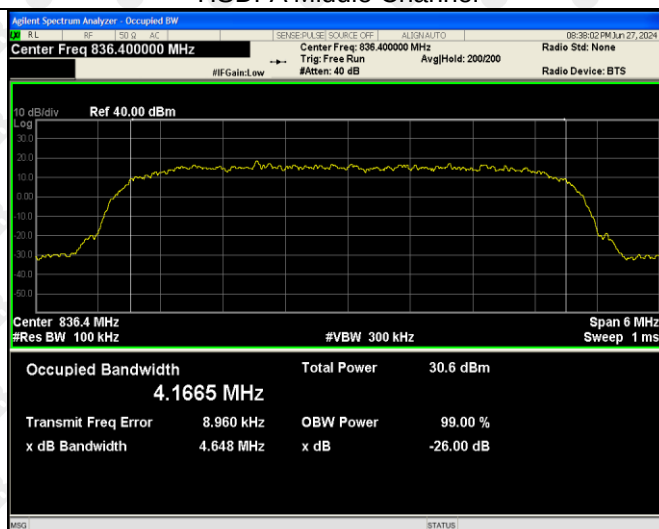


HSDPA High Channel

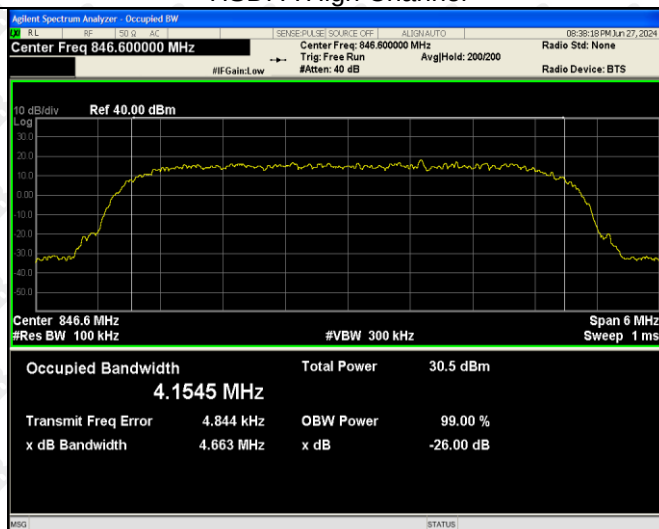


HSUPA Low Channel

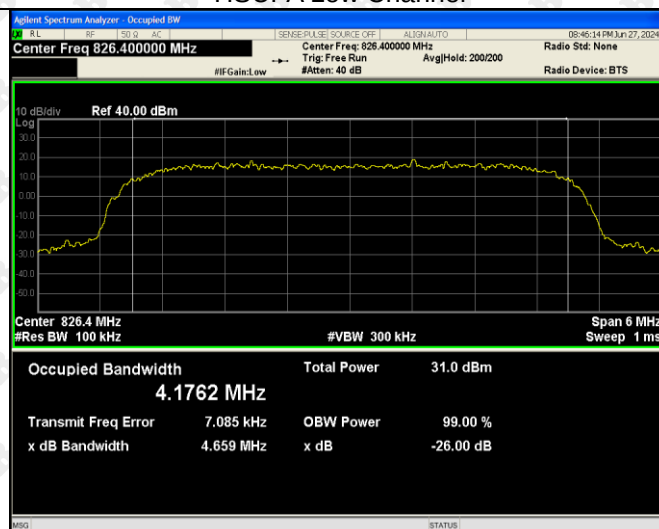


HSUPA Middle Channel

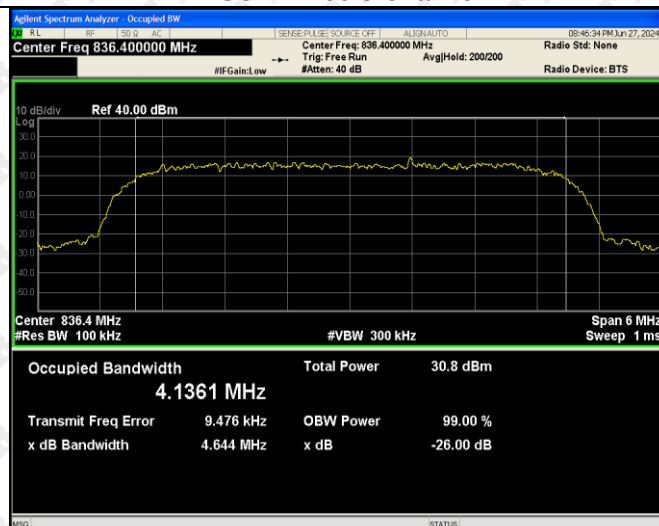


HSUPA High Channel

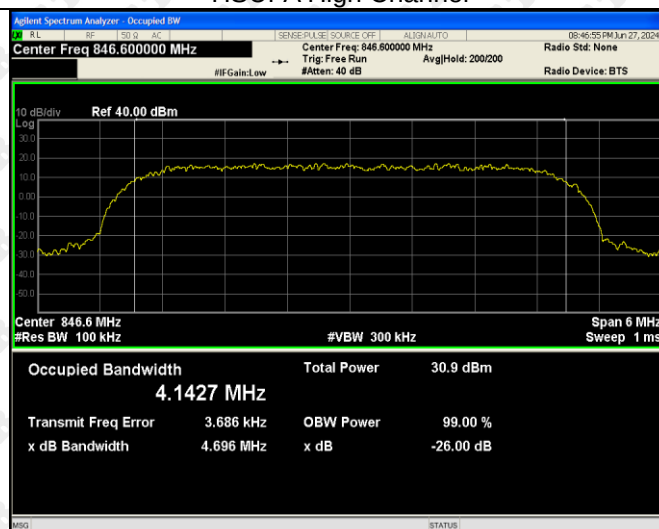


For Band II

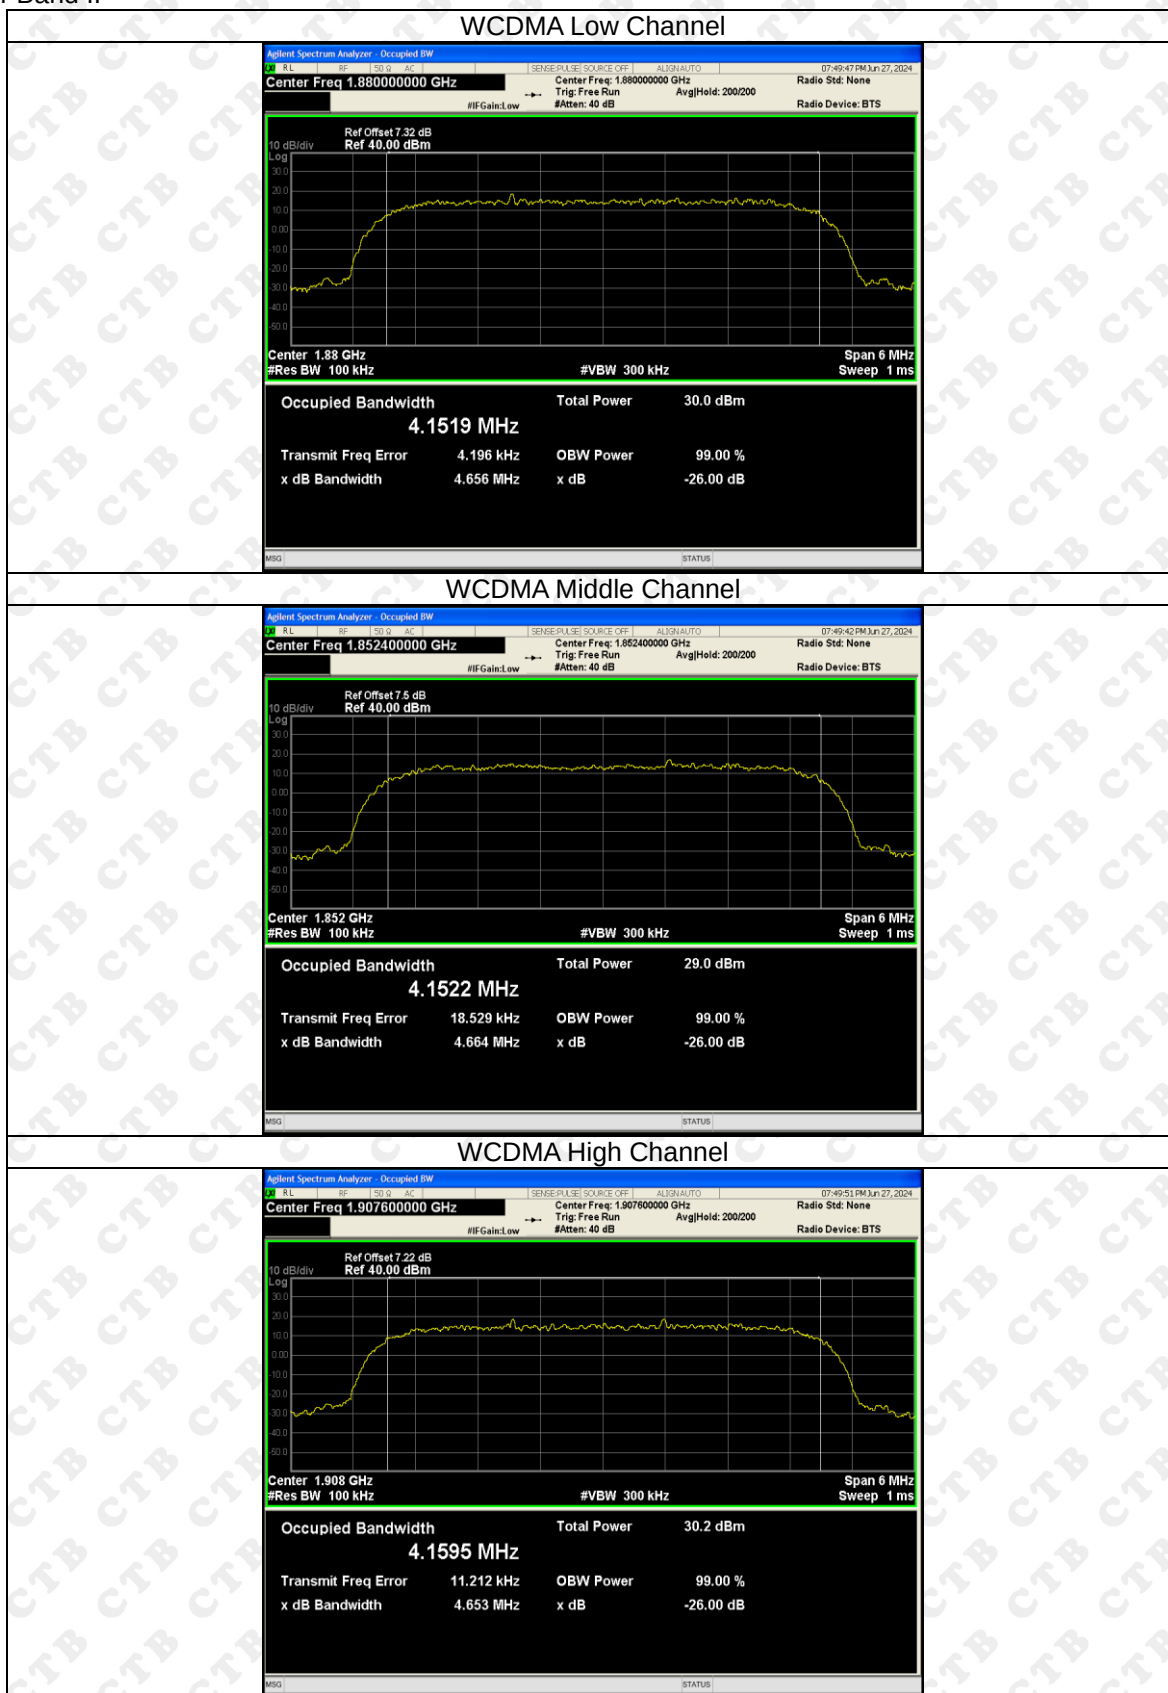


HSDPA Low Channel

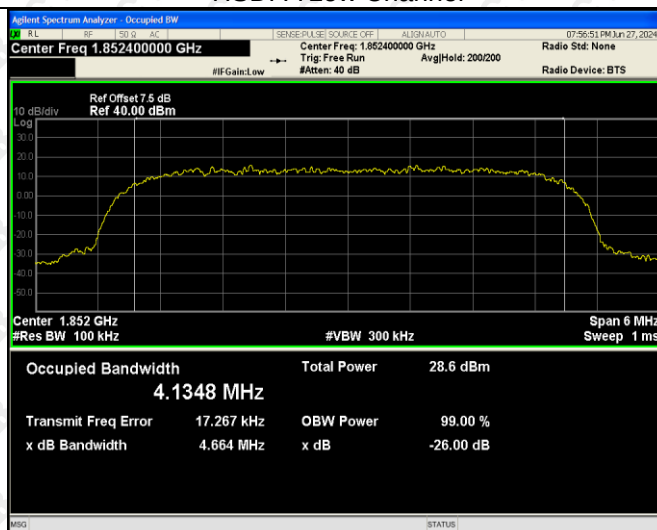


HSDPA Middle Channel

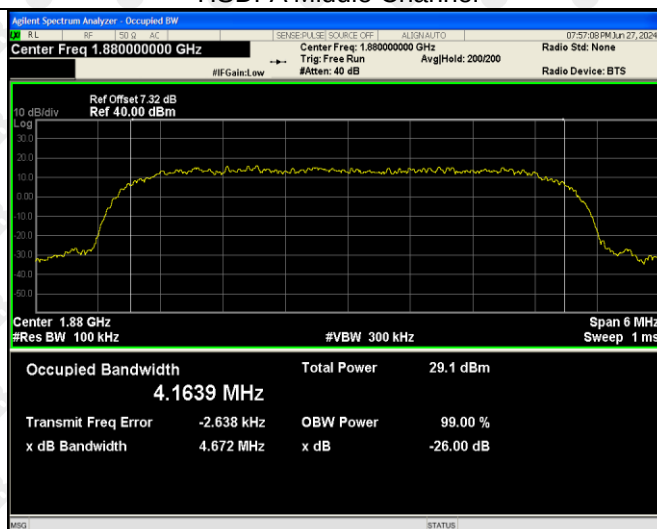


HSDPA High Channel

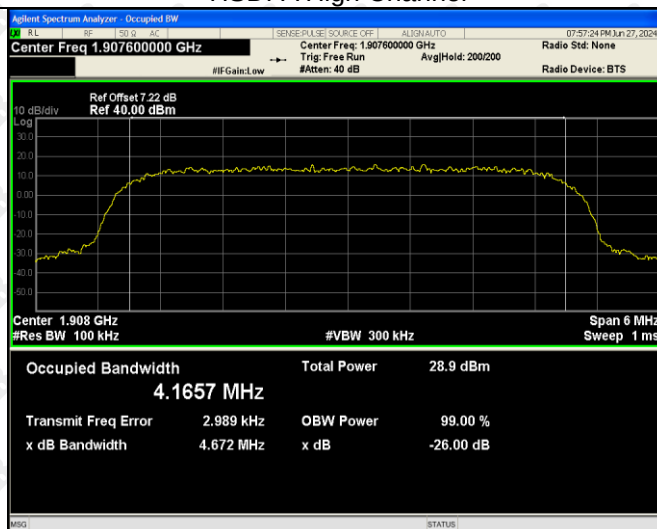


HSUPA Low Channel

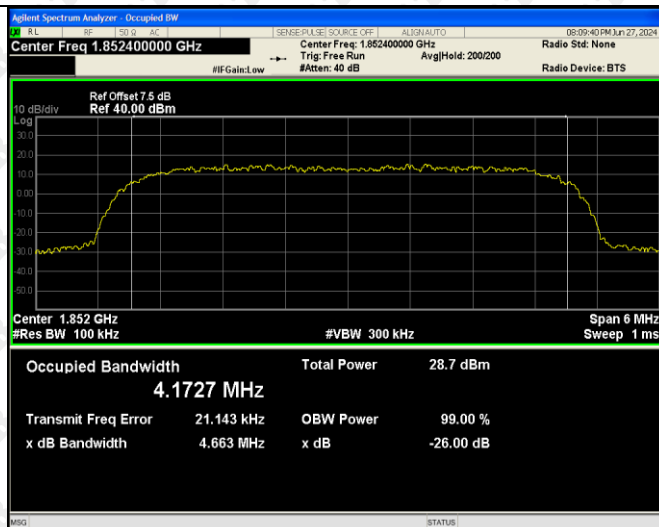

HSUPA Middle Channel

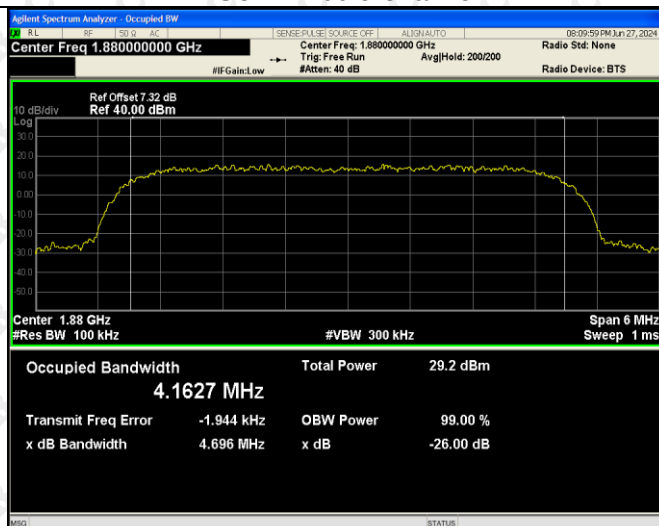

HSUPA High Channel

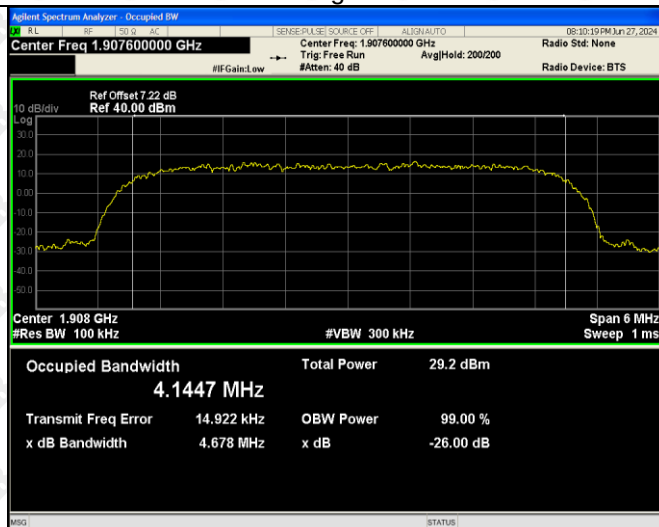

9. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL

9.1 Standard Applicable


According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10^{th} harmonic.

Test Configuration for the out of band emissions testing:

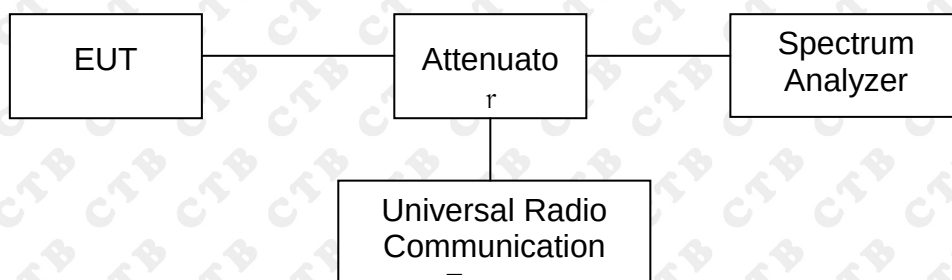




9.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	1010 mbar


9.4 Summary of Test Results/Plots

Please refer to the following test plots

For Band V

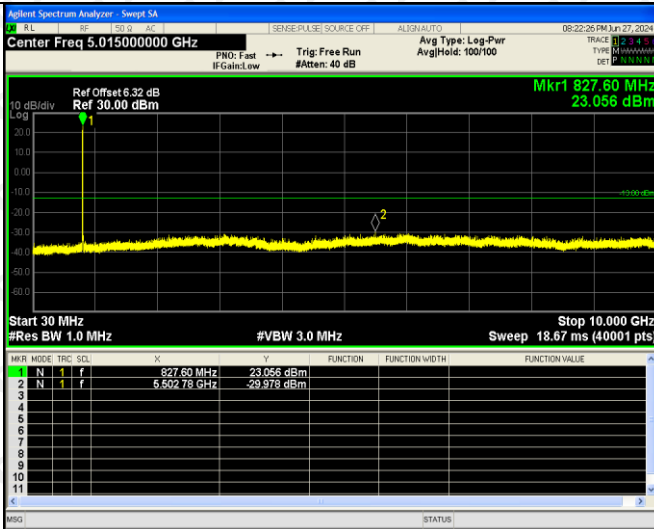
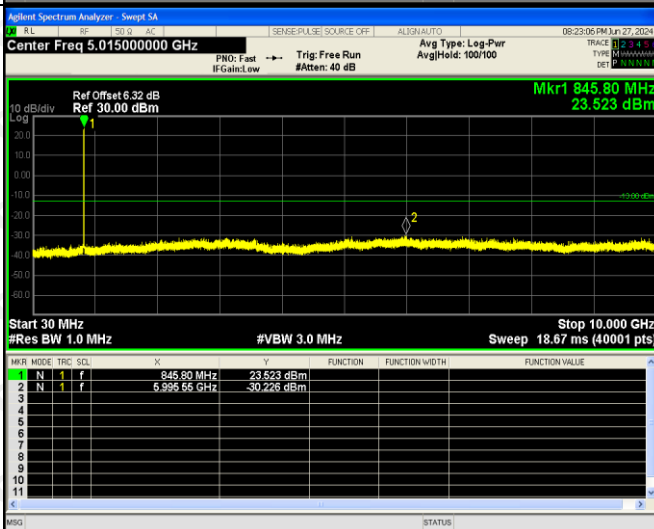
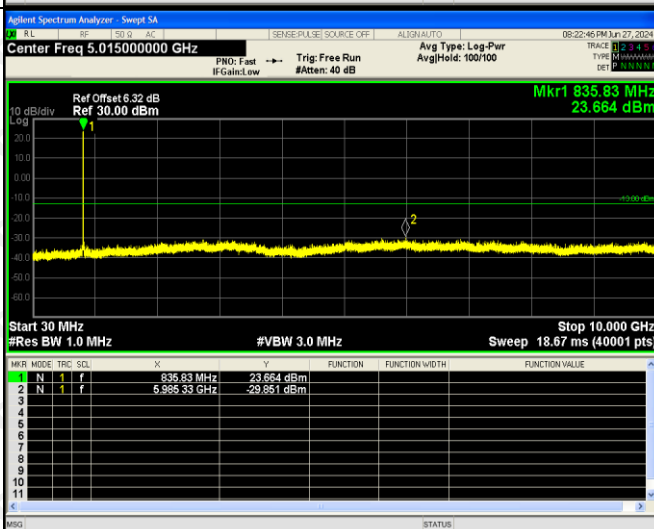
WCDMA Low Channel	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>827.60 MHz</td><td>23.056 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>5.50278 GHz</td><td>-29.978 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	827.60 MHz	23.056 dBm				2	N	1	f	5.50278 GHz	-29.978 dBm				
MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	827.60 MHz	23.056 dBm																								
2	N	1	f	5.50278 GHz	-29.978 dBm																								
WCDMA Middle Channel	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>845.80 MHz</td><td>23.523 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>5.99655 GHz</td><td>-30.226 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	845.80 MHz	23.523 dBm				2	N	1	f	5.99655 GHz	-30.226 dBm				
MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	845.80 MHz	23.523 dBm																								
2	N	1	f	5.99655 GHz	-30.226 dBm																								
WCDMA High Channel	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>835.83 MHz</td><td>23.664 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>5.98533 GHz</td><td>-29.851 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	835.83 MHz	23.664 dBm				2	N	1	f	5.98533 GHz	-29.851 dBm				
MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	835.83 MHz	23.664 dBm																								
2	N	1	f	5.98533 GHz	-29.851 dBm																								

WCDMA
Low
Band
Spurious
Emission

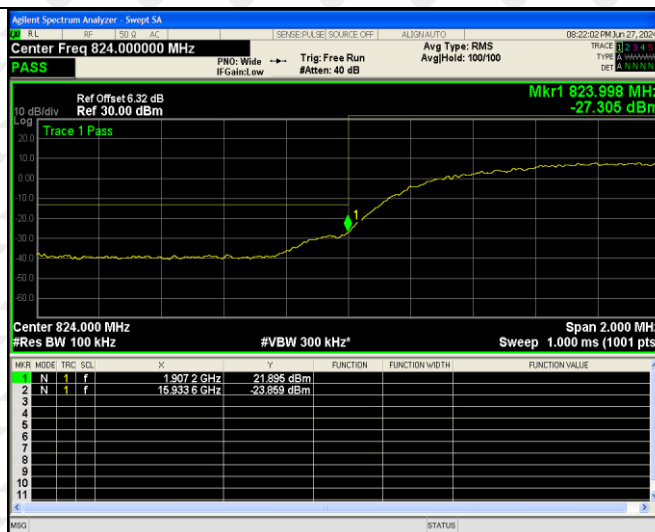


WCDMA
High
Band
Spurious
Emission

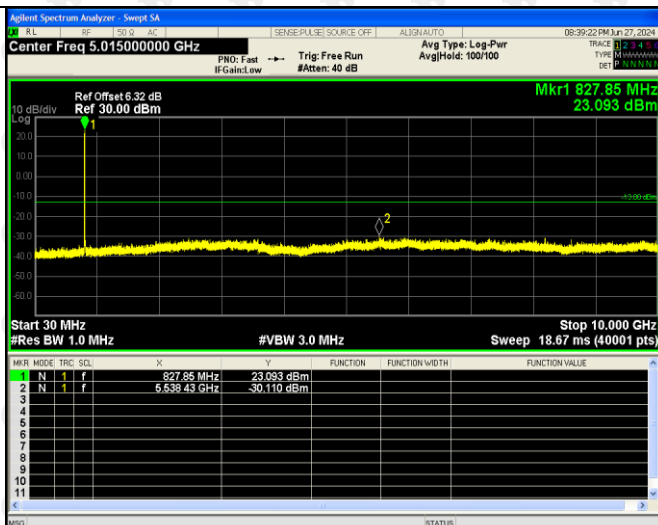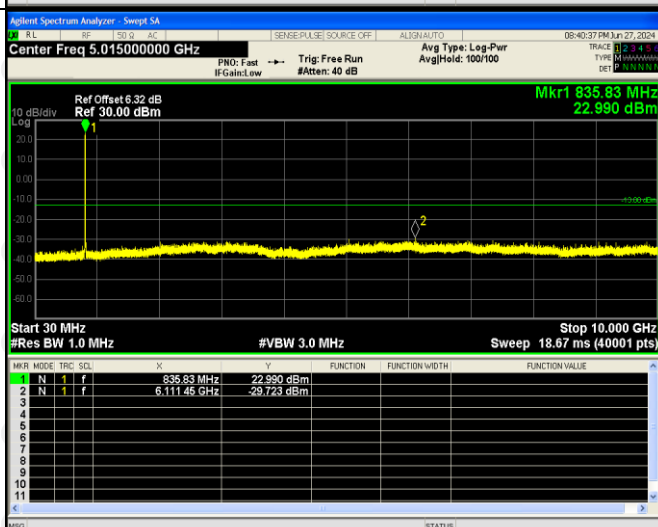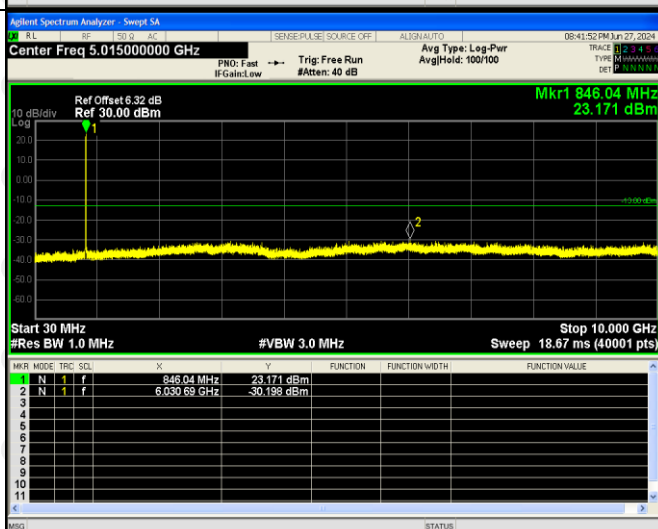

HSDPA
Low
Channel

HSDPA
Middle
Channel

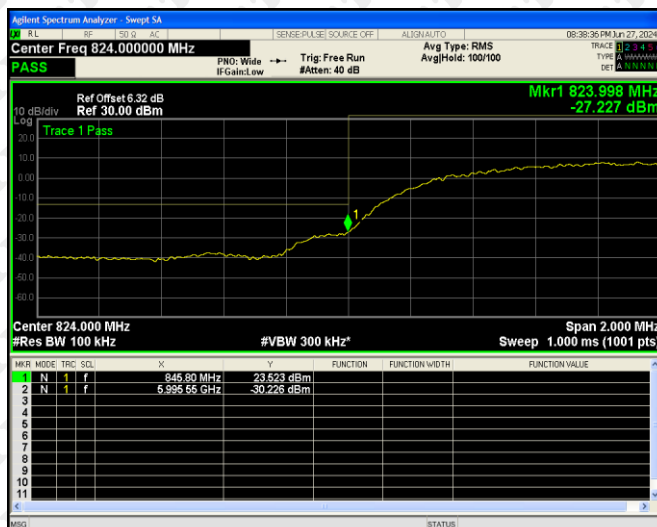HSDPA
High
Channel


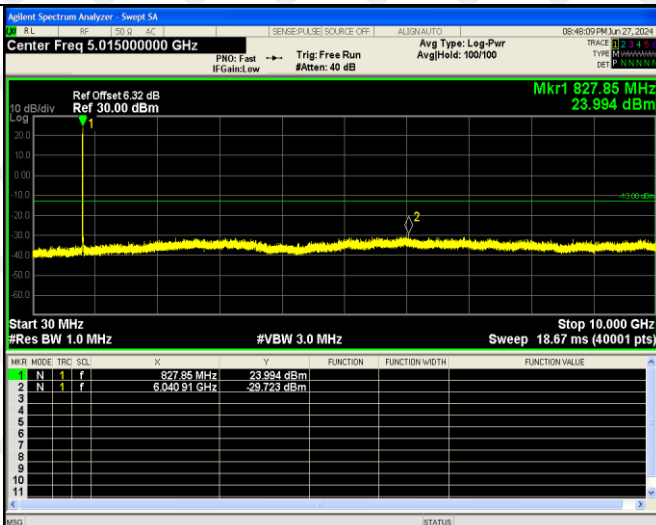
HSDPA
Low
Band
Spurious
Emission




HSDPA
High
Band
Spurious
Emission




HSUPA
Low
Channel




HSUPA
Middle
Channel

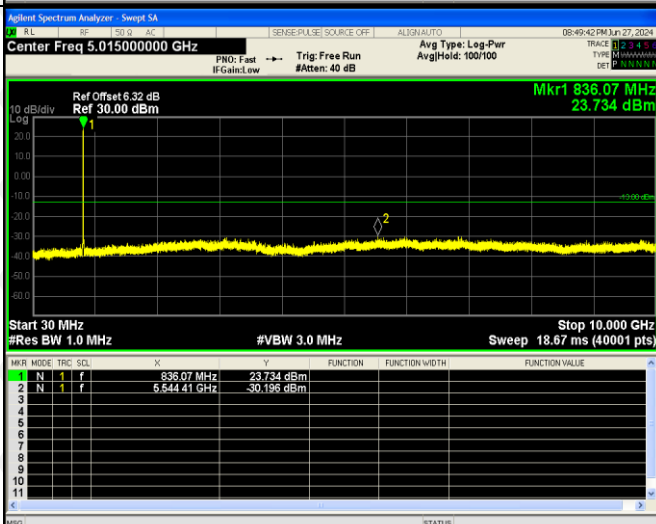

HSUPA
High
Channel

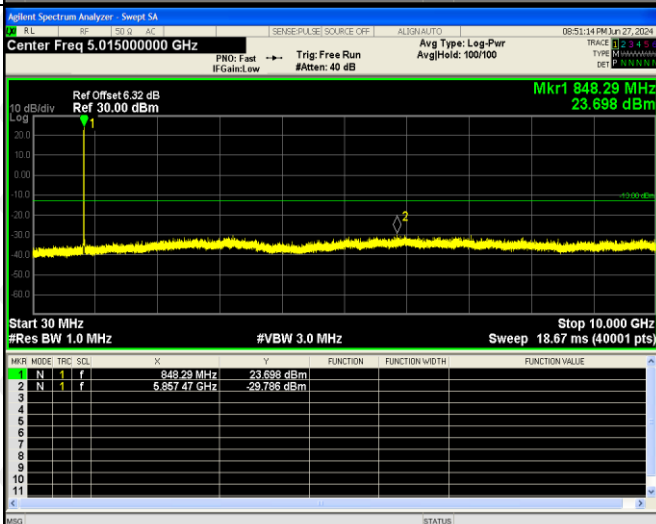




HSUPA
Low
Band
Spurious
Emission

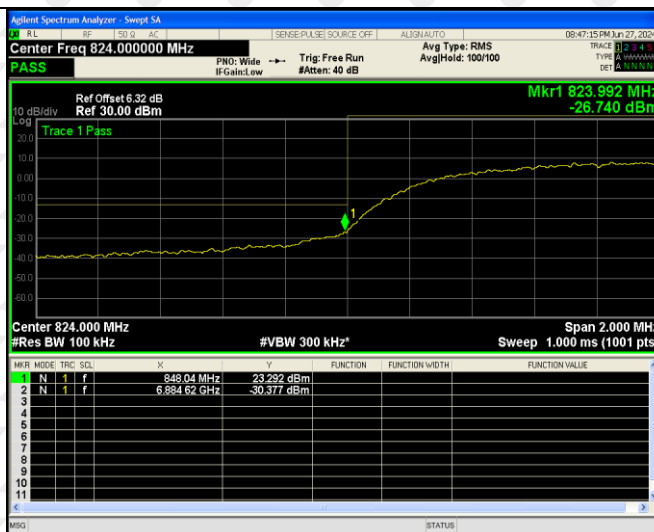


HSUPA
High
Band
Spurious
Emission



For Band II

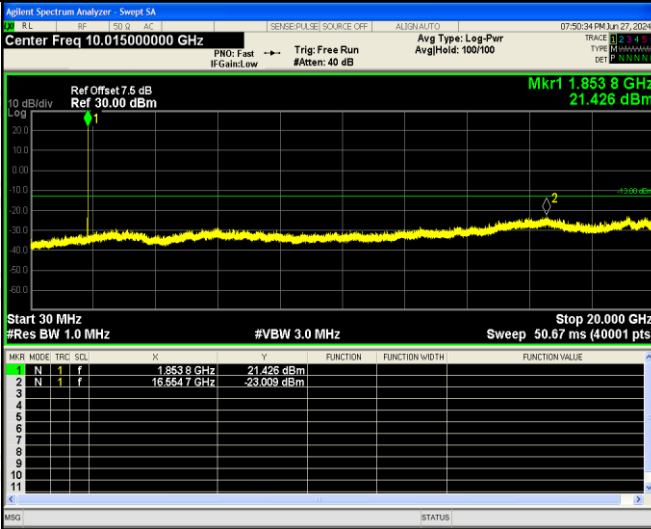
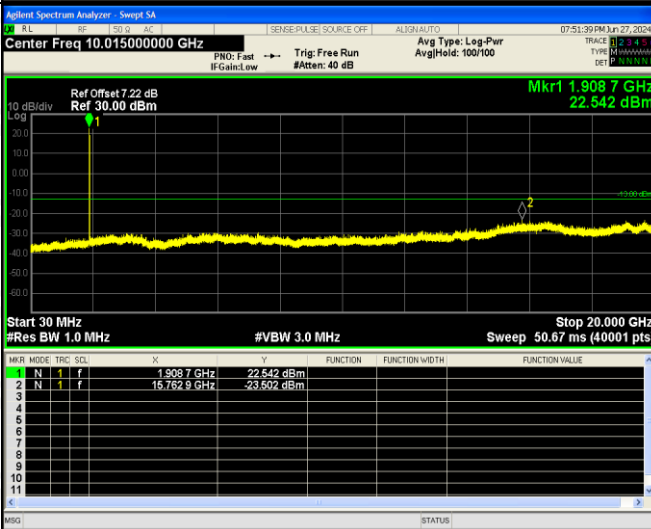
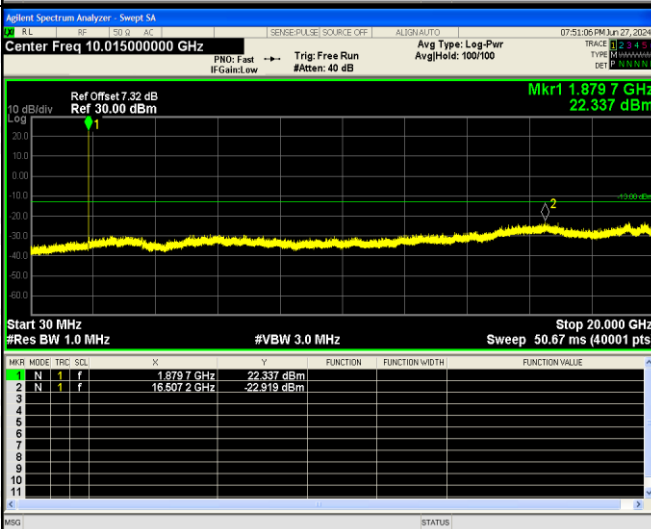
WCDMA Low Channel	
WCDMA Middle Channel	
WCDMA High Channel	

WCDMA
Low
Band
Spurious
Emission

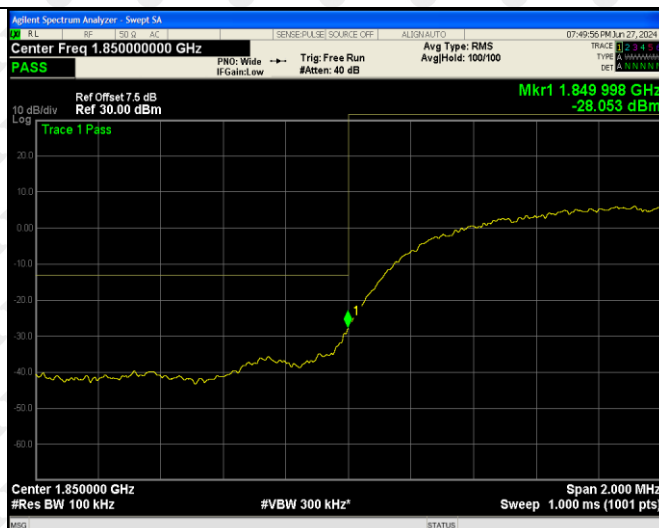


WCDMA
High
Band
Spurious
Emission

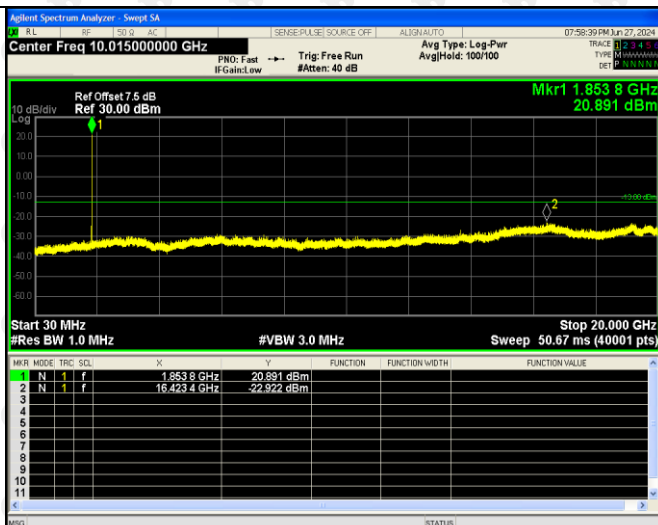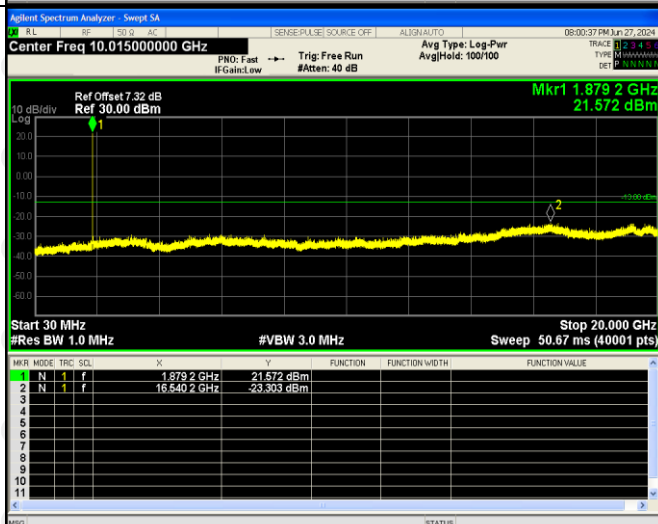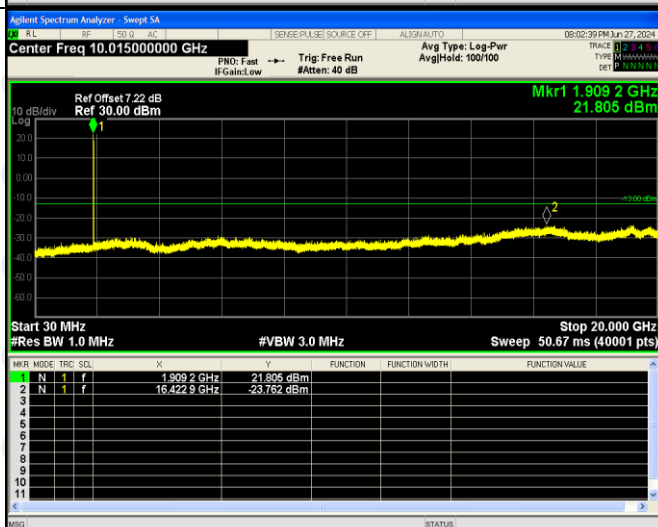

HSDPA
Low
Channel

HSDPA
Middle
Channel

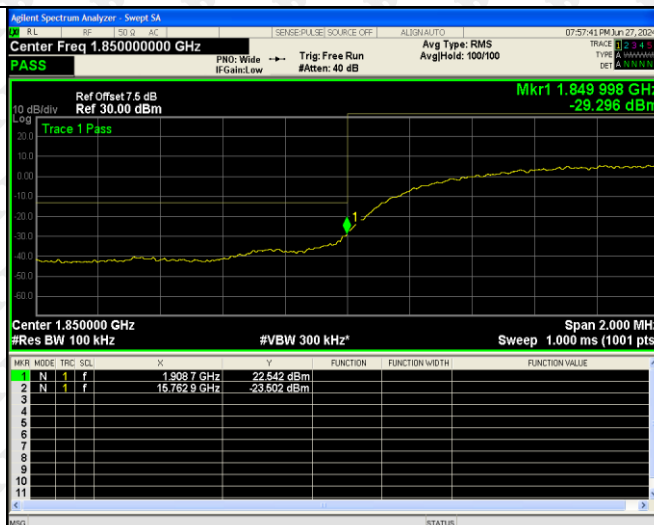HSDPA
High
Channel


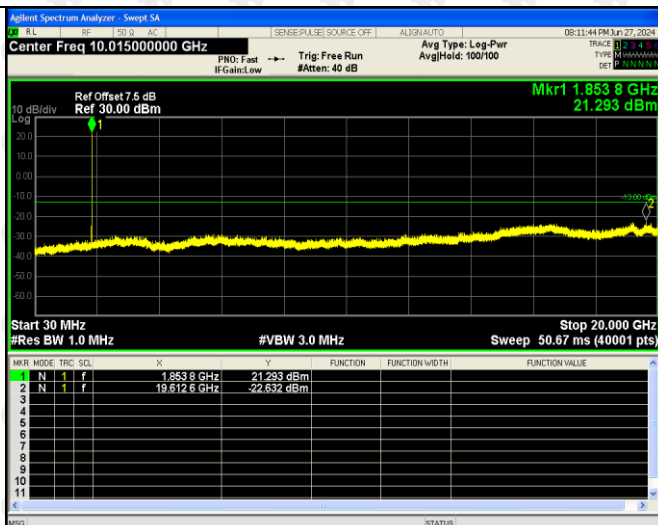
HSDPA
Low
Band
Spurious
Emission




HSDPA
High
Band
Spurious
Emission




HSUPA
Low
Channel




HSUPA
Middle
Channel

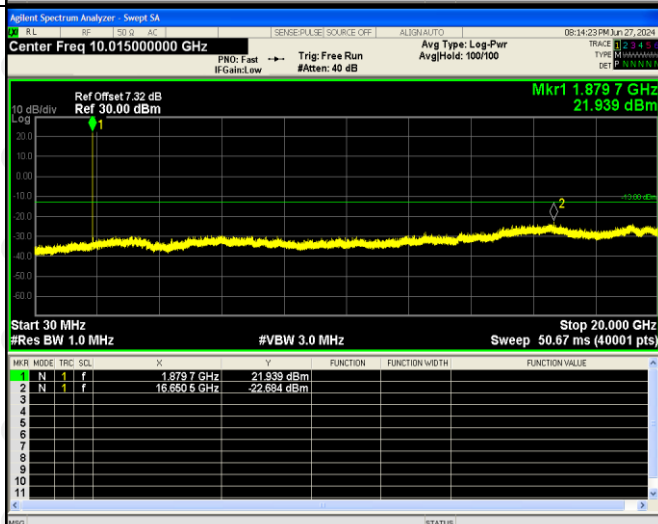

HSUPA
High
Channel

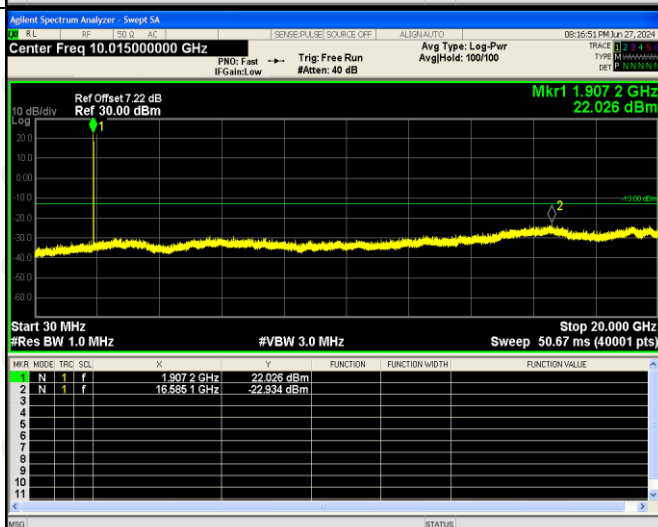

HSUPA
Low
Band
Spurious
Emission

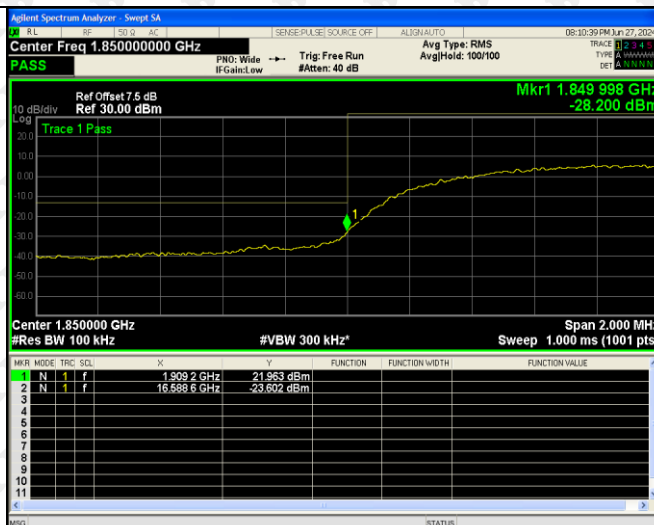

HSUPA
High
Band
Spurious
Emission



10. SPURIOUS RADIATED EMISSIONS

10.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

10.2 Test Procedure

- 1.The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
- 2.The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
- 3.The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- 4.Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

10.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	101 kPa
Test Voltage	DC 3.7V

10.4 Summary of Test Results/Plots

According to the data below, the FCC Part22.917 and 24.238 standards, and had the worst margin of:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes are performed, but only the worst case is recorded in this report.

For Band 5 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (826.4MHz)						
45.04	-74.61	3.91	-70.70	-13	-57.70	H
1649.89	-55.61	10.56	-45.05	-13	-32.05	H
2475.38	-55.46	13.5	-41.96	-13	-28.96	H
46.15	-72.83	3.93	-68.90	-13	-55.90	V
1647.34	-55.26	10.41	-44.85	-13	-31.85	V
2471.14	-61.78	13.16	-48.62	-13	-35.62	V
Middle Channel (836.6MHz)						
42.16	-74.78	4.02	-70.76	-13	-57.76	H
1671.50	-56.53	4.66	-51.87	-13	-38.87	H
2503.19	-47.97	8.34	-39.63	-13	-26.63	H
40.43	-57.87	4.17	-53.70	-13	-40.70	V
1665.04	-57.27	4.94	-52.33	-13	-39.33	V
2501.04	-64.86	8.19	-56.67	-13	-43.67	V
High Channel (846.6MHz)						
43.85	-67.95	3.87	-64.08	-13	-51.08	H
1689.88	-54.86	4.89	-49.97	-13	-36.97	H
2538.88	-48.52	8.42	-40.10	-13	-27.10	H
39.39	-57.23	3.95	-53.28	-13	-40.28	V
1689.28	-64.61	4.99	-59.62	-13	-46.62	V
2537.49	-63.89	8.12	-55.77	-13	-42.77	V

For Band 2 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.4MHz)						
39.97	-75.44	3.91	-71.53	-13	-58.53	H
1644.45	-52.35	10.56	-41.79	-13	-28.79	H
2478.04	-58.96	13.5	-45.46	-13	-32.46	H
40.07	-65.57	3.93	-61.64	-13	-48.64	V
1647.62	-54.97	10.41	-44.56	-13	-31.56	V
2471.51	-56.54	13.16	-43.38	-13	-30.38	V
Middle Channel (1880MHz)						
45.37	-73.76	4.02	-69.74	-13	-56.74	H
1669.80	-54.10	4.66	-49.44	-13	-36.44	H
2505.75	-46.60	8.34	-38.26	-13	-25.26	H
38.23	-60.71	4.17	-56.54	-13	-43.54	V
1665.48	-64.20	4.94	-59.26	-13	-46.26	V
2500.39	-59.29	8.19	-51.10	-13	-38.10	V
High Channel (1907.6MHz)						
38.10	-70.79	3.87	-66.92	-13	-53.92	H
1688.01	-55.28	4.89	-50.39	-13	-37.39	H
2532.98	-49.48	8.42	-41.06	-13	-28.06	H
44.04	-58.27	3.95	-54.32	-13	-41.32	V
1688.87	-57.16	4.99	-52.17	-13	-39.17	V
2539.66	-64.85	8.12	-56.73	-13	-43.73	V

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

11. FREQUENCY STABILITY

11.1 Standard Applicable

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Cellular Band

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	N/A	N/A
929 to 960	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

According to §27.54 The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

11.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

11.3 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	101kPa

11.4 Summary of Test Results/Plots

For WCDMA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	-0.11	-0.00013
40	NV	-0.25	-0.00030
30	NV	0.39	0.00047
20	NV	0.64	0.00076
10	NV	1.14	0.00137
0	NV	0.66	0.00078
-10	NV	1.21	0.00144
-20	NV	1.45	0.00174
-30	NV	1.04	0.00125

For WCDMA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	-0.06	-0.00003
40	NV	0.24	0.00013
30	NV	-0.17	-0.00009
20	NV	0.11	0.00006
10	NV	1.22	0.00065
0	NV	0.73	0.00039
-10	NV	1.28	0.00068
-20	NV	2.19	0.00116
-30	NV	2.09	0.00111

For HSDPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	0.16	0.00019
40	NV	0.24	0.00029
30	NV	0.77	0.00092
20	NV	0.03	0.00004
10	NV	0.67	0.00080
0	NV	1.39	0.00166
-10	NV	1.13	0.00135
-20	NV	1.74	0.00208
-30	NV	1.51	0.00181

For HSDPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	4.63	0.00246
40	NV	4.55	0.00242
30	NV	5.11	0.00272
20	NV	6.00	0.00319
10	NV	6.46	0.00344
0	NV	6.04	0.00321
-10	NV	6.89	0.00367
-20	NV	7.20	0.00383
-30	NV	7.01	0.00373

For HSUPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	0.51	0.00060
40	NV	0.58	0.00069
30	NV	0.88	0.00106
20	NV	0.80	0.00095
10	NV	1.35	0.00161
0	NV	1.54	0.00184
-10	NV	1.30	0.00156
-20	NV	2.20	0.00263
-30	NV	2.76	0.00330

For HSUPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	6.37	0.00339
40	NV	6.27	0.00334
30	NV	7.15	0.00380
20	NV	7.23	0.00385
10	NV	7.88	0.00419
0	NV	8.39	0.00446
-10	NV	7.92	0.00421
-20	NV	8.88	0.00472
-30	NV	8.71	0.00463

So, Frequency Stability Versus Input Voltage is:


Reference Frequency(Middle Channel): WCDMA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	1.57	0.00187
	NV	1.36	0.00162
	HV	1.58	0.00189
Reference Frequency(Middle Channel): WCDMA 1732.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	1.06	0.00061
	NV	0.62	0.00036
	HV	1.01	0.00058
Reference Frequency(Middle Channel): WCDMA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	2.25	0.00120
	NV	2.10	0.00111
	HV	2.40	0.00128
Reference Frequency(Middle Channel): HSDPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	1.47	0.00176
	NV	1.87	0.00223
	HV	1.90	0.00228
Reference Frequency(Middle Channel): HSDPA 1732.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	6.05	0.00322
	NV	5.87	0.00312
	HV	6.51	0.00346

Reference Frequency(Middle Channel): HSDPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	6.47	0.00344
	NV	6.63	0.00353
	HV	7.28	0.00387
Reference Frequency(Middle Channel): HSUPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	1.94	0.00232
	NV	2.41	0.00289
	HV	3.01	0.00360
Reference Frequency(Middle Channel): HSUPA 1732.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	5.40	0.00312
	NV	5.99	0.00346
	HV	6.51	0.00376
Reference Frequency(Middle Channel): HSUPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	8.62	0.00459
	NV	9.02	0.00480
	HV	9.47	0.00504


12. EUT TEST PHOTO

Radiated Emission

Below 1G

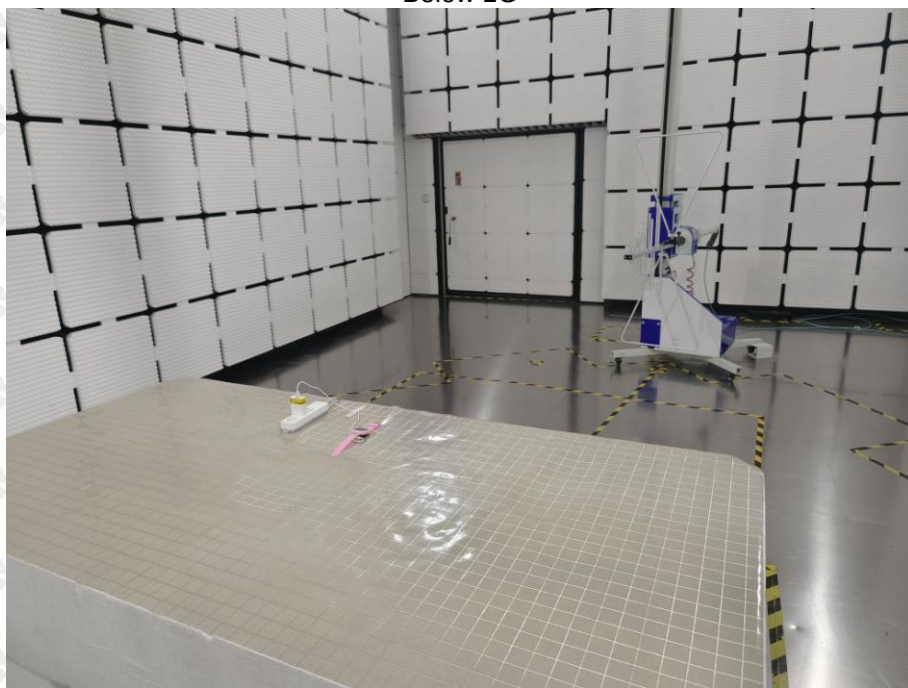

Above 1G

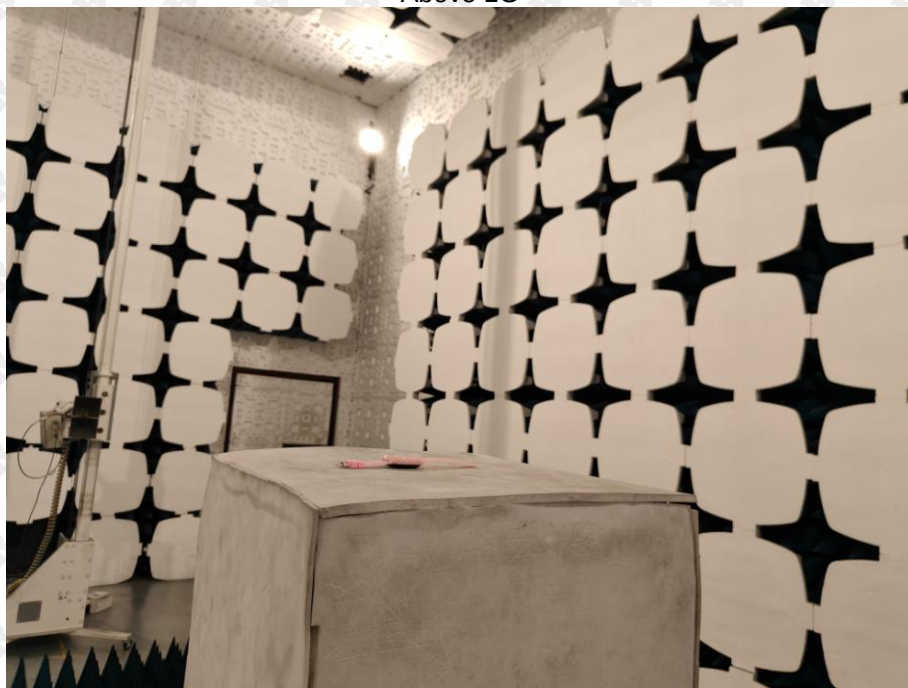

***** END OF REPORT *****