

Applicant: RodRock Enterprises co., LTD

Product: LED MAGNETIC WIRELESS TOW LIGHT KITS

Model No.: 2060090

Trademark: N/A

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 & FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Terry Tang

Manager

Dated: May 20, 2024


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TWN2405601E Page 2 of 32

Date: 2024-05-20



Special Statement:

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Date: 2024-05-20



Test Report Conclusion

Content General Details..... 1.0 1.1 Test Lab Details.... 1.2 Applicant Details.... 4 1.3 Description of EUT 4 1.4 Submitted Sample.... Test Duration. 1.5 5 5 1.6 Test Uncertainty. 1.7 Test By..... 5 2.0 List of Measurement Equipment. 6 7 3.0 Technical Details..... 3.1 Summary of Test Results.... 7 3.2 7 Test Standards.... 4.0 7 EUT Modification.... 5.0 Power Line Conducted Emission Test. 8 5.1 Schematics of the Test..... 8 Test Method and Test Procedure.... 5.2 8 Configuration of the EUT..... 5.3 5.4 EUT Operating Condition.... 9 5.5 Conducted Emission Limit..... 9 5.6 Test Result. 6.0 Radiated Emission test.... 10 Test Method and Test Procedure.... 10 6.1 6.2 Configuration of the EUT..... 11 EUT Operation Condition.... 6.3 11 6.4 Radiated Emission Limit.... 11 6.5 Test Result. 13 7.0 Band Edge..... 17 7.1 Test Method and Test Procedure.... 17 7.2 Radiated Test Setup. 17 7.3 Configuration of the EUT.... 17 7.4 EUT Operating Condition.... 17 7.5 Band Edge Limit. 17 7.6 Band Edge Test Result. 18 8.0 Antenna Requirement 22 9.0 20dB bandwidth measurement..... 23 FCC ID Label.... 25 10.0

The report refers only to the sample tested and does not apply to the bulk.

11.0

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Photo of Test Setup and EUT View....

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2024-05-20



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: RodRock Enterprises co., LTD

Address: NO. 89 JIULITING ROAD, XIUZHOU DISTRICT JIAXING, ZHEJIANG, CHINA Post

code:314000

1.3 Description of EUT

Product: LED MAGNETIC WIRELESS TOW LIGHT KITS

Manufacturer: Jiaxing Rodrock AutoParts Manufacturing co., LTD

Address: NO. 89 JIULITING ROAD, XIUZHOU DISTRICT JIAXING, ZHEJIANG,

CHINA Post code:314000

Factory: Jiaxing Rodrock AutoParts Manufacturing co., LTD

Address: NO. 89 JIULITING ROAD, XIUZHOU DISTRICT JIAXING, ZHEJIANG,

CHINA Post code:314000

Trademark: N/A

Model Number: 2060090

Additional Model Name N/A

Rating: DC12.0V

Modulation Type: FSK

Modulation Type: FSK
Operation Frequency: 2450MHz

Channel Number: 1

Hardware Version: WTLRX-L-V8_20210119
Software Version: WTLRX-L-V8_20210119

Serial No.: 193175543967

Antenna Designation PCB antenna with gain 2.7dBi Max (Get from the antenna specification)

1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TWN2405601E Page 5 of 32

Date: 2024-05-20



1.5 Test Duration

2024-05-06 to 2024-05-20

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty =3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 32

Report No.: TWN2405601E

Date: 2024-05-20



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2023-07-14	2024-07-13
LISN	R&S	EZH3-Z5	100294	2023-07-14	2024-07-13
LISN	R&S	EZH3-Z5	100253	2023-07-14	2024-07-13
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2023-07-14	2024-07-13
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2023-07-14	2024-07-13
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17
Power meter	Anritsu	ML2487A	6K00003613	2023-07-14	2024-07-13
Power sensor	Anritsu	MA2491A	32263	2023-07-14	2024-07-13
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2023-07-14	2024-07-13
EMI Test Receiver	RS	ESCS 30	834115/006	2023-07-14	2024-07-13
Spectrum	HP/Agilent	E4407B	MY50441392	2023-07-14	2024-07-13
Spectrum	RS	FSP	1164.4391.38	2023-07-14	2024-07-13
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2023-07-14	2024-07-13
RF Cable	Zhengdi	7m		2023-07-14	2024-07-13
Pre-Amplifier	Schwarebeck	BBV9743	#218	2023-07-14	2024-07-13
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2023-07-14	2024-07-13
LISN	SCHAFFNER	NNB42	00012	2023-07-14	2024-07-13
ESPI Test Receiver	R&S	ESPI 3	100379	2023-07-14	2024-07-13
LISN	R&S	EZH3-Z5	100294	2023-07-14	2024-07-13

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 32

Report No.: TWN2405601E

Date: 2024-05-20



3.0 Technical Details

3.1 Summary of test results

The EU	Γ has been	tested a	according	to the	following	specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	N/A	N/A
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies
FCC Part 15.215(c)	20dB bandwidth	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2024-05-20



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

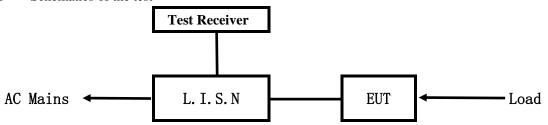


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: N/A

Block diagram of Test setup

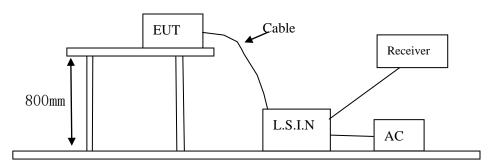

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

1 channel are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID	
LED MAGNETIC WIRELESS	Jiaxing Rodrock AutoParts	2060090	2BKBH-2060090	
TOW LIGHT KITS	Manufacturing co., LTD	2000090	2 DKD H-2000090	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TWN2405601E Page 9 of 32

Date: 2024-05-20



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

ſ	Device	Manufacturer	Model	Rating
ŀ	N/A	Wandiacturer	Wodel	Rating

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB µ V)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results: N/A

Note: EUT not directly or In-directly connected the AC power source, this test item not applicable.

Date: 2024-05-20



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 9kHz to 25 GHz was investigated. The frequency spectrum is set as follows:


Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
ADOVE IGHZ	Peak	1MHz	10Hz	Average

(Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.

- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

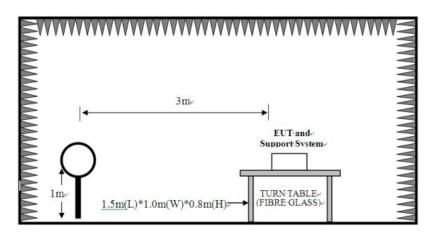


Date: 2024-05-20



For radiated emissions from 30MHz to1GHz

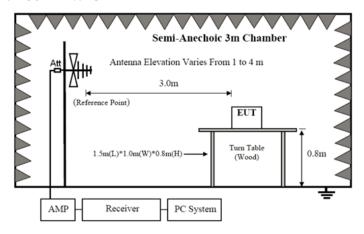

For radiated emissions above 1GHz

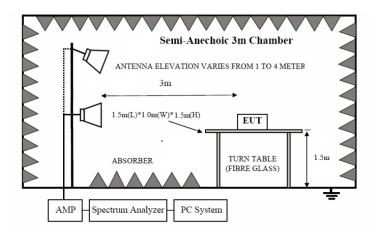

- 6.2 Configuration of the EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Strength of Fundamental (3m)		Field Strength of Harmonics (3m)		
(MHz)	mV/m	dBuV/m	uV/m	dBuV/m	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TWN2405601E Page 12 of 32

Date: 2024-05-20



2400 2402 7	~~	0.4.4.4	444 (75 4)		- 4 / 4	= 4 (D 1)
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)
2100 2103.5	50) i (riverage)	III (I can)	500	3 (Tiverage)	/ I (I call)

Note:

- 1. RF Field Strength $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-80	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.

Report No.: TWN2405601E Page 13 of 32

Date: 2024-05-20




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2450MHz

Horizontal

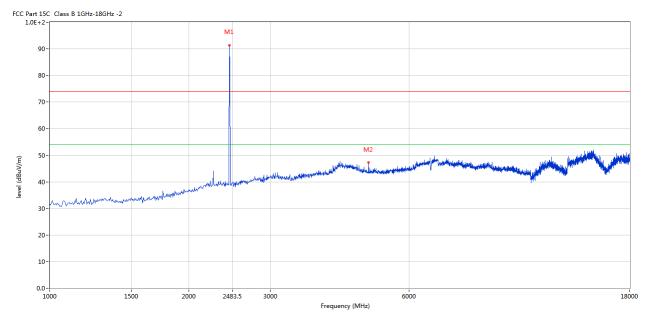

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2450	91.35	-3.57	114.0	-22.65	Peak	263.00	100	Horizontal	Pass
2	4900.525	47.23	3.22	74.0	-26.77	Peak	305.00	100	Horizontal	Pass


Page 14 of 32

Report No.: TWN2405601E

Date: 2024-05-20



Vertical

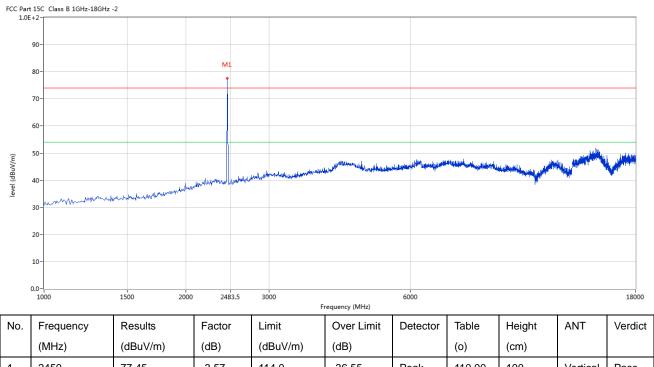

110.00 Pass 2450 77.45 -3.57 114.0 -36.55 Peak 100 Vertical

Note:

- (1) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier
- (2) Margin=Emission-Limits
- (3) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (4) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TWN2405601E Page 15 of 32

Date: 2024-05-20




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

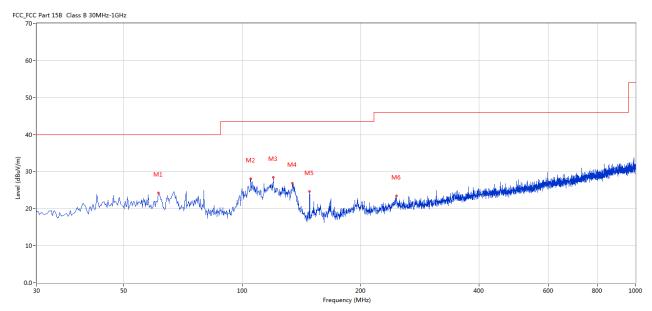

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	61.275	24.23	-13.14	40.0	15.77	Peak	278.00	100	Horizontal	Pass
2	105.156	28.06	-13.23	43.5	15.44	Peak	261.00	100	Horizontal	Pass
3	119.945	28.44	-15.32	43.5	15.06	Peak	267.00	100	Horizontal	Pass
4	134.249	26.92	-17.05	43.5	16.58	Peak	339.00	100	Horizontal	Pass
5	148.310	24.65	-17.16	43.5	18.85	Peak	134.00	100	Horizontal	Pass
6	246.498	23.42	-12.15	46.0	22.58	Peak	210.00	100	Horizontal	Pass

Report No.: TWN2405601E Page 16 of 32

Date: 2024-05-20




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

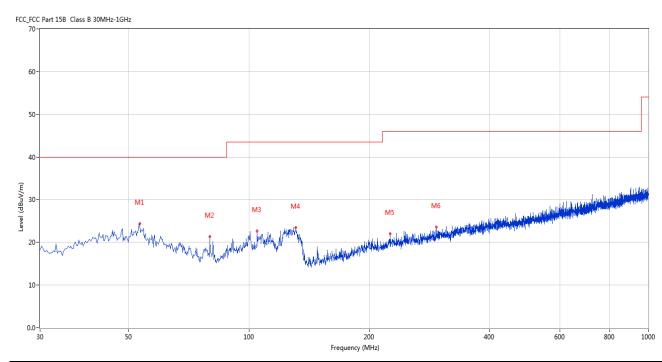

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	53.274	24.34	-11.51	40.0	15.66	Peak	184.00	100	Vertical	Pass
2	79.943	21.34	-17.44	40.0	18.66	Peak	237.00	100	Vertical	Pass
3	104.914	22.70	-13.23	43.5	20.80	Peak	241.00	100	Vertical	Pass
4	131.097	23.51	-16.83	43.5	19.99	Peak	12.00	100	Vertical	Pass
5	225.891	21.98	-12.85	46.0	24.02	Peak	308.00	100	Vertical	Pass
6	294.501	23.59	-11.20	46.0	22.41	Peak	121.00	100	Vertical	Pass

Date: 2024-05-20




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

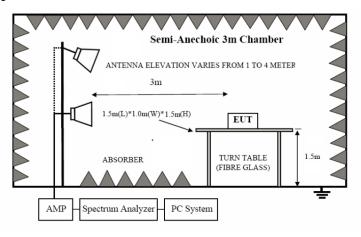

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of the EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Report No.: TWN2405601E Page 18 of 32

Date: 2024-05-20




7.6 Test Result

]	Product:	LED MA	AGNETIC LIGHT	WIRELESS '	TOW	Polar	ity				
	Mode	I		ansmitting		Test Vo	ltage		DC12V		
Te	mperature		24 de			Humio			56% RH		
Te	est Result:		Pas	SS							
	Part 15C Class B 1GHz-18	GHz -2			•			•			
	90 - 80 - 70 - 60 -										
level (dBuV/m)	30 - 20 - 10 - 2350	en and deposition of the state	to a transfer of the second second second		M2	Adaringhilas badinan	long, deskaldi jepis lämingla	ndesig skouweskenskuste	de displication of the state of	2460	
NO.	30 - 20 - 10 -	Results	Factor		a, da, v. ini ^{dela} ra, muziraka ku ku mini di da uniya	Detector	Table	Height	ANT		
	30 - 20 - 10 - 2350			politica e e e e e e e e e e e e e e e e e e e	Frequency (MHz)					2460	
No.	30 - 20 - 10 - 2350	Results	Factor	Limit	Frequency (MHz) Over Limit		Table	Height		2460	
	30- 20- 10- 2350 Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Frequency (MHz) Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	2460 Verdic	

Report No.: TWN2405601E Page 19 of 32



Product:	LED MAGNETIC WIRELESS TOW LIGHT KITS	Detector	Vertical
Mode	Keeping Transmitting	Test Voltage	DC12V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		
FCC Part 15C Class B 1GHz-18GHz - 1.0E+2-	2		

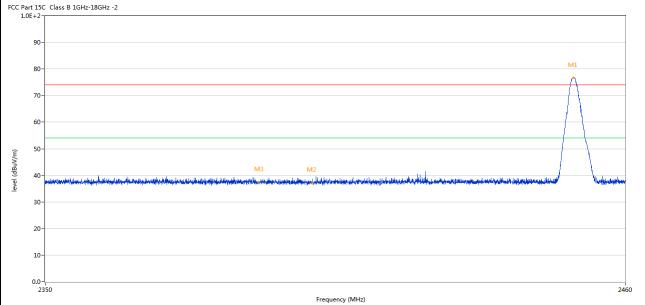

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2449.883	76.71	-3.57	74.0	2.71	Peak	100.00	100	Vertical	N/A
2	2400.000	37.18	-3.57	74.0	-36.82	Peak	268.63	100	Vertical	Pass
3	2390.000	37.32	-3.53	74.0	-36.68	Peak	285.19	100	Vertical	Pass

Report No.: TWN2405601E Page 20 of 32



P	Product:	LED M		C WIRELES IT KITS	S TOW	P	olarity		Horizont	al
	Mode		Keeping	Fransmitting		Test	Test Voltage		DC12V	
Ten	nperature	24 deg. C,				Humidity			56% RH	
Tes	st Result:		F	Pass						
1.0E+2- 90 80 70 60 50 30 10 0.00	- was dependence language de de constant	M1	Mary desiler, desperaphens	the day the later was a selected	nagatha a chail da dighin di ba	Mades of the desired the second and		None of the latest of the late	per jags de Alexandra, principa de sobre de	
2-	440				Frequency (MHz)		2483.5			2500
No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdi
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	2449.883	91.32	-3.57	74.0	17.32	Peak	265.00	100	Horizontal	N/A
2	2483.500	38.53	-3.57	74.0	-35.47	Peak	254.33	100	Horizontal	Pass

Page 21 of 32

Report No.: TWN2405601E



]	Product:	LED MA	GNETIC T LIGHT	WIRELESS KITS	TOW	Detec	tor		Vertical	
	Mode	K	eeping Tra	ansmitting		Test Vo	ltage		DC12V	
Te	mperature		24 de	g. C,		Humio	lity		56% RH	
Te	est Result:		Pas	ss						
CC Part 1 1.0E+	15C Class B 1GHz-18GHz -	2								
8 7 6 5 5 5 5 5 6 6 6 6 6 6 6 6 6 6 6 6 6	10-	M1					M2			
	00-	/	A dit yekkile para 2014 kilo isti	ar Word achte dag gellen myskelfeld gener kalden de	ander land the stronger ha	gerfilianggilgiska-vikiterkikeng	underford von Angelein von Angel	indian ilahan ada gaphabanan	n kapani undiga un nik <u>undu an kapa</u>	
	10 -	/ Man	Admyddis _i gan saeith de gwl		requency (MHz)	ert filmeny playes and steek deny	2483.5	indianinan dippludusina	n industrial and the state of t	2500
	0-	Results	Factor			Detector		Height	ANT	2500
3 2 1 0.	0-2440			Fi	requency (MHz)		2483.5			2500
3 2 1 0.	Frequency	Results	Factor	F: Limit	requency (MHz) Over Limit		2483.5 Table	Height		

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

Date: 2024-05-20



Page 22 of 32

8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna. The antenna gain is 2.7dBi Max. It fulfills the requirement of this section. Test Result: Pass

Date: 2024-05-20



Page 23 of 32

9.0 20dB Bandwidth Measurement

Test Configuration



Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Limit

N/A

Page 24 of 32

Report No.: TWN2405601E

Date: 2024-05-20



Test Result

GFSK										
Product:	LIGHT KITS					est Mode:		Keep tran	smitting	
Mode	Kee	ping Transmi	tting		Те	est Voltage		DC12V		
Temperature		24 deg. C,			I	Humidity		56% RH		
Test Result:		Pass				Detector		PF	ζ	
20dB Bandwidth		1.413MHz								
Ref Lvl	Marke ndB BW		00 dB	VI	BW BW WT	100 k 300 k 5 m	Ηz	F Att	20 dB	
10 asm	BW	1.412825	65 MHZ	51	W.T.	5 M	s o	11.0	dBn	1 •
			1			▼1		-0 2.44988	.09 dBm 277 GHz	A
0			<u> </u>	<u>\</u>		ndH BW		20	.00 dB 565 MHz	
-10						VTì	[T1]	-20	.09 dBm	
	T					∨ ⊤2		2.44934	770 GHz	
-20 1MAX		8						2.45076	052 GHz	1MA
-30	~~/						7		~~.	
-40										
-50										
-60										
-70										
-80										
-90 Center 2.	45 GHz		300 kH	z /				Sna	n 3 MHz	
	MAY.2024 1	4:57:31	230	-/				Spa	5 11112	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into an will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: TWN2405601E Page 25 of 32

Date: 2024-05-20



10.0 FCC ID Label


FCC ID: 2BKBH-2060090

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

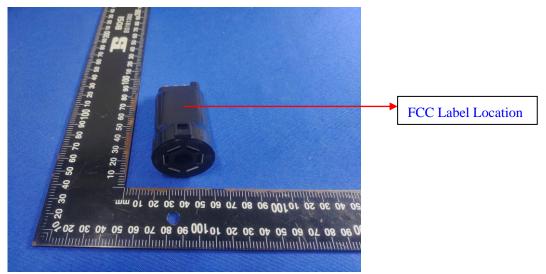

Date: 2024-05-20




11.0 Photo of testing

11.1 Conducted test View

N/A

Radiated emission test view

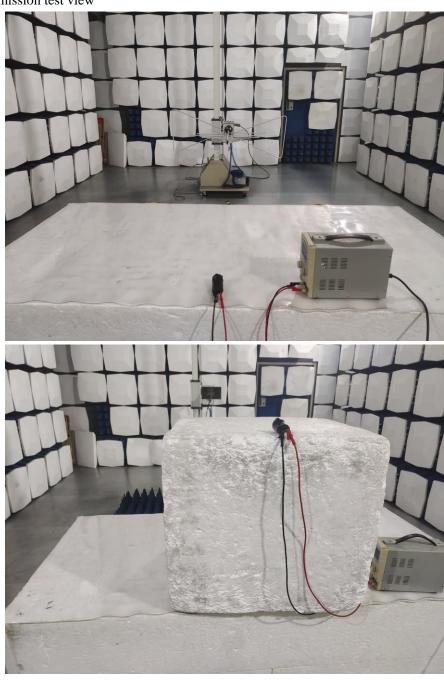


Date: 2024-05-20



11.2 Photographs – EUT

Outside View

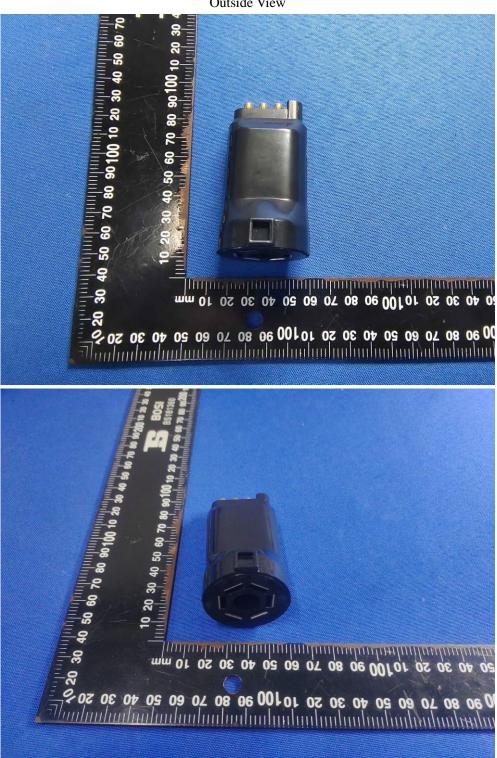

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 28 of 32

Report No.: TWN2405601E

Date: 2024-05-20



Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TWN2405601E Page 29 of 32




Outside View



Report No.: TWN2405601E Page 30 of 32



Inside View

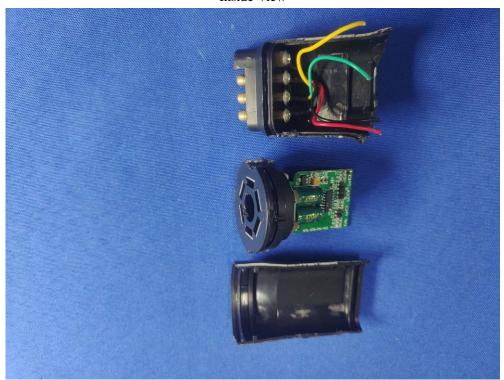


Page 31 of 32

Report No.: TWN2405601E

Date: 2024-05-20



Inside View

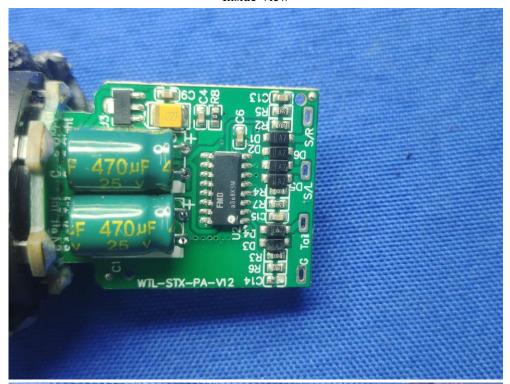



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Report No.: TWN2405601E Page 32 of 32

Date: 2024-05-20



Inside View

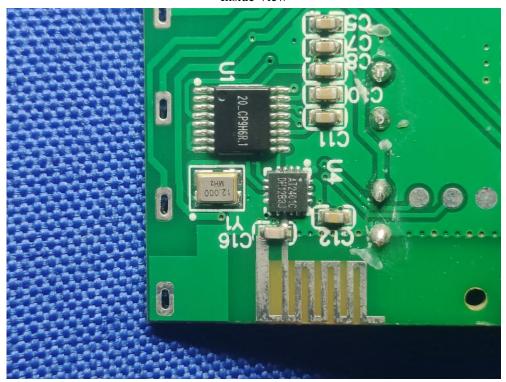

-- End of the report--