

Test Report

Report No. : MTi250221011-0101E1

Date of Issue : 2025-03-05

Applicant : Savewo Energy Limited

Product : MagCell Ultra -Qi2 Magnetic Wireless PowerBank

Model(s) : MC1002Q2

FCC ID : 2BKF4-MC1002Q2

Shenzhen Microtest Co., Ltd.



Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	5
1.3	Description of support units	5
2	Measurement uncertainty	6
3	Test facilities and accreditations	6
3.1	Test laboratory	6
4	List of test equipment	7
5	Test result	8
5.2	Test setup	9
5.3	Test Procedures	9
5.4	Information of test equipment	10
5.5	Test results	11
	Photographs of the Test Setup	19
	Photographs of the EUT	22

Test Result Certification		
Applicant	Savewo Energy Limited	
Applicant Address	1/F,266-270 Texaco Road, Tsuen Wan, N.T., Hong Kong, China	
Manufacturer	Shenzhen Rcell Technology Co., Limited	
Manufacturer Address	Building A906 Room,Paradise Building,Xuegang Road No.4001, Bantian Longgang District,Shenzhen, China	
Product description		
Product name	MagCell Ultra -Qi2 Magnetic Wireless PowerBank	
Trademark	N/A	
Model name	MC1002Q2	
Series Model(s)	N/A	
Standards	FCC CFR 47 PART 1, § 1.1310 part2.1093	
Test method	KDB 680106 D01 Wireless Power Transfer v04	
Testing Information		
Date of test	2025-02-24 to 2025-02-27	
Test Result	Pass	
Prepared by	Letter Lan	<i>Letter Lan.</i>
Reviewed by	David Lee	<i>David. Lee</i>
Approved by	Leon Chen	<i>Leon chen</i>

TEST REPORT

Report No.: MTi250221011-0101E1

1 General Description

1.1 Description of the EUT

Product name:	MagCell Ultra -Qi2 Magnetic Wireless PowerBank
Model name:	MC1002Q2
Series Model:	N/A
Model difference:	N/A
Electrical rating:	USB-C Port/Cable Input: 5V/3A, 9V/2A, 12V/1.5A (18W Max.) USB-C Port/Cable Output: 5V/3A, 9V/2.22A, 10V/2.25A, 12V/1.67A Lightning Output: 5V/2.4A Wireless Charging: 5W/7.5W/10W/15W(Max) Battery Capacity: 10000mAh 3.85V (38.5Wh)
Accessories:	N/A
Hardware version:	V1.0
Software version:	V1.0
Test sample(s) number:	MTi250221011-01-R001
RF specification:	
Operation frequency:	112-205kHz (5W, 7.5W, 10W, 15W EPP) 360kHz (15W MPP)
Modulation type:	ASK
Antenna type:	Coil Antenna

TEST REPORT

Report No.: MTi250221011-0101E1

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Wireless Output (5W)
Mode2	Wireless Output (7.5W)
Mode3	Wireless Output (10W)
Mode4	Wireless Output (15W MPP)
Mode5	Wireless Output (15W EPP)
Mode6	Stand by

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Mobile phone	Find X3	AD3J023817000952	Oppo
Mobile phone	iPhone 12	F17DMBNE0DYM	Apple
Support cable list			
Description	Length (m)	From	To
/	/	/	/

TEST REPORT

Report No.: MTi250221011-0101E1

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurements(3kHz~10MHz)	$\pm 14.8\%$
Electric field measurements(3kHz~10MHz)	$\pm 17.5\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3 Test facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

TEST REPORT

Report No.: MTi250221011-0101E1

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E143	Near-field Electric and Magnetic Field Sensor System	SPEAG	MAGPy-8H3 D+ED3	3101	2024/3/12	2027/3/11

No.	Equipment	Manufacturer	Model	Software version:	Cal. date	Cal. Due
MTI-E016S	MPE test software	SPEAG	MAGPY 2.6	2.6	/	/

TEST REPORT

Report No.: MTi250221011-0101E1

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz

* = Plane-wave equivalent power density


Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

TEST REPORT

Report No.: MTi250221011-0101E1

5.2 Test setup

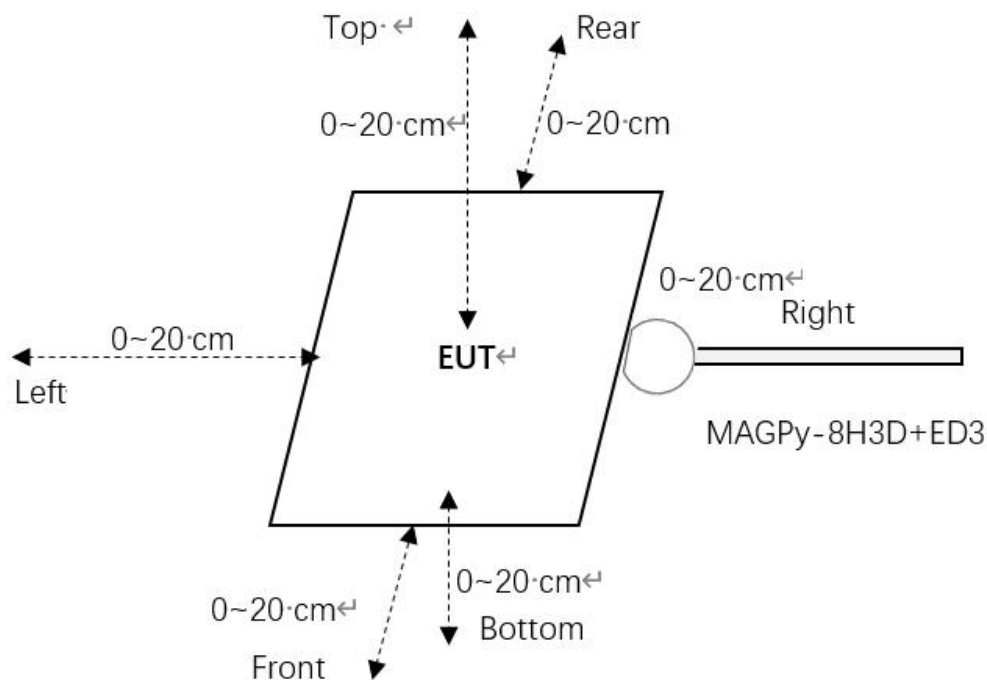

Note: tips mode of the test probe is used for 0cm measurement.


5.3 Test Procedures

a. H-field measurements should be taken 0 cm ~ 20 cm with 2 cm increments from the center of the probe.

The center of the probe to the tip surface of the probe is 18.5 mm, so the directly testing can be performed at the probe center from 2 cm to 20 cm.

To measure the 0 cm H-field, the probe tip mode is used. The total H-field at the tip-surface $H_{tip-surface}$ can be extrapolated using the total H-field measured at the top and bottom sensors, H_{top} and H_{bottom} , as well as the normalized H-field gradient G_n . The field extrapolation formula is a polynomial function of G_n ($\Delta d = 18.5$ mm)

$$H_{tip-surface} = \frac{H_{bottom} + H_{top}}{2} \sum_{i=0}^7 ci(G_n \Delta d)^i$$

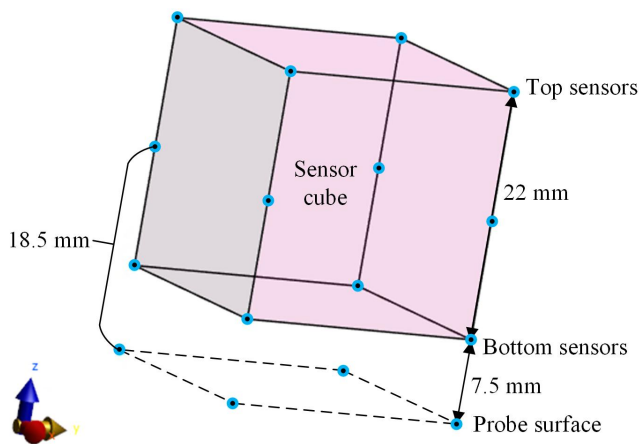

TEST REPORT

Report No.: MTi250221011-0101E1

5.4 Information of test equipment

Test equipment: MAGPy-8H3D+ED3	
Diameter	60mm
8 isotropic H-field sensors	Concentric loops of 1cm ² arranged at the corner of a cube of 22mm side length
1 isotropic E-field sensor	Orthogonal dipole/monopole (arm length: 50mm)
Measurement center	18.5mm from the probe tip
Dimensions	110*635*35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
	
Test probe, without the casing	

Item	Specification
Test frequency range:	3kHz ~ 10MHz
Probe sensitivity	E-field: 0.08-2000 V/m H-field: 0.1-3200 A/m
Probe level response	E-field: ± 1 dB H-field: ± 1 dB
linearity error	E-field: ± 0.3 dB H-field: ± 0.3 dB
Isotropy	E-field: ± 0.8 dB H-field: ± 0.6 dB

TEST REPORT

Report No.: MTi250221011-0101E1

5.5 Test results

All client power has been assessed (1%,50%, 99%), and the 1% battery status of client device was the worst.

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.56	1.63	95.09%
Left	1.55		
Right	0.32		
Front	0.28		
Rear	0.33		
Bottom	0.05		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.27	1.63	28.18%
Left	0.46		
Right	0.27		
Front	0.13		
Rear	0.16		
Bottom	0.04		

TEST REPORT

Report No.: MTi250221011-0101E1

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 4cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.14	1.63	18%
Left	0.293		
Right	0.14		
Front	0.07		
Rear	0.08		
Bottom	0.03		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 6cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.093	1.63	8.98%
Left	0.146		
Right	0.068		
Front	0.046		
Rear	0.064		
Bottom	0.036		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 8cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.07	1.63	7.06%
Left	0.115		
Right	0.045		
Front	0.025		
Rear	0.095		
Bottom	0.05		

TEST REPORT

Report No.: MTi250221011-0101E1

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.053	1.63	5.73%
Left	0.093		
Right	0.013		
Front	0.007		
Rear	0.067		
Bottom	0.003		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.047	1.63	5.4%
Left	0.088		
Right	0.013		
Front	0.006		
Rear	0.062		
Bottom	0.003		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.042	1.63	5.09%
Left	0.083		
Right	0.012		
Front	0.006		
Rear	0.060		
Bottom	0.002		

TEST REPORT

Report No.: MTi250221011-0101E1

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.038	1.63	4.72%
Left	0.077		
Right	0.011		
Front	0.005		
Rear	0.055		
Bottom	0.002		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.034	1.63	4.48%
Left	0.073		
Right	0.010		
Front	0.004		
Rear	0.051		
Bottom	0.001		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.030	1.63	4.17%
Left	0.068		
Right	0.009		
Front	0.003		
Rear	0.047		
Bottom	0.001		

TEST REPORT

Report No.: MTi250221011-0101E1

All client power has been assessed (1%,50%, 99%), and the 1% battery status of client device was the worst.

Test condition 1: Mode5 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.61	1.63	98.71%
Left	1.54		
Right	1.09		
Front	1.61		
Rear	1.45		
Bottom	0.21		

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.46	1.63	80.98%
Left	1.05		
Right	0.68		
Front	1.32		
Rear	0.71		
Bottom	0.33		

TEST REPORT

Report No.: MTi250221011-0101E1

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 4cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.21	1.63	49.69%
Left	0.755		
Right	0.56		
Front	0.81		
Rear	0.53		
Bottom	0.085		

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 6cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.21	1.63	45.50%
Left	0.72		
Right	0.53		
Front	0.74		
Rear	0.45		
Bottom	0.08		

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 8cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.12	1.63	26.38%
Left	0.43		
Right	0.31		
Front	0.42		
Rear	0.26		
Bottom	0.05		

TEST REPORT

Report No.: MTi250221011-0101E1

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.11	1.63	24.54%
Left	0.40		
Right	0.30		
Front	0.39		
Rear	0.22		
Bottom	0.05		

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.09	1.63	23.31%
Left	0.38		
Right	0.27		
Front	0.33		
Rear	0.21		
Bottom	0.04		

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.07	1.63	20.86%
Left	0.34		
Right	0.24		
Front	0.30		
Rear	0.18		
Bottom	0.04		

TEST REPORT

Report No.: MTi250221011-0101E1

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.05	1.63	18.40%
Left	0.30		
Right	0.21		
Front	0.28		
Rear	0.17		
Bottom	0.03		

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.04	1.63	17.79%
Left	0.24		
Right	0.29		
Front	0.22		
Rear	0.13		
Bottom	0.02		

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.03	1.63	13.50%
Left	0.21		
Right	0.22		
Front	0.20		
Rear	0.11		
Bottom	0.02		

TEST REPORT

Report No.: MTi250221011-0101E1

Photographs of the Test Setup

MPE



TEST REPORT

Report No.: MTi250221011-0101E1

MPE



TEST REPORT

Report No.: MTi250221011-0101E1

MPE



TEST REPORT

Report No.: MTi250221011-0101E1

Photographs of the EUT

See the Appendix - EUT Photos.

TEST REPORT

Report No.: MTi250221011-0101E1

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****