

TEST REPORT

Product Name : Massage Chair
Model Number : SY-201A, M1820X, SY-20XX
FCC ID : 2BKHU-SY-201A

Prepared for : Zhejiang Shuyue Health Technology Co.,Ltd.
Address : No.17th Xingyang Road, Furniture Garden, Wanquan
Industry Base, Pingyang County, Wenzhou City, Zhejiang
Province

Prepared by : EMTEK (NINGBO) CO., LTD.
Address : No. 8, Building 8, Lane 216, Qingyi Road, Ningbo Hi-Tech
Zone, Ningbo, Zhejiang, China

Tel: +86-574-27907998
Fax: +86-574-27721538

Report Number : ENB2407310122W00401R
Date(s) of Tests : July 31, 2024 to August 23, 2024
Date of issue : August 31, 2024

Table of Contents

1 TEST RESULT CERTIFICATION	3
2 EUT TECHNICAL DESCRIPTION	5
3 SUMMARY OF TEST RESULT	6
4 TEST METHODOLOGY	7
4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4.2 MEASUREMENT EQUIPMENT USED	7
4.3 DESCRIPTION OF TEST MODES	9
4.4 TEST SOFTWARE	9
5 FACILITIES AND ACCREDITATIONS	10
5.1 FACILITIES	10
5.2 LABORATORY ACCREDITATIONS AND LISTINGS	10
6 TEST SYSTEM UNCERTAINTY	11
7 SETUP OF EQUIPMENT UNDER TEST	12
7.1 RADIO FREQUENCY TEST SETUP 1	12
7.2 RADIO FREQUENCY TEST SETUP 2	12
7.3 CONDUCTED EMISSION TEST SETUP	14
7.4 SUPPORT EQUIPMENT	14
8 FREQUENCY HOPPING SYSTEM REQUIREMENTS	15
8.1 STANDARD APPLICABLE	15
8.2 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	15
8.3 EQUAL HOPPING FREQUENCY USE	16
8.4 FREQUENCY HOPPING SYSTEM	16
9 TEST REQUIREMENTS	17
9.1 20DB BANDWIDTH	17
9.2 CARRIER FREQUENCY SEPARATION	23
9.3 NUMBER OF HOPPING FREQUENCIES	29
9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)	31
9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER	34
9.6 CONDUCTED SUPRIIOUS EMISSION	40
9.7 RADIATED SPURIOUS EMISSION	47
9.8 CONDUCTED EMISSION TEST	61
9.9 ANTENNAAPPLICATION	64

1 TEST RESULT CERTIFICATION

Applicant : Zhejiang Shuyue Health Technology Co.,ltd.

Address : No.17th Xingyang Road, Furniture Garden, Wanquan Industry Base, Pingyang County, Wenzhou City, Zhejiang Province

Manufacturer : Zhejiang Shuyue Health Technology Co.,ltd.

Address : No.17th Xingyang Road, Furniture Garden, Wanquan Industry Base, Pingyang County, Wenzhou City, Zhejiang Province

EUT : Massage Chair

Model Name : SY-201A, M1820X, SY-20XX

Trademark : N/A

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by EMTEK (NINGBO) CO., LTD.The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : July 31, 2024 to August 23, 2024

Prepared by : 
June Gao /Engineer

Reviewer : 
Lucas Xu /Supervisor

Approve & Authorized Signer : 
Tony wei/Manager



Modified History

Version	Report No.	Revision Date	Summary
/	ENB2407310122W00401R	/	Original report



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product Name	Massage Chair
Model number	SY-201A, M1820X, SY-20XX (Note: SY-201A is the factory model, M1820X is the customer model, and the two models are the same sample. SY-20XX is a factory series model, "XX" stands for 1A, 1B, 2A, 2B, 3A, 3B, 5A, 5B, 6A, 6B, 7A, 7B, 8A, 8B, 9A, 9B. All models differ only in appearance. The schematic design, PCB Layout, etc. are the same. The X in the M1820X indicates the range from 0 to 9, A to Z, and all models differ only in appearance, with the same internal components, PCB layout, and principle. We chose SY-201A for RF test.)
Sample number	ENB2407310122W004-1-1
Device Type	Bluetooth V5.0
Data Rate	1Mbps for GFSK modulation 2Mbps for pi/4-DQPSK modulation 3Mbps for 8DPSK modulation
Modulation	GFSK pi/4-DQPSK 8DPSK
Operating Frequency Range	2402-2480MHz
Number of Channels	79 channels
Max Transmit Power	2.36 dBm
Antenna Type	PCB Antenna
Gain	1.7 dBi
Test Voltage	AC 120V, 60Hz
Temperature Range	-5℃ to +35℃
Date of Received	July 31, 2024


Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC PartClause	Test Parameter	Verdict	Remark
15.247(a)(1)	20 dB Bandwidth	PASS	
15.247(a)(1)	Carrier Frequency Separation	PASS	
15.247(a)(1)	Number of Hopping Frequencies	PASS	
15.247(a)(1)	Average Time of Occupancy (Dwell Time)	PASS	
15.247(b)(1)	Maximum Peak Conducted Output Power	PASS	
15.247(c)	Conducted Spurious Emissions	PASS	
15.247(d) 15.209	Radiated Spurious Emissions	PASS	
15.207	Conducted Emission	PASS	
15.203	Antenna Application	PASS	
NOTE1:N/A (Not Applicable)			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2BKHU-SY-201A filing to comply with Section 15.247 of the FCC Part 15, Subpart C.

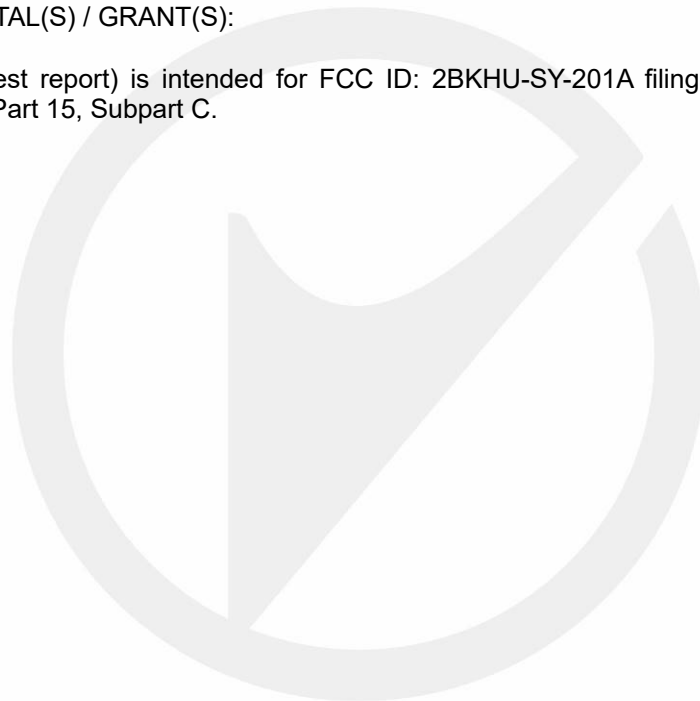

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

Equ.No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
ENE-001	EMI Test Receiver	R & S	ESCI	101108	Dec 14, 2023	1 Year
ENE-158	L.I.S.N	Schwarzbeck	NNLK 8129	0373	Nov 17, 2023	1 Year
ENE-004	L.I.S.N	Schwarzbeck	NSLK 8126	8126-462	July 06, 2023	1 Year
ENE-006	Pulse Limiter	MTS-systemtechnik	IMP-136	2611115-001-0033	July 06, 2023	1 Year
ENE-278	RF Switching Unit	HTEC	HRSU	222101	July 06, 2023	1 Year
ENE-083	RF Cable	Hubber Suhner/Swiss	CBL-RE-3	/	May 30, 2024	1 Year
ENE-162-2	RF Cable	TIMES	2M(N-N)	605236-0002	May 30, 2024	1 Year
ENE-149	Conduction Test Room 1#	SKET	11.5*5*4m	/	Dec 17, 2021	3 Year

4.2.2 Radiated Emission Test Equipment

Equ. No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
ENE-186	EMI Test Receiver	R&S	ESR7	102487	Apr 25, 2024	1 Year
ENE-009	Pre-Amplifier	CD	PAP-0203	22015	July 06, 2023	1 Year
ENE-010	Bilog Antenna	Schwarzbeck	VULB 9163	9163-467	July 11, 2022	2 Year
ENE-061	Attenuator 6dB	Bracke	BM10008.6	N/A	July 06, 2023	1 Year
ENE-025-1	RF Cable	CD	CBL3-NN-3m	100319-2140500-1	Apr 14, 2024	1 Year
ENE-025-2	RF Cable	CD	CBL3-NN-0.5m	100319-2140500-2	Apr 14, 2024	1 Year
ENE-137-1	RF Cable	CD	CBL3-NN-6m	101216-2146000-1	Apr 14, 2024	1 Year
ENE-137-2	RF Cable	CD	CBL3-NN-6m	101216-2146000-2	Apr 14, 2024	1 Year
ENE-146	3-Meter Anechoic Chamber1#	SKET	9*6*6m	/	Apr 17, 2023	3 Year

4.2.3 Radio Frequency Test Equipment

Equ. No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
ENE-256	EXA Signal Analyzer	Keysight	N9010B	MY62060219	July 02, 2024	1 Year
ENE-172	RF Control Unit	Tonscend	JS0806-2(V.6E)	21L8060521	February 27, 2024	1 Year
ENE-092	DC Power Supply	KEFUNA	KDP3603	2004D3062946	July 02, 2024	1 Year



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for Bluetooth GFSK modulation; 2Mbps for Bluetooth pi/4-DQPSK modulation; 3Mbps for Bluetooth 8DPSK) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth V5.0

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	...	...
1	2403	40	2442	76	2478
2	2404	41	2443	77	2479
...	...	...	...	78	2480

Note: $f_c = 2402\text{MHz} + (k-1) \times 1\text{MHz}$ $k=1$ to 79

Test Frequency and Channel for Bluetooth V5.0

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	78	2480

4.4 TEST SOFTWARE

Item	Software
Radiated Emission:	FCC (V2.23)
Conducted Emission	FCC (V2.23)

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 8, Building 8, Lane 216, Qingyi Road, Ningbo Hi-Tech Zone, Ningbo, Zhejiang, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 32.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: **Accredited by CNAS**

The Certificate Registration Number is L6666.

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2018 (identical to ISO/IEC 17025:2017)

Designation by FCC

Designation Number: CN1354

Test Firm Registration Number: 427606

Accredited by A2LA

The certificate is valid until May 31, 2025

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0114

Test Firm Registration Number: 9469A

Name of Firm

: EMTEK (NINGBO) CO., LTD.

Site Location

: No. 8, Building 8, Lane 216, Qingyi Road, Ningbo Hi-Tech Zone, Ningbo, Zhejiang, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%



7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2014 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

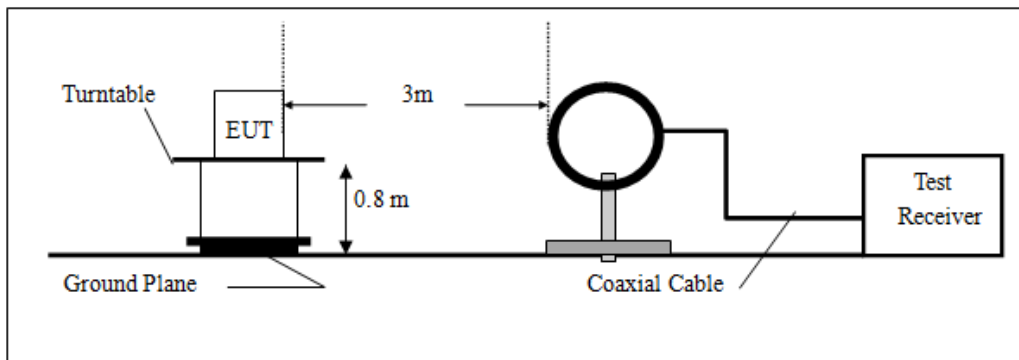

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

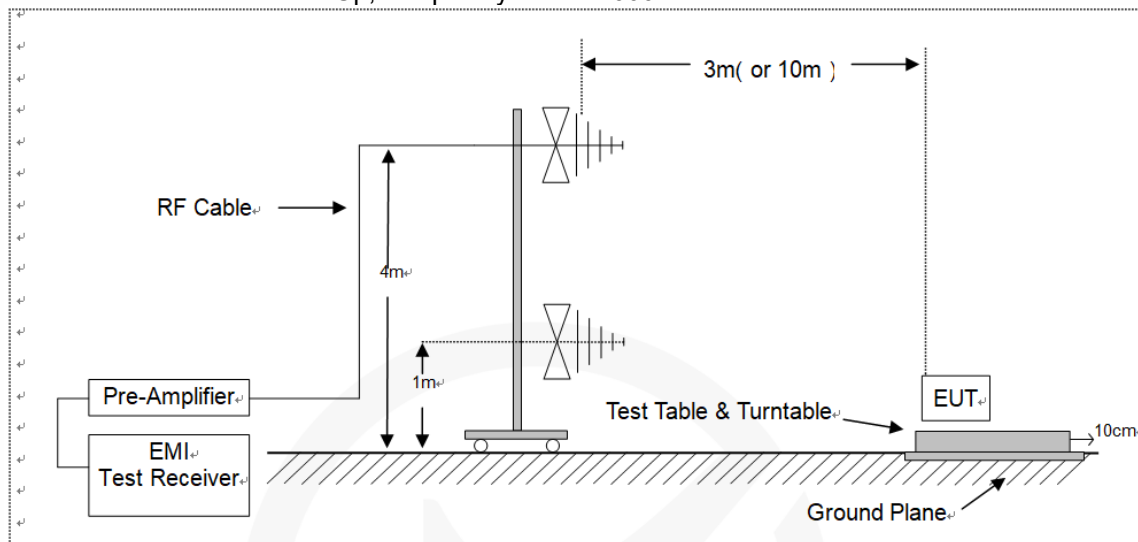

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

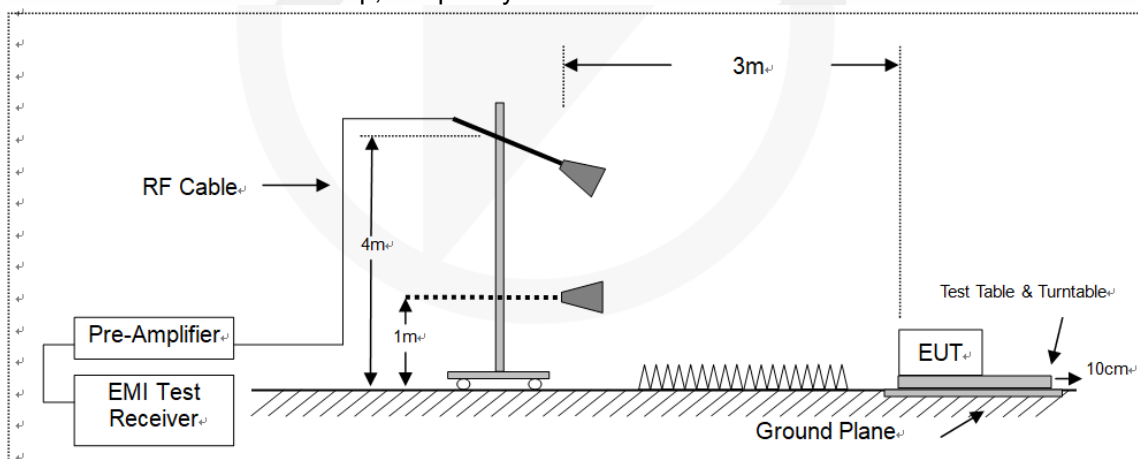


7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Game fitness board) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2014 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

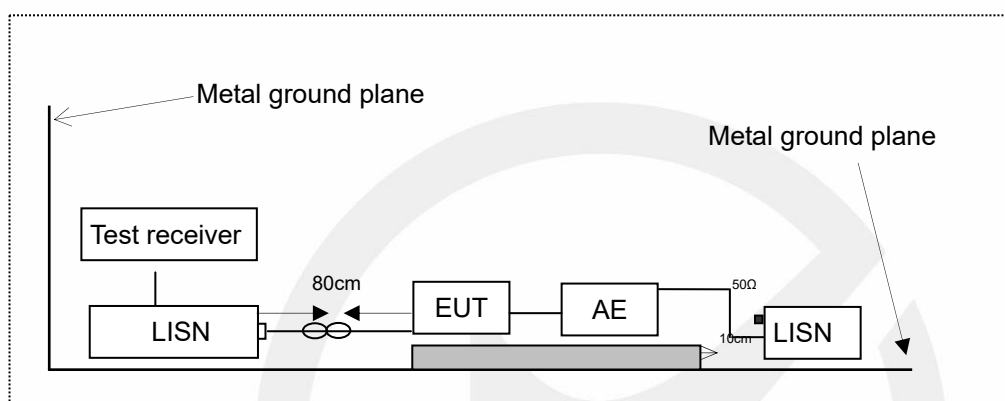

7.4 SUPPORT EQUIPMENT

EUT Cable List and Details

Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Cable List and Details

Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 FREQUENCY HOPPING SYSTEM REQUIREMENTS

8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

8.2 EUT Pseudorandom Frequency Hopping Sequence


The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels.

The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

Longest sequence of zeros: 8 (non-inverted signal)

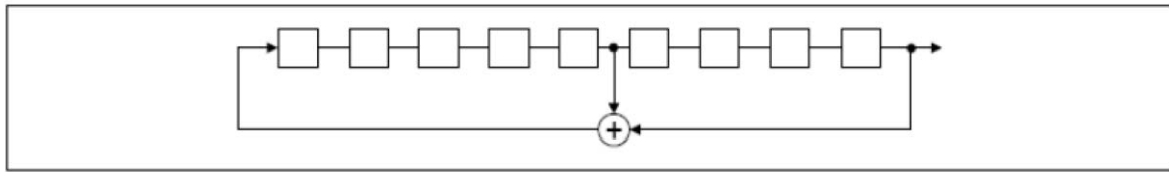

Linear Feedback Shift Register for Generation of the PRBS sequence

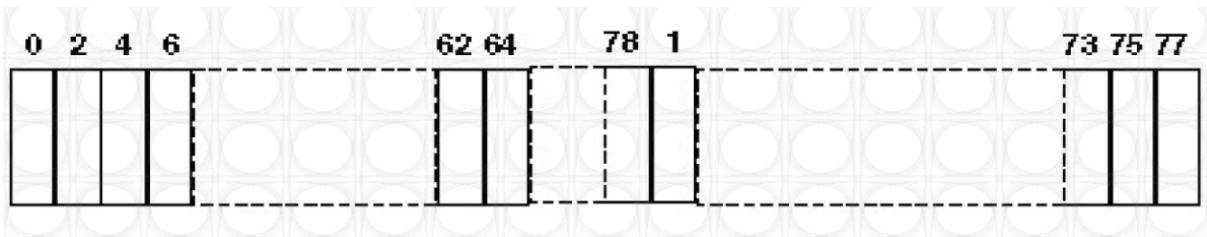

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode:

35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53

Each Frequency used equally on the average by each transmitter

8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

9 TEST REQUIREMENTS

9.1 20DB BANDWIDTH

Applicable Standard

According to FCC Part 15.247(a)(1) and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

No limit requirement.

Test Configuration

Test according to clause 7.1 radio frequency test setup 1

Test Procedure

The EUT was operating in Bluetooth V5.0 and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) = 100kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.


Measure and record the results in the test report.


Test Results



Temperature: 27 °C
Humidity: 56 %


Test Date: August 13, 2024
Test By: Lucas Xu

Modulation Mode	Channel Number	Channel Frequency (MHz)	20dB Bandwidth (MHz)
GFSK	0	2402	1.018
	39	2441	1.041
	78	2480	1.046
pi/4-DQPSK	0	2402	1.276
	39	2441	1.303
	78	2480	1.342
8DPSK	0	2402	1.257
	39	2441	1.297
	78	2480	1.298

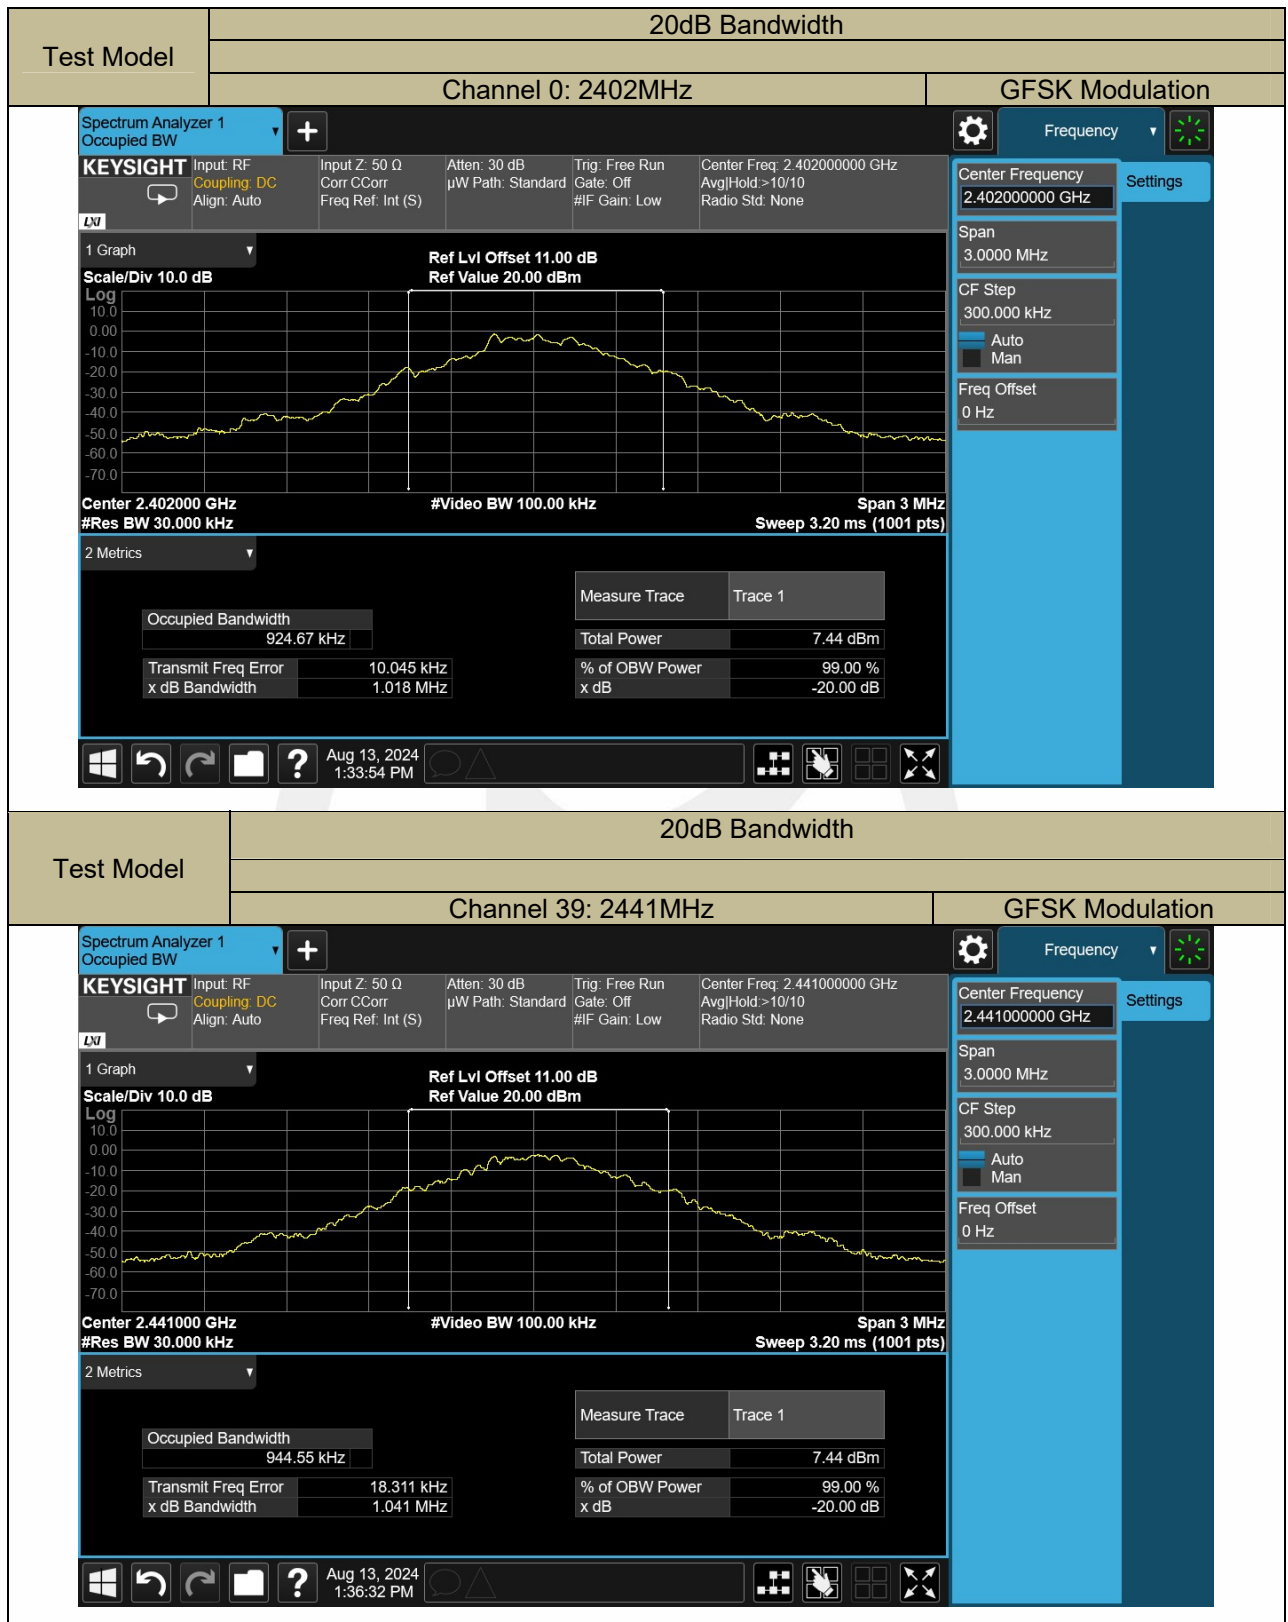

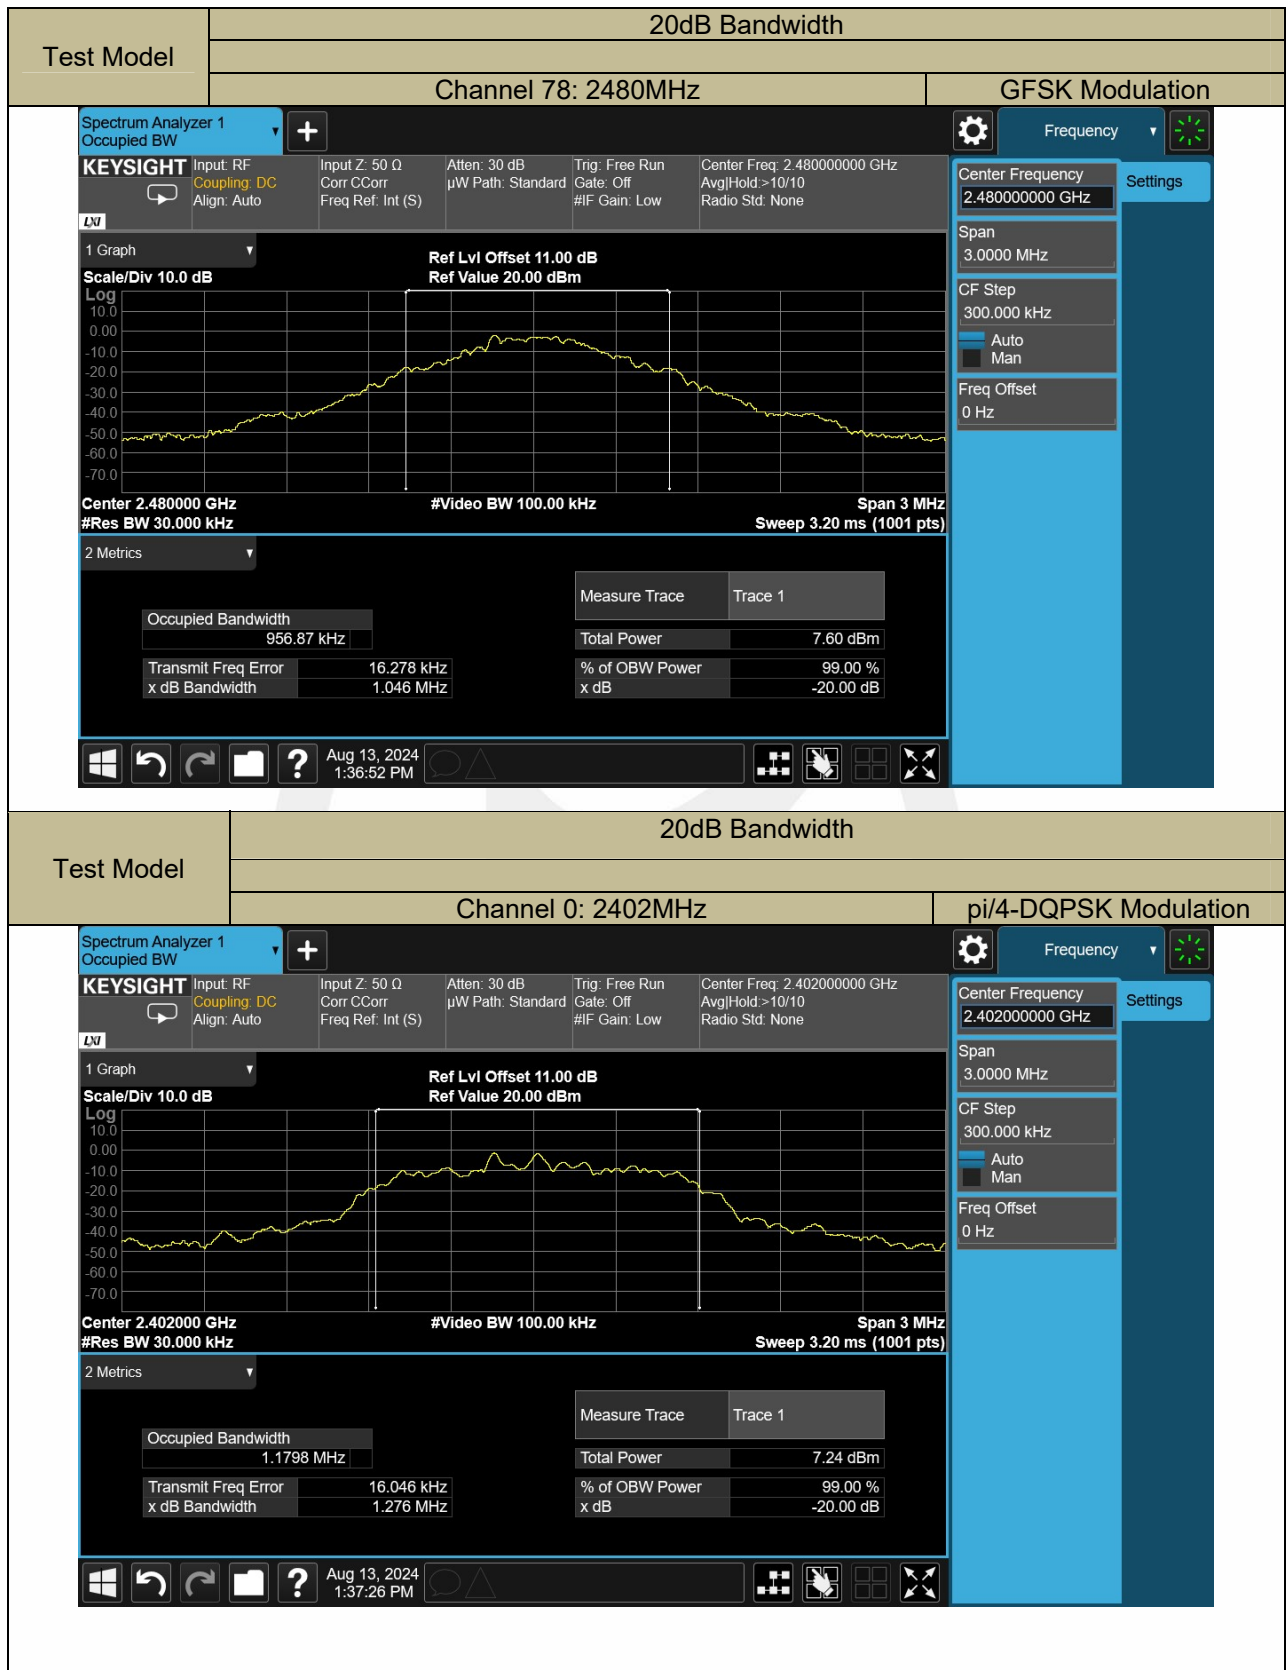

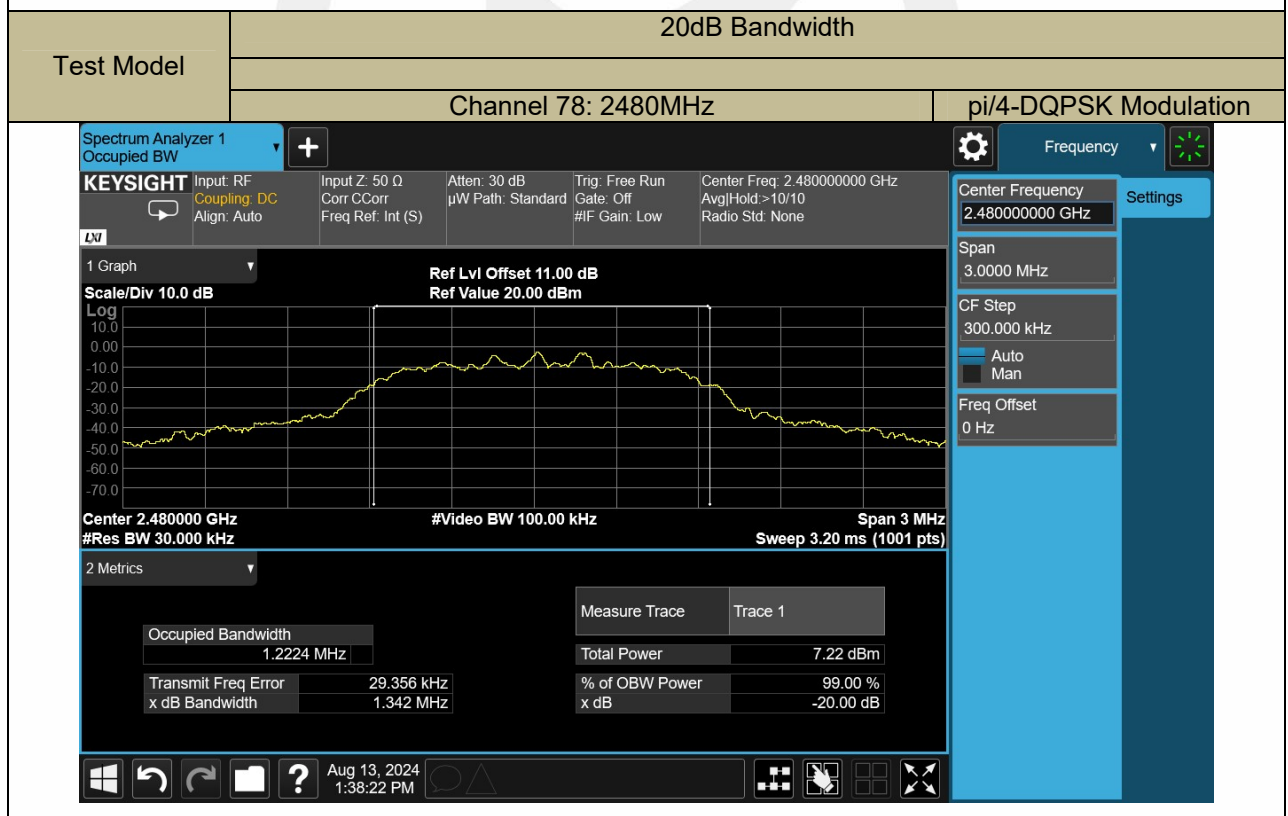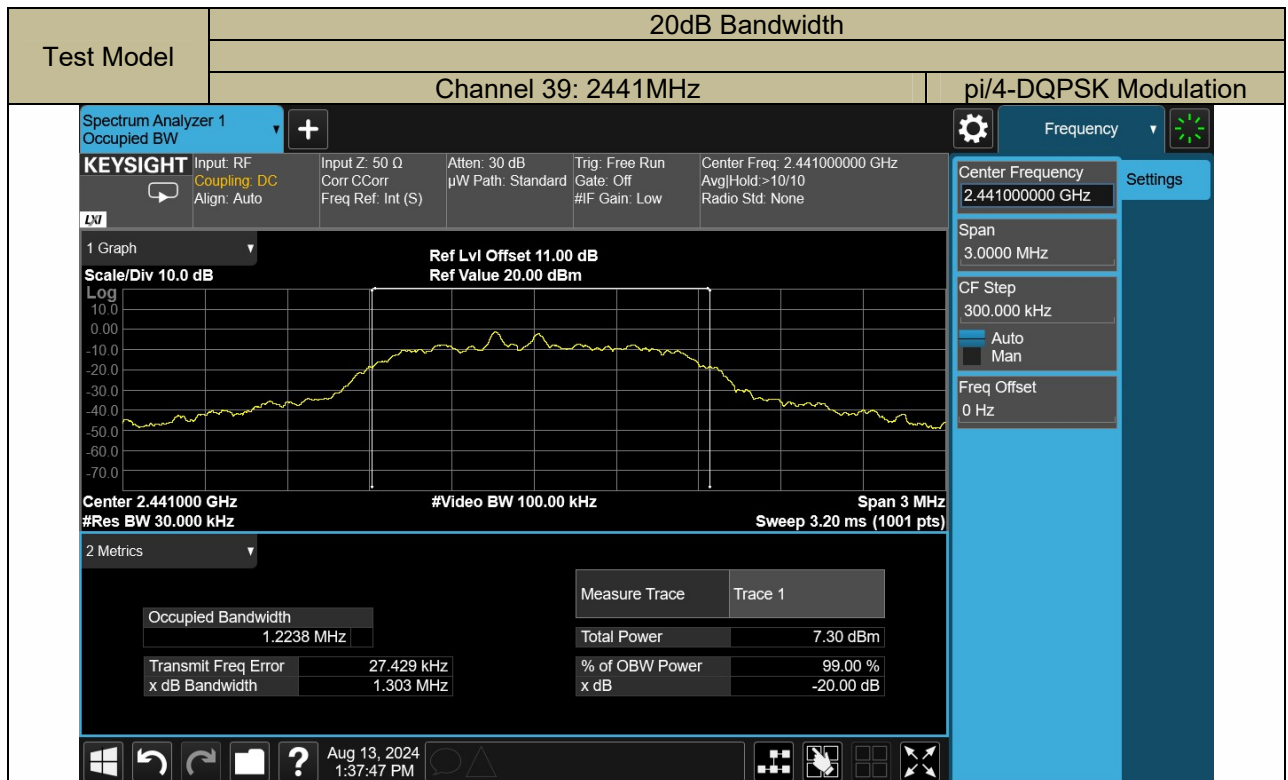

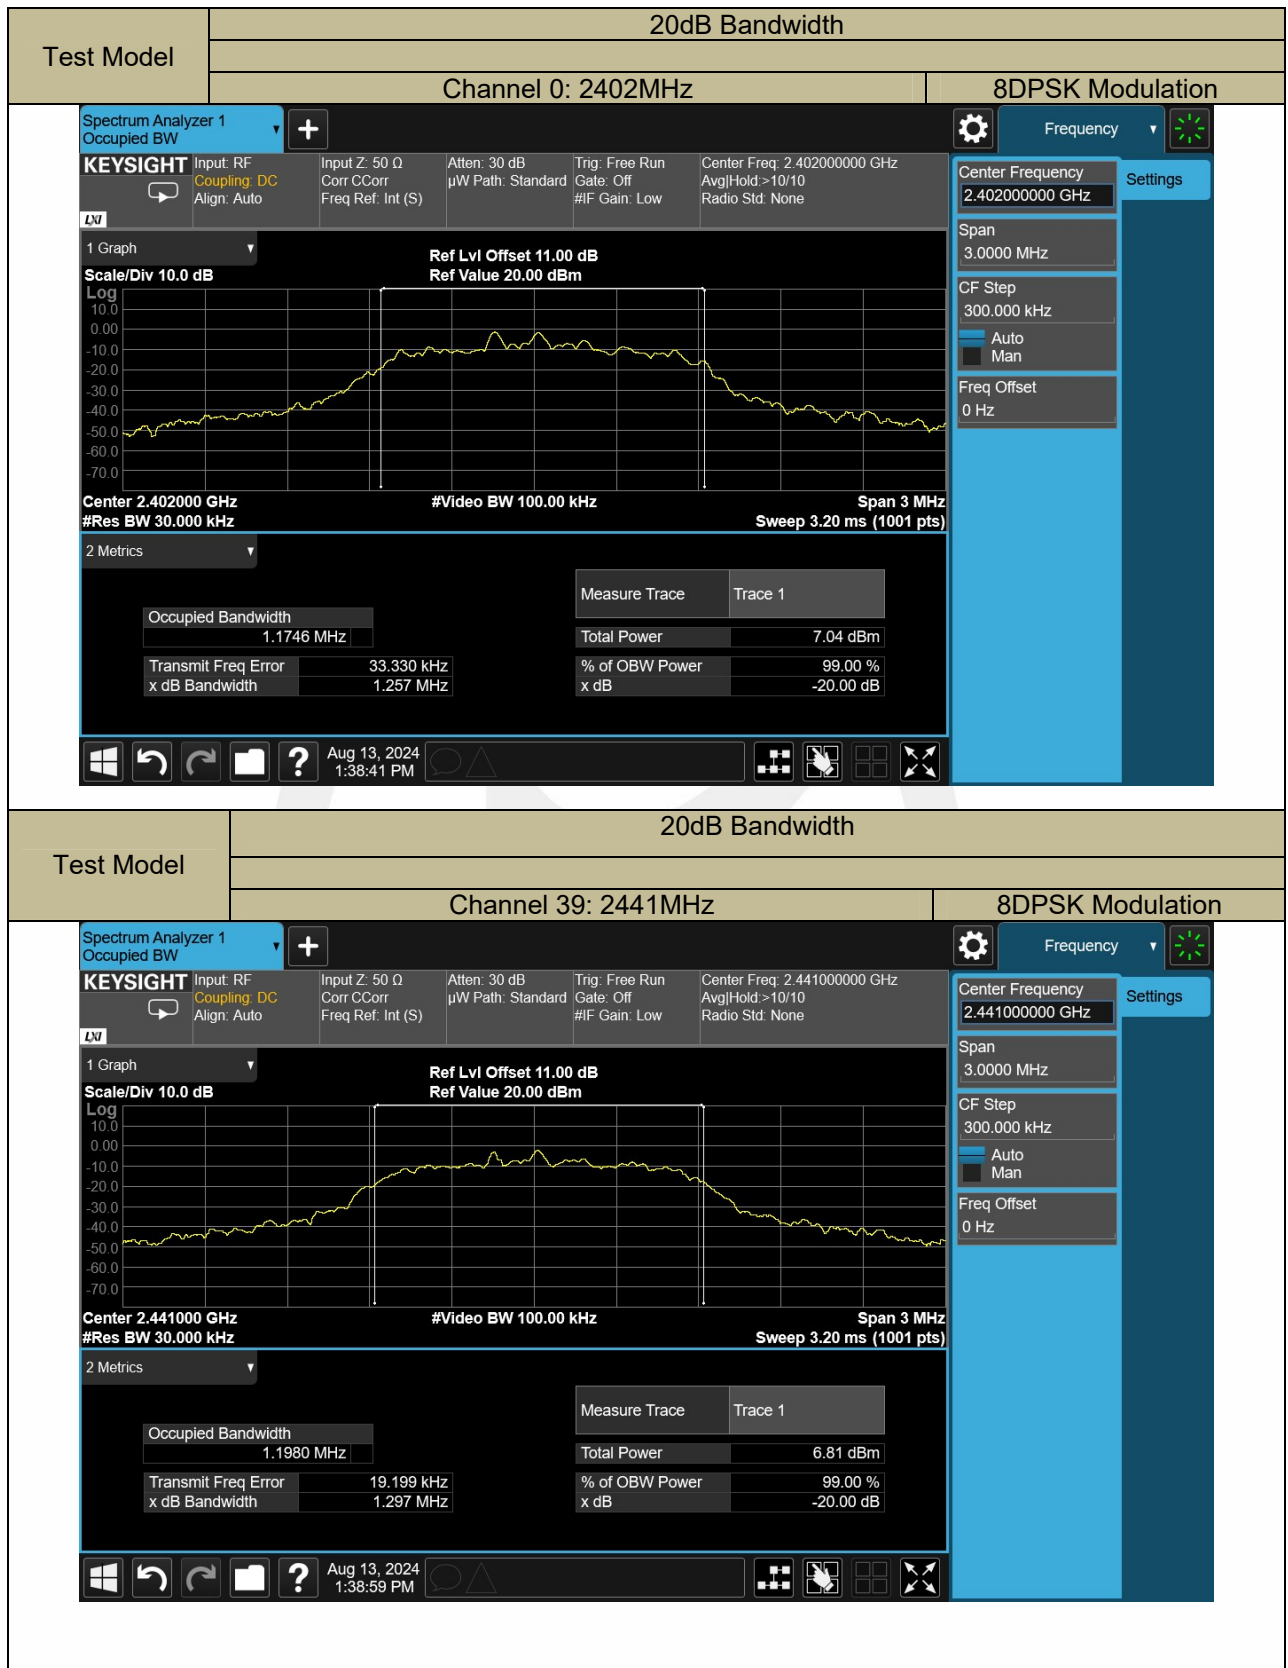



9.2 CARRIER FREQUENCY SEPARATION

Applicable Standard

According to FCC Part 15.247(a)(1) and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

Test Configuration

Test according to clause 7.1 radio frequency test setup 1

Test Procedure

- According to FCC Part 15.247(a)(1)
The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Set the RBW = 100kHz. Set VBW = 300kHz.
Set the span = wide enough to capture the peaks of two adjacent channels
Set Sweep time = auto couple.
Set Detector = peak. Set Trace mode = max hold.
Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.


Test Results

Temperature: 27 °C Test Date: August 13, 2024
Humidity: 56% Test By: Lucas Xu

Modulation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	0	2402	0.999	>0.68	PASS
	39	2441	1.005	>0.69	PASS
	78	2480	0.996	>0.70	PASS
pi/4-DQPSK	0	2402	1.005	>0.85	PASS
	39	2441	0.999	>0.87	PASS
	78	2480	0.999	>0.89	PASS
8DPSK	0	2402	0.999	>0.84	PASS
	39	2441	0.993	>0.86	PASS
	78	2480	0.999	>0.87	PASS


Note: Limit = 20dB bandwidth * 2/3, if it is greater than 25kHz and the output power is less than 125mW (21dBm).



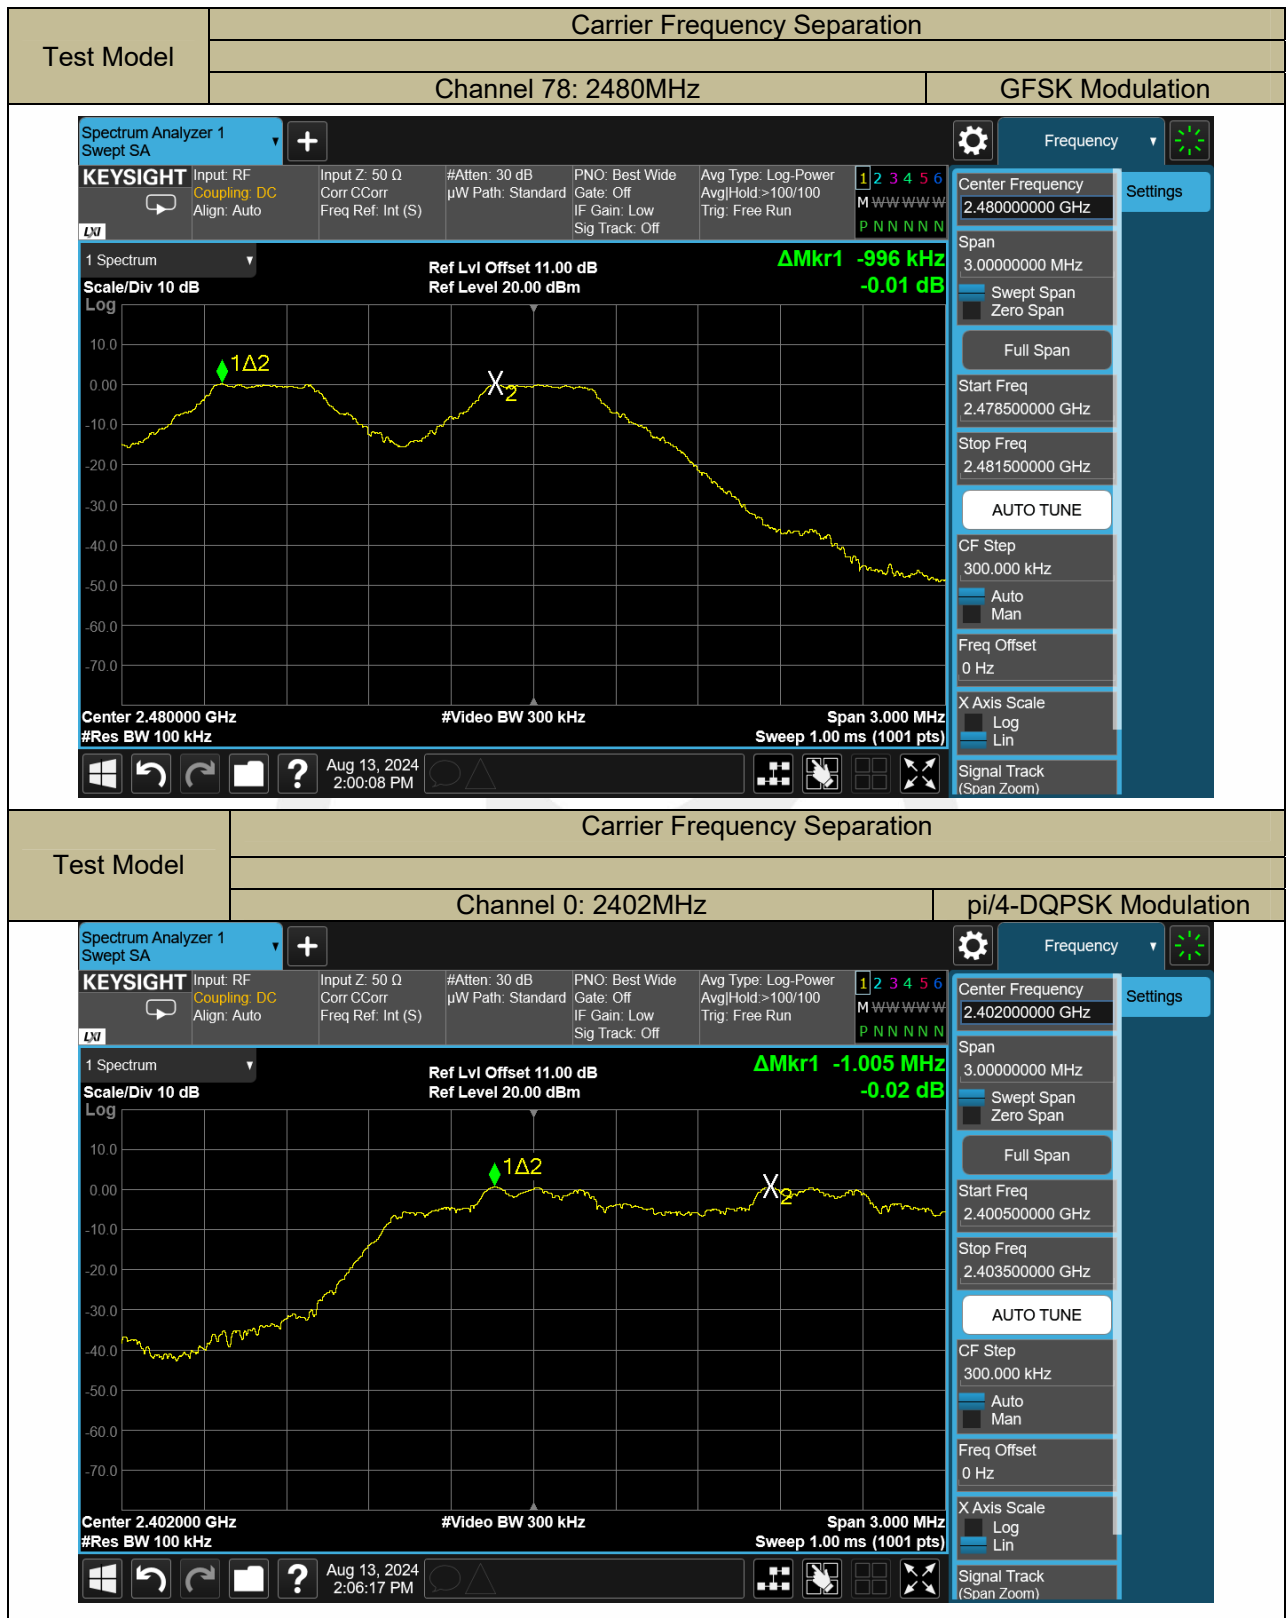





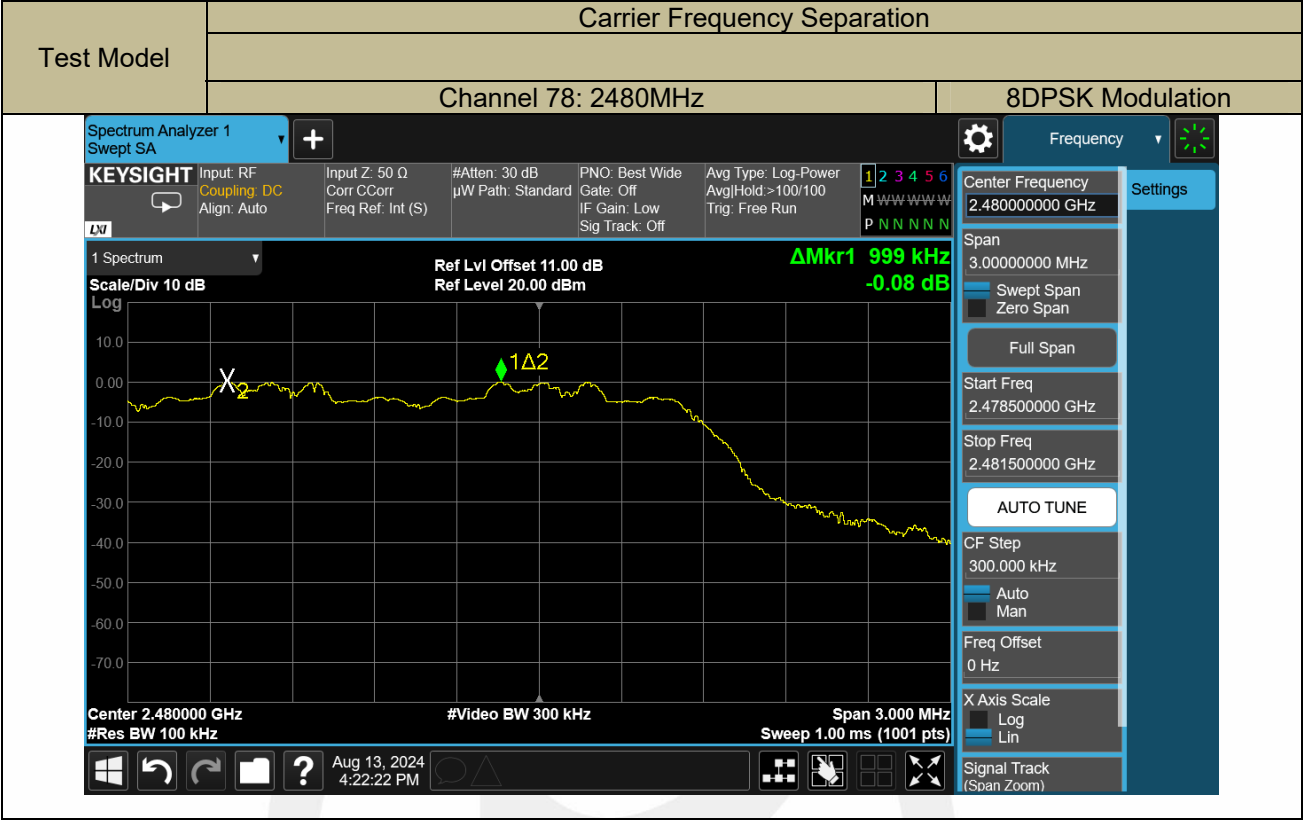

9.3 NUMBER OF HOPPING FREQUENCIES

Applicable Standard

According to FCC Part 15.247(a)(1) (iii) and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

Test Configuration

Test according to clause 7.1 radio frequency test setup 1

Test Procedure

- According to FCC Part 15.247(a)(1)(iii)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

Test Results

Temperature: 27 °C
Humidity: 56 %

Test Date: August 17, 2024
Test By: Lucas Xu

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel limit
2402-2480 (GFSK)	79	> 15
Note: Both BR & EDR mode has same result .		

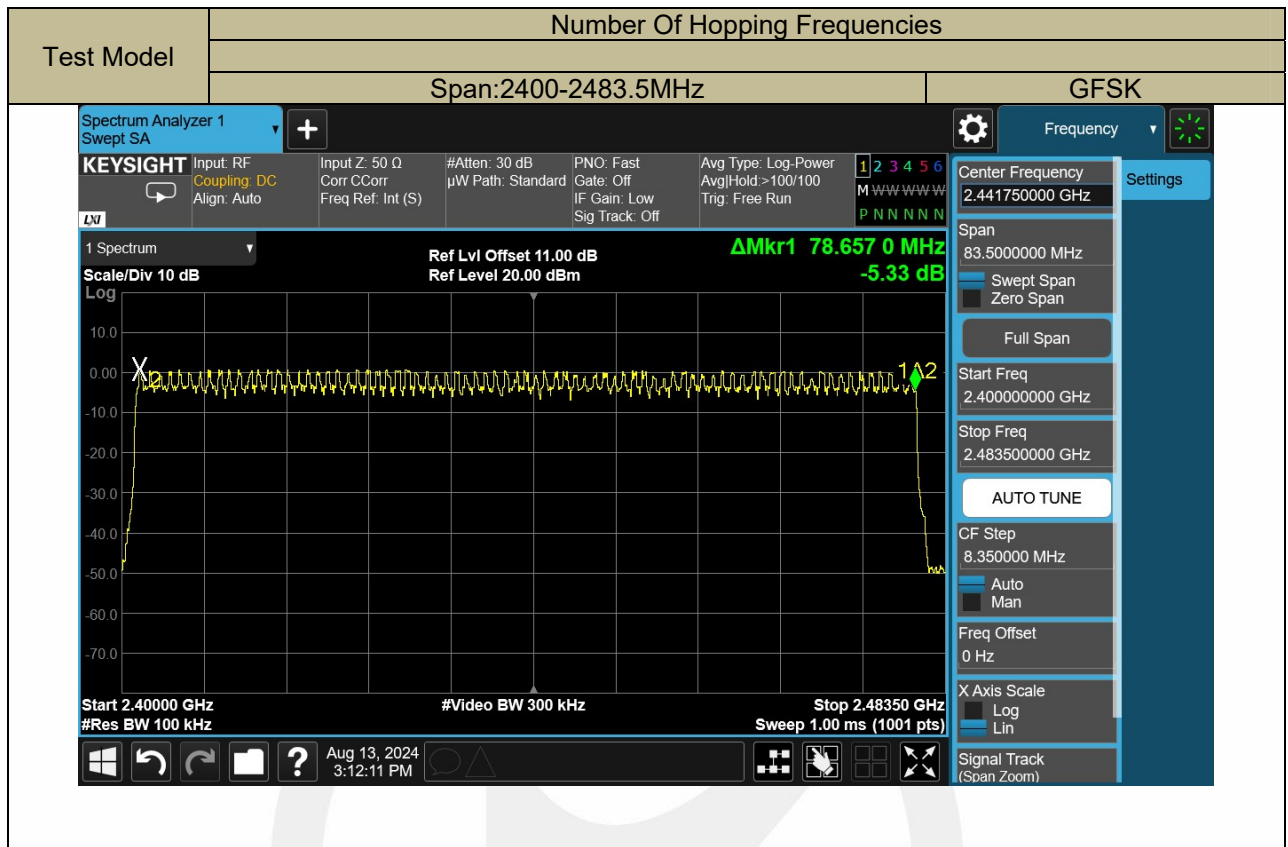

9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

For frequency hopping systems operating in the 2400-2483.5MHz band, the averagetime of occupancy on any channel shall not be greater than 0.4s within a period of 0.4smultiplied by the number of hopping channels employed.

Test Configuration

Test according to clause 7.1 radio frequency test setup 1

Test Procedure

- According to FCC Part15.247(a)(1)(iii)
The EUT must have its hopping function enabled. Use the following spectrum analyzersettings:
Span = zero span, centered on a hopping channel
RBW = 1 MHz
VBW ≥ RBW
Sweep = as necessary to capture the entire dwell time per hopping channel
Detector function = peak
Trace = max hold
If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphsof this Section.

Test Results

Temperature: 26 °C Test Date: June 17, 2024
Humidity: 62 % Test By: Lucas Xu


Modulation Mode	Channel Number	Packet type	Pluse width (ms)	DwellTime (ms)	Limit (ms)	Verdict
GFSK	0	DH1	0.378	118.72	<400	PASS
	0	DH3	1.620	259.20	<400	PASS
	0	DH5	2.868	305.92	<400	PASS


Note1: $DwellTime(DH1) = PW * (1600/2/79) * 31.6$

$DwellTime(DH3) = PW * (1600/4/79) * 31.6$

$DwellTime(DH5) = PW * (1600/6/79) * 31.6$

Note2: Bluetooth (GFSK, pi/4-DQPSK, 8DPSK)mode have been tested, and the worst results has been recorded on the follow page.

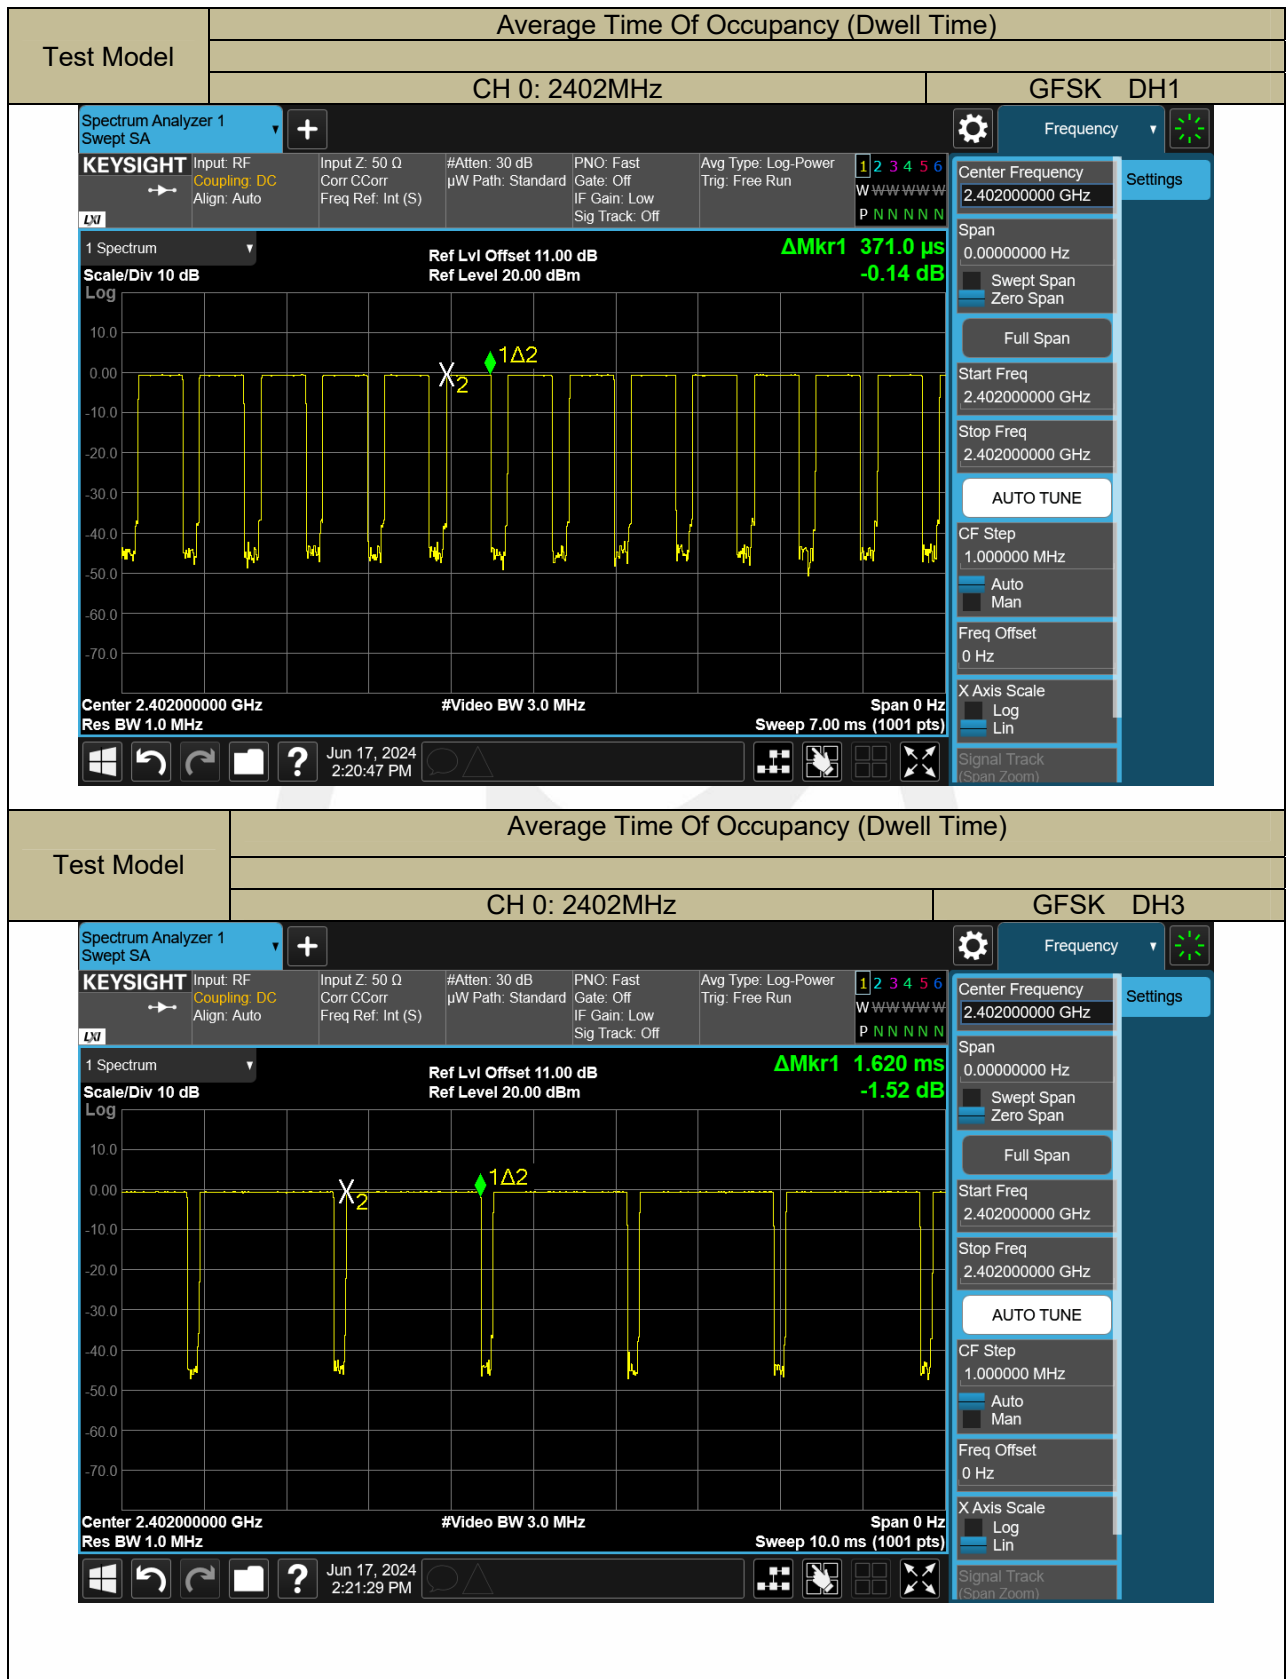

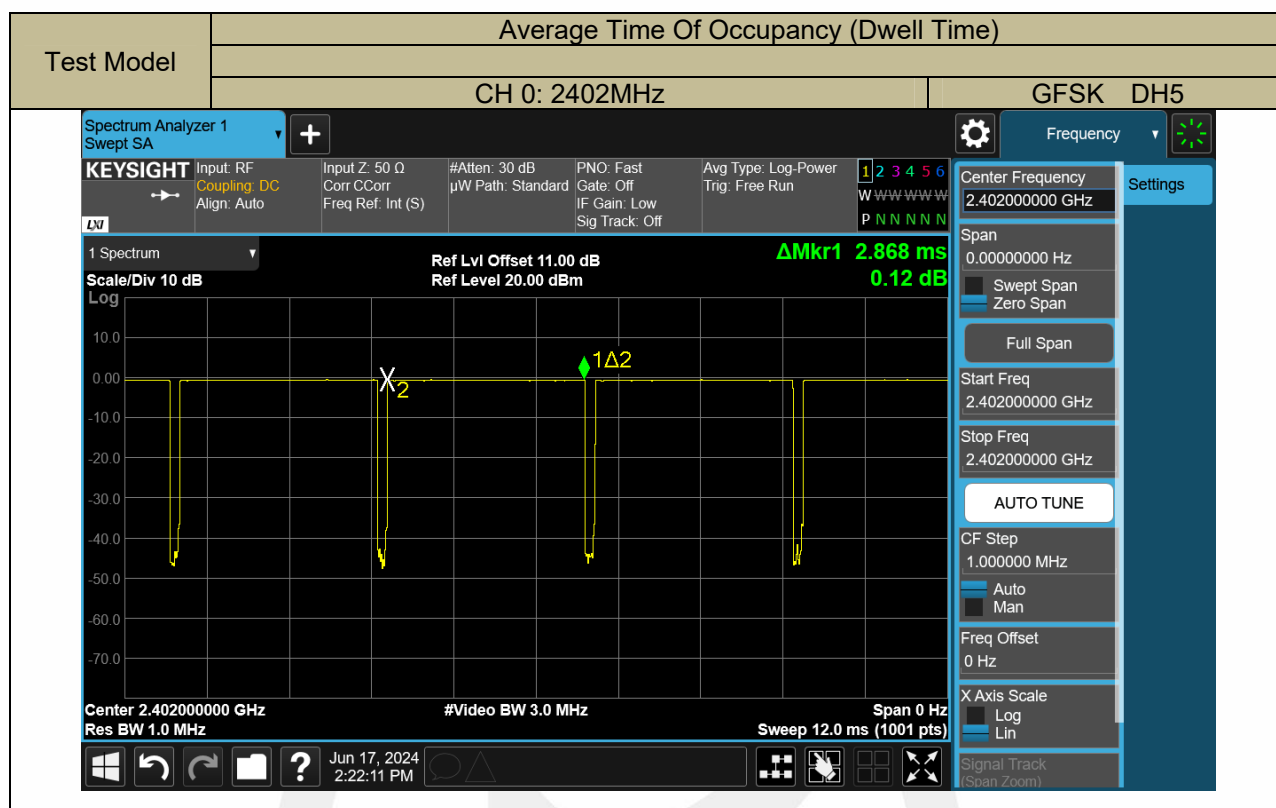

9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC Part 15.247(b)(1) and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Test Configuration

Test according to clause 7.1 radio frequency test setup 1

Test Procedure

■ According to FCC Part15.247(b)(1)

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel(about 10MHz)

Set RBW > the 20 dB bandwidth of the emission being measured(about 3MHz)

Set VBW $\geq$ RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

Test Results


Temperature: 27 °C


Humidity: 56%


Test Date: August 17, 2024


Test By: Lucas Xu


Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
GFSK	0	2402	1.01	21	PASS
	39	2441	0.74	21	PASS
	78	2480	0.54	21	PASS
pi/4-DQPSK	0	2402	1.76	21	PASS
	39	2441	1.59	21	PASS
	78	2480	1.36	21	PASS
8DPSK	0	2402	2.36	21	PASS
	39	2441	2.00	21	PASS
	78	2480	1.78	21	PASS
Note:N/A					

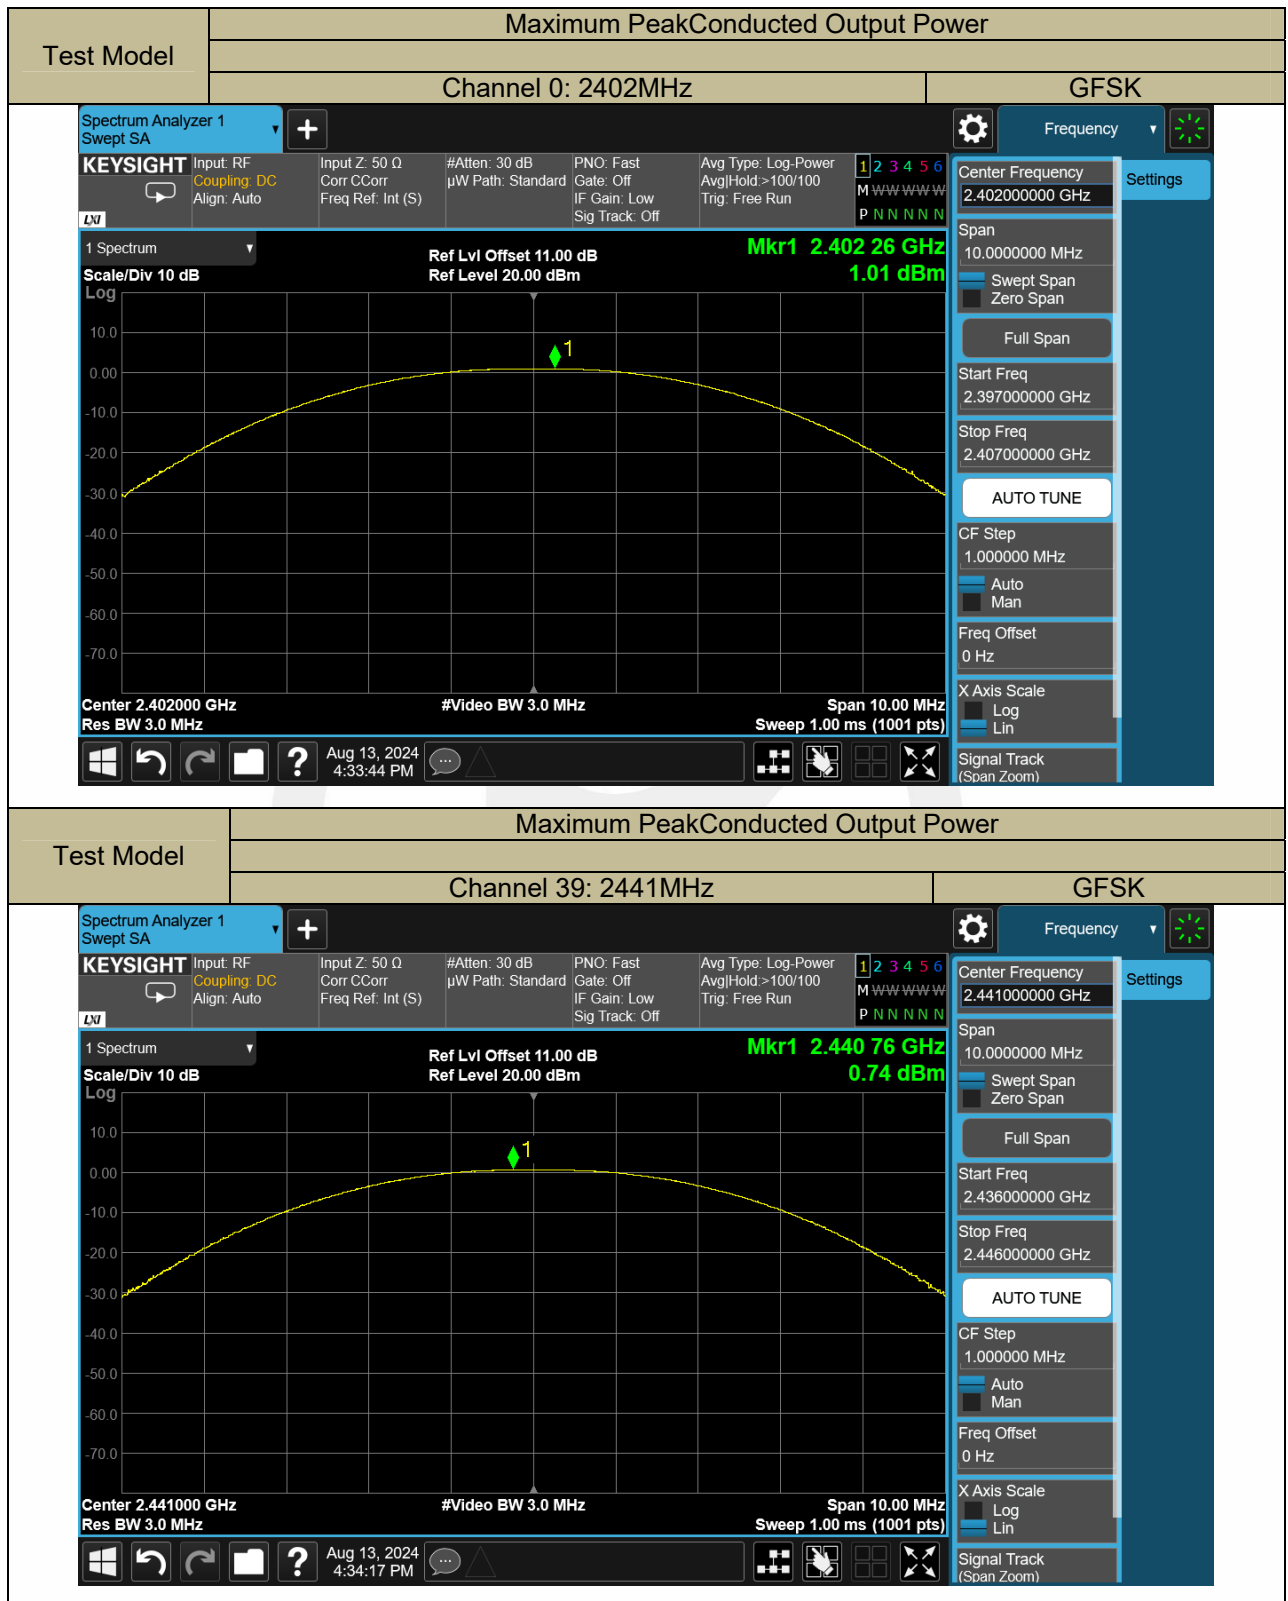

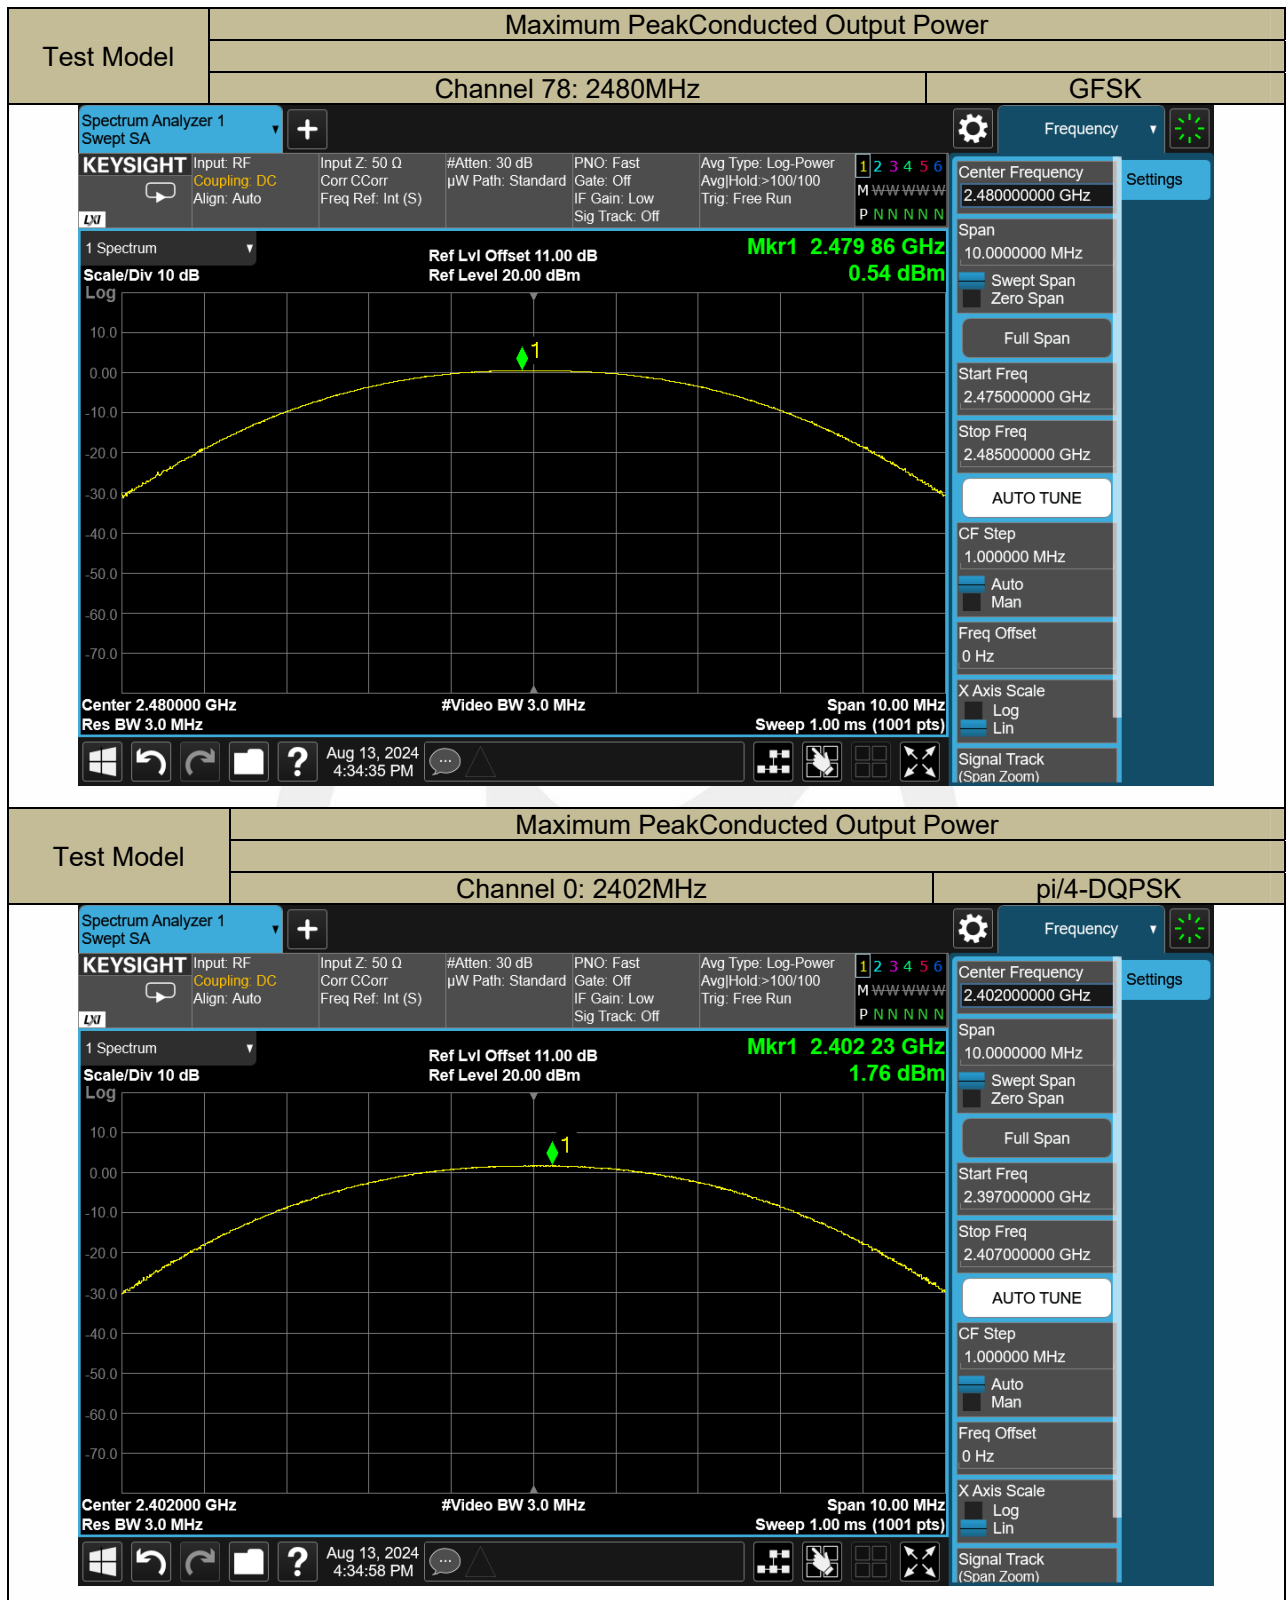

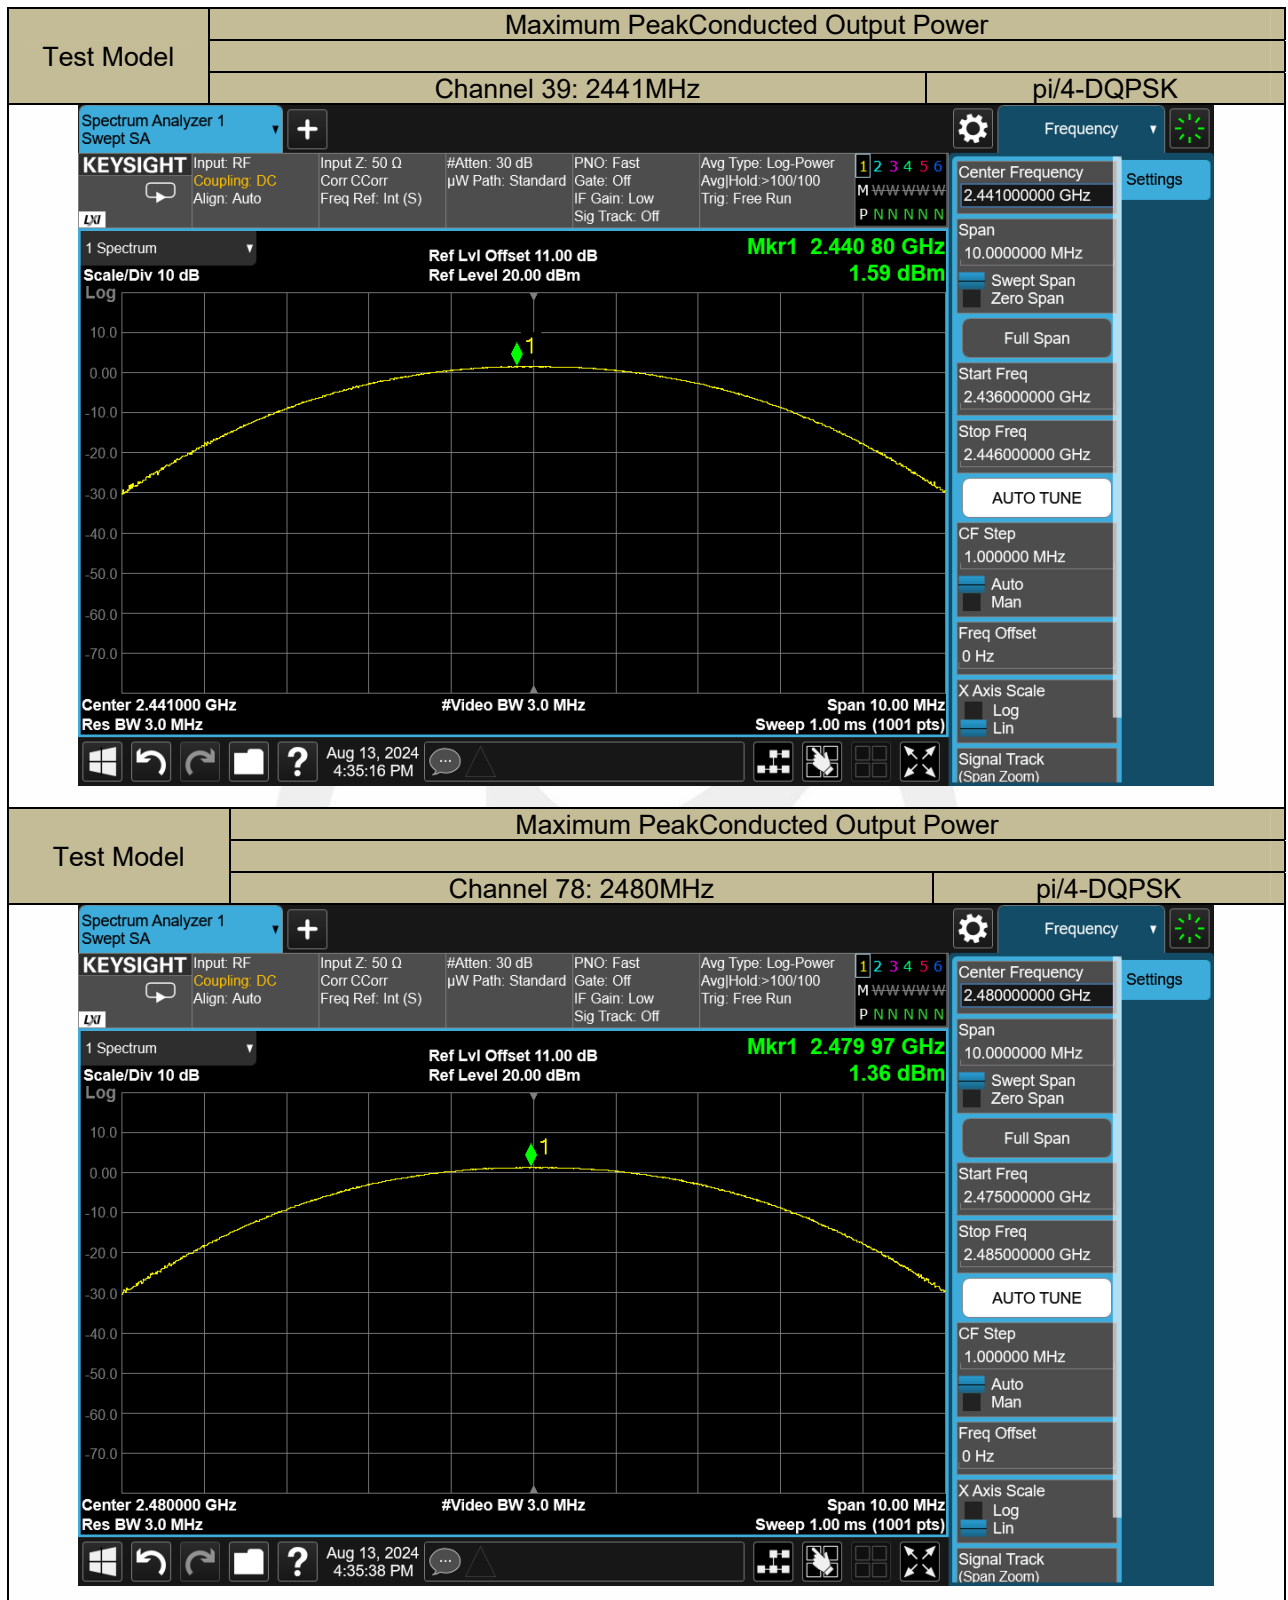

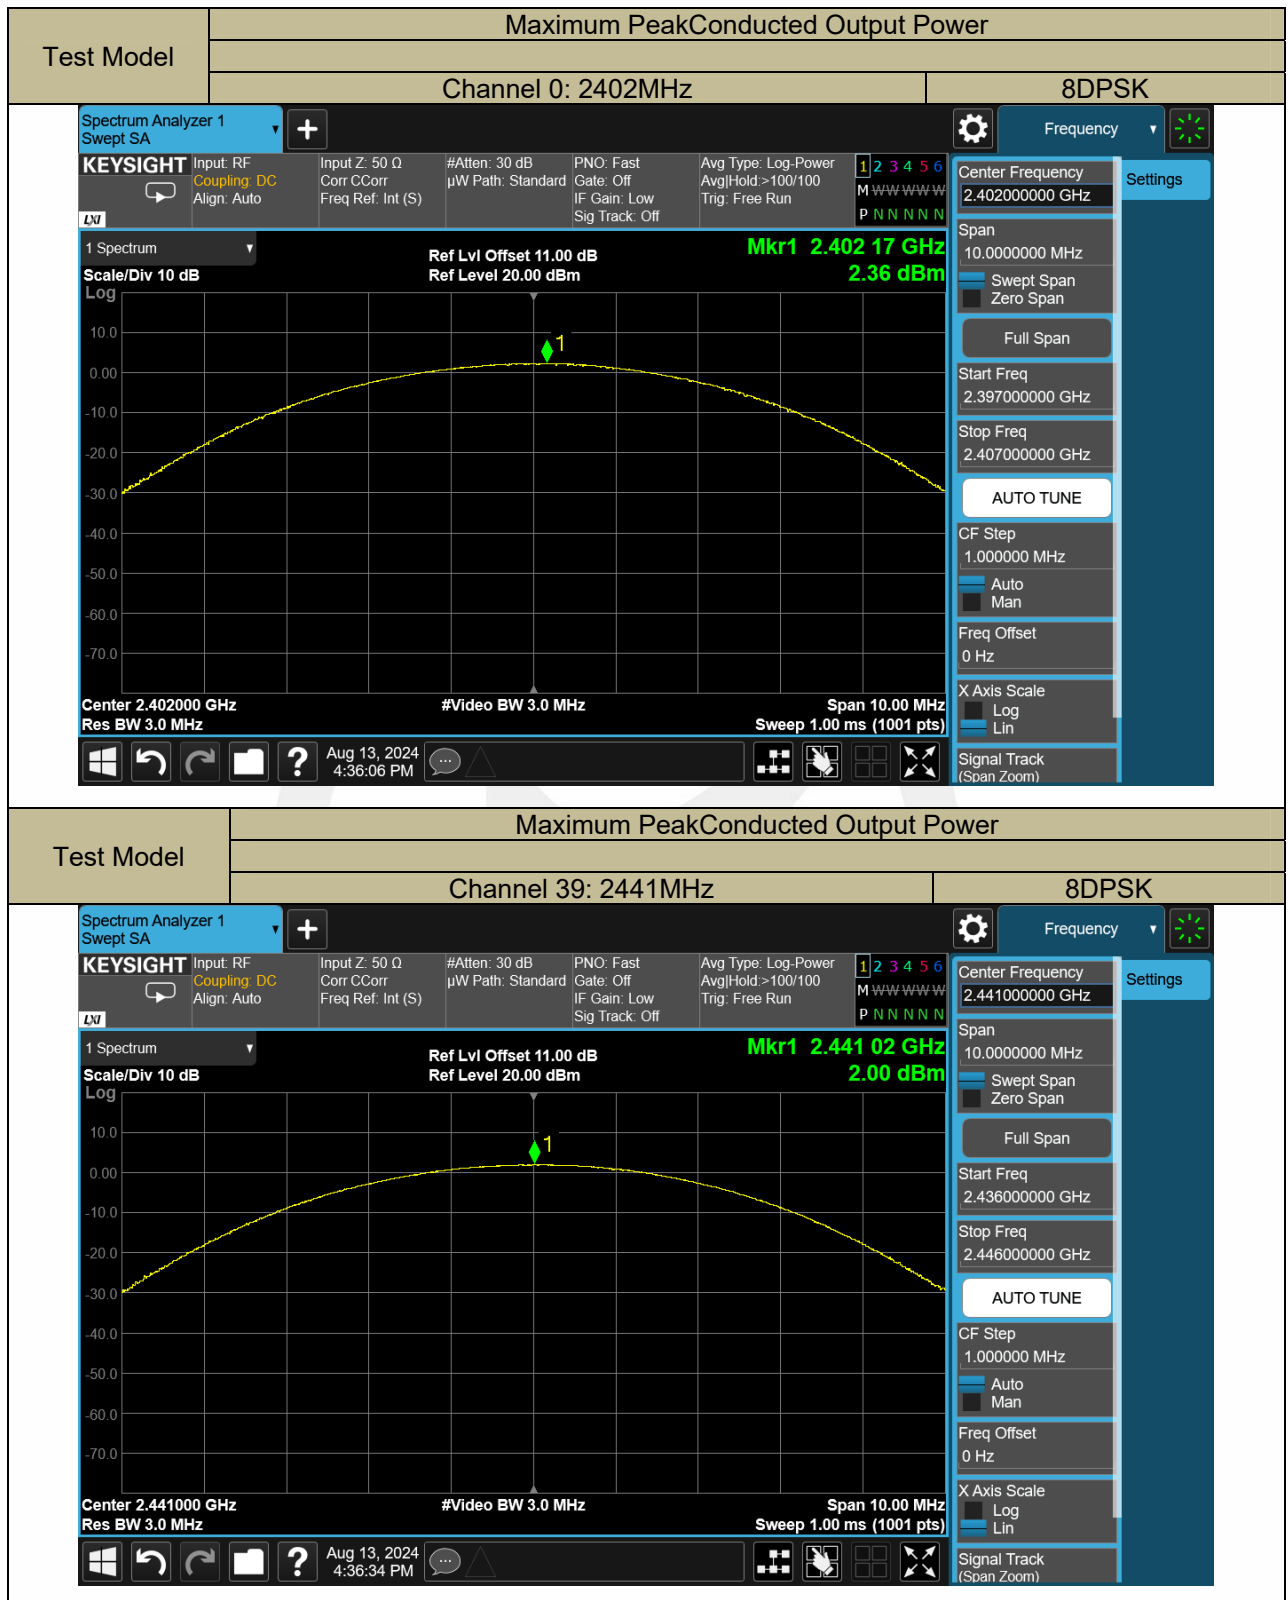

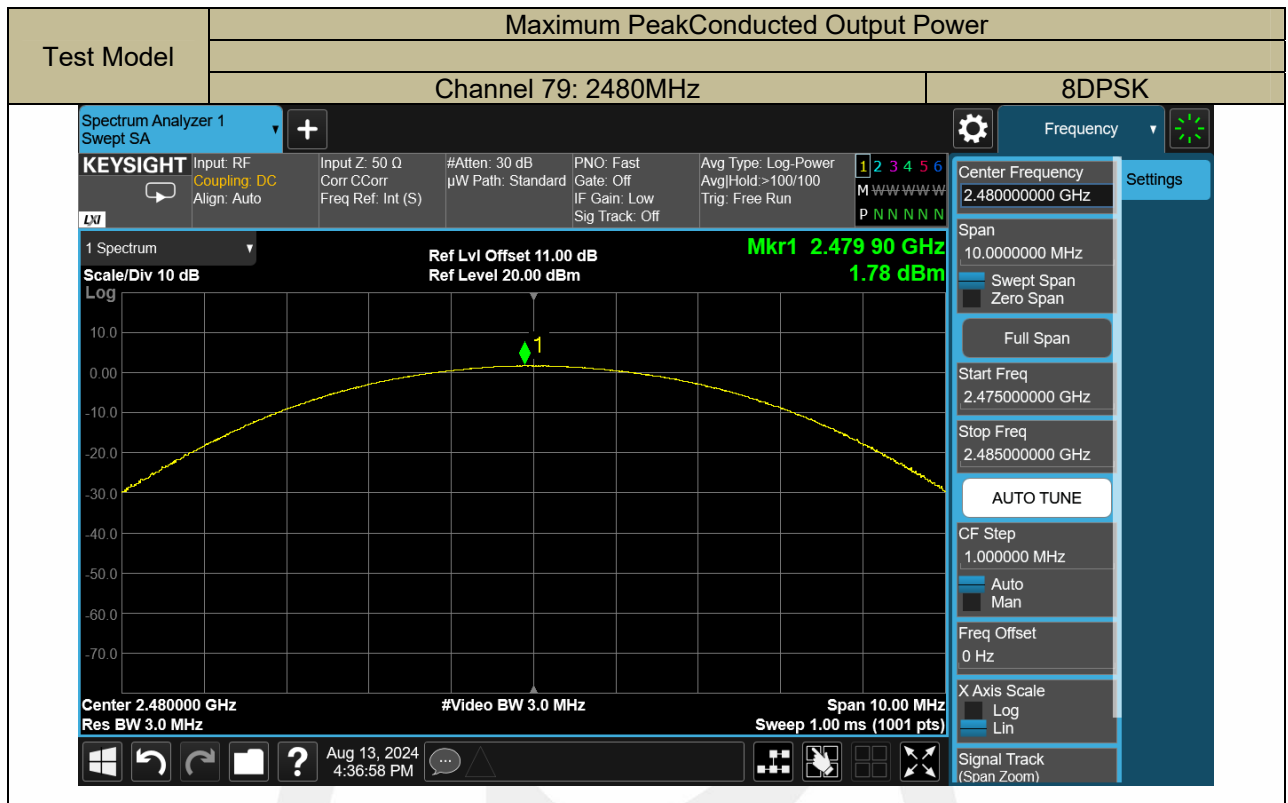

9.6 CONDUCTED SUPRIIOUS EMISSION

Applicable Standard

According to FCC Part 15.247(d) and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

Test according to clause 7.1 radio frequency test setup 1

Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximumconducetedlevel.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

■ Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW $\geq 1\%$ of the span=100kHzSet VBW $\geq$ RBW

Set Sweep = autoSetDetector function = peakSetTrace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

■ ConducetedSpurious RF Conducted Emission

Use the following spectrum analyzer settings:


Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz).Set RBW = 100 kHzSetVBW $\geq$ RBW


Set Sweep = autoSetDetector function = peakSetTrace = max hold



Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.


Test Results



Bluetooth (GFSK, pi/4-DQPSK,8DPSK) mode have been tested, and the worst result(GFSK)was report as below:

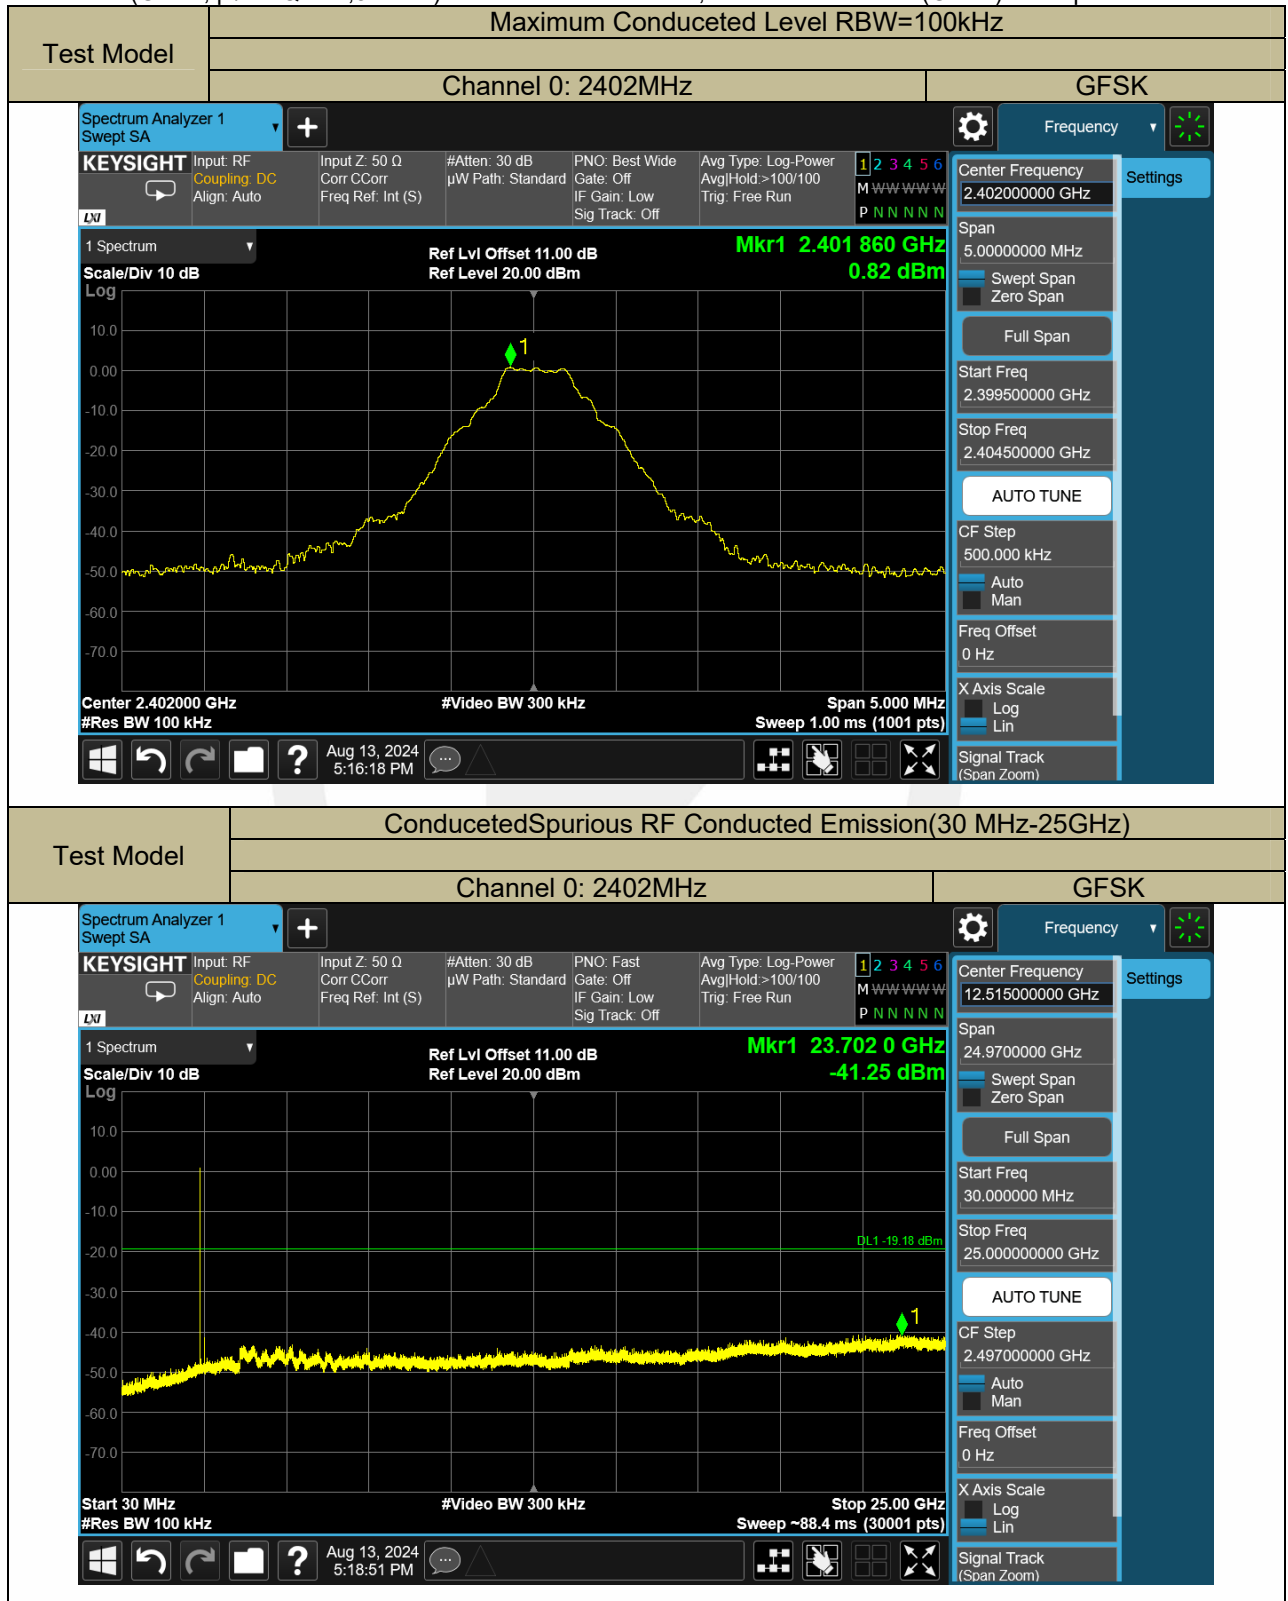


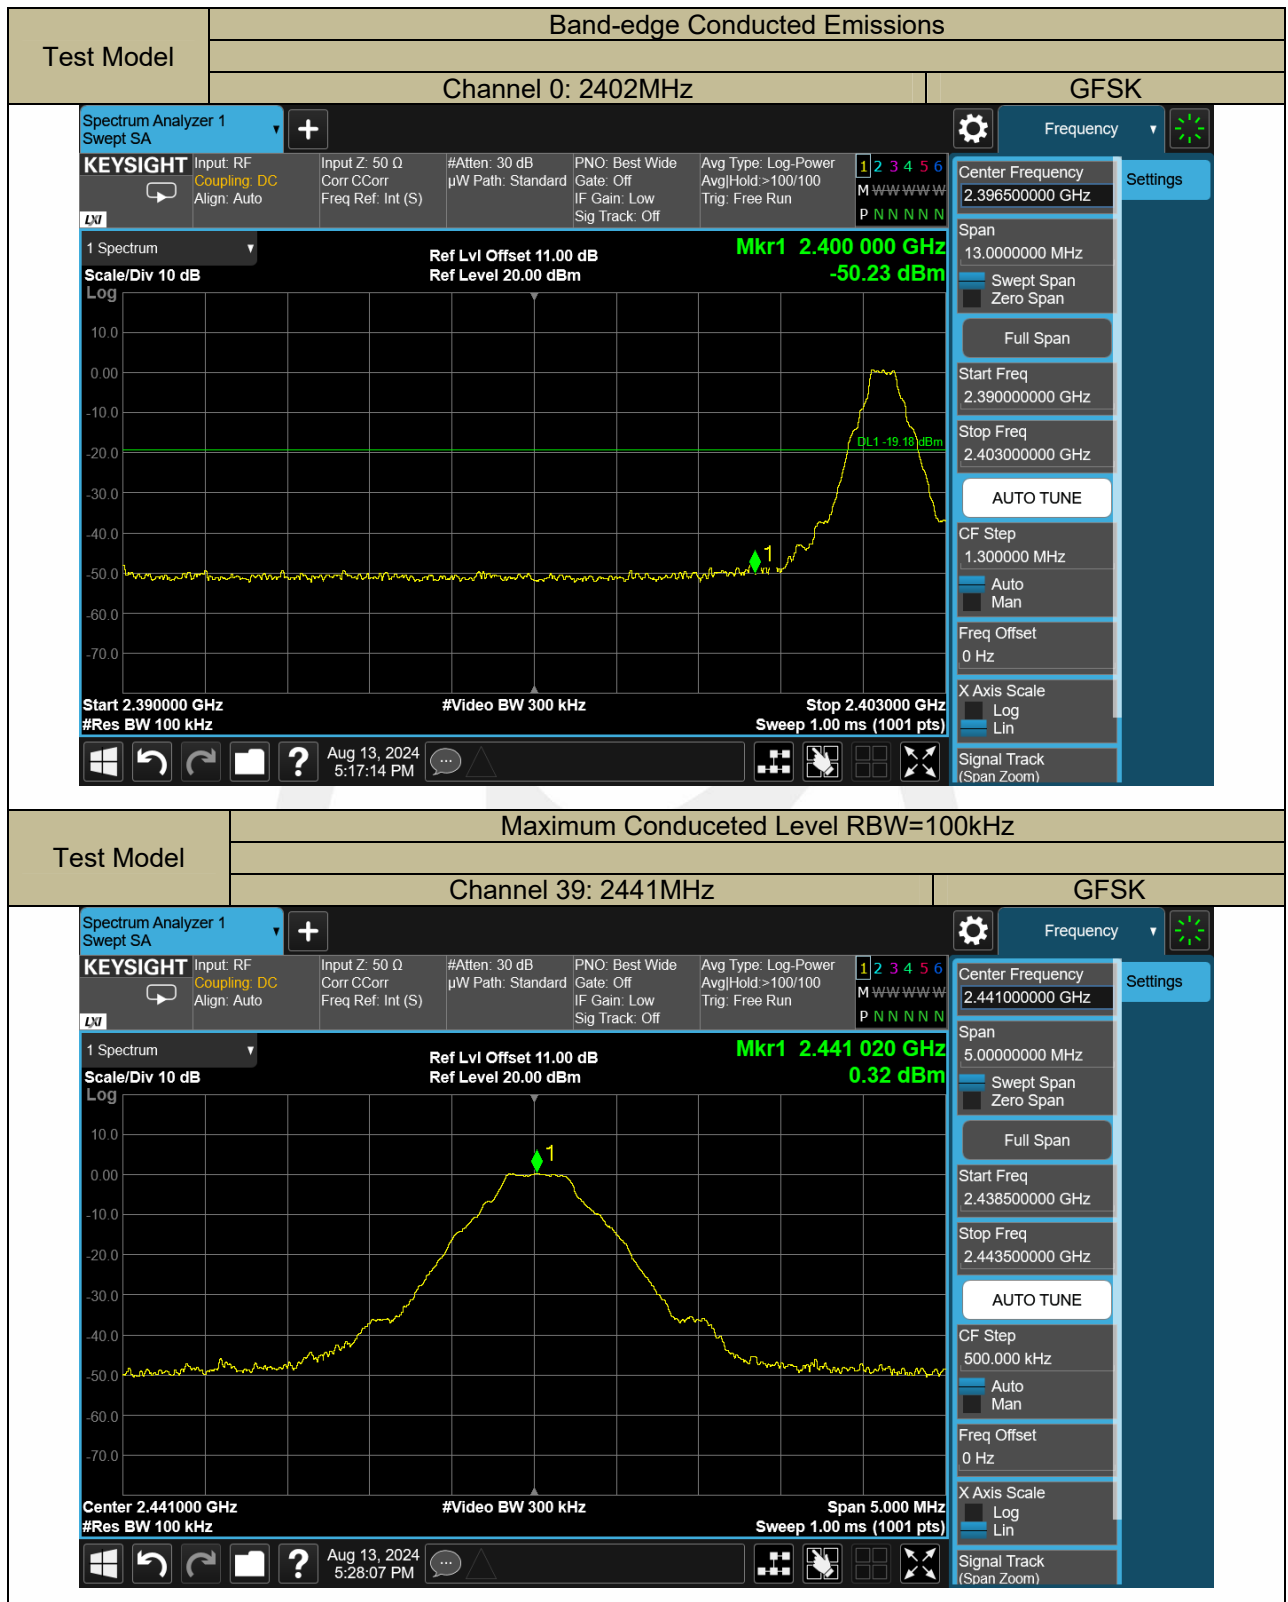

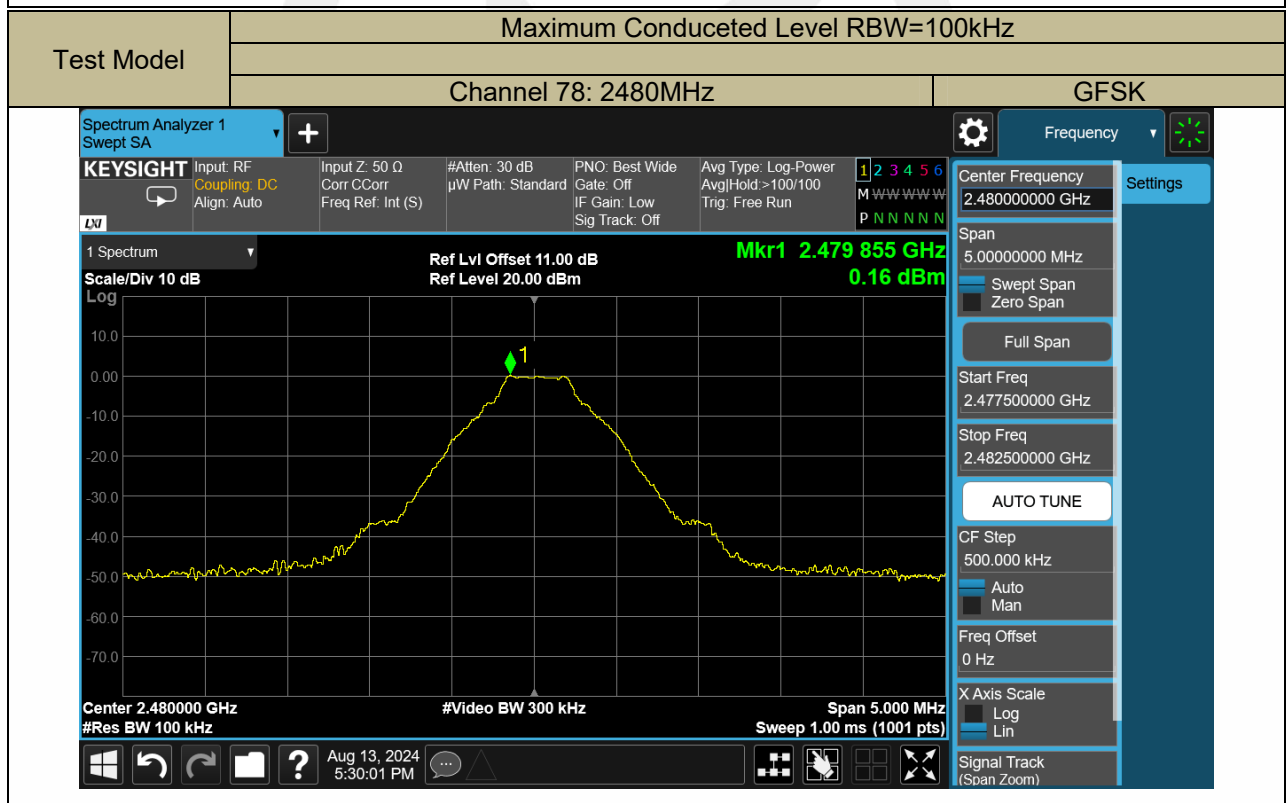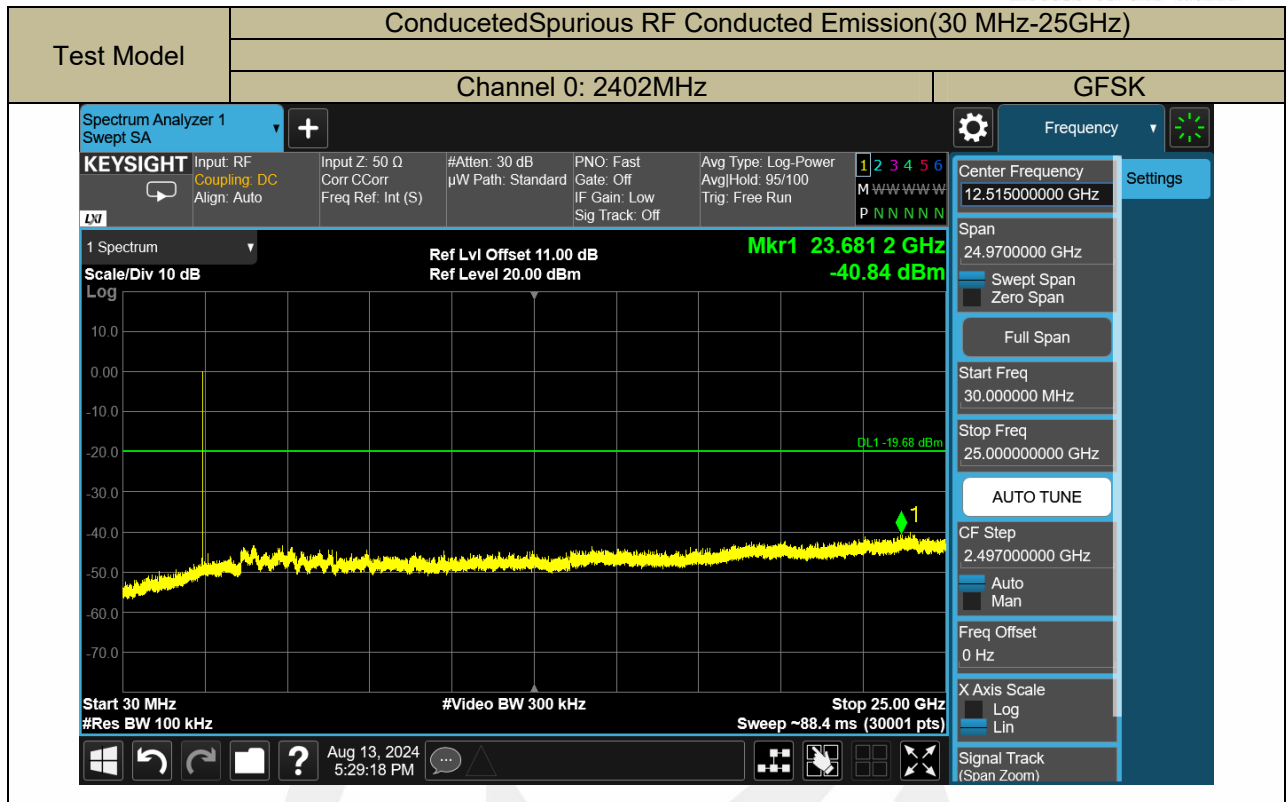

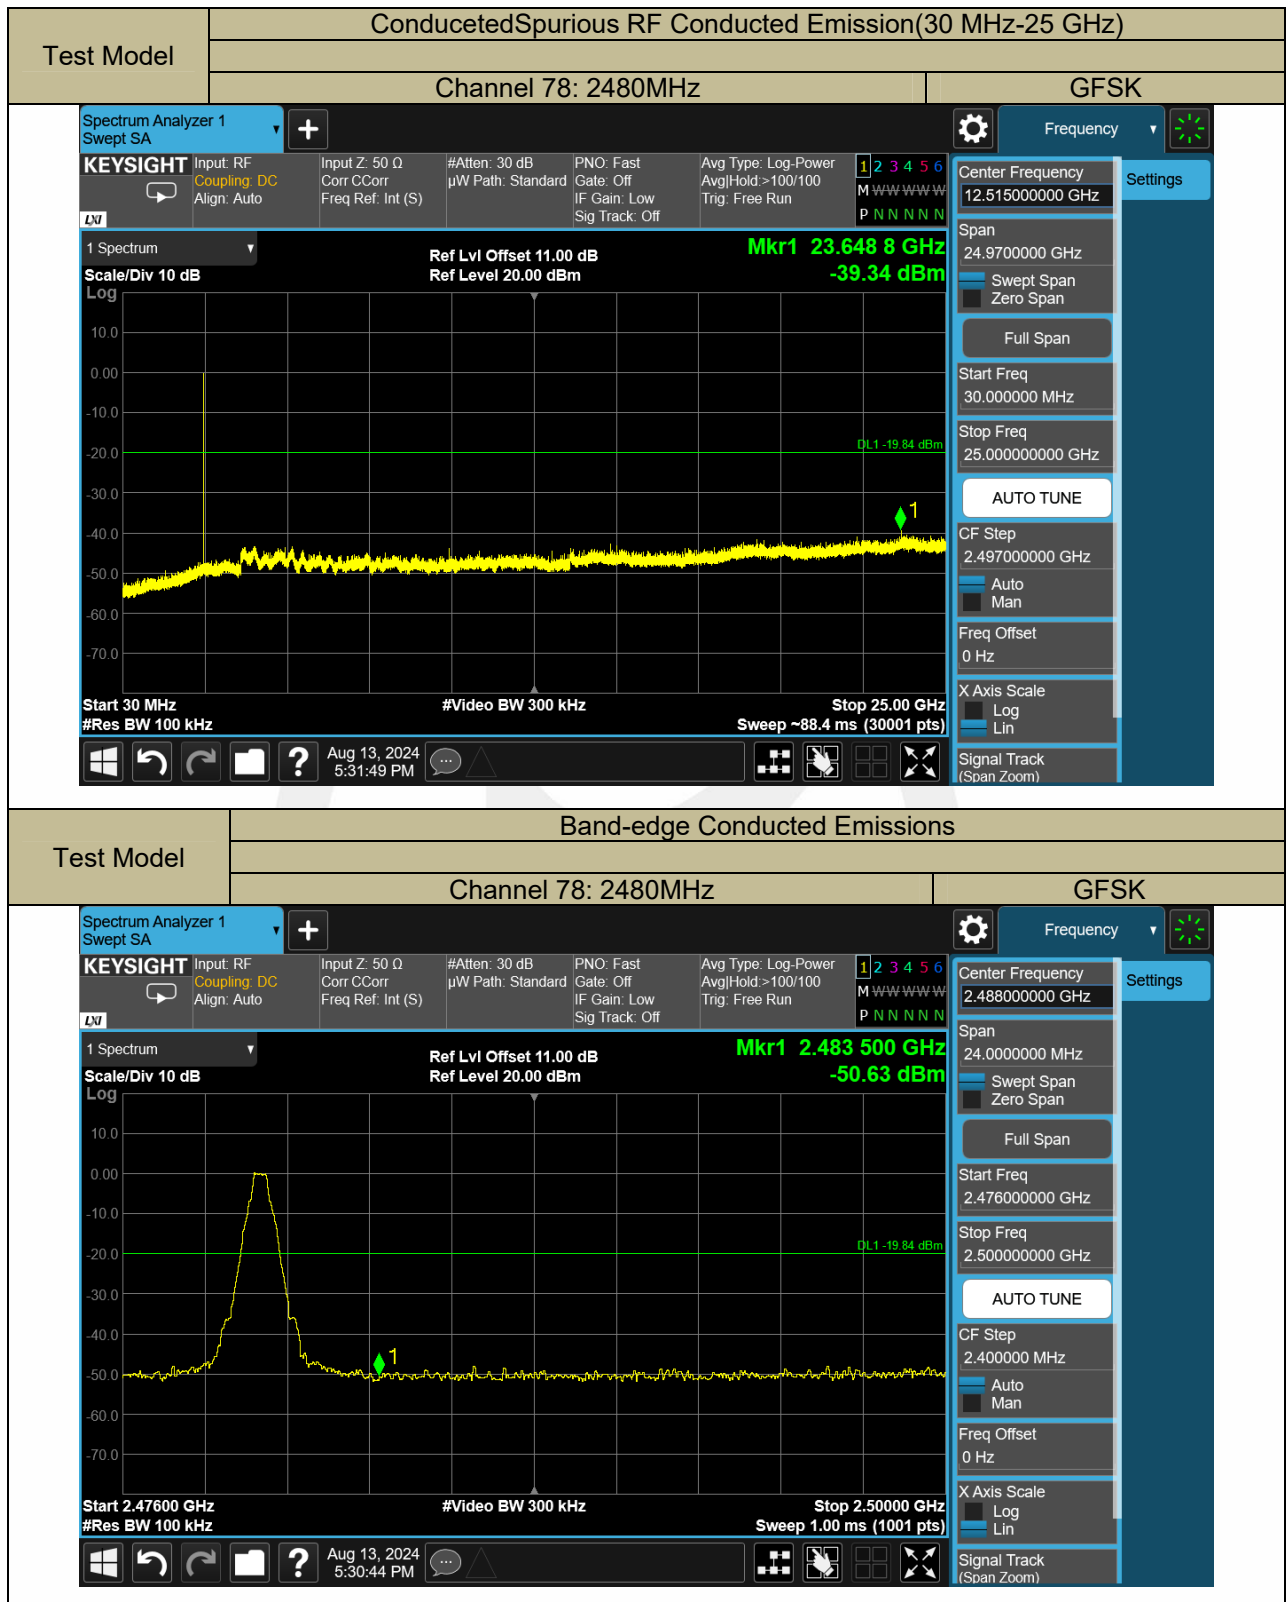

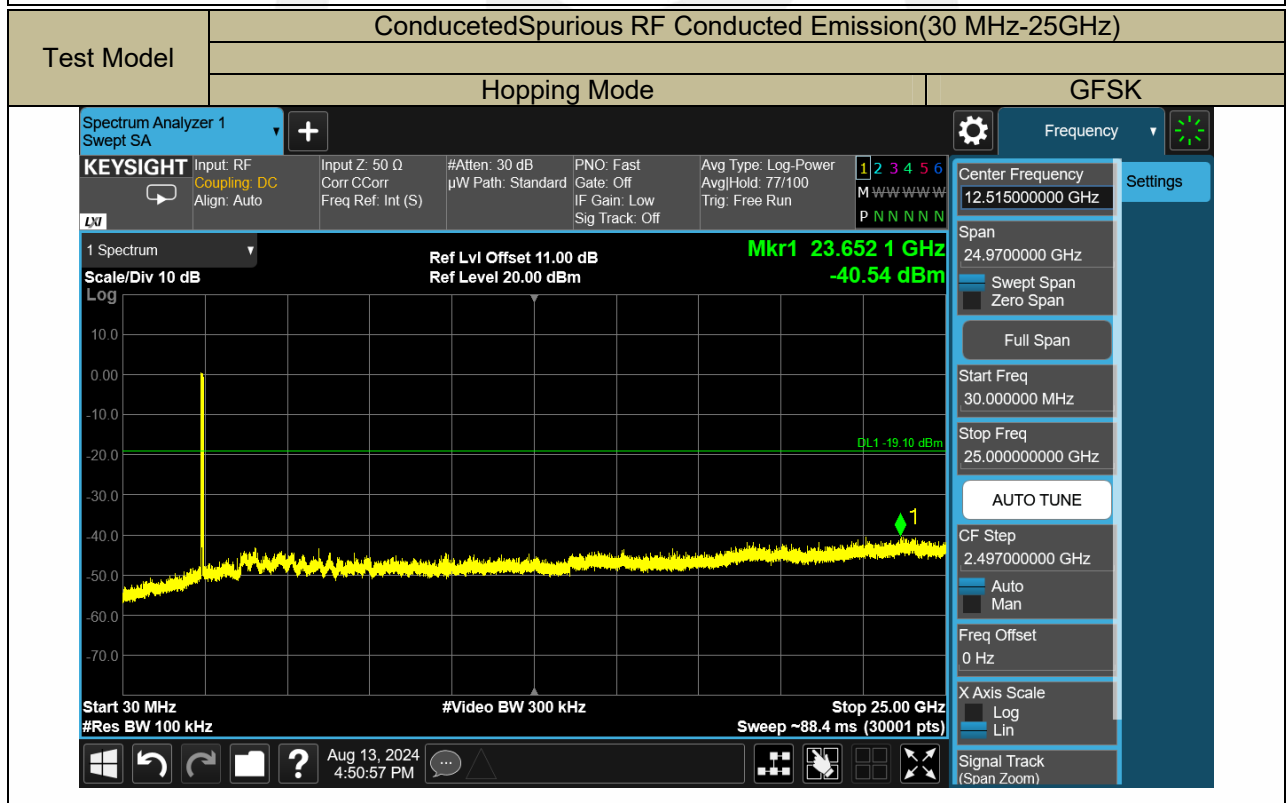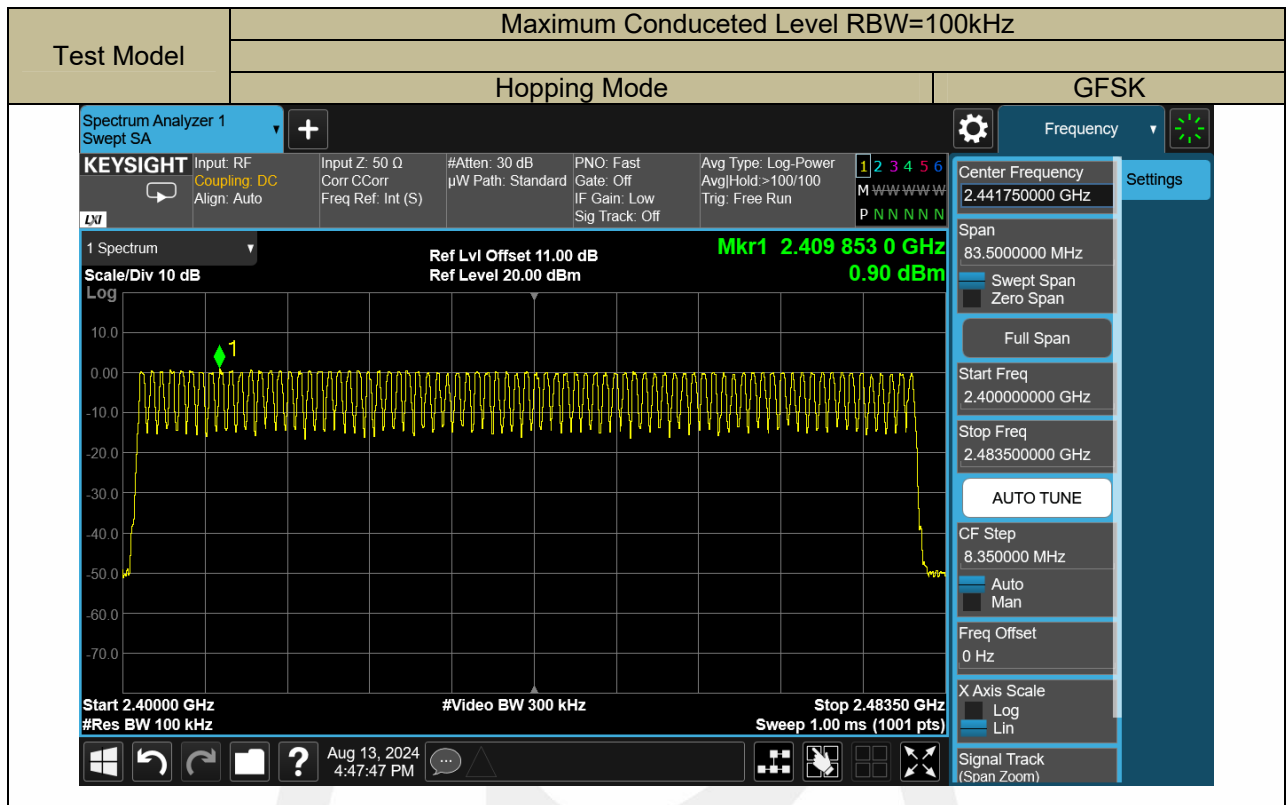

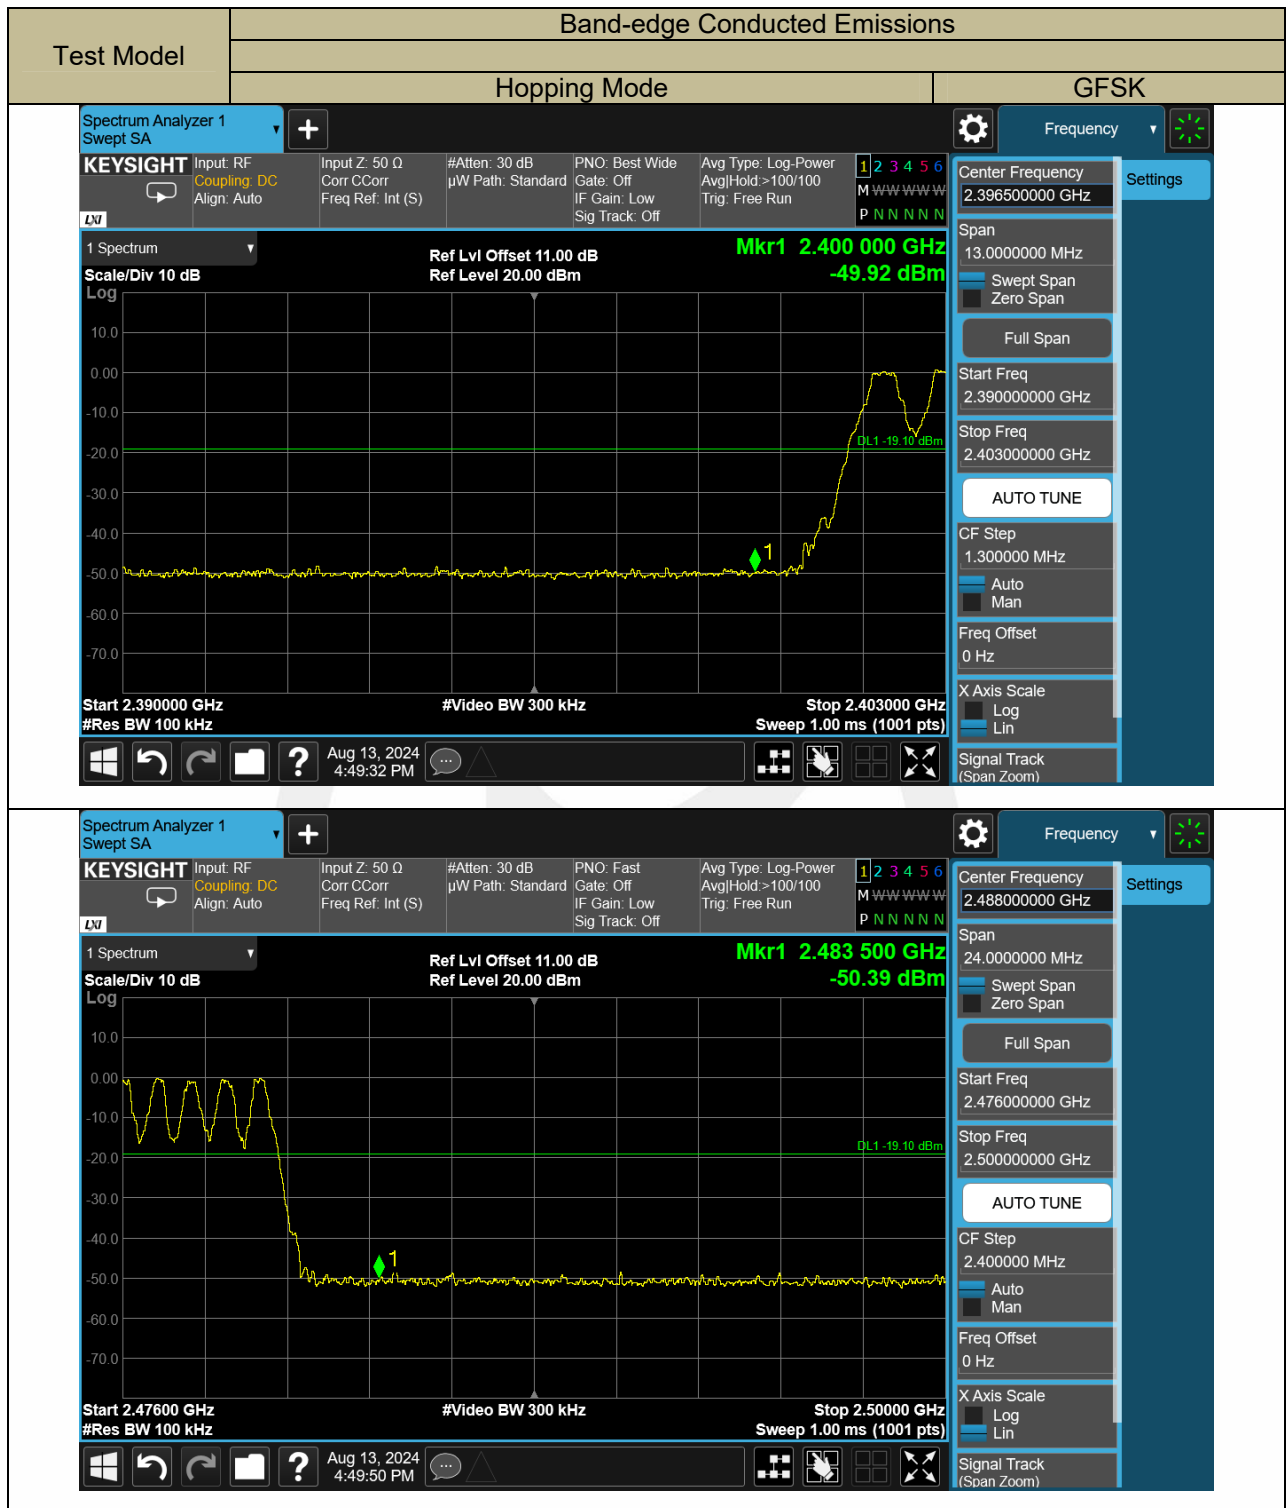

Spectrum Analyzer 1
Swept SA

KEYSIGHT

Input: RF
Coupling: DC
Align: Auto

Input Z: 50 Ω
Corr CCorr
Freq Ref: Int (S)

#Atten: 30 dB
μW Path: Standard

PNO: Fast
Gate: Off
IF Gain: Low
Sig Track: Off

Avg Type: Log-Power
Avg/Hold: >100/100
Trig: Free Run

1 2 3 4 5 6
M www www
P N N N N N

1 Spectrum
Scale/Div 10 dB
Log

Ref Lvl Offset 11.00 dB
Ref Level 20.00 dBm

Mkr1 2.483 500 GHz
-50.39 dBm

Start 2.47600 GHz
#Res BW 100 kHz
#Video BW 300 kHz
Stop 2.50000 GHz
Sweep 1.00 ms (1001 pts)

Center Frequency
2.488000000 GHz

Span
24.0000000 MHz
Swept Span
Zero Span
Full Span

Start Freq
2.476000000 GHz
Stop Freq
2.500000000 GHz
AUTO TUNE

CF Step
2.400000 MHz
Auto
Man

Freq Offset
0 Hz

X Axis Scale
Log
Lin

Signal Track
(Span Zoom)

9.7 RADIATED SPURIOUS EMISSION

Applicable Standard

According to FCC Part 15.247(d) and 15.209 and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.209, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Test Configuration

Test according to clause 7.2 radio frequency test setup 2

Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz)

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2014 respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

Test Results

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature: 18 °C Test Date: August 16, 2024
Humidity: 59 % Test By: Lucas Xu
Test mode: TX Mode

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})$ (dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

Spurious Emission Above 1GHz(1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK,8DPSK, non hopping) mode have been tested, and the worst result(GFSK)was report as below:

Temperature:	18 ℃	Test Date:	August 16, 2024
Humidity:	59 %	Test By:	Lucas Xu
Test mode:	GFSK	Frequency:	Channel 0: 2402MHz

Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
4804.000	54.84	-8.8	46.04	74.00	27.96	PK+	V	PASS
4804.000	42.07	-8.8	33.27	54.00	20.73	AVG	V	PASS
9608.000	48.02	2.53	50.55	74.00	23.45	PK+	V	PASS
9608.000	33.41	2.53	35.94	54.00	18.06	AVG	V	PASS
14888.000	43.32	9.01	52.33	74.00	21.67	PK+	V	PASS
14888.000	29.13	9.01	38.14	54.00	15.86	AVG	V	PASS
Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
4804.000	53.14	-8.8	44.34	74.00	29.66	PK+	H	PASS
4804.000	38.44	-8.8	29.64	54.00	24.36	AVG	H	PASS
14901.500	43.79	8.98	52.77	74.00	21.23	PK+	H	PASS
14901.500	29.60	8.98	38.58	54.00	15.42	AVG	H	PASS
17878.500	39.55	12.3	51.85	74.00	22.15	PK+	H	PASS
17878.500	27.06	12.3	39.36	54.00	14.64	AVG	H	PASS

Temperature:	18 ℃	Test Date:	August 16, 2024
Humidity:	59 %	Test By:	Lucas Xu
Test mode:	GFSK	Frequency:	Channel 39: 2441MHz

Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
4882.000	53.73	-8.21	45.52	74.00	28.48	PK+	V	PASS
4882.000	38.37	-8.21	30.16	54.00	23.84	AVG	V	PASS
14212.500	43.99	9.06	53.05	74.00	20.95	PK+	V	PASS
14212.500	29.73	9.06	38.79	54.00	15.21	AVG	V	PASS
17607.500	40.55	11.36	51.91	74.00	22.09	PK+	V	PASS
17607.500	26.22	11.36	37.58	54.00	16.42	AVG	V	PASS
Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
4882.000	55.37	-8.21	47.16	74.00	26.84	PK+	H	PASS
4882.000	42.95	-8.21	34.74	54.00	19.26	AVG	H	PASS
14742.000	43.61	9.19	52.80	74.00	21.20	PK+	H	PASS
14742.000	28.29	9.19	37.48	54.00	16.52	AVG	H	PASS
17605.000	40.66	11.37	52.03	74.00	21.97	PK+	H	PASS
17605.000	27.57	11.37	38.94	54.00	15.06	AVG	H	PASS

Temperature: 18 °C
Humidity: 59 %
Test mode: GFSK

Test Date: August 16, 2024
Test By: Lucas Xu
Frequency: Channel 78: 2480MHz

Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
4960.000	57.44	-7.41	50.03	74.00	23.97	PK+	V	PASS
4960.000	42.65	-7.41	35.24	54.00	18.76	AVG	V	PASS
14744.500	42.53	9.19	51.72	74.00	22.28	PK+	V	PASS
14744.500	27.29	9.19	36.48	54.00	17.52	AVG	V	PASS
17921.000	40.45	12.7	53.15	74.00	20.85	PK+	V	PASS
17921.000	26.52	12.7	39.22	54.00	14.78	AVG	V	PASS
Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
4960.000	55.29	-7.41	47.88	74.00	26.12	PK+	H	PASS
4960.000	41.30	-7.41	33.89	54.00	20.11	AVG	H	PASS
13960.500	43.28	9.19	52.47	74.00	21.53	PK+	H	PASS
13960.500	28.48	9.19	37.67	54.00	16.33	AVG	H	PASS
17999.500	38.70	13.65	52.35	74.00	21.65	PK+	H	PASS
17999.500	24.81	13.65	38.46	54.00	15.54	AVG	H	PASS

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, pi/4-DQPSK,8DPSK) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

Temperature:	18 °C	Test Date:	August 16, 2024
Humidity:	59 %	Test By:	Lucas Xu
Test mode:	GFSK	Frequency:	Channel 0: 2402MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2327.720	H	57.37	74.00	- 16.63	44.64	54.00	- 9.36
2313.320	V	57.70	74.00	- 16.30	43.69	54.00	- 10.31


Temperature:	18 °C	Test Date:	August 16, 2024
Humidity:	59 %	Test By:	Lucas Xu
Test mode:	GFSK	Frequency:	Channel 78: 2480MHz


Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2488.904	H	59.22	74.00	- 14.78	44.67	54.00	- 9.33
2499.868	V	58.84	74.00	- 15.16	44.32	54.00	- 9.68


Temperature:	18 °C	Test Date:	August 16, 2024
Humidity:	59 %	Test By:	Lucas Xu
Test mode:	GFSK	Frequency:	Hopping

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2400.000	H	55.83	74.00	-18.17	40.33	54.00	-13.67
2483.500	H	56.92	74.00	-17.08	41.97	54.00	-12.03
2400.000	V	56.13	74.00	-17.87	41.25	54.00	-12.75
2483.500	V	56.62	74.00	-17.38	42.49	54.00	-11.51

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

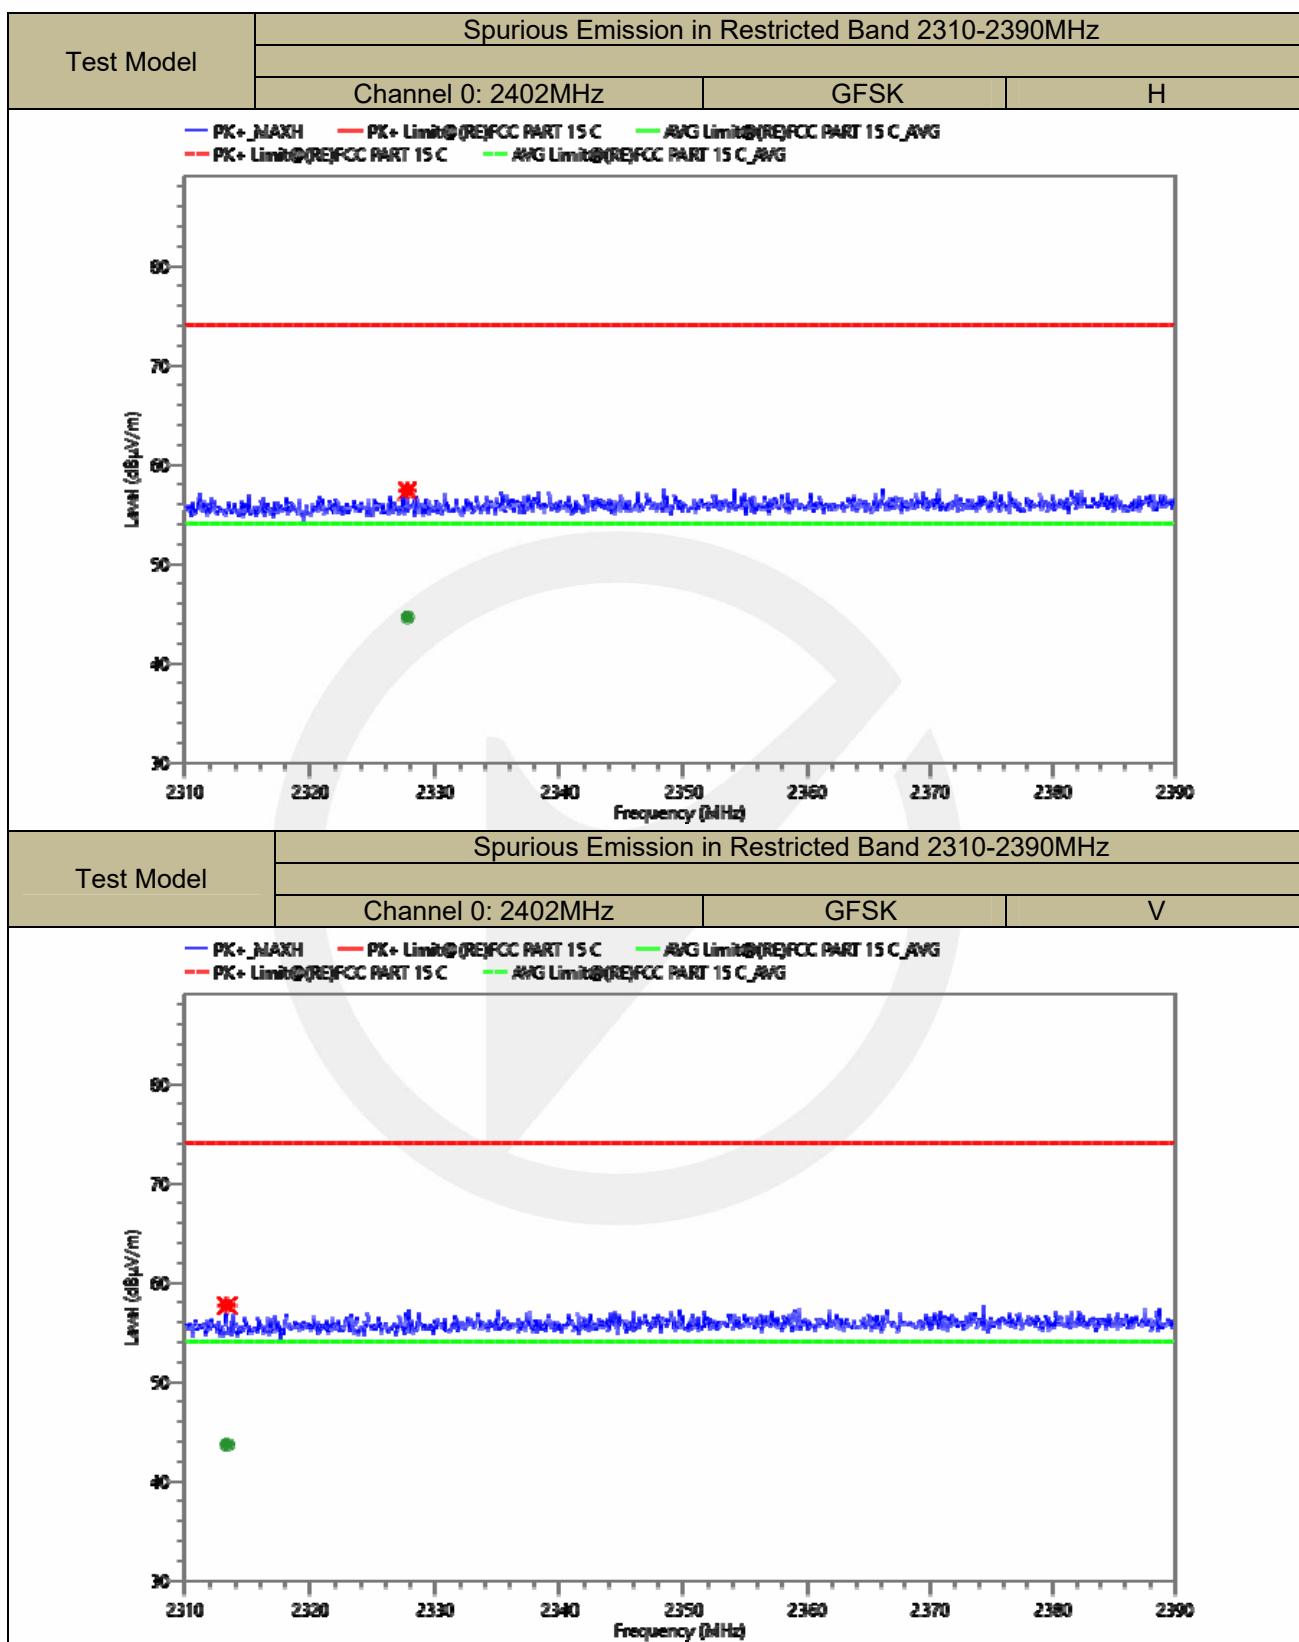


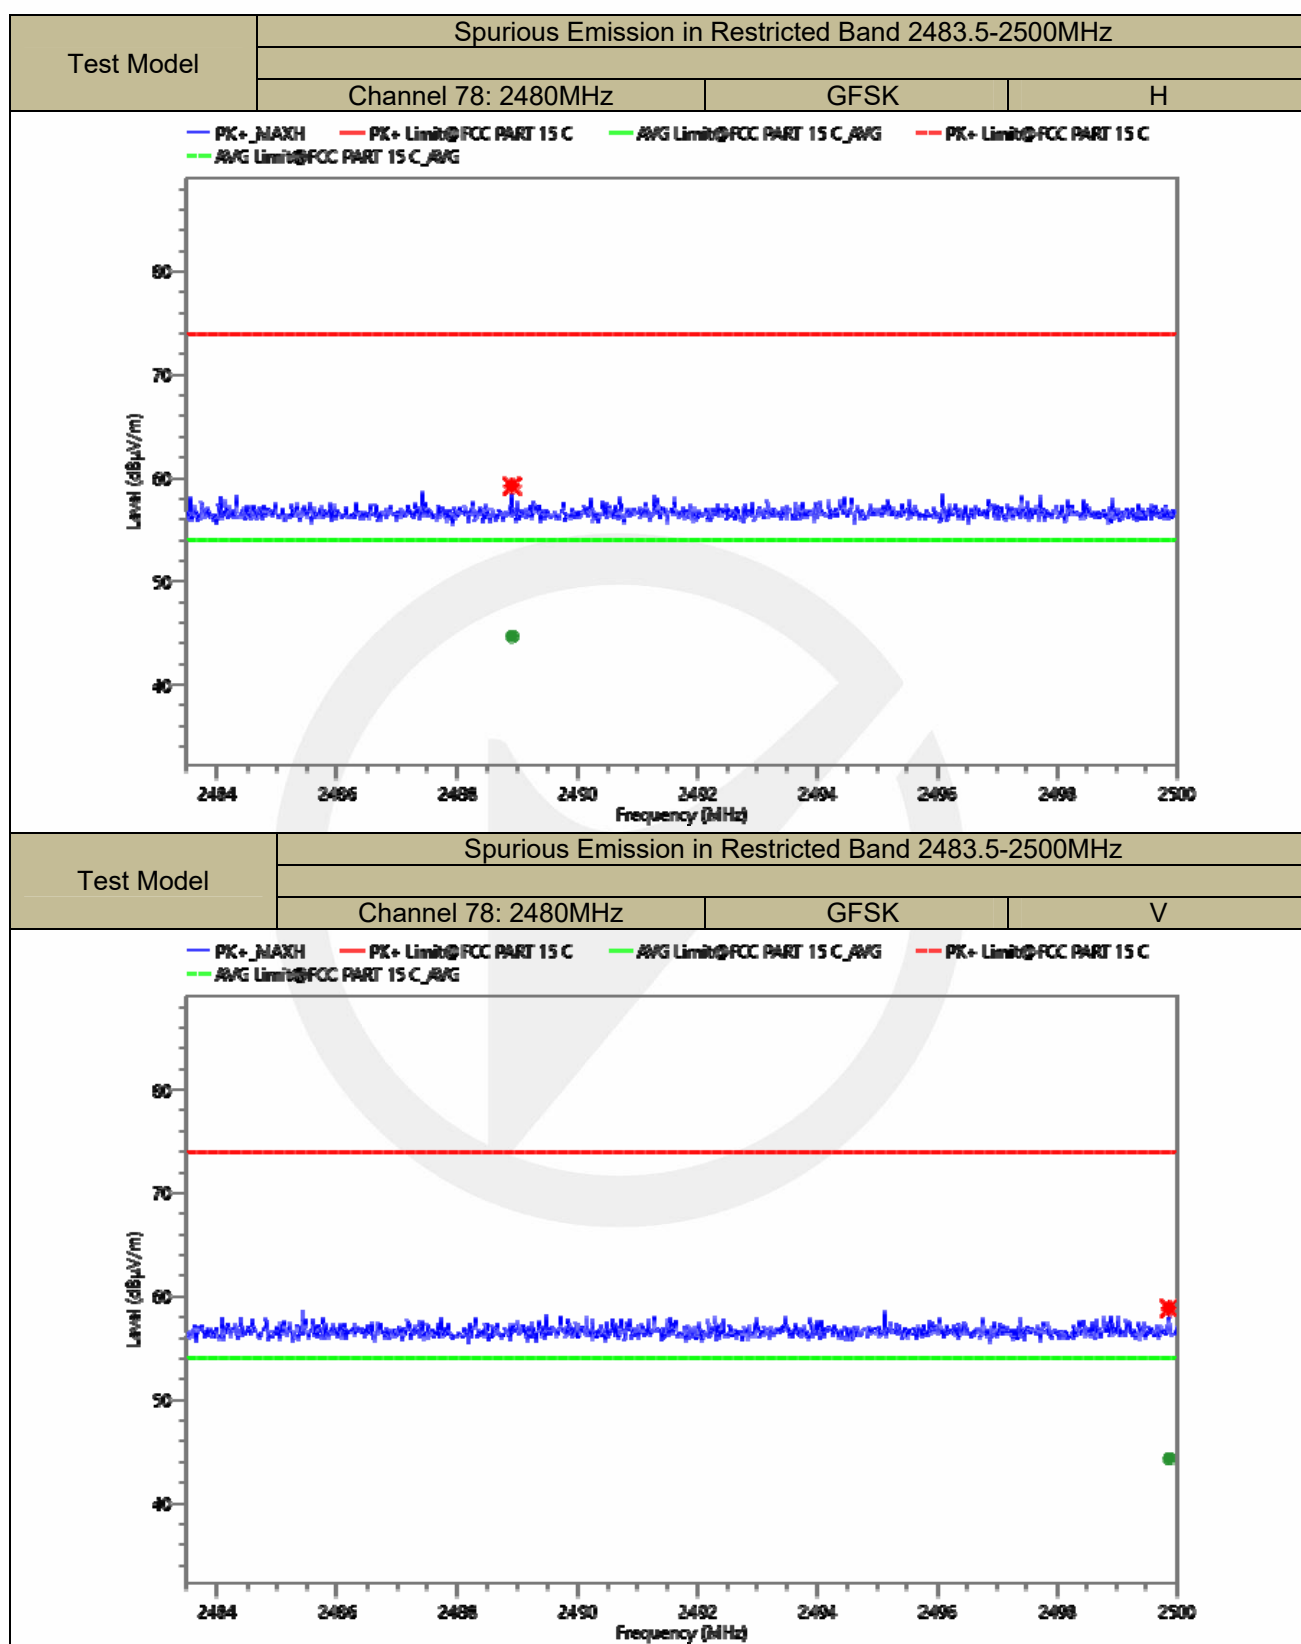

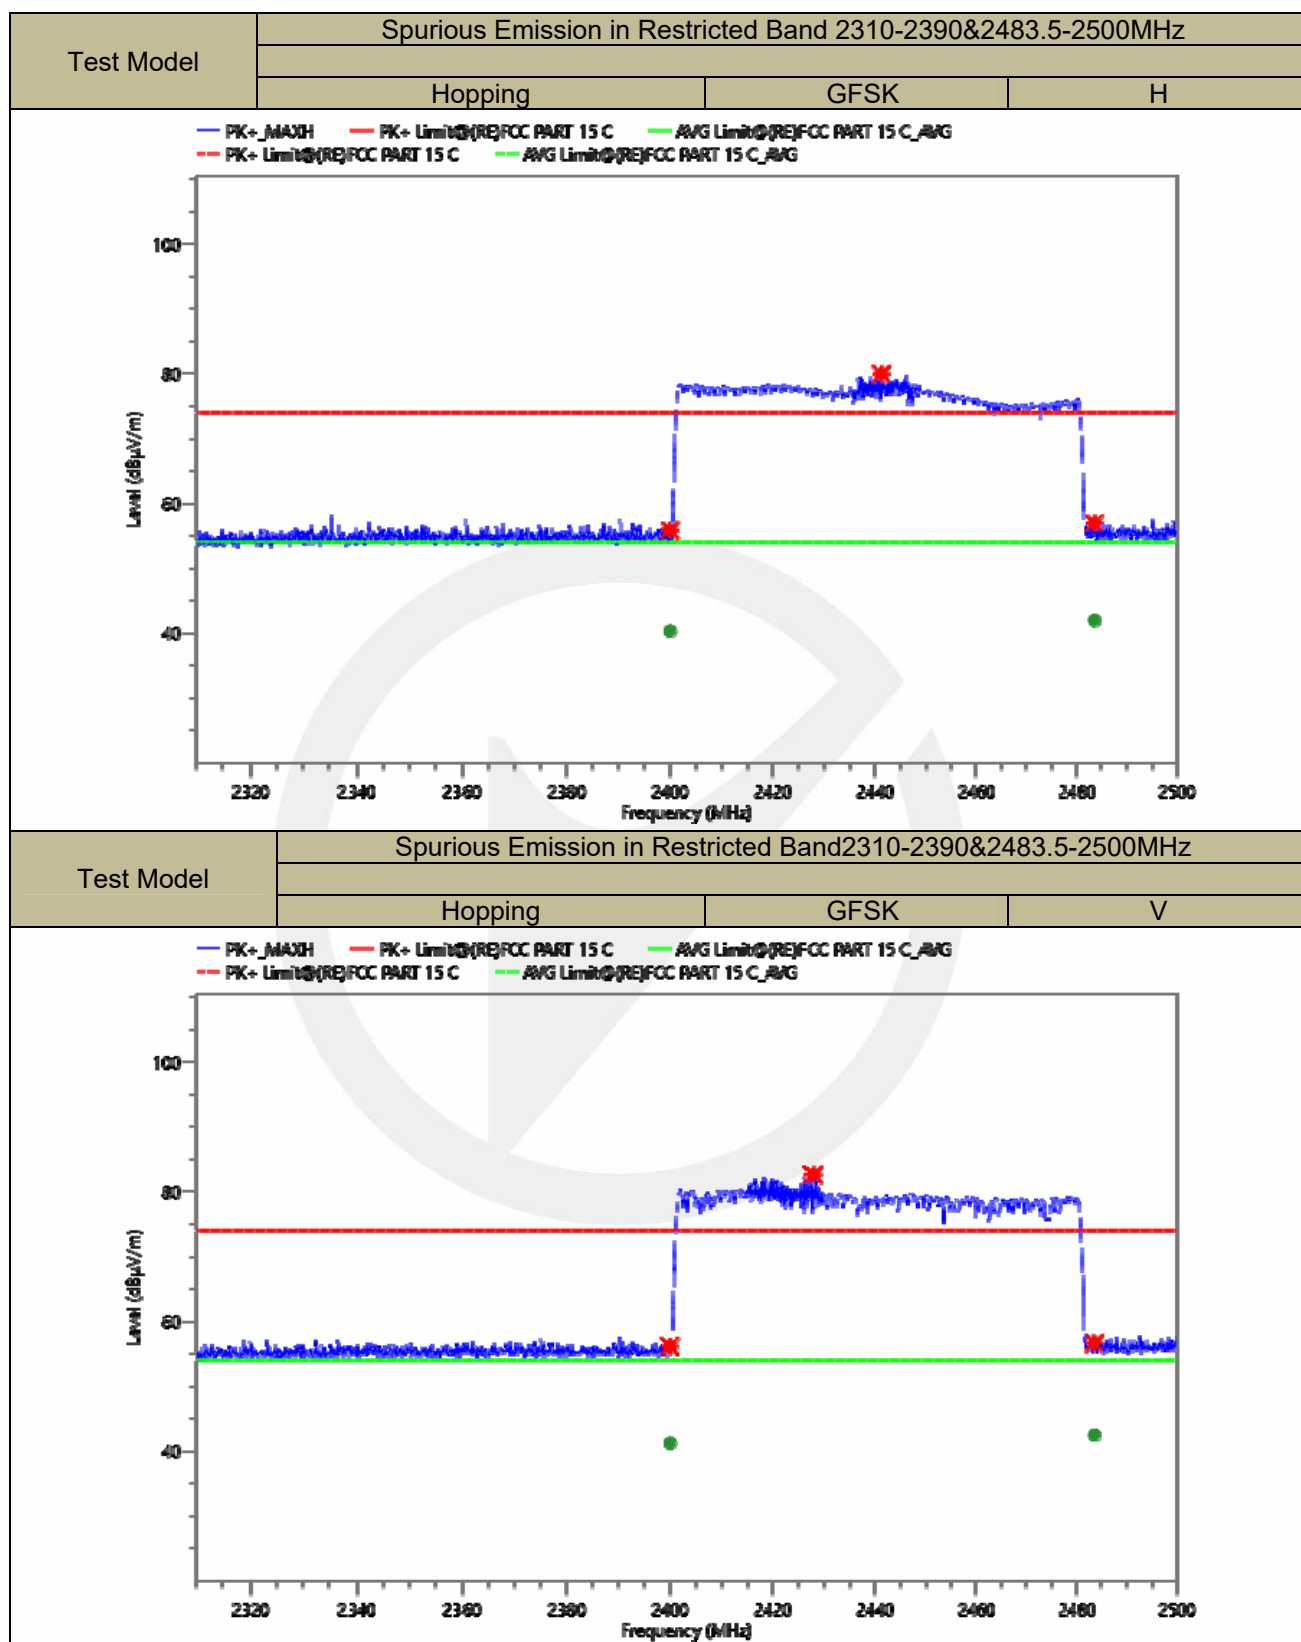


■ Spurious Emission below 1GHz(30MHz to 1GHz)
Bluetooth (GFSK, pi/4-DQPSK, 8DPSK)mode have been tested, and the worst result was report as below:

Project Information			
Mode:	TX2402	Voltage:	AC 120V/60Hz
Environment:	Temp: 21 °C; Humi:66%	Engineer:	Chris Fan

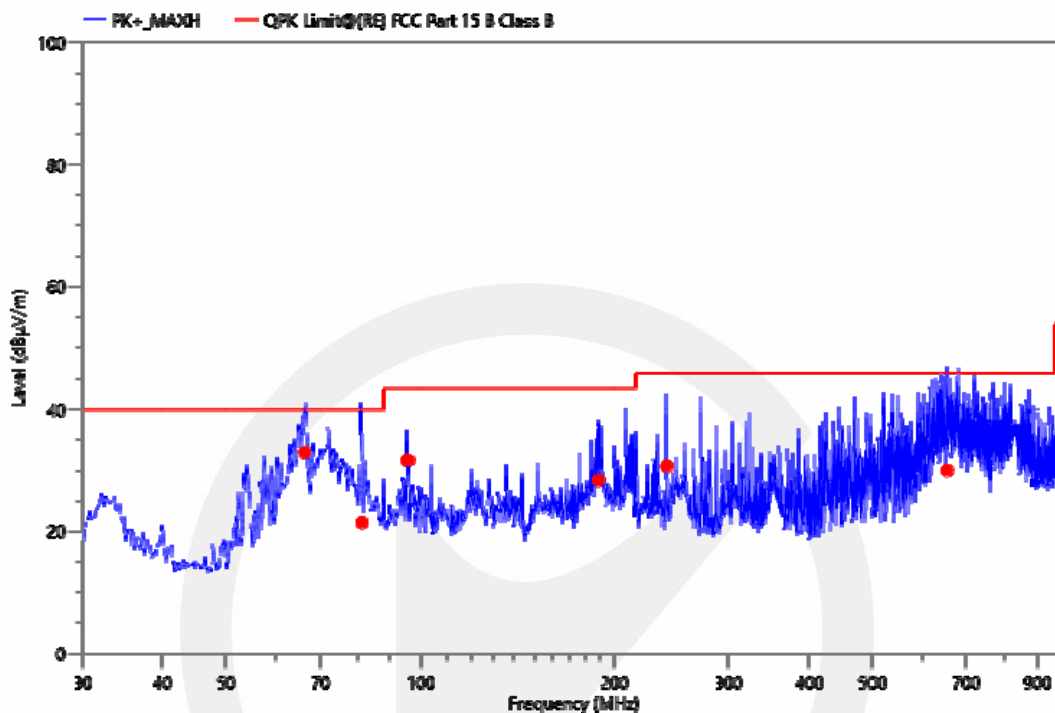


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	66.196	59.53	-26.6	32.93	40.00	7.07	QPK	200.0	H	157.4	PASS
2	81.178	48.30	-26.82	21.48	40.00	18.52	QPK	200.0	H	158.9	PASS
3	95.572	57.33	-25.63	31.70	43.50	11.80	QPK	200.0	H	224.4	PASS
4	188.692	53.93	-25.56	28.37	43.50	15.13	QPK	200.0	H	138.9	PASS
5	240.102	53.98	-23.27	30.71	46.00	15.29	QPK	100.0	H	105.0	PASS
6	653.128	45.06	-15.03	30.03	46.00	15.97	QPK	200.0	H	44.9	PASS

Project Information			
Mode:	TX2402	Voltage:	AC 120V/60Hz
Environment:	Temp: 21 °C; Humi:66%	Engineer:	Chris Fan

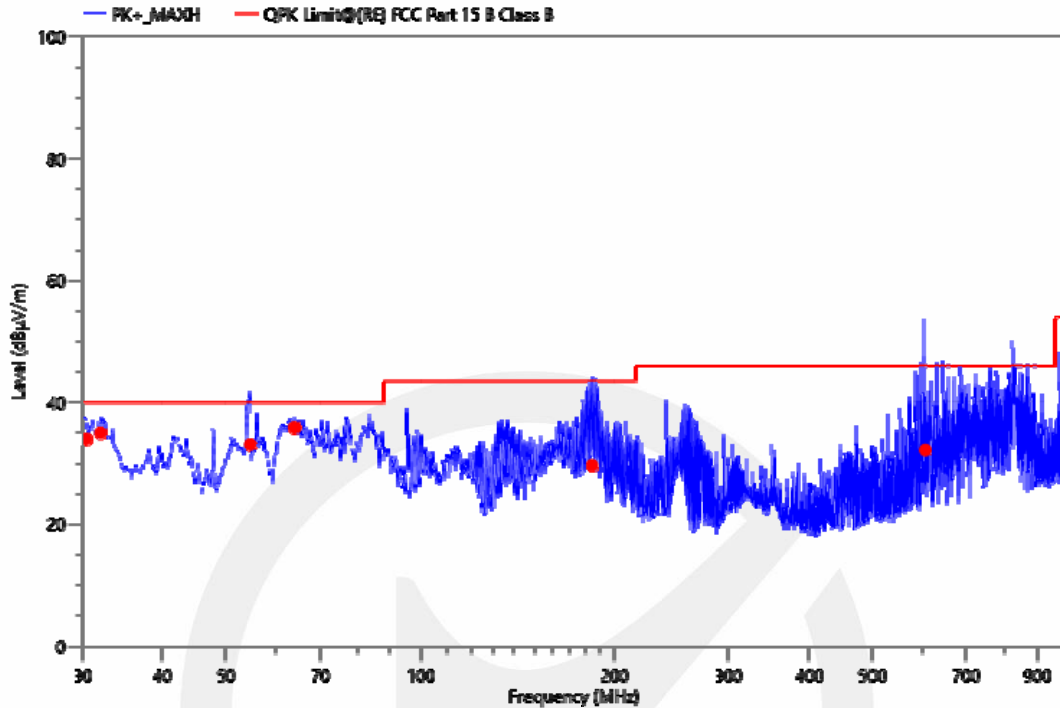


No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	30.378	59.29	-25.34	33.95	40.00	6.05	QPK	100.0	V	82.2	PASS
2	32.011	60.17	-25.21	34.96	40.00	5.04	QPK	100.0	V	122.2	PASS
3	54.654	58.00	-24.96	33.04	40.00	6.96	QPK	200.0	V	288.7	PASS
4	64.026	62.18	-26.35	35.83	40.00	4.17	QPK	100.0	V	89.2	PASS
5	184.585	55.31	-25.69	29.62	43.50	13.88	QPK	100.0	V	231.7	PASS
6	604.768	46.84	-14.73	32.11	46.00	13.89	QPK	100.0	V	232.7	PASS

Project Information			
Mode:	TX2441	Voltage:	AC 120V/60Hz
Environment:	Temp: 21 °C; Humi:66%	Engineer:	Chris Fan

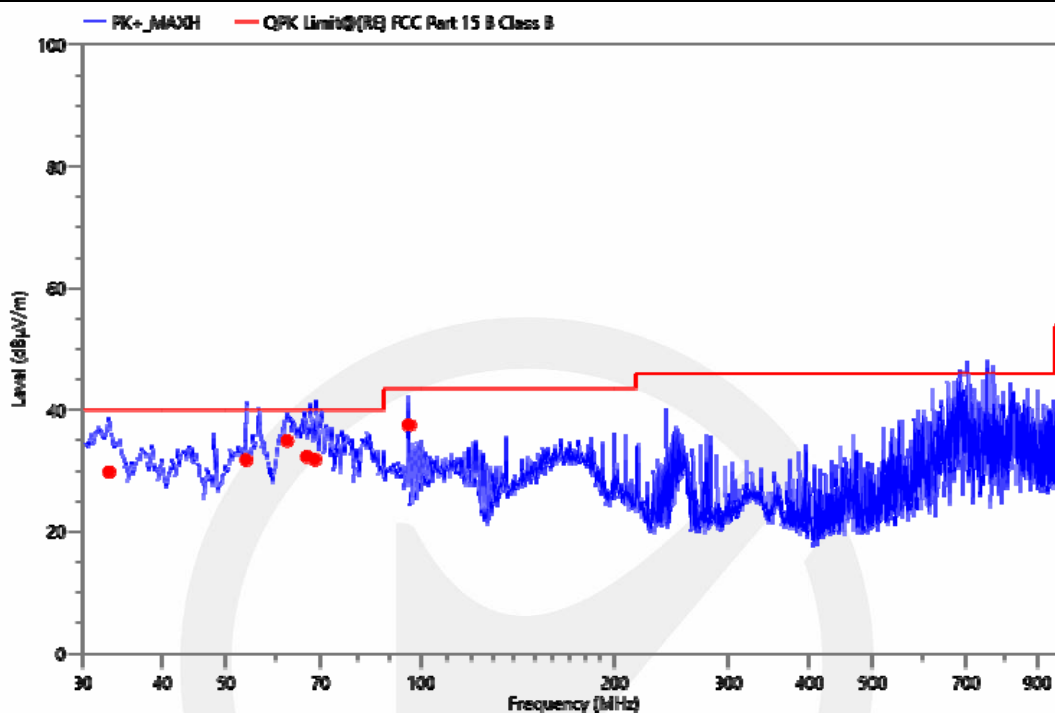


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	32.963	54.94	-25.13	29.81	40.00	10.19	QPK	100.0	V	334.3	PASS
2	53.752	56.59	-24.8	31.79	40.00	8.21	QPK	100.0	V	3.3	PASS
3	62.303	61.09	-26.14	34.95	40.00	5.05	QPK	100.0	V	225.3	PASS
4	66.543	58.97	-26.64	32.33	40.00	7.67	QPK	100.0	V	334.3	PASS
5	68.561	58.71	-26.88	31.83	40.00	8.17	QPK	100.0	V	334.3	PASS
6	96.027	63.10	-25.6	37.50	43.50	6.00	QPK	100.0	V	90.8	PASS

Project Information			
Mode:	TX2441	Voltage:	AC 120V/60Hz
Environment:	Temp: 21 °C; Humi:66%	Engineer:	Elvis Xia

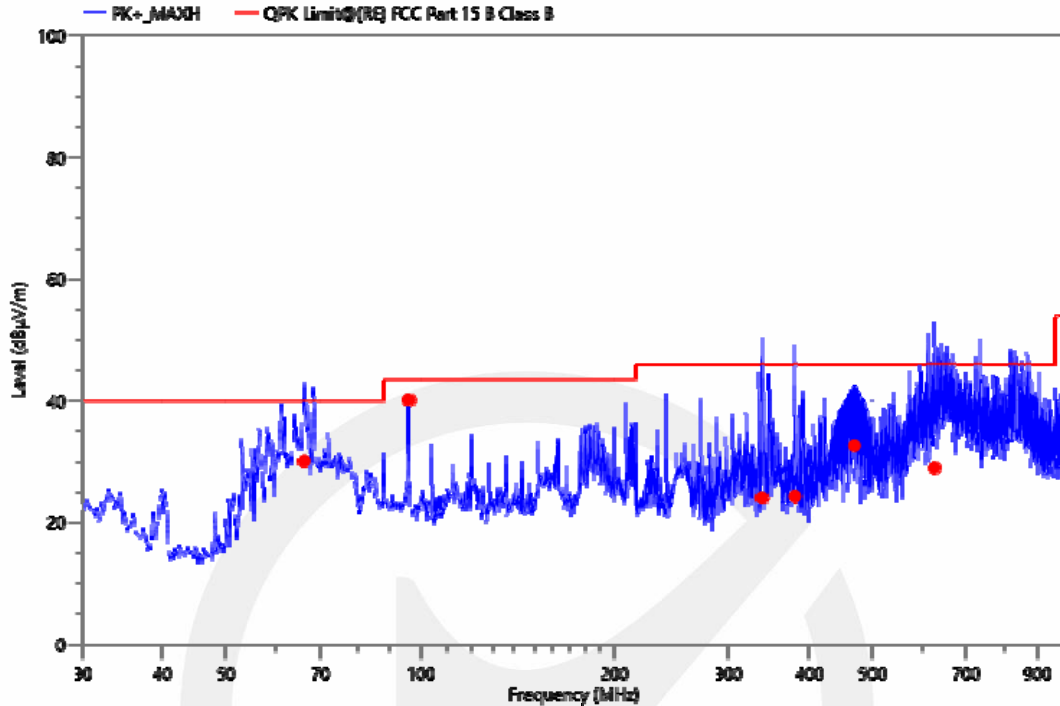


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	66.071	56.67	-26.59	30.08	40.00	9.92	QPK	200.0	H	359.4	PASS
2	96.035	65.71	-25.6	40.11	43.50	3.39	QPK	200.0	H	170.1	PASS
3	337.199	44.81	-20.81	24.00	46.00	22.00	QPK	200.0	H	74.1	PASS
4	379.588	44.56	-20.3	24.26	46.00	21.74	QPK	200.0	H	74.1	PASS
5	470.574	51.89	-19.32	32.57	46.00	13.43	QPK	200.0	H	41.1	PASS
6	624.222	43.98	-15	28.98	46.00	17.02	QPK	200.0	H	164.6	PASS

Project Information			
Mode:	TX2480	Voltage:	AC 120V/60Hz
Environment:	Temp: 21 °C; Humi:66%	Engineer:	Chris Fan

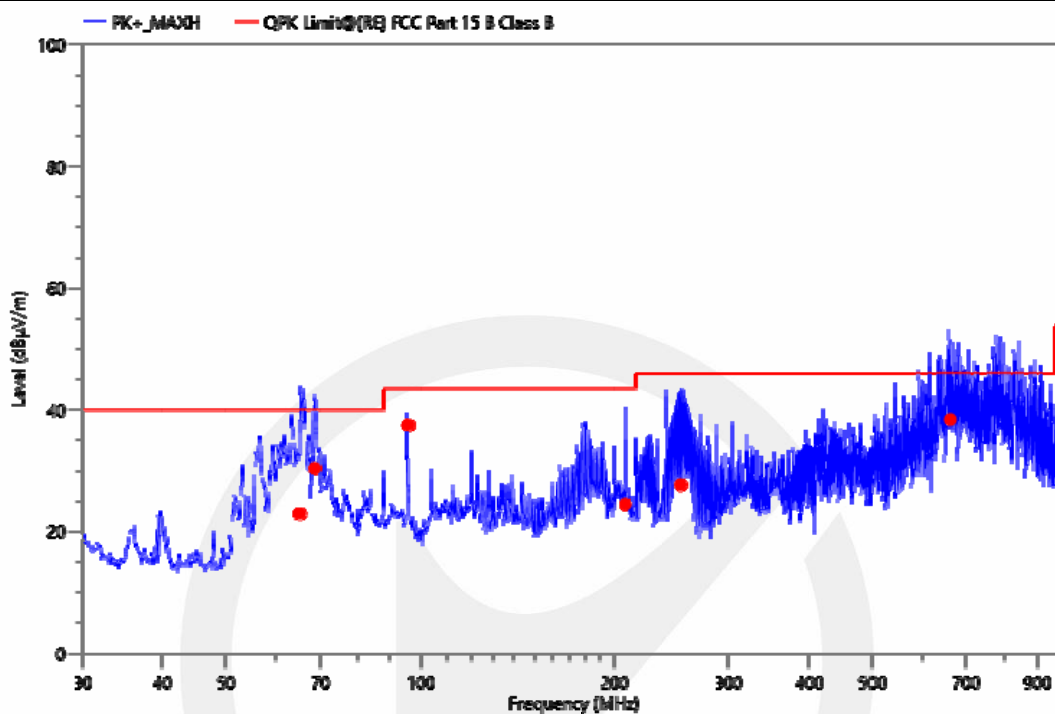

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	65.014	49.40	-26.46	22.94	40.00	17.06	QPK	100.0	H	192.1	PASS
2	68.561	57.21	-26.88	30.33	40.00	9.67	QPK	100.0	H	177.6	PASS
3	95.788	63.10	-25.62	37.48	43.50	6.02	QPK	200.0	H	184.5	PASS
4	208.092	48.90	-24.46	24.44	43.50	19.06	QPK	200.0	H	79.5	PASS
5	252.615	50.37	-22.72	27.65	46.00	18.35	QPK	100.0	H	196.6	PASS
6	661.741	53.41	-15.07	38.34	46.00	7.66	QPK	100.0	H	95.6	PASS

Project Information			
Mode:	TX2480	Voltage:	AC 120V/60Hz
Environment:	Temp: 21 °C; Humi:66%	Engineer:	Chris Fan

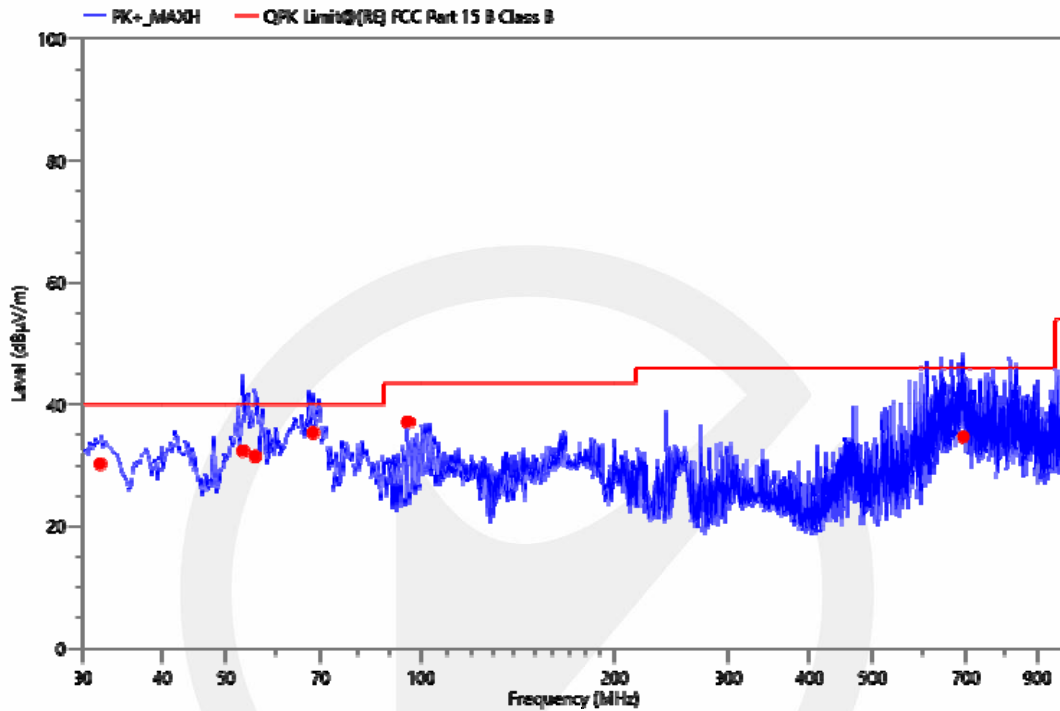

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	31.932	55.43	-25.21	30.22	40.00	9.78	QPK	100.0	V	202.2	PASS
2	53.138	57.10	-24.7	32.40	40.00	7.60	QPK	100.0	V	289.7	PASS
3	55.516	56.63	-25.11	31.52	40.00	8.48	QPK	100.0	V	350.2	PASS
4	68.102	62.18	-26.82	35.36	40.00	4.64	QPK	100.0	V	327.7	PASS
5	95.726	62.75	-25.62	37.13	43.50	6.37	QPK	100.0	V	253.2	PASS
6	693.354	49.72	-15.07	34.65	46.00	11.35	QPK	200.0	V	227.2	PASS

9.8 CONDUCTED EMISSION TEST

Applicable Standard

According to FCC Part 15.207(a)

Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

Test according to clause 7.3 conducted emission test setup

Test Procedure


The EUT was placed on a table which is 0.1m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

Test Results

PASS.


Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result was report as below:

Project Information			
Mode:	TX2402	Voltage:	AC 120V/60Hz
Environment:	Temp: 24 °C; Humi:55%	Engineer:	Alan Li

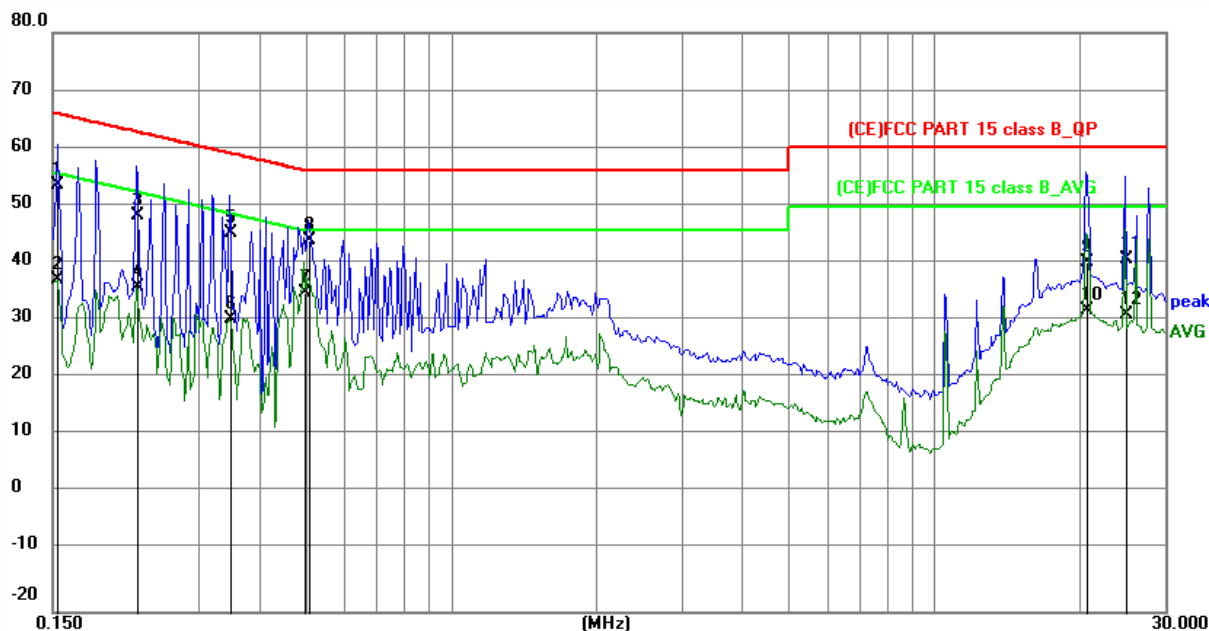

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE	Verdict
1	0.1539	44.00	9.71	53.71	65.79	12.08	QPK	L1	GND	PASS
2	0.1539	27.82	9.71	37.53	55.79	18.26	AVG	L1	GND	PASS
3	0.2240	38.70	9.84	48.54	62.67	14.13	QPK	L1	GND	PASS
4	0.2240	26.32	9.84	36.16	52.67	16.51	AVG	L1	GND	PASS
5	0.3487	35.60	9.79	45.39	58.99	13.60	QPK	L1	GND	PASS
6	0.3487	20.83	9.79	30.62	48.99	18.37	AVG	L1	GND	PASS
7	0.4971	25.60	9.60	35.20	46.05	10.85	QPK	L1	GND	PASS
8	0.5088	34.70	9.61	44.31	56.00	11.69	AVG	L1	GND	PASS
9	20.6943	30.50	9.86	40.36	60.00	19.64	QPK	L1	GND	PASS
10	20.6943	22.30	9.86	32.16	50.00	17.84	AVG	L1	GND	PASS
11	24.9219	30.90	9.97	40.87	60.00	19.13	QPK	L1	GND	PASS
12	24.9219	21.50	9.97	31.47	50.00	18.53	AVG	L1	GND	PASS

Project Information			
Mode:	TX2402	Voltage:	AC 120V/60Hz
Environment:	Temp: 24 °C; Humi:69c%	Engineer:	Alan Li

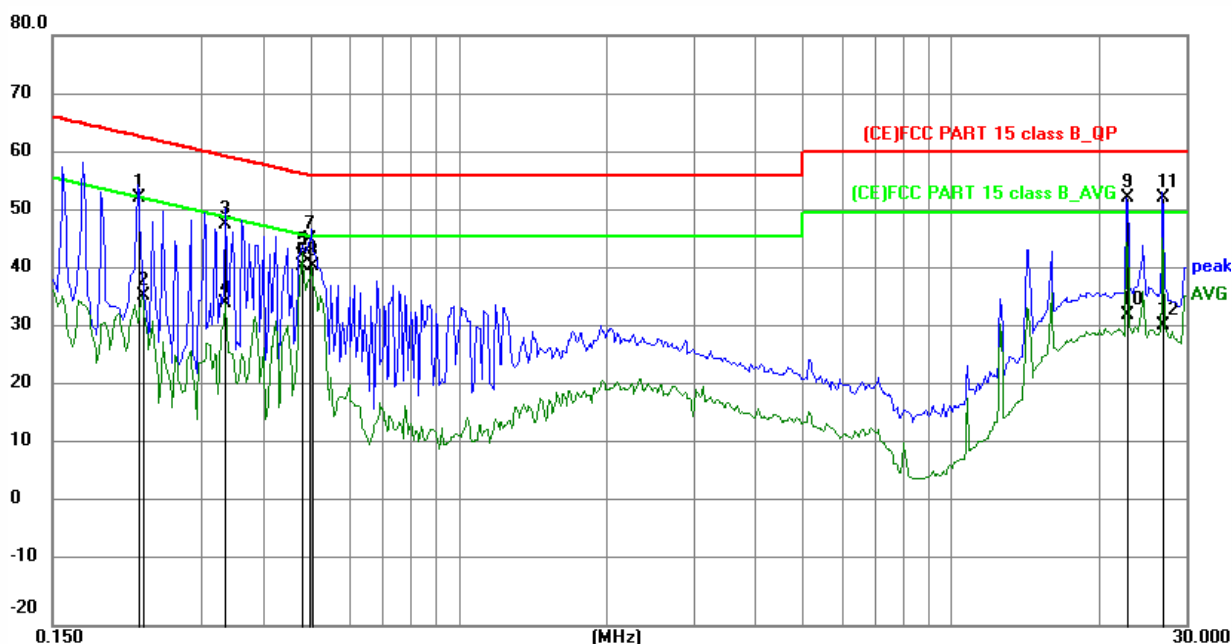

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE	Verdict
1	0.2240	42.56	9.86	52.42	62.67	10.25	QPK	N	GND	PASS
2	0.2280	26.16	9.84	36.00	52.52	16.52	AVG	N	GND	PASS
3	0.3371	38.25	9.73	47.98	59.27	11.29	QPK	N	GND	PASS
4	0.3371	24.85	9.73	34.58	49.27	14.69	AVG	N	GND	PASS
5	0.4814	33.14	9.58	42.72	56.31	13.59	QPK	N	GND	PASS
6	0.4814	31.25	9.58	40.83	46.31	5.48	AVG	N	GND	PASS
7	0.4993	35.77	9.56	45.33	56.01	10.68	QPK	N	GND	PASS
8	0.5049	31.24	9.57	40.81	46.00	5.19	AVG	N	GND	PASS
9	22.7535	42.58	9.92	52.50	60.00	7.50	QPK	N	GND	PASS
10	22.7535	22.80	9.92	32.72	50.00	17.28	AVG	N	GND	PASS
11	26.9148	42.15	10.31	52.46	60.00	7.54	QPK	N	GND	PASS
12	26.9148	20.50	10.31	30.81	50.00	19.19	AVG	N	GND	PASS

9.9 ANTENNA APPLICATION

Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Result

Pass.

The EUT has 1 PCB Antenna: The PCB Antenna Gain is 1.7 dBi;

Note: ☒ Antenna use a permanently attached antenna which is not replaceable.
☐ Not using a standard antenna jack or electrical connector for antenna replacement
☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

*** End of Report ***

声明 Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效;

This report will be void without authorized signature or special seal for testing report.

2. 未经许可本报告不得部分复制;

This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效, 委托方对样品的代表性和资料的真实性负责;

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内, 仅作为客户委托、科研、教学或内部质量控制等目的使用;

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定, 未考虑不确定度所带来的风险, 本实验室不承担相关责任, 特别约定、标准或规范中有明确规定的除外;

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检测报告若有异议, 请于收到报告之日起 20 日内提出;

Objections shall be raised within 20 days from the date receiving the report.