


Case No. : CTA24061300702	
Ambient Condition: 24 °C, 59 %RH	
According Standard: ■Part15C	
Test Date: 2024.6.20	Test Engineer: Evan ouyang

Appendix B.1: DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant0	2402	0.668	2401.656	2402.324	0.5	PASS
		2440	0.692	2439.624	2440.316	0.5	PASS
		2480	0.700	2479.624	2480.324	0.5	PASS

Test Graphs

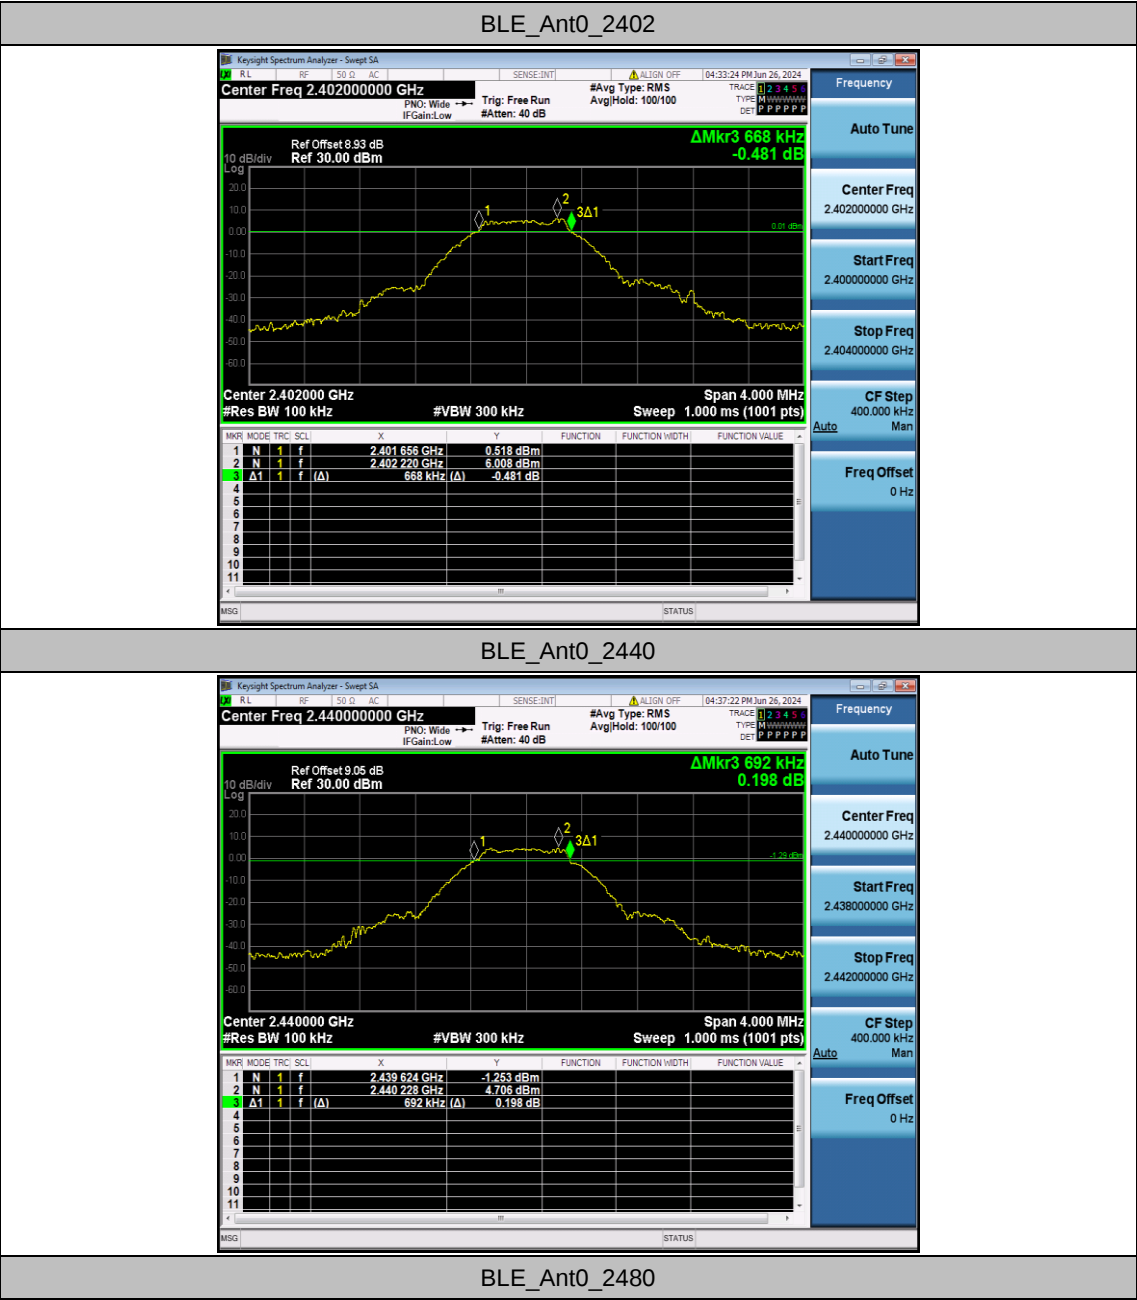



Appendix B.2: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
BLE	Ant0	2402	1.0314	2401.4695	2402.5009
		2440	1.0403	2439.4607	2440.5010
		2480	1.0355	2479.4616	2480.4971

Test Graphs

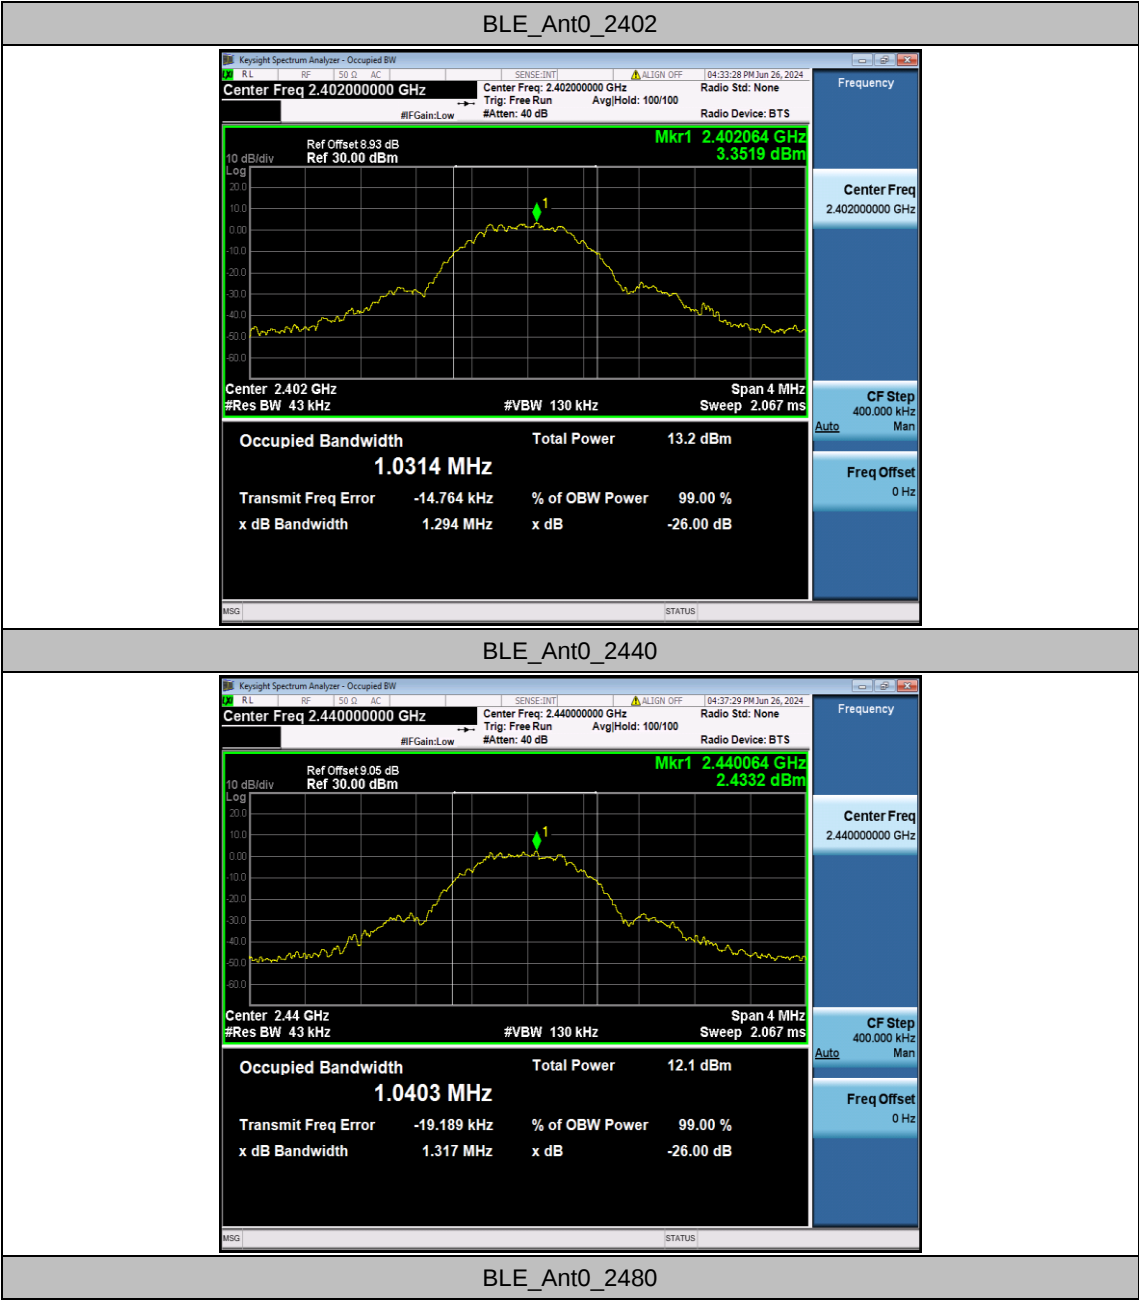

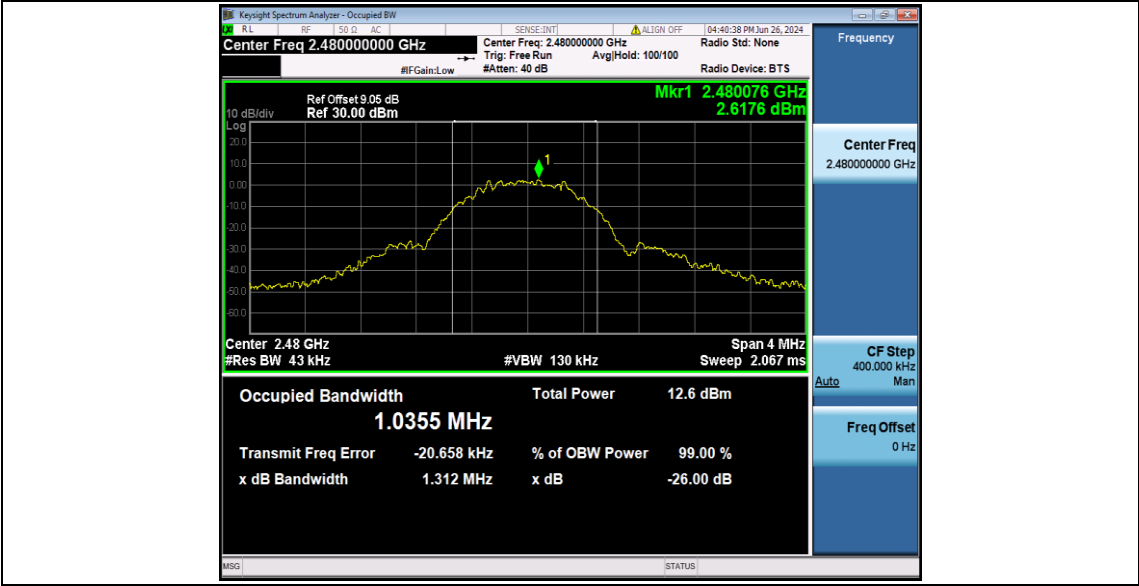

Appendix B.3: Maximum conducted output power

Test Result Peak

TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE	Ant0	2402	6.85	≤30	PASS
		2440	5.87	≤30	PASS
		2480	6.29	≤30	PASS

Appendix B.4: Maximum power spectral density


Test Result


TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE	Ant0	2402	-9.39	≤8.00	PASS
		2440	-10.22	≤8.00	PASS
		2480	-9.69	≤8.00	PASS

Note:

1. The Duty Cycle Factor and RBW Factor is compensated in the graph.

Test Graphs

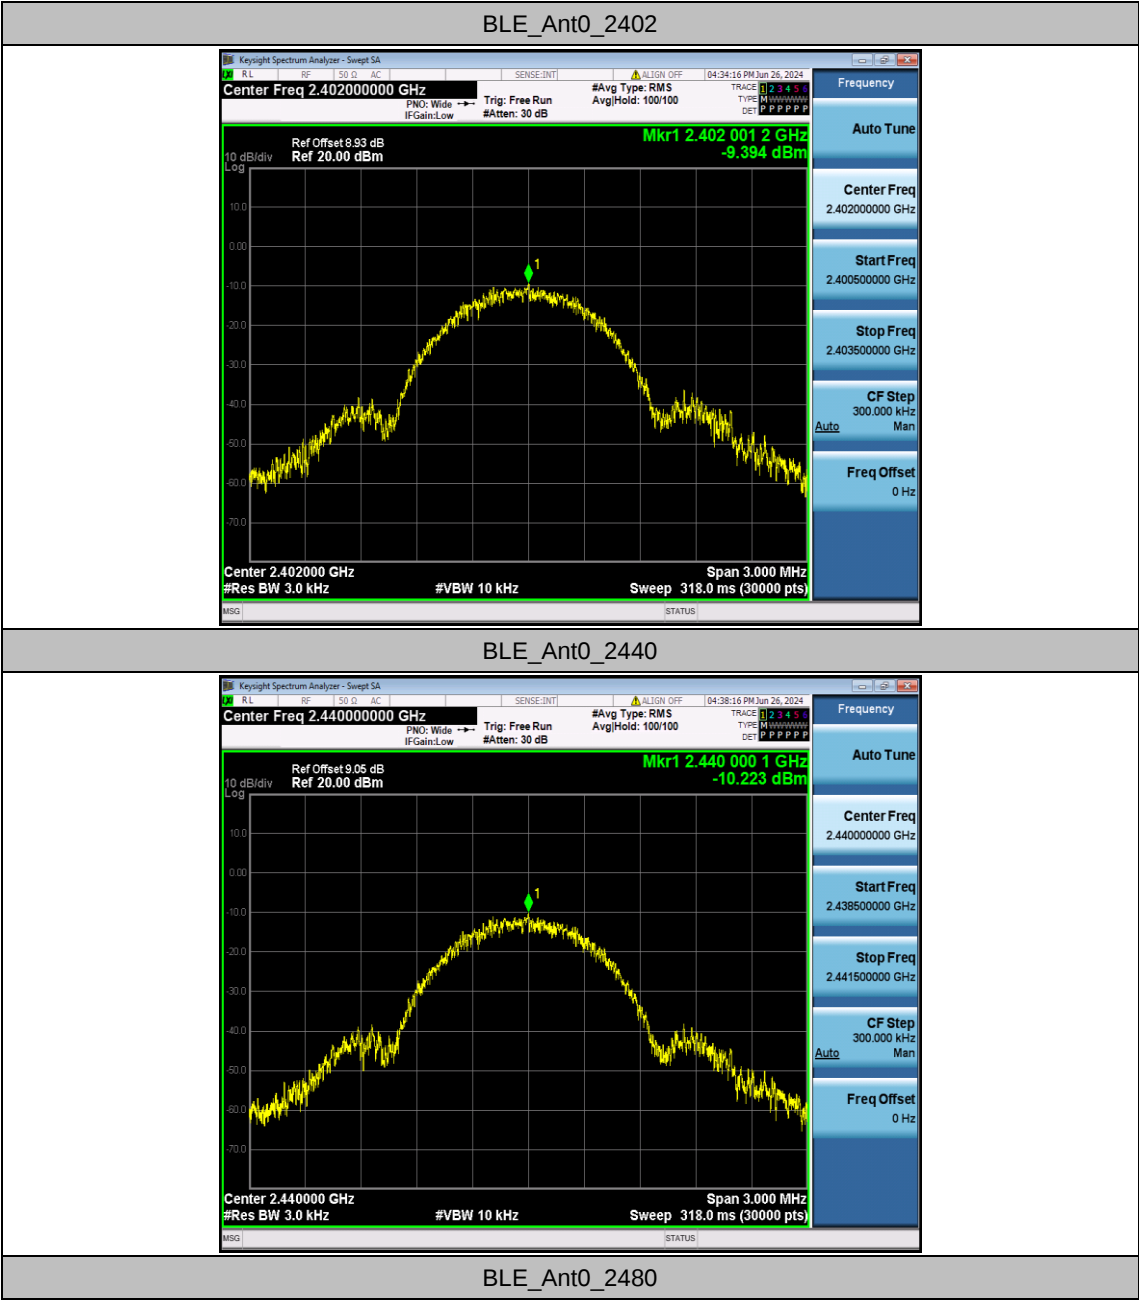

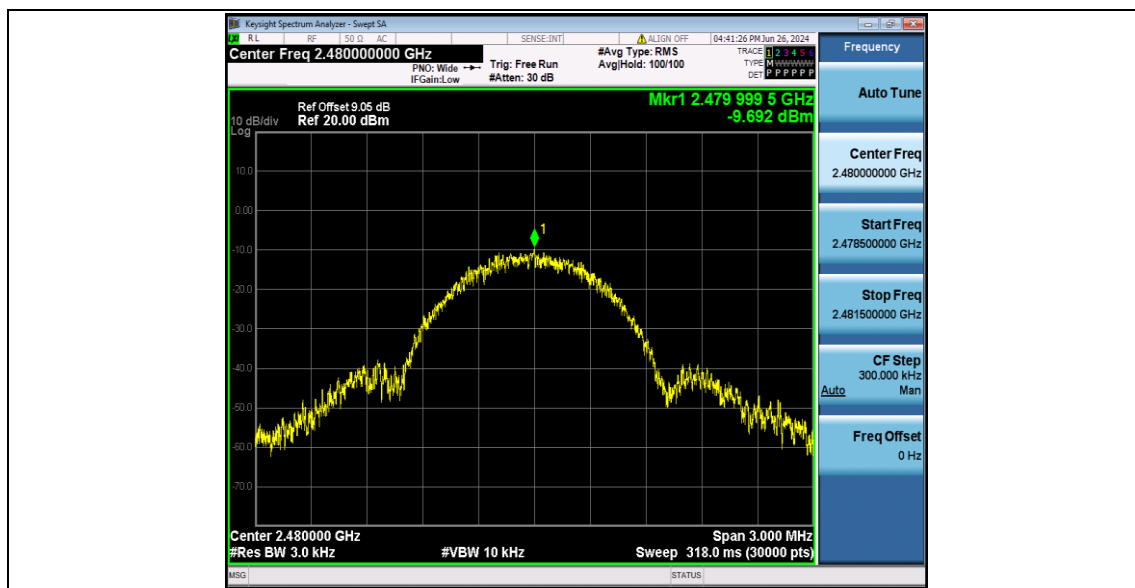


Appendix B.5: Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant0	Low	2402	6.39	-49.5	≤-13.62	PASS
		High	2480	6.01	-48.9	≤-13.99	PASS

Test Graphs

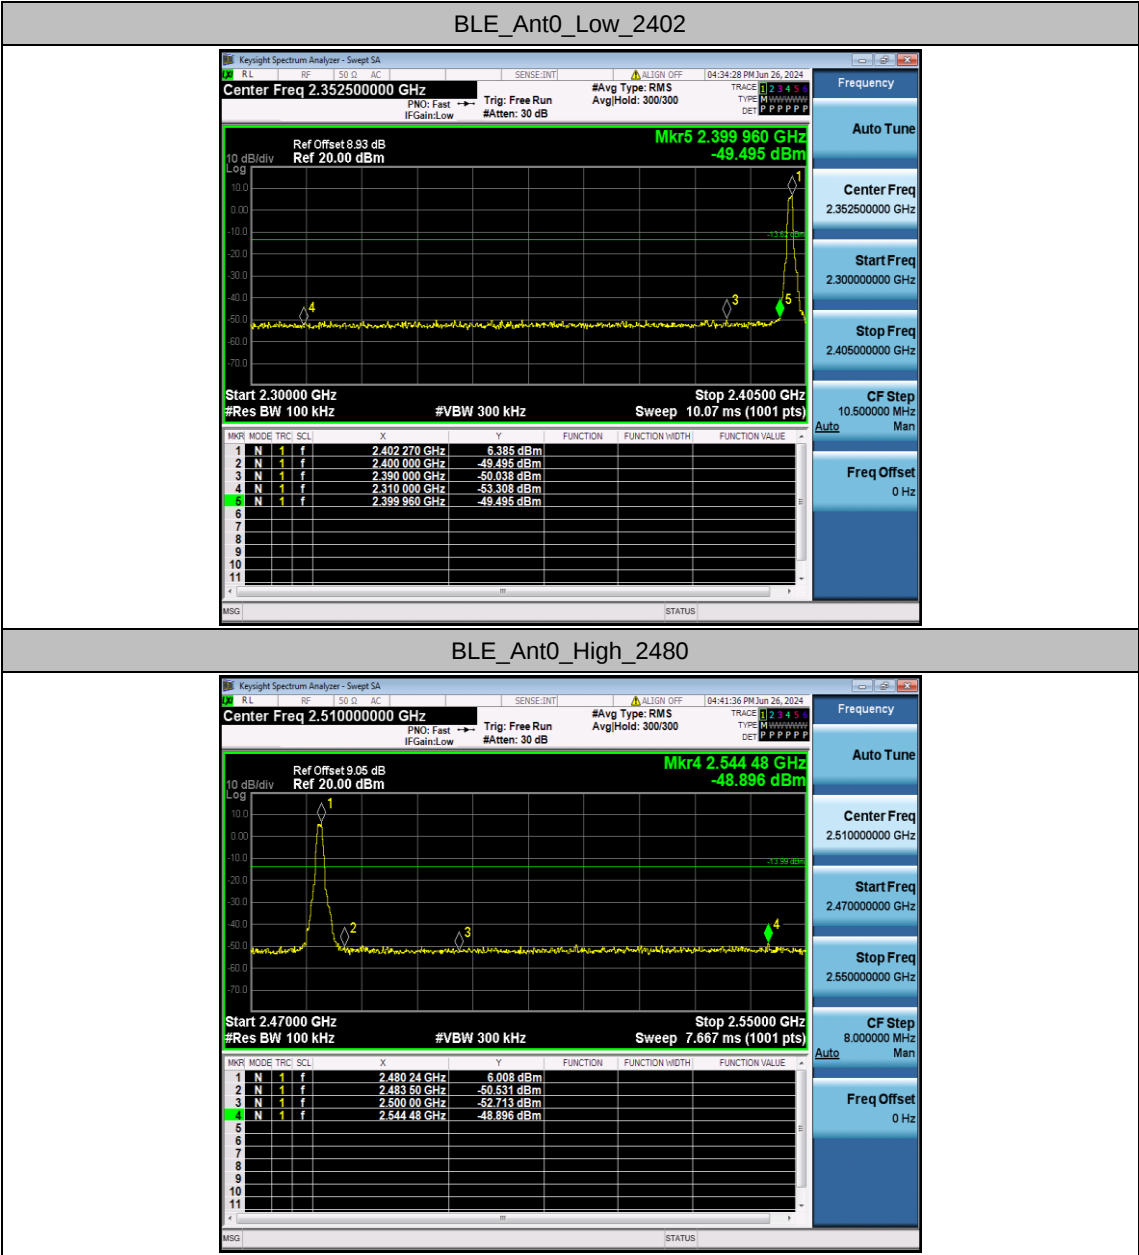



Appendix B.6: Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant0	2402	Reference	4.97	4.97	---	PASS
			30~1000	4.97	-60.72	≤ -15.03	PASS
			1000~26500	4.97	-47.98	≤ -15.03	PASS
		2440	Reference	4.62	4.62	---	PASS
			30~1000	4.62	-59.92	≤ -15.38	PASS
			1000~26500	4.62	-48.07	≤ -15.38	PASS
		2480	Reference	5.15	5.15	---	PASS
			30~1000	5.15	-60.91	≤ -14.85	PASS
			1000~26500	5.15	-47.96	≤ -14.85	PASS

Test Graphs

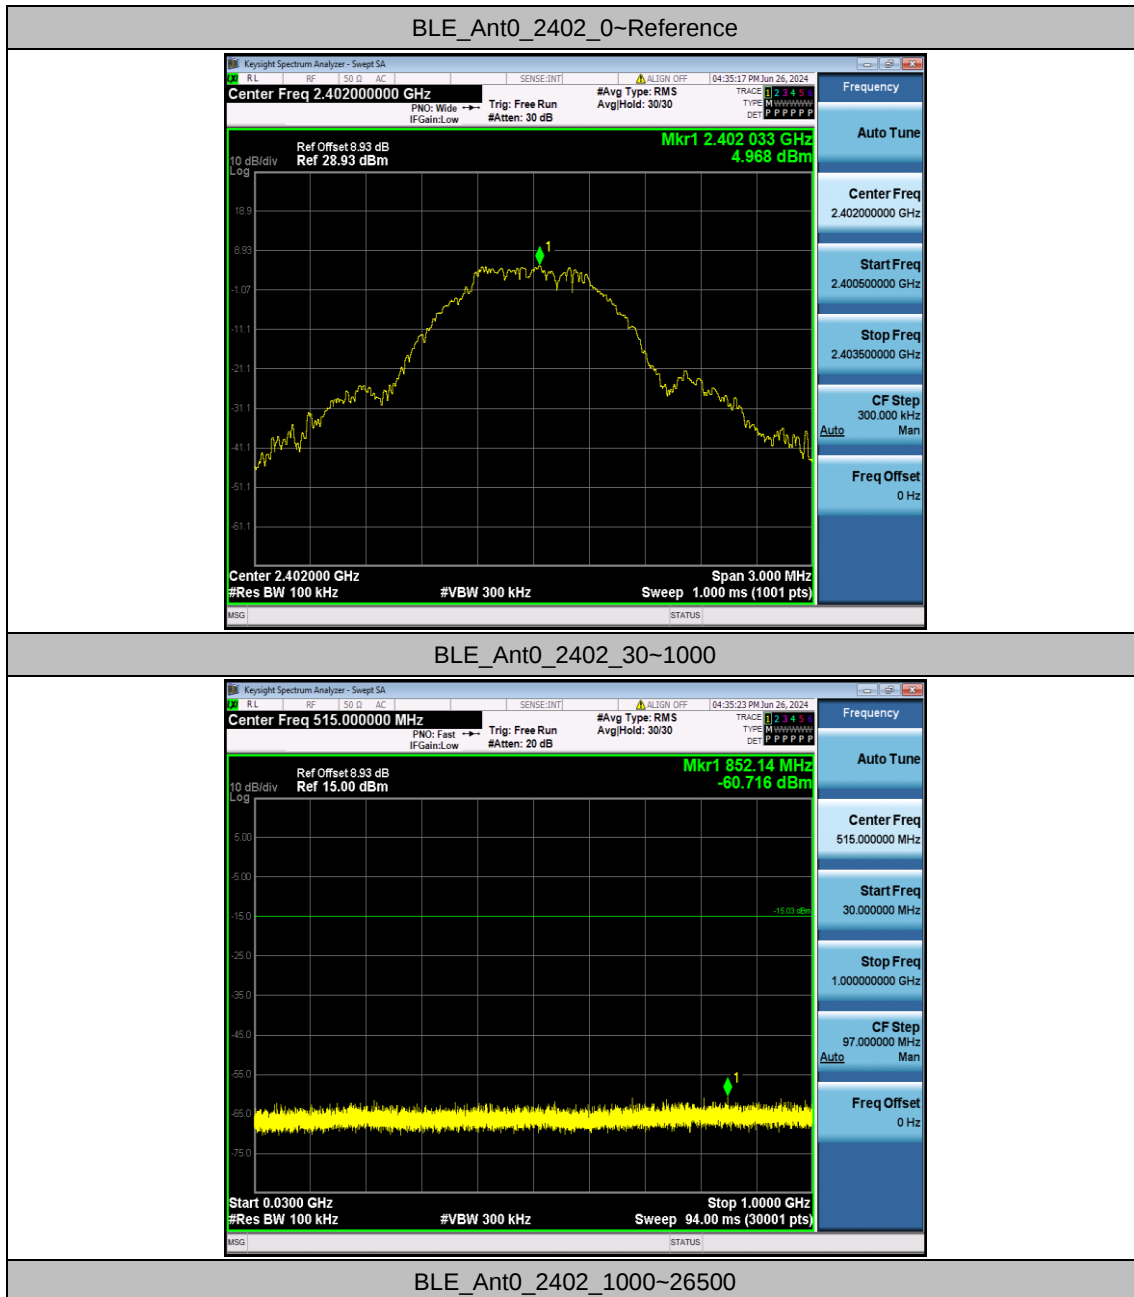


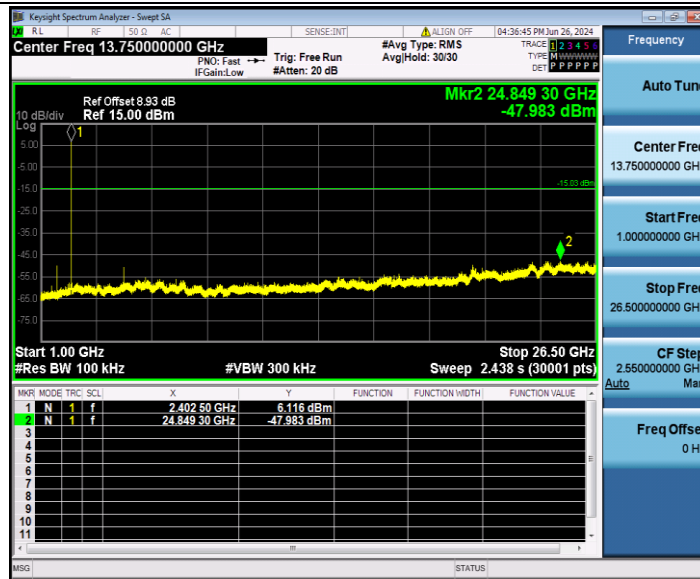


BLE_Ant0_2440_0~Reference



BLE_Ant0_2440_30~1000

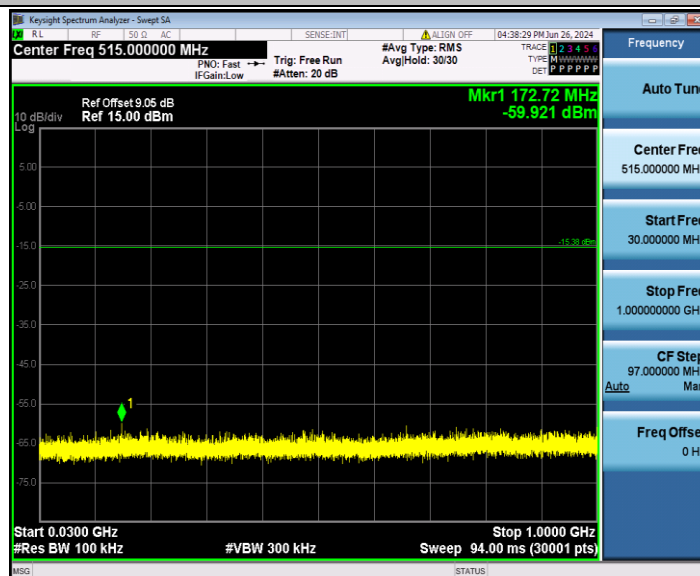


BLE_Ant0_2440_1000~26500

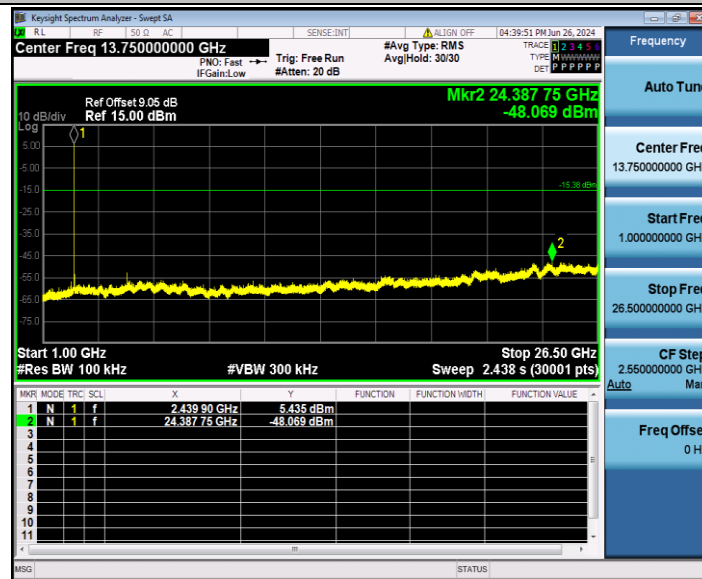

BLE_Ant0_2480_0~Reference



BLE_Ant0_2480_30~1000

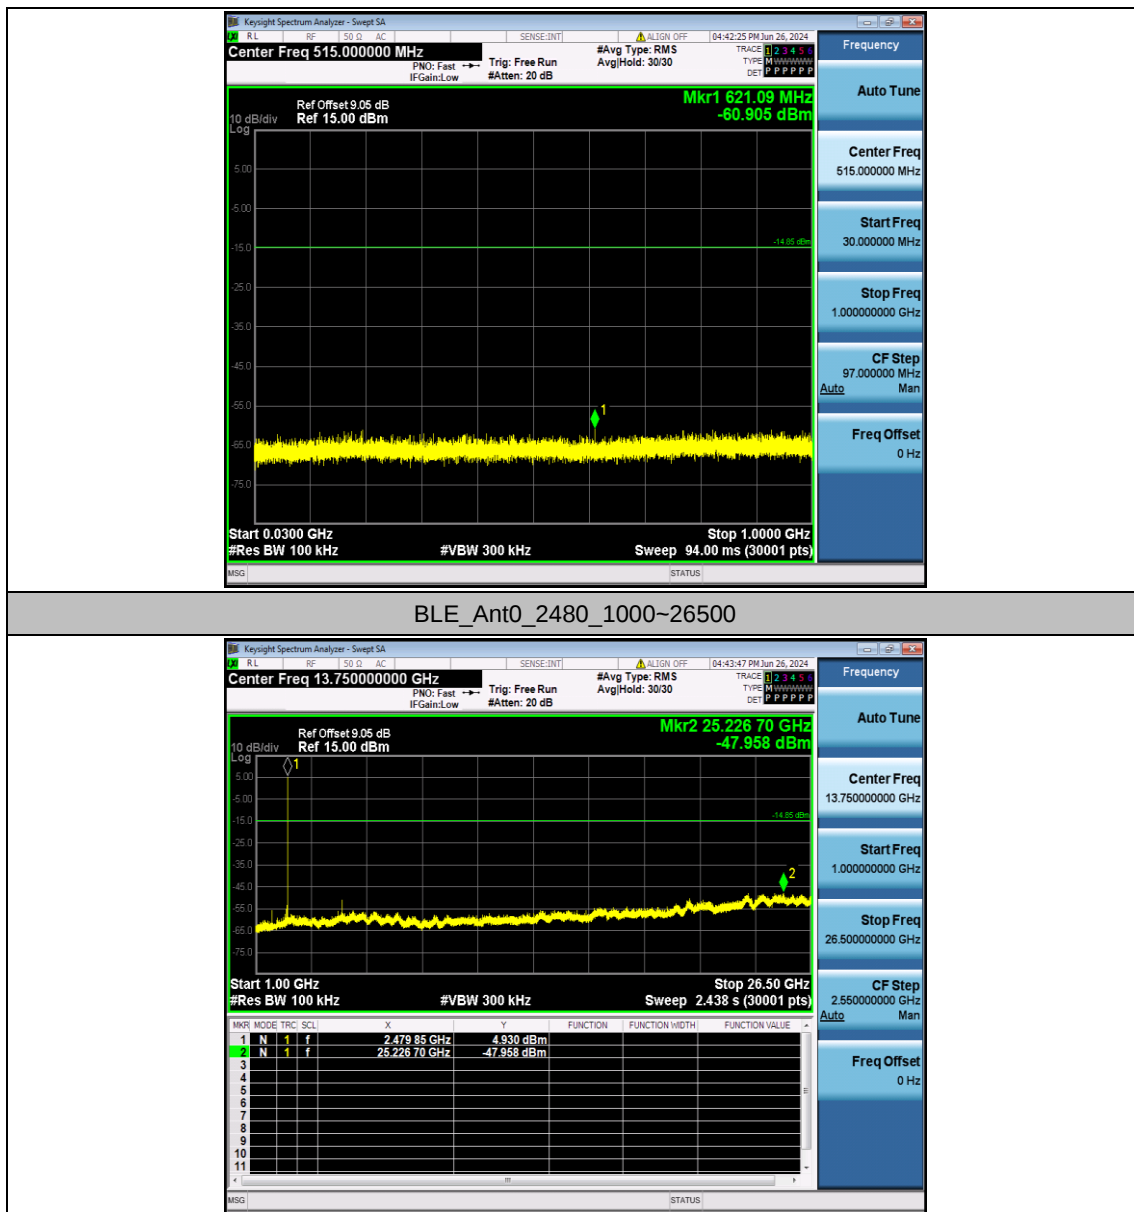

Appendix B.7: Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE	Ant0	Low	2402	AV	2310.000	-49.41	≤-41.20	45.79	≤54	PASS
				AV	2384.420	-48.79	≤-41.20	46.41	≤54	PASS
				AV	2390.000	-48.82	≤-41.20	46.38	≤54	PASS
				Peak	2310.000	-42.56	≤-21.20	52.64	≤74	PASS
				Peak	2383.475	-38.91	≤-21.20	56.29	≤74	PASS
				Peak	2390.000	-42.47	≤-21.20	52.73	≤74	PASS
		High	2480	AV	2483.500	-46.27	≤-41.20	48.93	≤54	PASS
				AV	2483.520	-46.27	≤-41.20	48.93	≤54	PASS
				AV	2500.000	-48.63	≤-41.20	46.57	≤54	PASS
				Peak	2483.500	-40.68	≤-21.20	54.52	≤74	PASS
				Peak	2494.880	-38.85	≤-21.20	56.35	≤74	PASS
				Peak	2500.000	-40.55	≤-21.20	54.65	≤74	PASS

Note:

1. The Antenna Gain is compensated in the graph.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

