



# TEST REPORT

**Product Name** : wireless data terminal  
**Brand Name** : ioutdoor  
**Model** : L240  
**Series Model** : N/A  
**FCC ID** : 2BKL6-L240  
**Applicant** : **Shenzhen Tianlong Century TechnologyDevelopment Co.,Ltd.**  
3F, 5F, Industrial Building, No.1, Quanxinyuan Industrial Zone,  
**Address** : Tongsheng Community, Dalang Street, Longhua District,  
Shenzhen  
**Manufacturer** : **Shenzhen Tianlong Century TechnologyDevelopment Co.,Ltd.**  
3F, 5F, Industrial Building, No.1, Quanxinyuan Industrial Zone,  
**Address** : Tongsheng Community, Dalang Street, Longhua District,  
Shenzhen  
**Standard(s)** : FCC CFR Title 47 Part 15 Subpart C Section 15.225  
**Date of Receipt** : July 10, 2025  
**Date of Test** : July 10, 2025~ Aug. 01, 2025  
**Issued Date** : Aug. 01, 2025

**Issued By:** **Guangdong Asia Hongke Test Technology Limited**  
B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street,  
Bao'an District, Shenzhen, Guangdong, China  
Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

**Reviewed by:**   
Aalen.Ye

**Approved by:**   
Allen Wang



Note: This device has been tested and found to comply with the standard(s) listed, this test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory. This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited. If there is a need to alter or revise this document, the right belongs to Guangdong Asia Hongke Test Technology Limited, and it should give a prior written notice of the revision document. This test report must not be used by the client to claim product endorsement.



**Report Revise Record**

| Report Version | Issued Date   | Notes           |
|----------------|---------------|-----------------|
| M1             | Aug. 01, 2025 | Initial Release |

# Contents

|          |                                            |           |
|----------|--------------------------------------------|-----------|
| <b>1</b> | <b>TEST SUMMARY.....</b>                   | <b>4</b>  |
| 1.1      | TEST STANDARDS .....                       | 4         |
| 1.2      | TEST SUMMARY .....                         | 4         |
| 1.3      | TEST FACILITY .....                        | 5         |
| 1.4      | MEASUREMENT UNCERTAINTY .....              | 5         |
| <b>2</b> | <b>GENERAL INFORMATION.....</b>            | <b>6</b>  |
| 2.1      | ENVIRONMENTAL CONDITIONS .....             | 6         |
| 2.2      | GENERAL DESCRIPTION OF EUT .....           | 6         |
| 2.3      | SPECIAL ACCESSORIES .....                  | 7         |
| 2.4      | EQUIPMENT LIST FOR THE TEST .....          | 7         |
| <b>3</b> | <b>TEST CONDITIONS AND RESULTS .....</b>   | <b>9</b>  |
| 3.1      | CONDUCTED EMISSIONS TEST .....             | 9         |
| 3.2      | RADIATED EMISSIONS.....                    | 12        |
| 3.3      | 20dB BANDWIDTH.....                        | 17        |
| 3.4      | FREQUENCY STABILITY .....                  | 18        |
| <b>4</b> | <b>TEST SETUP PHOTOGRAPHS OF EUT .....</b> | <b>20</b> |
| <b>5</b> | <b>PHOTOS OF EUT.....</b>                  | <b>21</b> |

# 1 TEST SUMMARY

## 1.1 Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.225](#): Operation within the band 13.110–14.010 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

## 1.2 Test Summary

| FCC PART 15 .225           |                               |      |
|----------------------------|-------------------------------|------|
| FCC Part 15.207            | AC Power Conducted Emission   | PASS |
| FCC Part 2.1049            | 20dB Bandwidth                | PASS |
| FCC Part 15.225(a) (b) (c) | In-band Emissions             | PASS |
| FCC Part 15.225(d)/15.209  | Out-of-band Emissions         | PASS |
| FCC Part 15.225(e)         | Frequency Stability Tolerance | PASS |

### 1.3 Test Facility

#### Test Laboratory:

#### Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified or accredited by the following organizations:

#### FCC-Registration No.: 251906 Designation Number: CN1376

Guangdong Asia Hongke Test Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### IC —Registration No.: 31737 CAB identifier: CN0165

The 3m Semi-anechoic chamber of Guangdong Asia Hongke Test Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 31737

#### A2LA-Lab Cert. No.: 7133.01

Guangdong Asia Hongke Test Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 1.4 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Guangdong Asia Hongke Test Technology Limited's quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Asia Hongke laboratory is reported:

| Test                          | Measurement Uncertainty   | Notes |
|-------------------------------|---------------------------|-------|
| Power Line Conducted Emission | 9KHz~30MHz $\pm 1.20$ dB  | (1)   |
| Radiated Emission             | 9KHz~30MHz $\pm 3.10$ dB  | (1)   |
| Radiated Emission             | 30MHz~1GHz $\pm 3.75$ dB  | (1)   |
| Radiated Emission             | 1GHz~18GHz $\pm 3.88$ dB  | (1)   |
| Radiated Emission             | 18GHz~40GHz $\pm 3.88$ dB | (1)   |
| RF power, conducted           | 30MHz~6GHz $\pm 0.16$ dB  | (1)   |
| RF power density, conducted   | $\pm 0.24$ dB             | (1)   |
| Spurious emissions, conducted | $\pm 0.21$ dB             | (1)   |
| Temperature                   | $\pm 1^{\circ}\text{C}$   | (1)   |
| Humidity                      | $\pm 3\%$                 | (1)   |
| DC and low frequency voltages | $\pm 1.5\%$               | (1)   |
| Time                          | $\pm 2\%$                 | (1)   |
| Duty cycle                    | $\pm 2\%$                 | (1)   |

The report uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty Multiplied by a coverage factor of  $k=2$  , providing a level of confidence of approximately 95%.

## 2 GENERAL INFORMATION

### 2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                     |         |
|---------------------|---------|
| Normal Temperature: | 25°C    |
| Relative Humidity:  | 55 %    |
| Air Pressure:       | 101 kPa |

### 2.2 General Description of EUT

|                                                                                                                                                                                              |                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| Product Name:                                                                                                                                                                                | wireless data terminal                                                           |
| Model/Type reference:                                                                                                                                                                        | L240                                                                             |
| Serial Model:                                                                                                                                                                                | N/A                                                                              |
| Power Supply:                                                                                                                                                                                | DC 5V from adapter<br>DC 3.8V from Rechargeable Li-ion battery                   |
| Adapter information:                                                                                                                                                                         | Model: HJ-0502000-US<br>Input: 100-240V~50/60Hz 0.35A<br>Output: 5.0V=2.0A 10.0W |
| Hardware Version:                                                                                                                                                                            | Z692_MB_V1.0                                                                     |
| Software Version:                                                                                                                                                                            | Z692_L240_GPS_EN_A05_V0.1_20250621                                               |
| Sample(s) Status:                                                                                                                                                                            | AiTSZ-250710008-1(Normal sample)<br>AiTSZ-250710008-2(Engineer sample)           |
| <b>NFC:</b>                                                                                                                                                                                  |                                                                                  |
| Operation frequency:                                                                                                                                                                         | 13.56MHz                                                                         |
| Modulation :                                                                                                                                                                                 | ASK                                                                              |
| No. of Channel :                                                                                                                                                                             | 1                                                                                |
| Antenna type:                                                                                                                                                                                | Loop Antenna                                                                     |
| <b>Remark:</b><br>The above DUT's information was declared by manufacturer. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.. |                                                                                  |


## 2.3 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

| Description | Manufacturer | Model | Serial No. | Provided by | Other |
|-------------|--------------|-------|------------|-------------|-------|
| /           | /            | /     | /          | /           | /     |
| /           | /            | /     | /          | /           | /     |

## 2.4 Equipment List for the Test

| No | Test Equipment                      | Manufacturer | Model No        | Serial No       | Cal. Date  | Cal. Due Date |
|----|-------------------------------------|--------------|-----------------|-----------------|------------|---------------|
| 1  | EMI Measuring Receiver              | R&S          | ESR             | 101160          | 2024.09.25 | 2025.09.24    |
| 2  | Spectrum Analyzer                   | R&S          | FSV40           | 101470          | 2024.09.23 | 2025.09.22    |
| 3  | Low Noise Pre Amplifier             | SCHWARZBECK  | BBV 9745        | 00282           | 2024.09.25 | 2025.09.24    |
| 4  | Low Noise Pre Amplifier             | CESHENG      | CSKJLNA23101 6A | CSKJLNA231016 A | 2024.09.25 | 2025.09.24    |
| 5  | Passive Loop                        | ETS          | 6512            | 00165355        | 2024.08.29 | 2027.08.28    |
| 6  | TRILOG Super Broadband test Antenna | SCHWARZBECK  | VULB9168        | 01434           | 2024.08.29 | 2027.08.28    |
| 7  | Broadband Horn Antenna              | Schwarzbeck  | BBHA 9120D      | 452             | 2024.08.29 | 2027.08.28    |
| 8  | Horn Antenna 15-40GHz               | SCHWARZBECK  | BBHA9170        | BBHA9170367     | 2024.08.28 | 2027.08.27    |
| 9  | 6dB Attenuator                      | JFW          | 50FPE-006       | 4360846-949-1   | 2024.09.24 | 2025.09.23    |
| 10 | EMI Test Receiver                   | R&S          | ESPI            | 100771          | 2024.09.25 | 2025.09.24    |
| 11 | LISN                                | R&S          | NNLK 8129       | 8130179         | 2024.09.24 | 2025.09.23    |
| 12 | LISN                                | R&S          | ESH3-Z5         | 892785/016      | 2024.09.23 | 2025.09.22    |
| 13 | Pulse Limiter                       | R&S          | ESH3-Z2         | 102789          | 2024.09.24 | 2025.09.23    |
| 14 | RF Automatic Test system            | TST          | TSTPASS         | 21033016        | 2024.09.25 | 2025.09.24    |
| 15 | Vector Signal Generator             | Agilent      | N5182A          | MY50143009      | 2024.09.25 | 2025.09.24    |
| 16 | Analog signal generator             | Agilent      | E8257           | MY51554256      | 2024.09.25 | 2025.09.24    |
| 17 | Spectrum Analyzer                   | Agilent      | N9020A          | MY51289843      | 2024.09.25 | 2025.09.24    |
| 18 | Spectrum Analyzer                   | Agilent      | N9020A          | MY53421570      | 2024.09.25 | 2025.09.24    |
| 19 | Power Sensor                        | Agilent      | 8481A           | MY41097697      | 2024.09.25 | 2025.09.24    |
| 20 | Wideband Radio communication tester | R&S          | CMW500          | 1201.0002K50    | 2024.09.24 | 2025.09.23    |
| 21 | DC power supply                     | ZHAOXIN      | RXN-305D-2      | 28070002559     | 2024.09.24 | 2025.09.23    |
| 22 | RE Software                         | EZ           | EZ-EMC_RE       | Ver.AIT-03A     | N/A        | N/A           |
| 23 | CE Software                         | EZ           | EZ-EMC_CE       | Ver.AIT-03A     | N/A        | N/A           |



|                                                                                                                                                                              |                                   |         |         |                   |     |     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|---------|---------|-------------------|-----|-----|
| 24                                                                                                                                                                           | RF Software                       | TST     | TSTPASS | Version 2.0       | N/A | N/A |
| 25                                                                                                                                                                           | RF Software                       | cesheng | WCS-WCN | Version 2024.6.20 | N/A | N/A |
| 26                                                                                                                                                                           | temporary antenna connector(Note) | NTS     | R001    | N/A               | N/A | N/A |
| Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list. |                                   |         |         |                   |     |     |



### 3 TEST CONDITIONS AND RESULTS


#### 3.1 Conducted Emissions Test

##### LIMIT

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

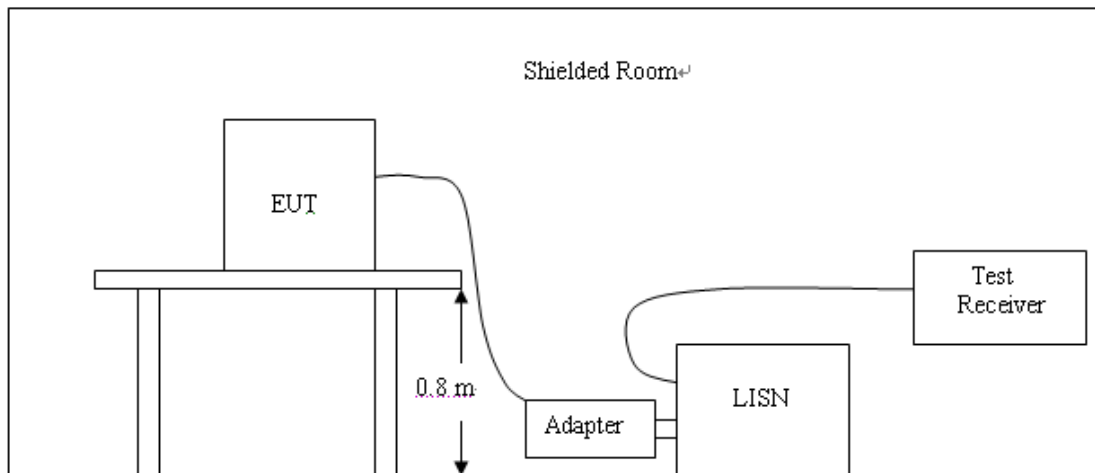


##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.


## TEST RESULTS

Remark: Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

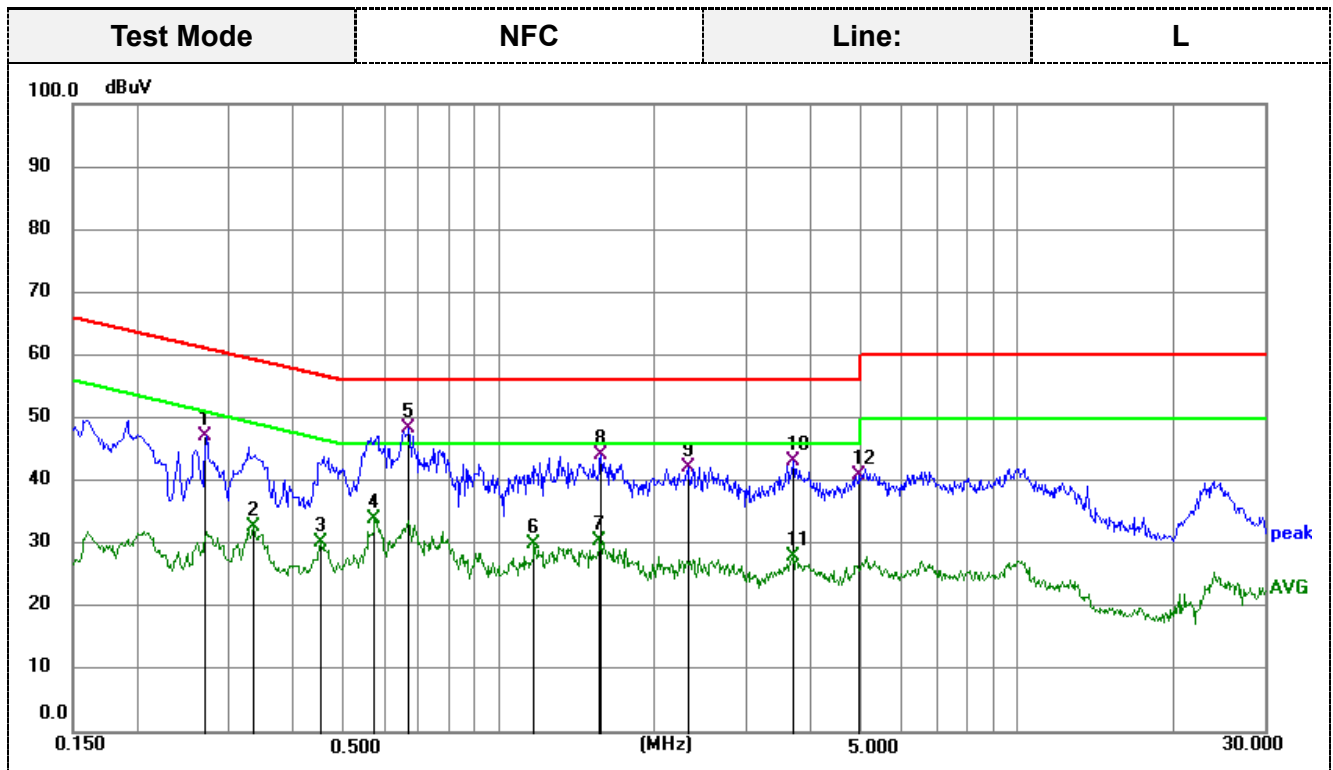

Remark: Correct Factor = Insertion loss of LISN + Cable loss + Insertion loss of Pulse Limiter;  
Measurement Result = Reading Level + Correct Factor;  
Margin = Measurement Result - Limit

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|--------|
| 1   | 0.2714             | 36.43             | 10.70           | 47.13            | 61.07           | -13.94         | QP     |
| 2   | 0.3345             | 22.10             | 10.70           | 32.80            | 49.34           | -16.54         | AVG    |
| 3   | 0.4515             | 19.52             | 10.69           | 30.21            | 46.85           | -16.64         | AVG    |
| 4   | 0.5730             | 23.24             | 10.68           | 33.92            | 46.00           | -12.08         | AVG    |
| 5   | 0.6673             | 37.74             | 10.68           | 48.42            | 56.00           | -7.58          | QP     |
| 6   | 1.1713             | 19.25             | 10.67           | 29.92            | 46.00           | -16.08         | AVG    |
| 7   | 1.5670             | 19.75             | 10.73           | 30.48            | 46.00           | -15.52         | AVG    |
| 8   | 1.5720             | 33.46             | 10.73           | 44.19            | 56.00           | -11.81         | QP     |
| 9   | 2.3100             | 31.46             | 10.79           | 42.25            | 56.00           | -13.75         | QP     |
| 10  | 3.6915             | 32.11             | 10.99           | 43.10            | 56.00           | -12.90         | QP     |
| 11  | 3.6915             | 17.06             | 10.99           | 28.05            | 46.00           | -17.95         | AVG    |
| 12  | 4.9650             | 29.83             | 11.02           | 40.85            | 56.00           | -15.15         | QP     |

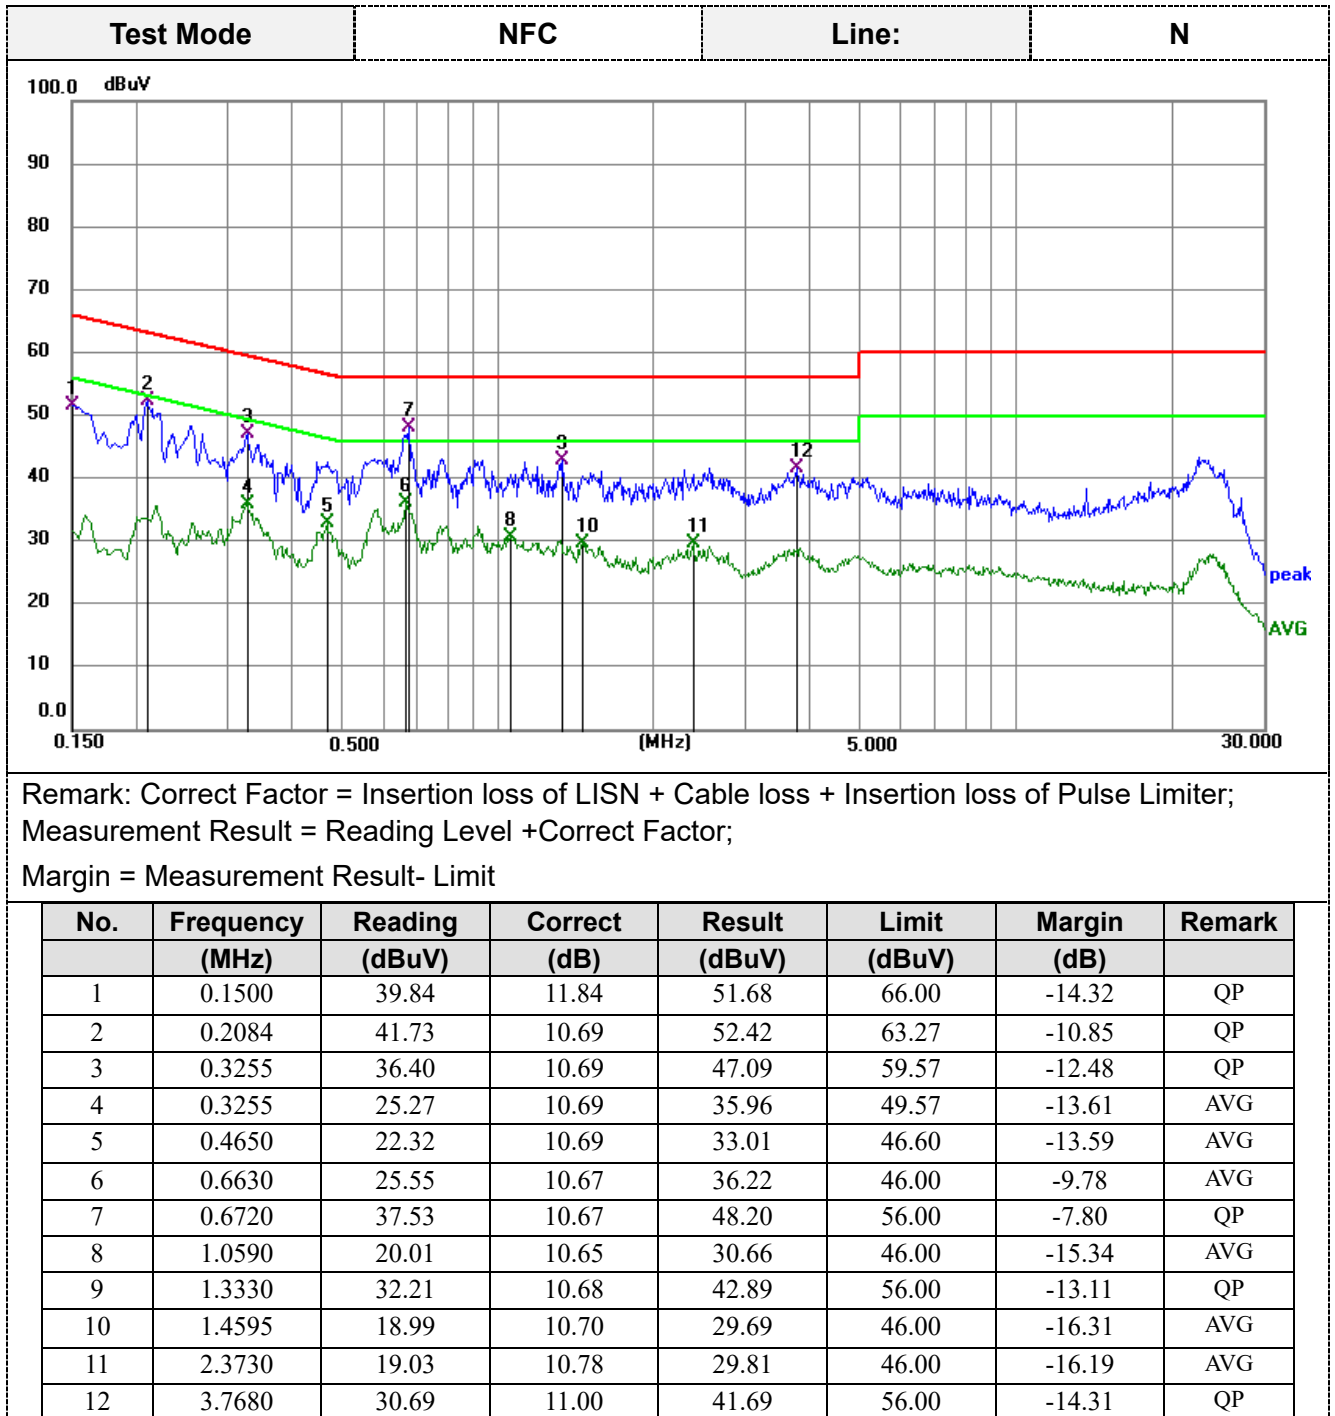

## 3.2 Radiated Emissions

### Limit


- The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.
- Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- The field strength of any emissions appearing outside of the 13.110– 14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Radiated emission limits


| Frequency (MHz) | Distance (Meters) | Radiated (dBuV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-13.110    | 3                 | 69.54                                      | 30                    |
| 13.110-13.410   | 3                 | 80.50                                      | 106                   |
| 13.410-13.553   | 3                 | 90.47                                      | 334                   |
| 13.553-13.567   | 3                 | 124.00                                     | 15848                 |
| 13.567-13.710   | 3                 | 90.47                                      | 334                   |
| 13.710-14.010   | 3                 | 80.50                                      | 106                   |
| 14.010-30.0     | 3                 | 69.54                                      | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |

### TEST CONFIGURATION

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

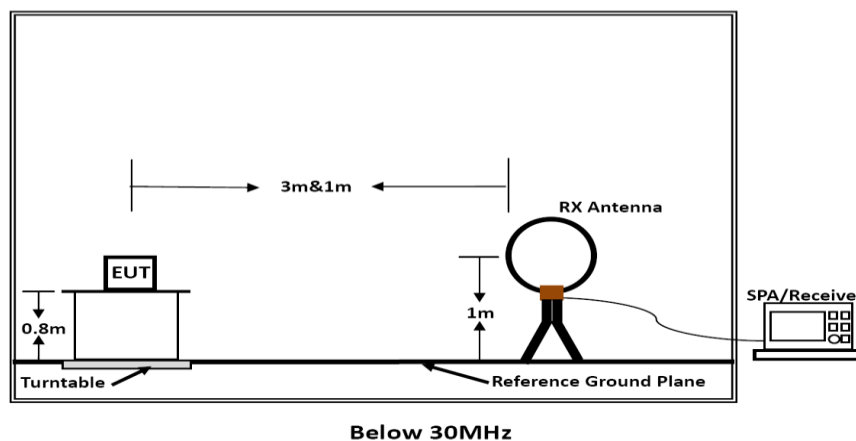

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

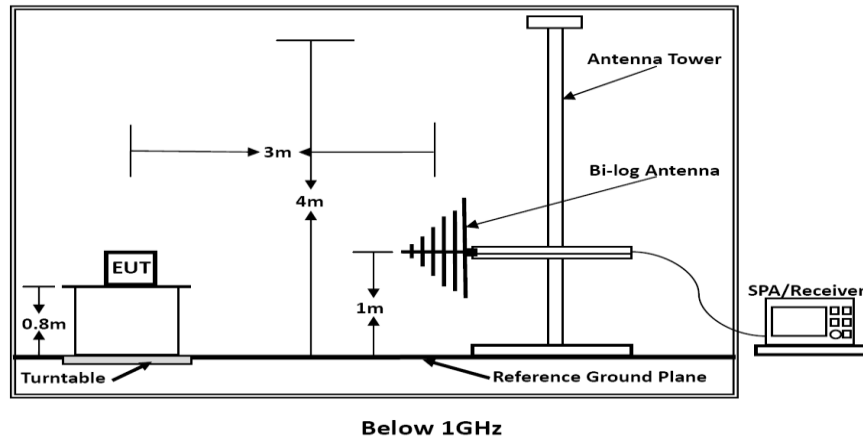

### Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 1GHz.
- The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type   | Test Distance |
|----------------------|---------------------|---------------|
| 9KHz-30MHz           | Active Loop Antenna | 3             |
| 30MHz-1GHz           | Bilog Antenna       | 3             |

- Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting          | Detector |
|----------------------|-----------------------------------------|----------|
| 9KHz-150KHz          | RBW=200Hz/VBW=3KHz, Sweep time=Auto     | QP       |
| 150KHz-30MHz         | RBW=9KHz/VBW=100KHz, Sweep time=Auto    | QP       |
| 30MHz-1GHz           | RBW=120KHz/VBW=1000KHz, Sweep time=Auto | QP       |

### TEST RESULTS

### Below 30MHz


| Frequency(MHz): |               | 13.56MHz |                | Polarity: | Antenna Position 0 |               |
|-----------------|---------------|----------|----------------|-----------|--------------------|---------------|
| Frequency       | Meter Reading | Factor   | Emission Level | Limits    | Margin             | Detector Type |
| (MHz)           | (dBμV)        | (dB/m)   | (dBμV/m)       | (dBμV/m)  | (dB)               |               |
| 4.665           | 12.71         | 22.37    | 35.08          | 69.54     | -34.46             | PEAK          |
| 13.239          | 22.79         | 22.55    | 45.34          | 80.50     | -35.16             | PEAK          |
| 13.491          | 33.6          | 22.6     | 56.20          | 90.47     | -34.27             | PEAK          |
| 13.565          | 39.82         | 22.62    | 62.44          | 124.00    | -61.56             | PEAK          |
| 13.687          | 32.28         | 22.64    | 54.92          | 90.47     | -35.55             | PEAK          |
| 13.878          | 21.52         | 22.68    | 44.20          | 80.50     | -36.30             | PEAK          |
| 24.935          | 14.05         | 23.1     | 37.15          | 69.54     | -32.39             | PEAK          |

| Frequency(MHz): |               | 13.56MHz |                | Polarity: | Antenna Position 90 |               |
|-----------------|---------------|----------|----------------|-----------|---------------------|---------------|
| Frequency       | Meter Reading | Factor   | Emission Level | Limits    | Margin              | Detector Type |
| (MHz)           | (dBμV)        | (dB/m)   | (dBμV/m)       | (dBμV/m)  | (dB)                |               |
| 4.908           | 14.59         | 22.47    | 37.06          | 69.54     | -32.48              | PEAK          |
| 13.178          | 21.34         | 22.54    | 43.88          | 80.50     | -36.62              | PEAK          |
| 13.544          | 32.68         | 22.61    | 55.29          | 90.47     | -35.18              | PEAK          |
| 13.565          | 41.25         | 22.62    | 63.87          | 124.00    | -60.13              | PEAK          |
| 13.571          | 32.6          | 22.62    | 55.22          | 90.47     | -35.25              | PEAK          |
| 13.943          | 21.12         | 22.69    | 43.81          | 80.50     | -36.69              | PEAK          |

#### REMARKS:

1. Emission level (dBuV/m) = Reading (dBuV)+ Factor (dB/m)
2. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)
3. Margin value = Emission level- Limit value.
4. Other emission levels are attenuated 20dB below the limit and not recorded in report.

### For 30MHz-1GHz

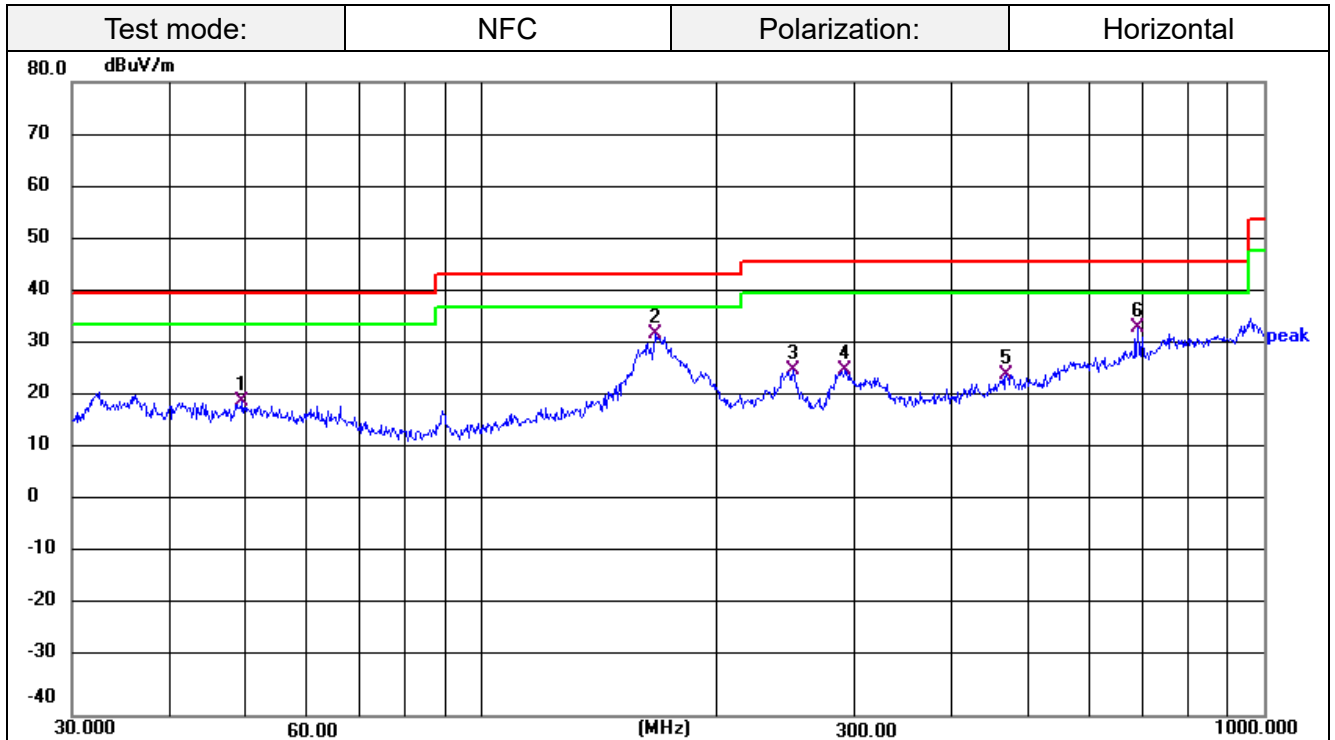


Remark:

Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin= Emission Level - Limit.

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|
| 1   | 49.5328         | 36.07          | -16.60        | 19.47          | 40.00          | -20.53      | QP   |
| 2   | 167.2366        | 48.99          | -16.75        | 32.24          | 43.50          | -11.26      | QP   |
| 3   | 250.3010        | 44.04          | -18.57        | 25.47          | 46.00          | -20.53      | QP   |
| 4   | 292.0582        | 42.64          | -17.18        | 25.46          | 46.00          | -20.54      | QP   |
| 5   | 468.8761        | 37.42          | -12.96        | 24.46          | 46.00          | -21.54      | QP   |
| 6   | 689.5643        | 41.79          | -8.39         | 33.40          | 46.00          | -12.60      | QP   |

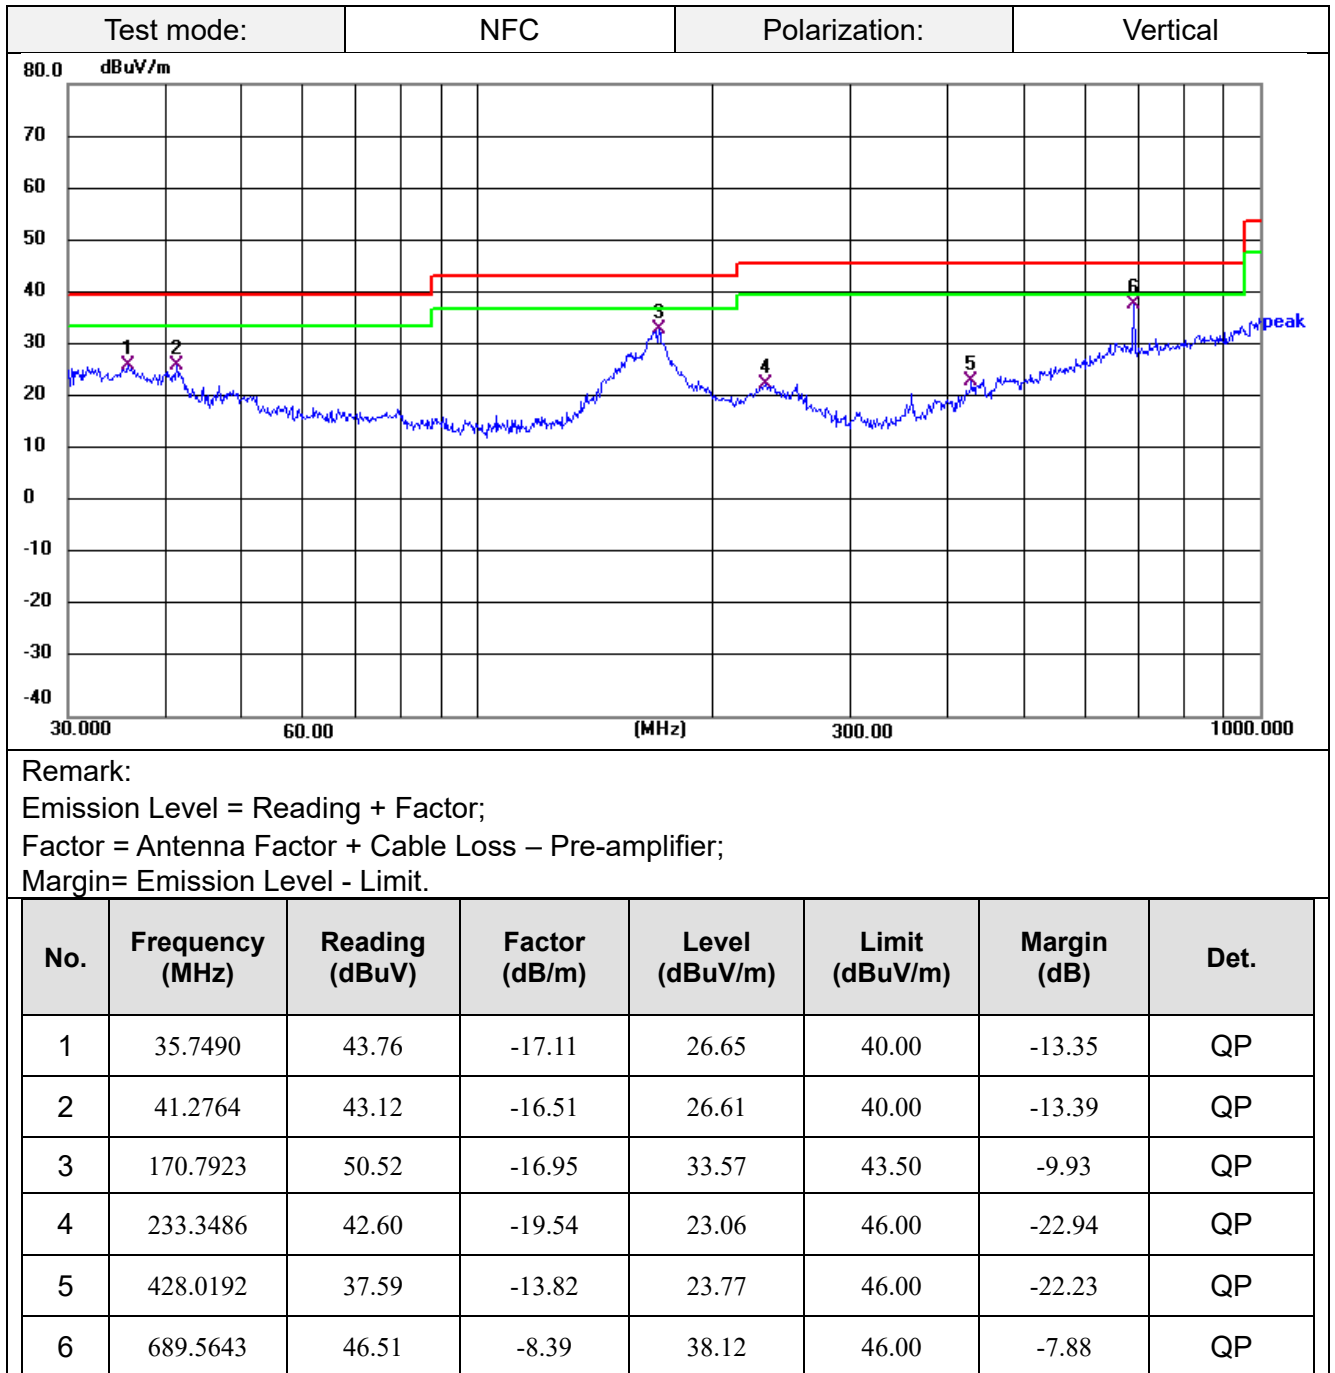



### 3.3 20dB Bandwidth

#### Limit


No limit for 20dB bandwidth.

#### Test Procedure

The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### Test Configuration



#### Test Results

| Modulation | Frequency(MHz) | 20dB bandwidth (KHz) | 99dB bandwidth (KHz) | Result |
|------------|----------------|----------------------|----------------------|--------|
| ASK        | 13.56          | 0.247                | 0.209                | Pass   |




### 3.4 Frequency Stability

#### LIMIT

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

#### TEST CONFIGURATION

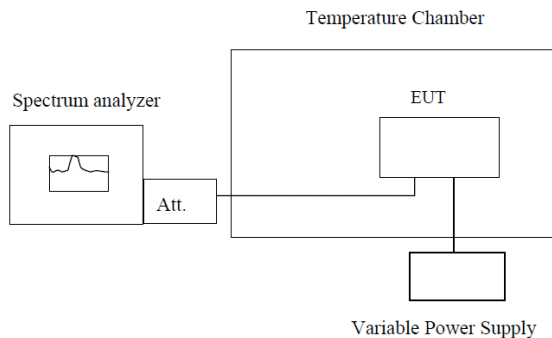

**Note :** Measurement setup for testing on Antenna connector



#### TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT  $20^{\circ}\text{C}$  operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to  $-20^{\circ}\text{C}$ . After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with  $10^{\circ}\text{C}$  increased per stage until the highest temperature of  $+50^{\circ}\text{C}$  reached.
7. Reduce the input voltage to specified extreme voltage variation ( $\pm 15\%$ ) or endpoint, record the maximum frequency change.

## TEST RESULTS

| Reference Frequency: 13.56MHz |                  |                 |                         |               |        |
|-------------------------------|------------------|-----------------|-------------------------|---------------|--------|
| Voltage ( V )                 | Temperature (°C) | Frequency (MHz) | Frequency Deviation(Hz) | Deviation (%) | Result |
| 3.80                          | +20(Ref)         | 13.56008        | 75                      | 0.000553%     | Pass   |
|                               | -20              | 13.56013        | 130                     | 0.000959%     | Pass   |
|                               | -10              | 13.5601         | 99                      | 0.000730%     | Pass   |
|                               | 0                | 13.56013        | 134                     | 0.000988%     | Pass   |
|                               | +10              | 13.56014        | 140                     | 0.001032%     | Pass   |
|                               | +20              | 13.56012        | 115                     | 0.000848%     | Pass   |
|                               | +25              | 13.56008        | 84                      | 0.000619%     | Pass   |
|                               | +30              | 13.56013        | 131                     | 0.000966%     | Pass   |
|                               | +40              | 13.56016        | 164                     | 0.001209%     | Pass   |
|                               | +50              | 13.56005        | 53                      | 0.000391%     | Pass   |
| 4.37                          | +20              | 13.56014        | 138                     | 0.001018%     | Pass   |
| 3.23                          | +20              | 13.56019        | 193                     | 0.001423%     | Pass   |

## 4 Test Setup Photographs of EUT

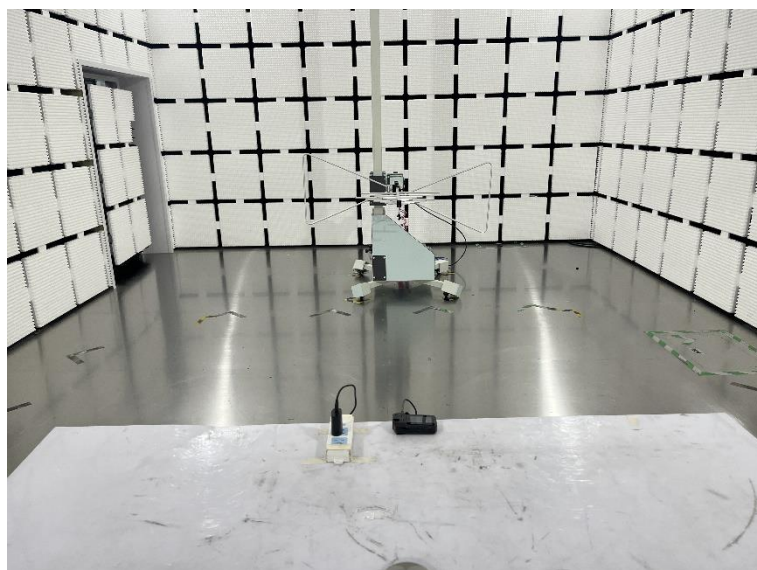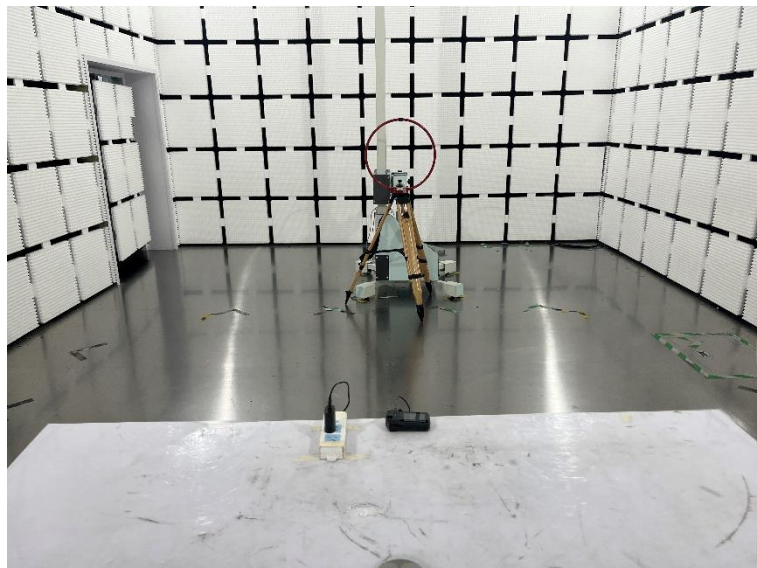

## 5 Photos of EUT

Please refer to test Report No.: AiTSZ-250710008FW1.

\*\*\*\*\* **End of Report** \*\*\*\*\*