

承認書

SPECIFICATION FOR APPROVAL

客 戶:

CUSTOMER:

Shenzhen Haitao Technology co.,Ltd

客 戶 料 號:

CUST P/N:

音 澤 料 號:

FINE P/N:

G43.5*0.8-20.5-#-10TS-6.5UH-L110MM+BJ

產 品 型 號:

DESC:

Φ43.5MMX0.8MM

日 期:

DATE:

2024/03/26

版 本:

Version:

A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
何立成	马莉	但可清	

Dongguan Yinze Electronic Technology Co., Ltd.

Factory address: No. 901, Building 2, Xinghan Road (Wealth Creation Central City), Chashan Town, Dongguan City

但可清 TEL: 18617251159


Version Change History

[illegible]

SPECIFICATION


產品型號: DESC	G43.5*0.8-20.5-#-10TS-6.5UH -L110MM+BJ	版本 Rev: A.0	客戶 CUST: 客戶料号 CUST P/N:	辉码
---------------	---	----------------	----------------------------	----

一、尺寸 DIMENSION:(mm)

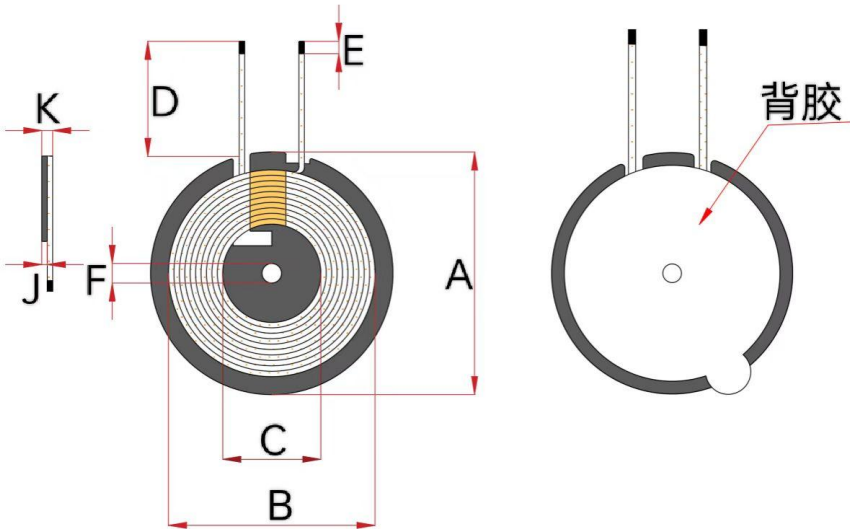

A	43.5±0.5
B	40.5±0.5
C	20.5±0.5
D	110±2
E	3±2
F	5.3±0.2
J	0.8±0.05
K	≤2.3
I	

二、原理图 SCHEMATIC DIAGRAM:

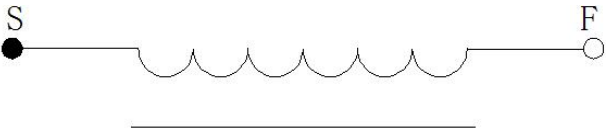

- 注:
- 交叉出线;
 - 线圈贴双槽磁片, 磁片尺寸 43.5±0.5mm,, 厚度为 0.8±0.05mm.
 - 磁片背面贴背胶

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	Silk covered wire#	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.7uH ±10%Single coil	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5uH ±10%Add magnetic disk	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-R	≤70m Ω		LCZ METER 502B
	DCR				

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
何立成 2024.03.26	