

承認書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER:

Haixin

客 戶 料 號:
CUST P/N:音 澤 料 號:
FINE P/N:

G50*0.8-20.5-#-10TS-6.8UH-L80MM+BJ

產 品 型 號:
DESC:

Φ 50MMX0.8MM

日 期:
DATE:

2024/03/26

版 本:
Version:

A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
He Li cheng	Ma Li	Dan ke qing	

东莞市音泽电子有限公司

Dongguan Yinze Electronics Co., LTD

工廠地址： 东莞市茶山镇兴韩（创富中心城）2 栋 901 号

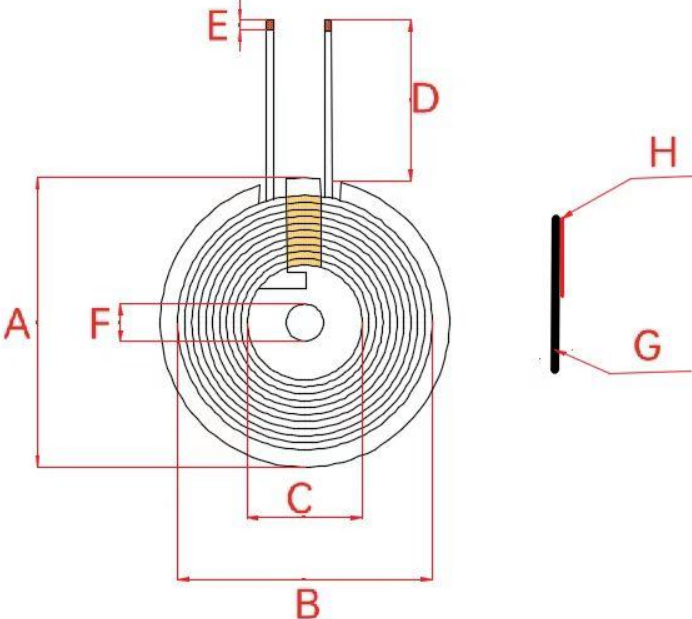
Factory address: No.901, Building 2, Xinghan (Chuangfu Central City), Chashan
Town, Dongguan City

Dan ke qing TEL: 18617251159

Version Change History

[illegible]

SPECIFICATION

Product model:	G50*0.8-20.5-#-10TS-6.8UH-L35MM+BJ	版本 Rev: A.0	客户 CUST: 客户料号 CUST P/N:	Haixin
一、尺寸 DIMENSION:(mm)			A	50±0.5
			B	40.5±0.5
			C	20.5±0.5
			D	80±2
			E	3±2
			F	5.3±0.2
			G	0.8±0.05
			H	≤2.3
			I	
			K	
二、原理图 SCHEMATIC DIAGRAM:			Note: 1. Cross wires; 2. Double-groove magnetic sheet is attached to the coil, the size of the magnetic sheet is 50±0.5mm, and the thickness is 0.8±0.05mm. 3. Adhesive is attached to the back of the magnetic sheet	

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	silk-covered wire#	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.7uH ±10%Separate coil	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5uH ±10%Add magnetic sheet	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-R	≤55m Ω		LCZ METER 502B
	DCR				

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
He Licheng 2024.03.26	