
Antenna specification

1、Antenna introduction


The Bluetooth module antenna is directly used on the PCB.

Manufacturer: SHENZHEN HST ELECTRONIC TECHNOLOGY CO., LTD.

Address: 2nd Floor,East Building6,TianFuAn Industrial Zone, LeZhuJiao, HangCheng Street
,ShenZhen,China

Model:HST-FM02

2、Antenna shape

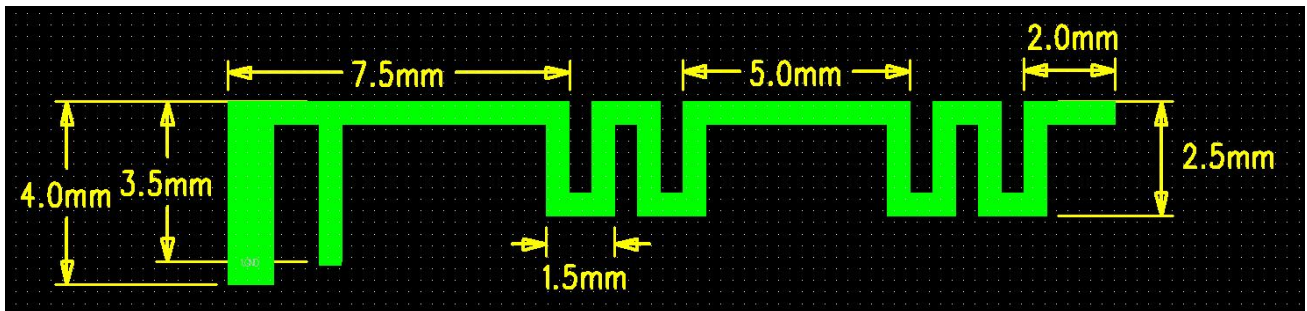

3、Antenna parameter

The Bluetooth antenna operates at 2402-2480 MHz and generates resonance in this band. The table below shows the main parameters of the antenna.


Frequency (MHz)	2402 ~ 2480 MHz
VSWR	≤ 1.95
Impedance	50 Ohm Nominal
Return Loss	-15 dB Max
Radiation	Omni-directional
Gain (Peak)	1.5 dBi
Polarization	Linear, Vertical
Admitted Power	1MW
Connector	Tin

4、 Antenna gain report


Spectrum Detector:	PK	Test Date :	Feb 18, 2022
Test By:	Mark	Temperature :	25°C
Test Result:	PASS	Humidity :	52 %
Modulation:	GFSK		

Frequency VNA (MHz)	E Total. dB(dB)
2400MHz	0.0403503
2410MHz	0.0886264
2420MHz	0.267381
2430MHz	0.193012
2440MHz	0.26366
2450MHz	0.0723139
2460MHz	0.36895
2470MHz	0.551525
2480MHz	1.50702
2490MHz	1.05232
2500MHz	1.08443


Direction map:

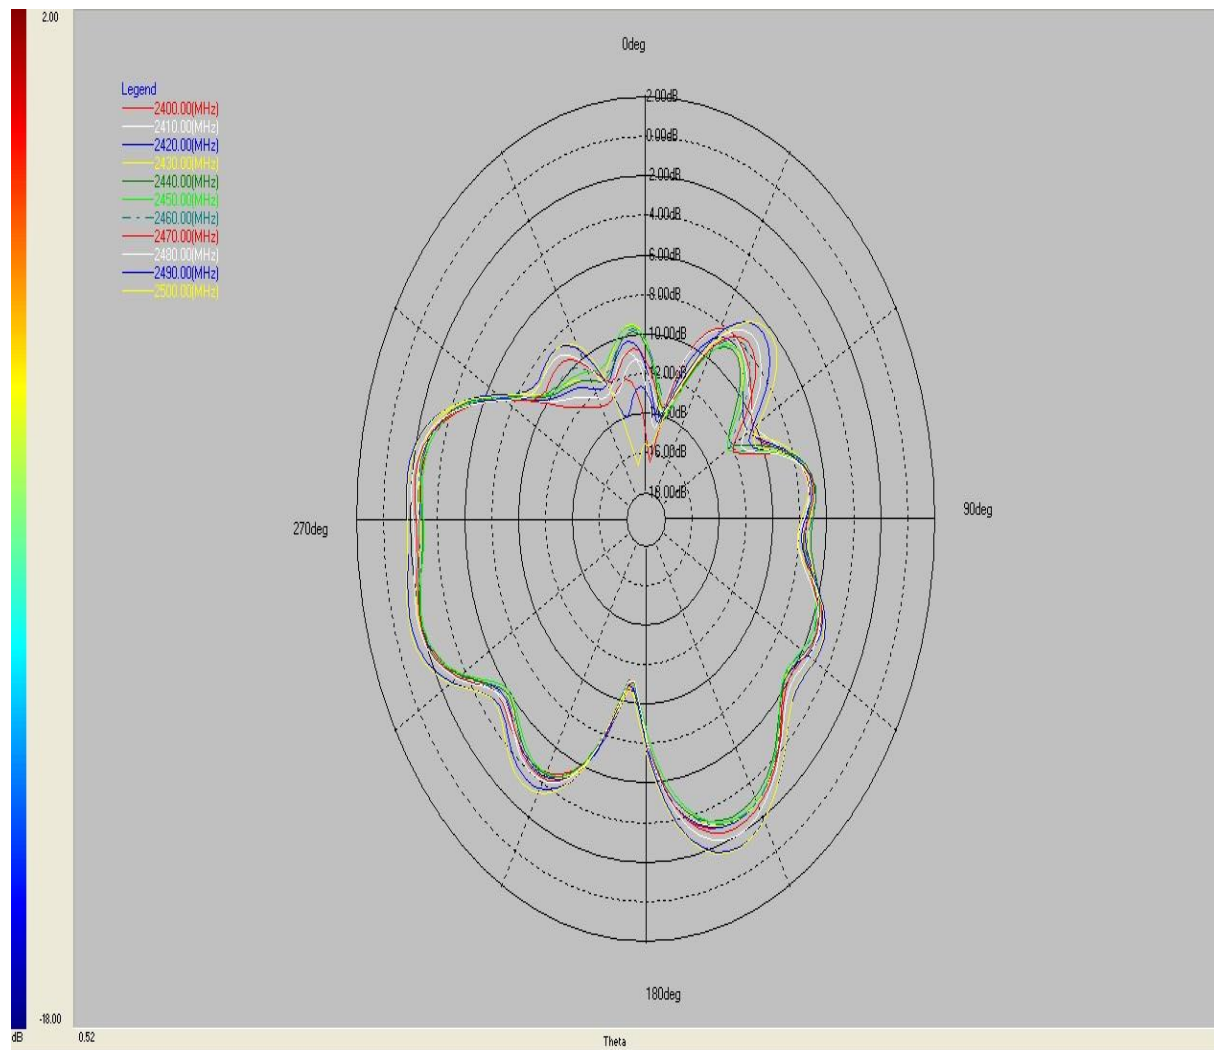

PHI 0°

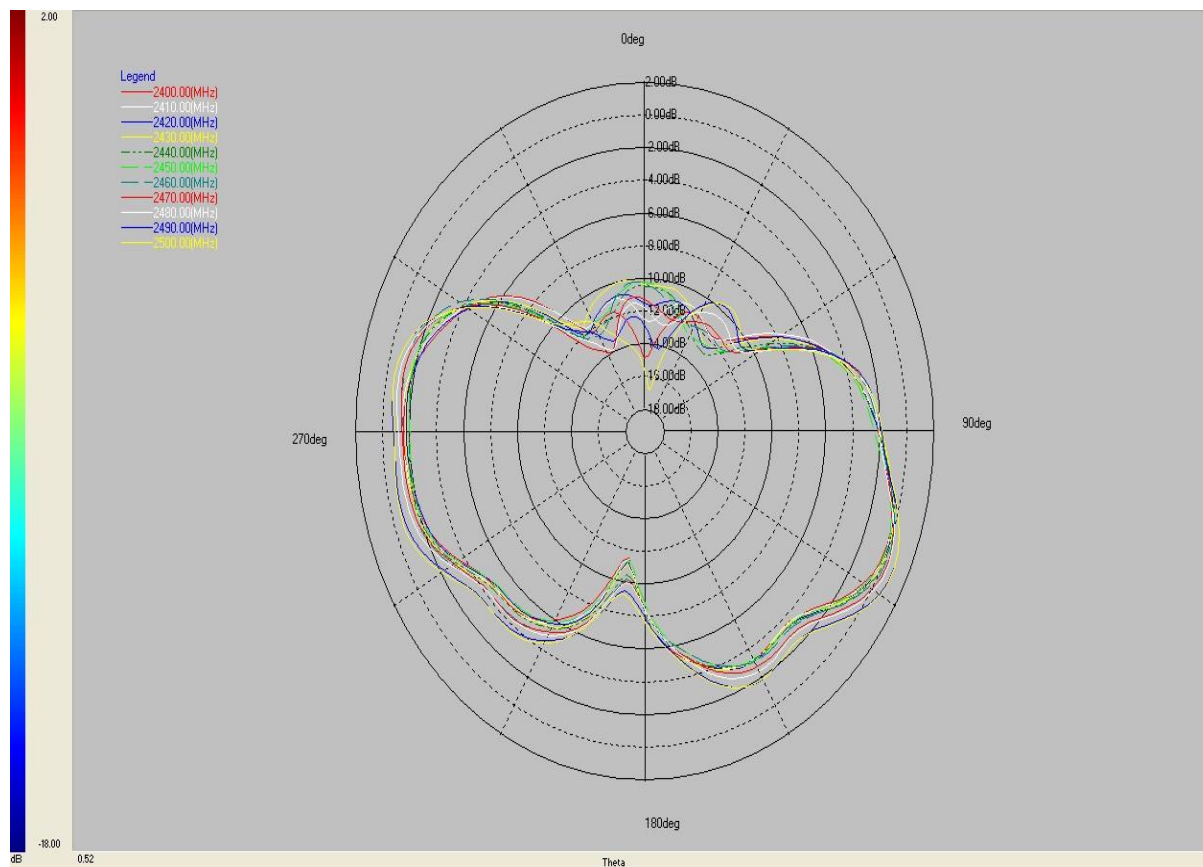

PHI 90°

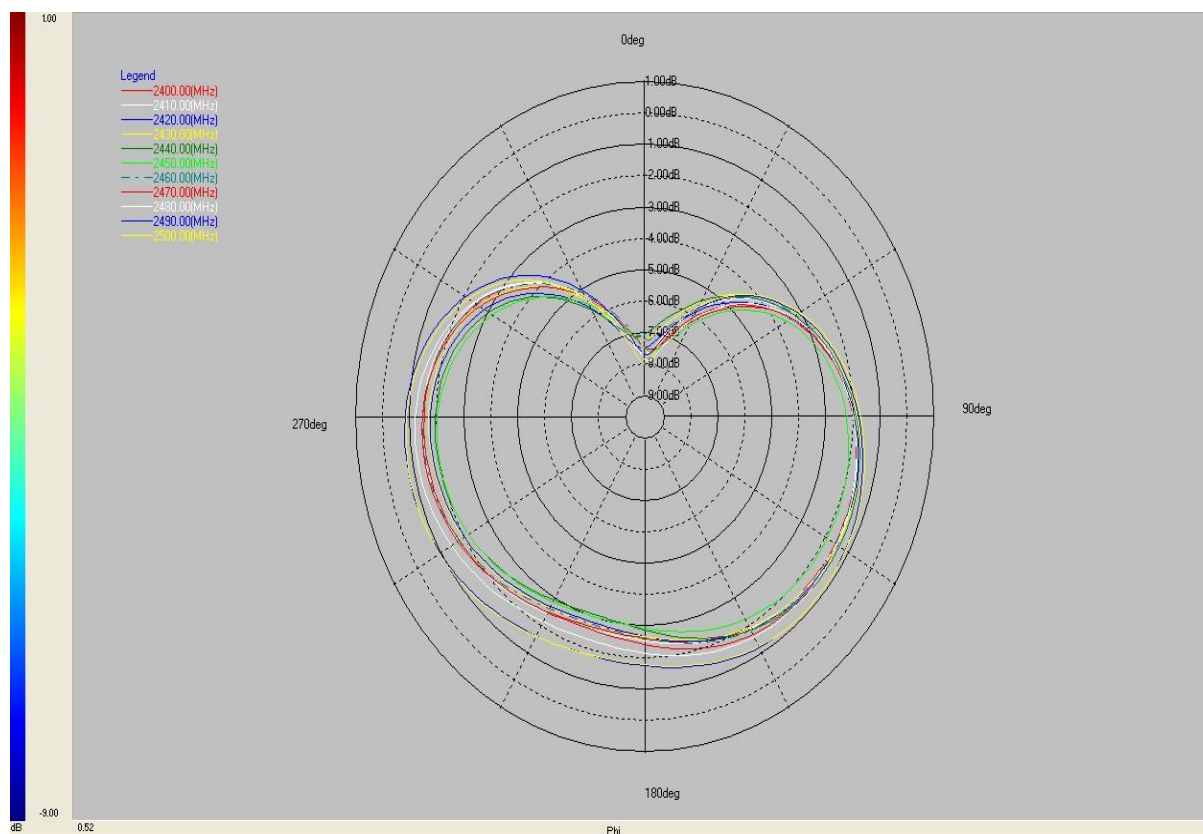

THETA 90°

