



FCC TEST REPORT

FCC ID: 2BKN3-RB20

On Behalf of

Rocware Corporation

4K Dual-lens PTZ Video Bar

Model No.: RB20, RB2*** (*: 0~9, A~Z or Blank), VHD-M2000S,
M2000S, T740**

Prepared for : Rocware Corporation
Address : 3/F-1, No. 2, Honghui Industrial Park, Xin'an Street, Bao'an
District, Shenzhen, China

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2502045-C01-R11
Date of Receipt : February 12, 2025
Date of Test : May 12, 2025-June 16, 2025
Date of Report : June 16, 2025
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of Connection Between EUT and Simulators	8
2.5. Test Mode Description	9
2.6. Software test version and power setting information	10
2.7. Test Conditions	10
2.8. Test Facility	11
2.9. Measurement Uncertainty	11
2.10. Test Equipment List	12
3. Spurious Emission	13
3.1. Test Limits	13
3.2. Block Diagram of Test setup	16
3.3. Test Procedure	17
3.4. Test Results	18
4. Power Line Conducted Emission	26
4.1. Test Limits	26
4.2. Test Procedure	26
4.3. Test Setup	26
4.4. Test Results	27
5. Out-of-band Emissions	30
5.1. Test Limits	30
5.2. Test Procedure	30
5.3. Test Setup	30
5.4. Test Results	30
6. Conducted Maximum Output Power	52
6.1. Test limits	52
6.2. Test Procedure	52
6.3. Test Setup	52
6.4. Test Results	52
7. Peak Power Spectral Density	54
7.1. Test limits	54
7.2. Test Procedure	54
7.3. Test Setup	54
7.4. Test Results	55
8. Bandwidth	72
8.1. Test limits	72
8.2. Test Procedure	72
8.3. Test Setup	72
8.4. Test Results	72
9. Band Edge Test	86
9.1. Block Diagram of Test Setup	86
9.2. Test Limit	86
9.3. Test Procedure	86
9.4. Test Results	87
10. Frequency stability	91
10.1. Test limit	91
10.2. Test Procedure	91
10.3. Test Setup	91

10.4. Test Results -----	91
11. Antenna Requirement-----	92
11.1. Standard Requirement -----	92
11.2. Antenna Connected Construction -----	92
11.3. Results -----	92
12. Photos of test setup -----	93
13. Photos of EUT -----	93

TEST REPORT DECLARATION

Applicant : Rocware Corporation
Address : 3/F-1, No. 2, Honghui Industrial Park, Xin'an Street, Bao'an District, Shenzhen, China
Manufacturer : Rocware Corporation
Address : 3/F-1, No. 2, Honghui Industrial Park, Xin'an Street, Bao'an District, Shenzhen, China
EUT Description : 4K Dual-lens PTZ Video Bar
(A) Model No. : RB20, RB2***** (*: 0~9, A~Z or Blank), VHD-M2000S, M2000S, T740
(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

RSS-247 Issue 3, RSS-Gen Issue 5, ANSI C63.10:2013

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part 15&RSS 247 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Felix Pang
Test Engineer


.....

Approved by (name + signature).....:

Simple Guan
Project Manager


.....

Date of issue.....:

June 16, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	June 16, 2025	Initial released Issue	Felix Pang

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15: 15.207 RSS-GEN(8.8), ANSI C63.10 :2013	P
6dB Bandwidth	FCC PART 15:15.247(a)(2) RSS-247(5.2 a), ANSI C63.10 :2013	P
Output Power	FCC Part 15: 15.247(b)(3) RSS-247(5.4 d), ANSI C63.10 :2013	P
Radiated Spurious Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) RSS-Gen(8.9), RSS-247(5.5) ANSI C63.10 :2013	P
Conducted Spurious, Band Edge Emission	FCC Part 15: 15.247(d) RSS-Gen(8.9), RSS-247(5.5) ANSI C63.10 :2013	P
Power Spectral Density	FCC PART 15:15.247(e) RSS-247(5.2 b), ANSI C63.10 :2013	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d) RSS-GEN(6.13), ANSI C63.10 :2013	P
Frequency stability	RSS-GEN(6.11)	N/A
Antenna Requirement	FCC Part 15: 15.203 RSS-GEN(6.8)	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty.		

2. General Information

2.1. Description of Device (EUT)

Product Name : 4K Dual-lens PTZ Video Bar
Model : RB20, RB2***** (*: 0~9, A~Z or Blank), VHD-M2000S, M2000S, T740
Diff : There is no difference except the name of the model. All tests are made with the RB20 model.
Test Voltage : DC 12V from Adapter

Radio technology : 2.4G WiFi

Operation frequency : 2412MHz-2462MHz for IEEE 802.11 b, g, n/HT20
2422MHz-2452MHz for IEEE 802.11 n/HT40

Channel No. : 802.11b/802.11g/802.11n(HT20): 11CH
802.11(HT40): 7CH

Modulation type : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)
IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11n:OFDM(64QAM, 16QAM, QPSK, BPSK)

Antenna Type : Internal antenna 1, Maximum Gain is 3.65dBi.
Internal antenna 2, Maximum Gain is 1.65dBi.

PMN : N/A

HVIN : N/A

Software version : V1.0

Hardware version/FVIN : V1.0

Note : Antenna information is provided by applicant.
Testing lab is not responsible for the accuracy of the information.

2.2. Accessories of Device (EUT)


Accessories : AC ADAPTER
 Manufacturer : Mass Power Electronics Inc.
 Model : S065-1A120300B3
 Rating : Input: 100-240V~50/60Hz 1.5A
 Output: DC 12.0V/5.0A

Accessories : AC ADAPTER
 Manufacturer : HUIZHOU FUJIA APPLIANCE TECH. CO., LTD
 Model : FJ-SW729S1205000N
 Rating : Input: 100-240V~50/60Hz 1.5A
 Output: DC 12.0V/5.0A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1	N/A	N/A	N/A	N/A

2.4. Block Diagram of Connection Between EUT and Simulators



2.5. Test Mode Description

Keeping TX			
Mode	Data rate (Mbps)	Channel	Frequency(MHz)
IEEE 802.11 b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11 g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 n/HT40	13.5	Low :CH1	2422
	13.5	Middle:CH4	2437
	13.5	High:CH7	2452
Note: According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test.			

Channel list:					
For IEEE 802.11b, g, n/HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		

For IEEE 802.11 n/HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2422	CH5	2442		
CH2	2427	CH6	2447		
CH3	2432	CH7	2452		
CH4	2437				

Note: The product comes with two adapters for use, all of which have been tested. The report reflects the data of the worst S065-1A120300B3 adapter model.

2.6. Software test version and power setting information

Software testing version	cmd.exe		
Mode	The client 's preset testing software is used to control the operation of EUT in continuous transmission mode and select the testing channel, wireless mode:		
Power level setup by client			
Mode	Channel	Frequency (MHz)	Soft Set
IEEE 802.11b/g/n20	Low :CH1	2412	TX level is set as defaults
	Middle: CH6	2437	TX level is set as defaults
	High: CH11	2462	TX level is set as defaults
IEEE 802.11n40	Low :CH3	2422	TX level is set as defaults
	Middle: CH6	2437	TX level is set as defaults
	High: CH9	2452	TX level is set as defaults

2.7. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

2.8. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

September 21, 2023 Certificated by IC

Registration Number: 31123

CAB identifier: CN0158

2.9. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power Line Conducted Emissions Test	2.17dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB(Polarize: V)
	2.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V)
	4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31dB(Polarize: V)
	4.30dB(Polarize: H)
Uncertainty for radio frequency	48.24KHz
Uncertainty for conducted RF Power	0.41dB
Uncertainty for Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Conducted-Spurious Emission	1.26dB

2.10. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G1 8G-45dB	SK20220329 01	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118 G-45	SK20200108 01	/	2024.12.18	1 Year
12	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.0 2-1111533-F z	/	2024.12.18	1 Year
13	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2024.12.18	1 Year
14	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
15	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
16	Regulated DC Power Supply	Xinouhua	ADC120V10 A	2022112516 38	/	2024.12.18	1 Year
17	Power meter	Agilent	E4419B	GB40202121	/	2024.12.18	1 Year
18	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2024.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer			Version		
RE	EZ EMC	Farad			PSI-3A1		
CE	EZ EMC	Farad			PSI-3A1		
RF	RTS	TACHOY			V1.0.0		

3. Spurious Emission

3.1. Test Limits

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

RSS-GEN Restricted frequency band

Table 7 – Restricted frequency bands^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 – 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8

6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 – 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSS.

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	$2400/F(\text{KHz})$	/
0.490-1.705	30	$24000/F(\text{KHz})$	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: The peak limit is 20 dB higher than the average limit

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500


Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A}/\text{m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30


Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

3.2. Block Diagram of Test setup


(1) In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

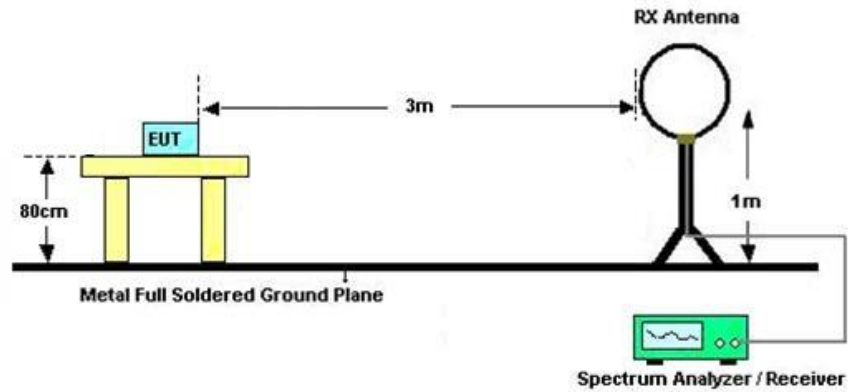

(2) In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

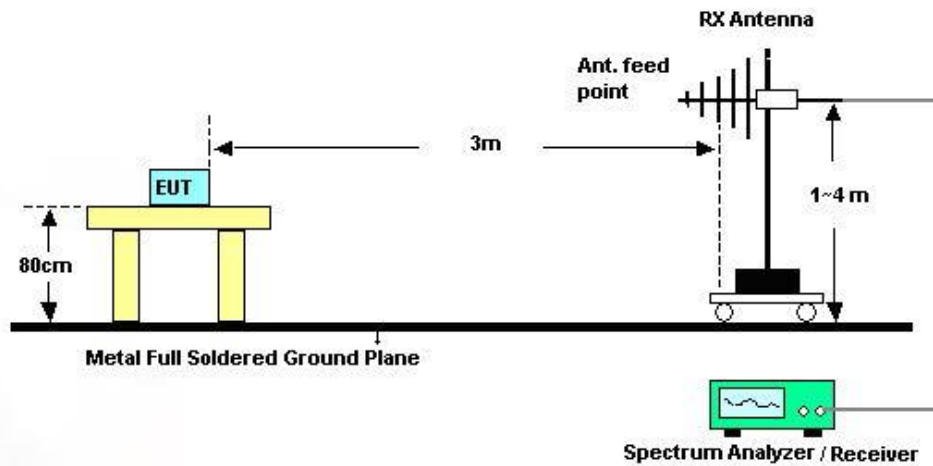

(3) In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

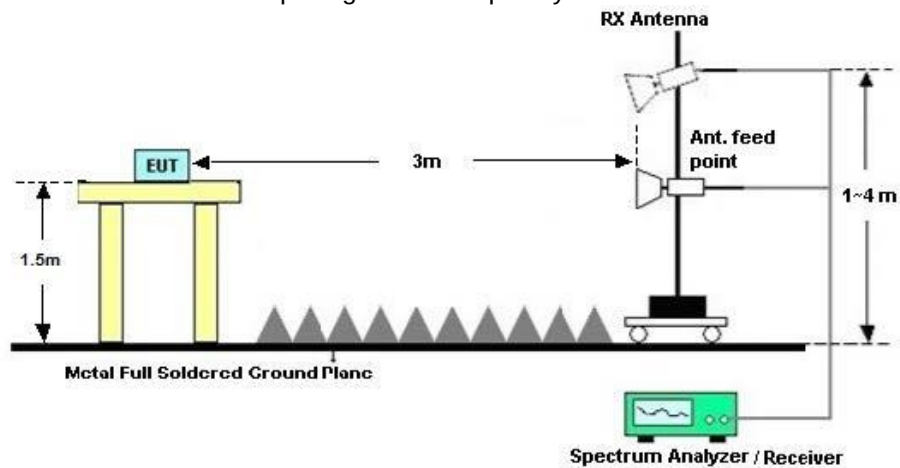

3.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

Test setup information:


9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHZ~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

3.4. Test Results

We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.
Detailed information please see the following page.


From 9KHz to 30MHz:	
Test Date : 2025.05.28	Temperature : 26℃
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : IEEE 802.11b mode	
Test Results : PASS	
Note:	The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz:	
Test Date : 2025.05.28	Temperature : 26℃
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : IEEE 802.11b mode	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. All modes have been tested, and only worst data of IEEE 802.11b mode, Channel 2412MHz was listed in this report.

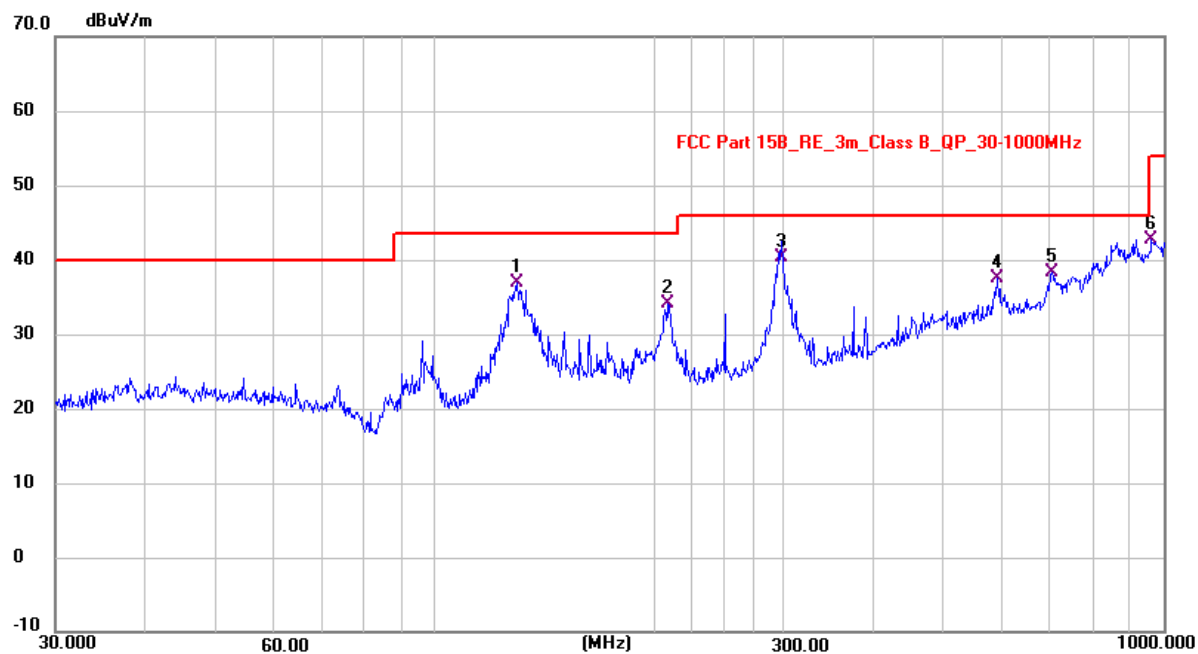Polarization: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	129.6950	23.66	13.20	36.86	43.50	-6.64	QP
2	208.3062	22.66	11.46	34.12	43.50	-9.38	QP
3 *	298.5297	25.34	14.88	40.22	46.00	-5.78	QP
4	592.5300	14.80	22.68	37.48	46.00	-8.52	QP
5	701.7610	13.73	24.54	38.27	46.00	-7.73	QP
6	965.1190	13.95	28.74	42.69	54.00	-11.31	QP

Level = Reading + Factor Margin = Level - Limit

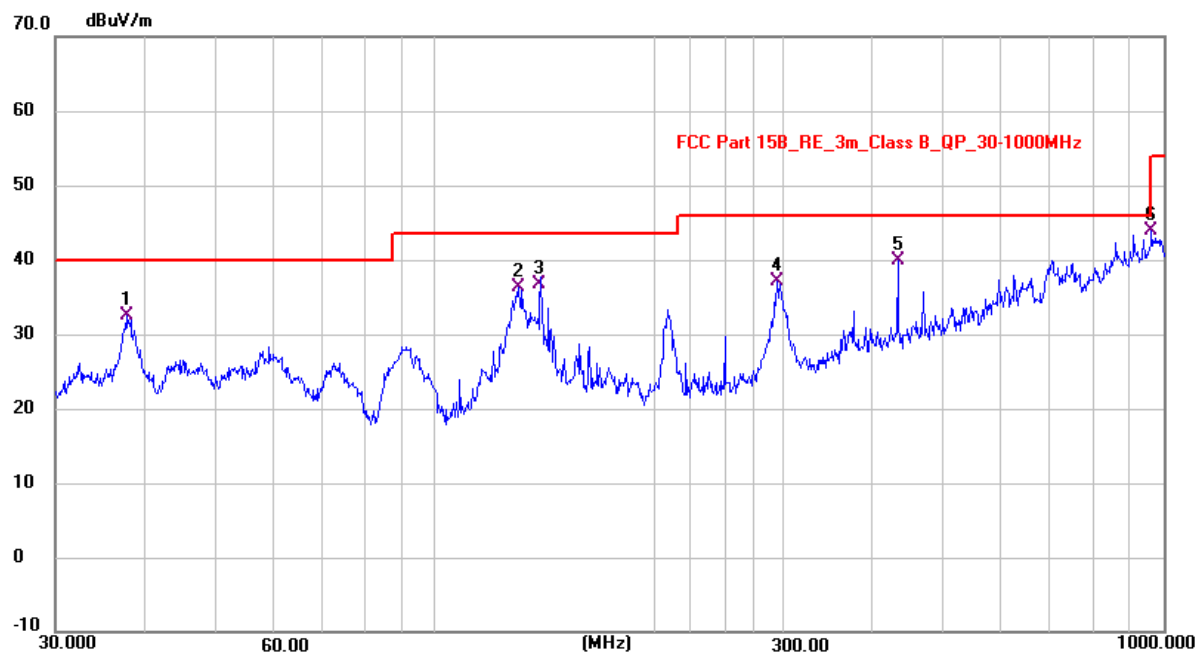Polarization: Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.6633	18.25	14.22	32.47	40.00	-7.53	QP
2	130.3218	23.03	13.25	36.28	43.50	-7.22	QP
3	139.4124	22.90	13.86	36.76	43.50	-6.74	QP
4	294.2427	22.28	14.80	37.08	46.00	-8.92	QP
5 *	432.1667	21.49	18.51	40.00	46.00	-6.00	QP
6	964.6960	15.21	28.74	43.95	54.00	-10.05	QP

Level = Reading + Factor Margin = Level - Limit

From 1GHz to 25GHz:	
Test Date : 2025.05.28	Temperature : 26℃
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : WIFI mode	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out. 4 Except for mode b/g, other modes test the MIMO status. The test result of SISO mode reflects the worst data between antenna 1 and antenna 2.

Test Mode : IEEE 802.11b TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	57.07	-13.25	43.82	74.00	-30.18	Peak
2	4824	V	48.20	-13.25	34.95	54.00	-19.05	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	55.03	-13.25	41.78	74.00	-32.22	Peak
6	4824	H	45.96	-13.25	32.71	54.00	-21.29	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11b TX Mid								
1	4874	V	59.22	-12.98	46.24	74.00	-27.76	Peak
2	4874	V	49.89	-12.98	36.91	54.00	-17.09	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	56.25	-12.98	43.27	74.00	-30.73	Peak
6	4874	H	48.22	-12.98	35.24	54.00	-18.76	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11b TX High								
1	4924	V	58.70	-12.70	46.00	74.00	-28.00	Peak
2	4924	V	48.41	-12.70	35.71	54.00	-18.29	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	57.49	-12.70	44.79	74.00	-29.21	Peak
6	4924	H	45.78	-12.70	33.08	54.00	-20.92	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit.								

Test Mode : IEEE 802.11g TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	58.85	-13.25	45.60	74.00	-28.40	Peak
2	4824	V	46.95	-13.25	33.70	54.00	-20.30	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	57.52	-13.25	44.27	74.00	-29.73	Peak
6	4824	H	45.35	-13.25	32.10	54.00	-21.90	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11g TX Mid								
1	4874	V	57.57	-12.98	44.59	74.00	-29.41	Peak
2	4874	V	48.67	-12.98	35.69	54.00	-18.31	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	54.57	-12.98	41.59	74.00	-32.41	Peak
6	4874	H	46.14	-12.98	33.16	54.00	-20.84	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11g TX High								
1	4924	V	60.36	-12.70	47.66	74.00	-26.34	Peak
2	4924	V	46.64	-12.70	33.94	54.00	-20.06	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	56.35	-12.70	43.65	74.00	-30.35	Peak
6	4924	H	47.85	-12.70	35.15	54.00	-18.85	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit.								

Test Mode : IEEE 802.11n/HT20 TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	60.06	-13.25	46.81	74.00	-27.19	Peak
2	4824	V	50.18	-13.25	36.93	54.00	-17.07	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	54.47	-13.25	41.22	74.00	-32.78	Peak
6	4824	H	45.92	-13.25	32.67	54.00	-21.33	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT20 TX Mid								
1	4874	V	59.06	-12.98	46.08	74.00	-27.92	Peak
2	4874	V	50.42	-12.98	37.44	54.00	-16.56	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	57.68	-12.98	44.70	74.00	-29.30	Peak
6	4874	H	44.96	-12.98	31.98	54.00	-22.02	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT20 TX High								
1	4924	V	56.61	-12.70	43.91	74.00	-30.09	Peak
2	4924	V	49.78	-12.70	37.08	54.00	-16.92	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	56.51	-12.70	43.81	74.00	-30.19	Peak
6	4924	H	45.09	-12.70	32.39	54.00	-21.61	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit.								

Test Mode : IEEE 802.11n/HT40 TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4844	V	57.53	-13.25	44.28	74.00	-29.72	Peak
2	4844	V	50.56	-13.25	37.31	54.00	-16.69	Avg
3	7266	--	--	--	--	--	--	--
4	9688	--	--	--	--	--	--	--
5	4844	H	56.08	-13.25	42.83	74.00	-31.17	Peak
6	4844	H	46.87	-13.25	33.62	54.00	-20.38	Avg
7	7266	--	--	--	--	--	--	--
8	9688	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT40 TX Mid								
1	4874	V	59.44	-12.98	46.46	74.00	-27.54	Peak
2	4874	V	47.36	-12.98	34.38	54.00	-19.62	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	55.37	-12.98	42.39	74.00	-31.61	Peak
6	4874	H	45.65	-12.98	32.67	54.00	-21.33	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT40 TX High								
1	4904	V	58.54	-12.70	45.84	74.00	-28.16	Peak
2	4904	V	47.17	-12.70	34.47	54.00	-19.53	Avg
3	7356	--	--	--	--	--	--	--
4	9808	--	--	--	--	--	--	--
5	4904	H	54.93	-12.70	42.23	74.00	-31.77	Peak
6	4904	H	48.32	-12.70	35.62	54.00	-18.38	Avg
7	7356	--	--	--	--	--	--	--
8	9808	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit.								

4. Power Line Conducted Emission

4.1. Test Limits

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.


4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs.

Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

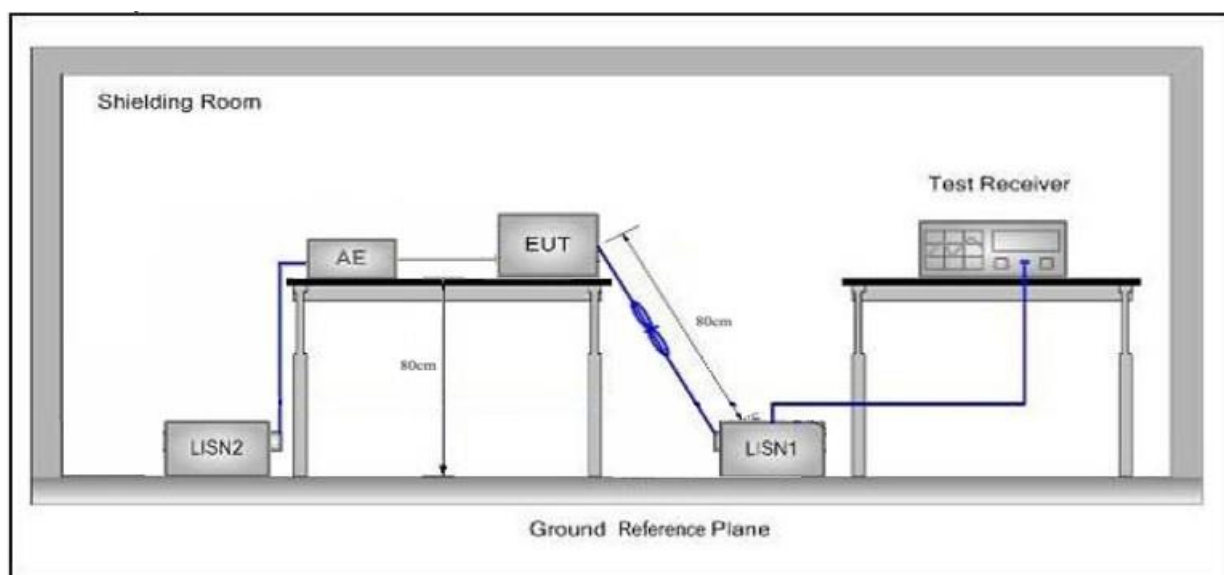


4.4. Test Results

Test Date	: 2025.05.25	Temperature	: 26℃
Test Engineer	: Felix Pang	Humidity	: 54%
Test Mode	: WIFI mode		
Test Results	: PASS		

Note: 1. The test results are listed in next pages.

2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.
3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.
4. All modes have been tested, and only worst data of b mode, Channel 2412MHz (AC 120V/ 60Hz) was listed in this report.


Polarization: L

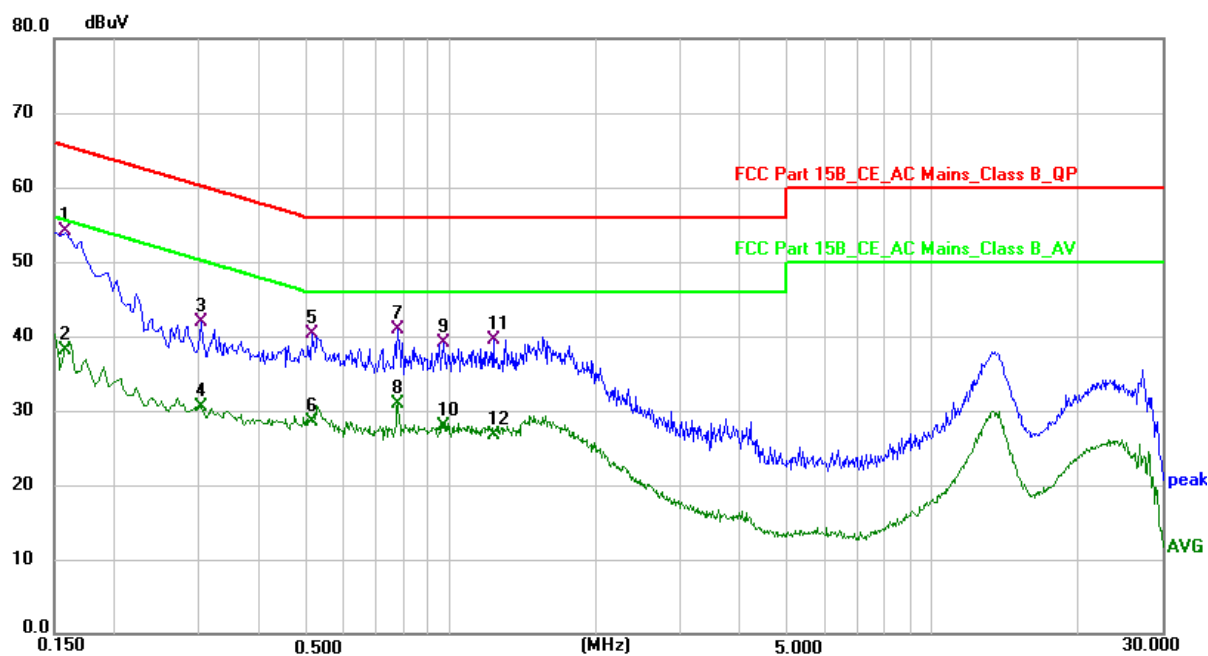

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.1580	44.12	9.94	54.06	65.57	-11.51	QP	P
2	0.1580	28.14	9.94	38.08	55.57	-17.49	AVG	P
3	0.3020	31.90	9.98	41.88	60.19	-18.31	QP	P
4	0.3020	20.53	9.98	30.51	50.19	-19.68	AVG	P
5	0.5140	30.37	9.88	40.25	56.00	-15.75	QP	P
6	0.5140	18.72	9.88	28.60	46.00	-17.40	AVG	P
7	0.7780	31.48	9.42	40.90	56.00	-15.10	QP	P
8	0.7780	21.45	9.42	30.87	46.00	-15.13	AVG	P
9	0.9660	29.74	9.41	39.15	56.00	-16.85	QP	P
10	0.9660	18.53	9.41	27.94	46.00	-18.06	AVG	P
11	1.2260	30.11	9.41	39.52	56.00	-16.48	QP	P
12	1.2260	17.34	9.41	26.75	46.00	-19.25	AVG	P

Note: Level = Reading + Factor Margin = Level - Limit

Polarization: N

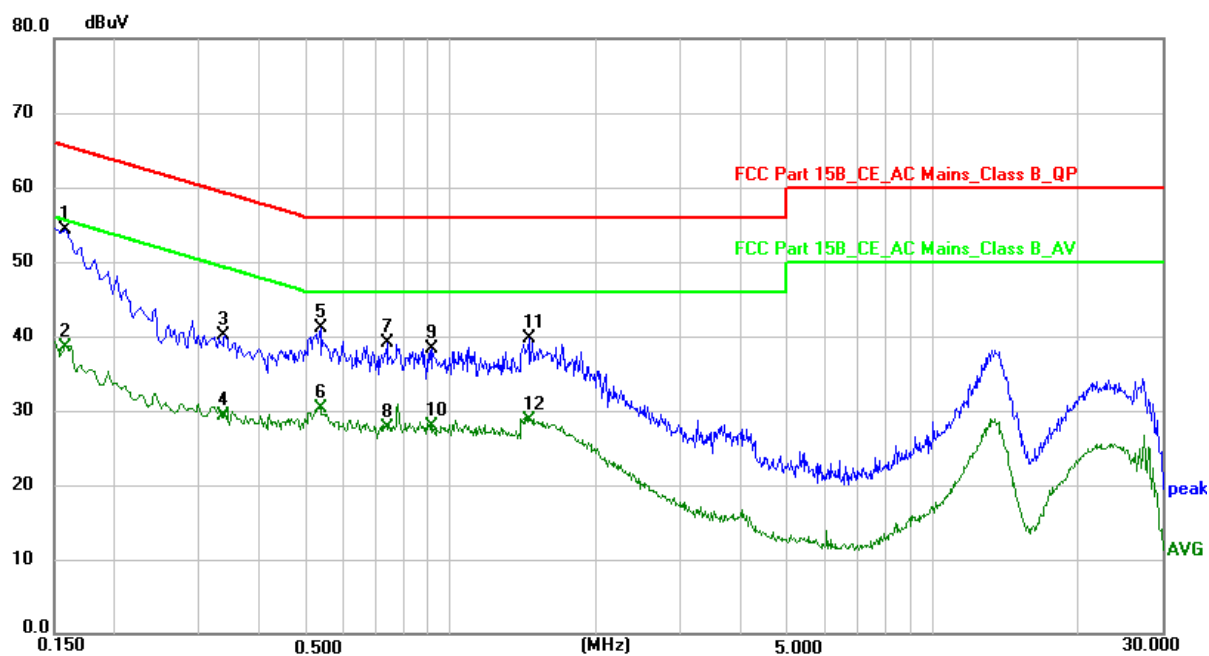

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.1580	44.52	9.82	54.34	65.57	-11.23	QP	P
2	0.1580	28.69	9.82	38.51	55.57	-17.06	AVG	P
3	0.3379	30.40	9.69	40.09	59.25	-19.16	QP	P
4	0.3379	19.67	9.69	29.36	49.25	-19.89	AVG	P
5	0.5340	31.27	9.78	41.05	56.00	-14.95	QP	P
6	0.5340	20.60	9.78	30.38	46.00	-15.62	AVG	P
7	0.7380	29.37	9.75	39.12	56.00	-16.88	QP	P
8	0.7380	17.86	9.75	27.61	46.00	-18.39	AVG	P
9	0.9140	28.72	9.59	38.31	56.00	-17.69	QP	P
10	0.9140	18.39	9.59	27.98	46.00	-18.02	AVG	P
11	1.4500	30.38	9.40	39.78	56.00	-16.22	QP	P
12	1.4500	19.37	9.40	28.77	46.00	-17.23	AVG	P

Note: Level = Reading + Factor Margin = Level - Limit

5. Out-of-band Emissions

5.1. Test Limits


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC Part 15.209(a) is not required.

Please refer section RSS-GEN&15.247.

5.2. Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

5.3. Test Setup

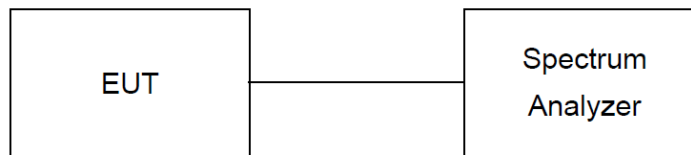

5.4. Test Results



PASS.

The test results are listed in next pages.


Band Edge: Pass

Note: Both antennas have been tested and only the worst data of antenna 1 is shown.

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_freq(MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	2399.488	4.515	-45.285	-15.485	Pass
NVNT	ANT1	802.11b	2462.00	2484.448	3.969	-57.614	-16.031	Pass
NVNT	ANT1	802.11g	2412.00	2398.928	-2.418	-42.149	-22.418	Pass
NVNT	ANT1	802.11g	2462.00	2484.544	-2.938	-56.018	-22.938	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	2399.936	-2.888	-41.151	-22.888	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	2483.536	-2.190	-55.385	-22.190	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	2399.760	-3.916	-41.990	-23.916	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	2483.680	-4.504	-47.980	-24.504	Pass

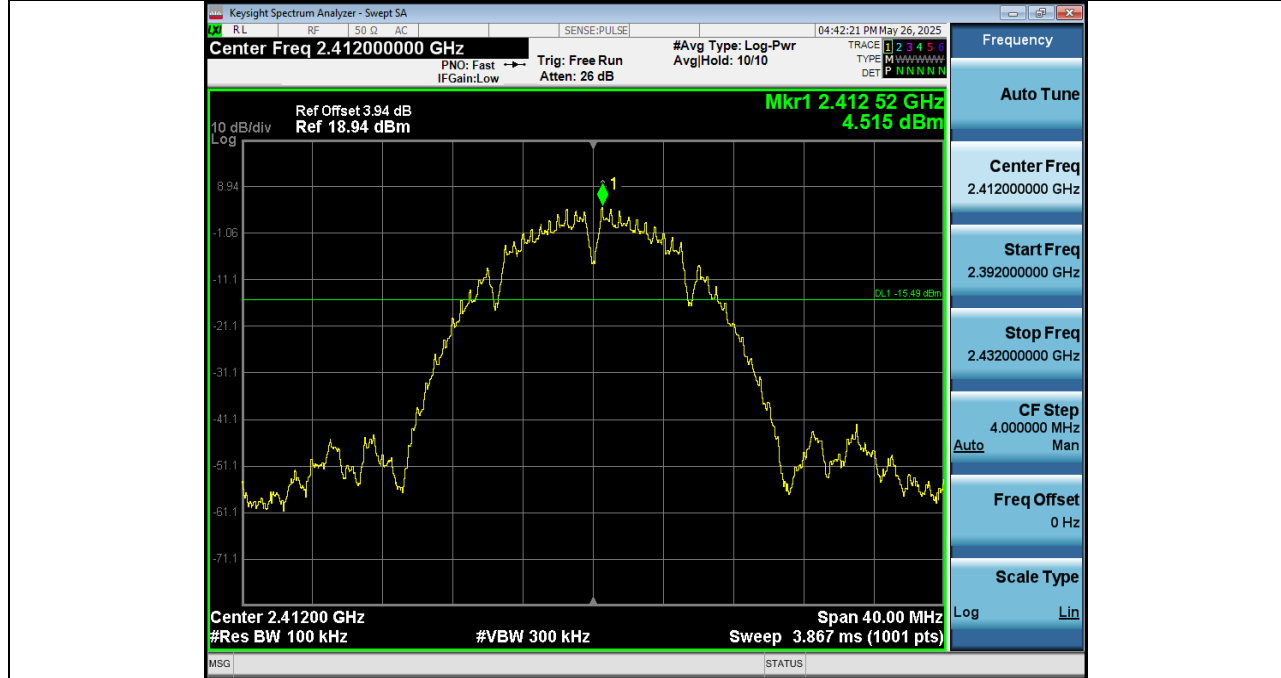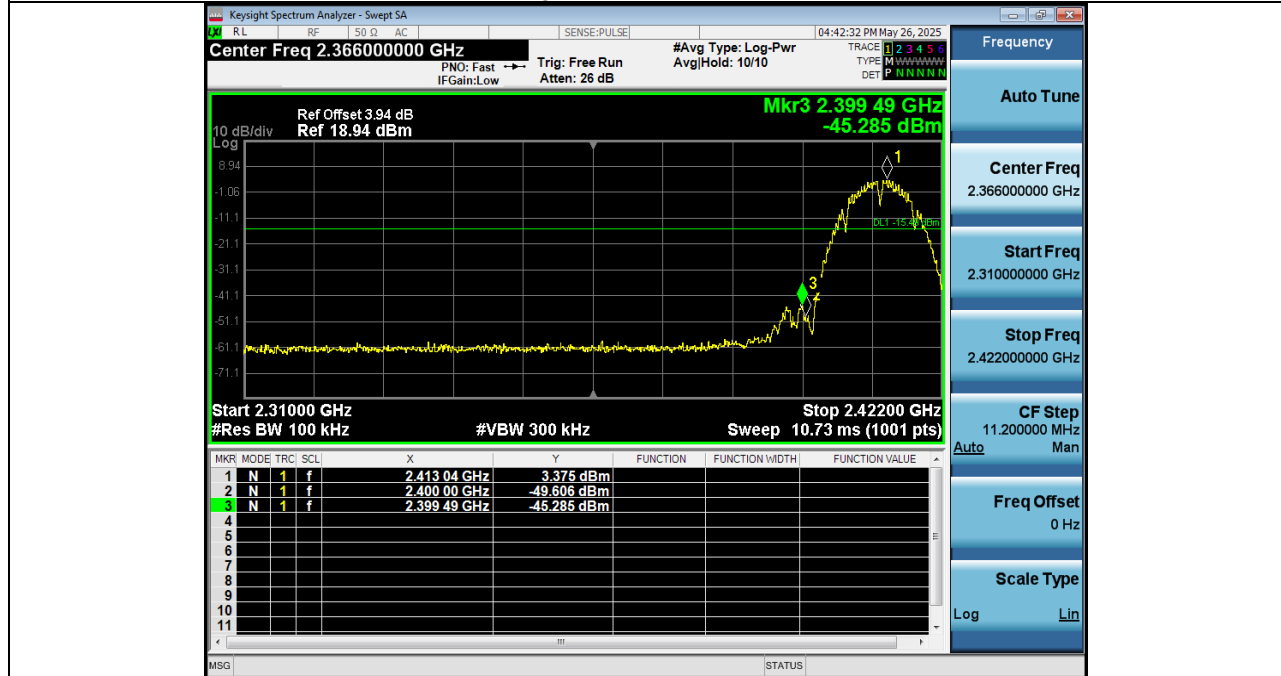1 Reference_Level_NVNT_ANT1_802_11b_2412**2 Bandedge_NVNT_ANT1_802_11b_2412**


1_Reference_Level_NVNT_ANT1_802_11b_2462

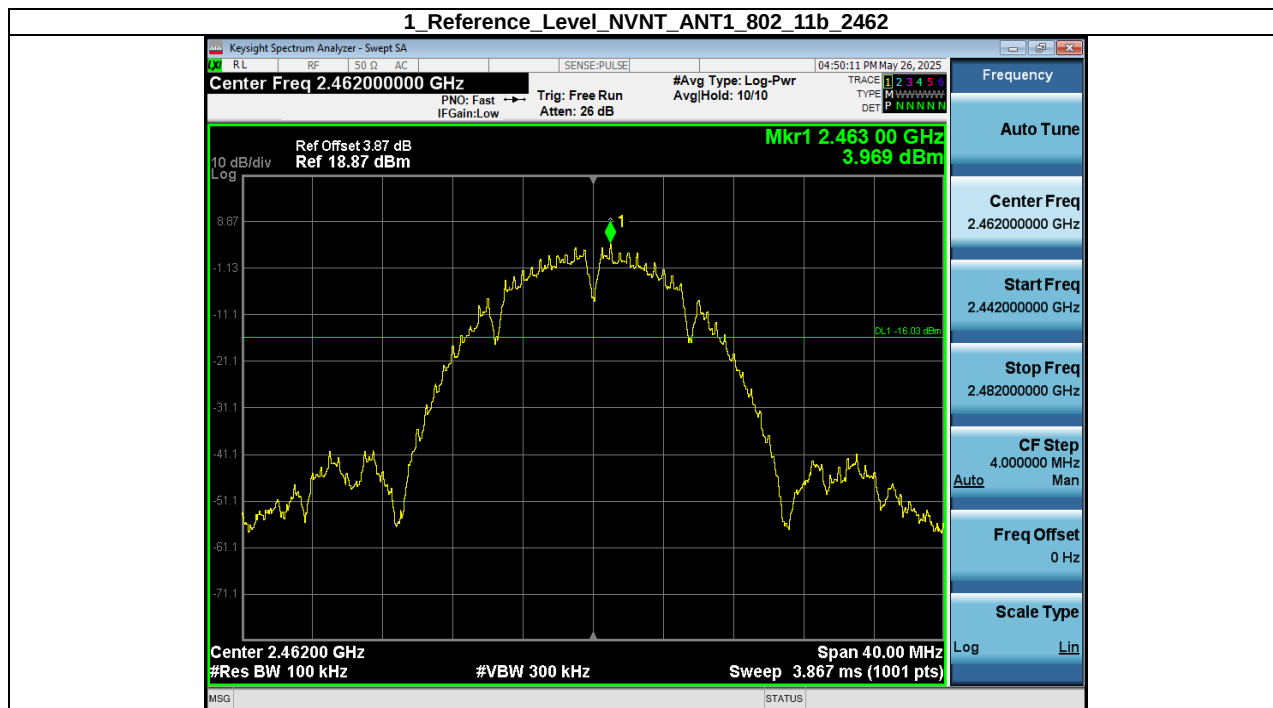


2_Bandedge_NVNT_ANT1_802_11b_2462




1_Reference_Level_NVNT_ANT1_802_11g_2412

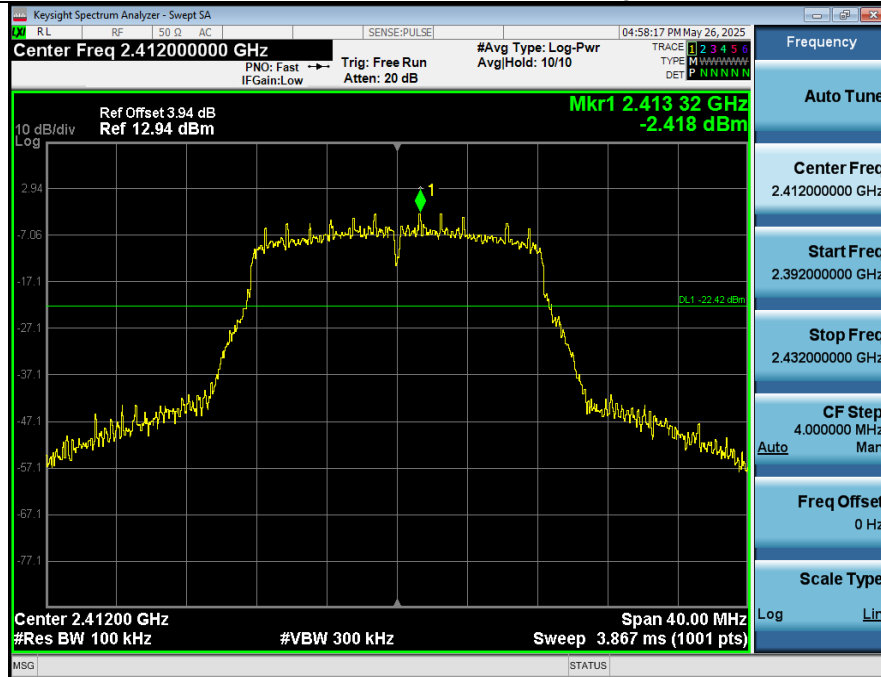

2_Bandedge_NVNT_ANT1_802_11g_2412


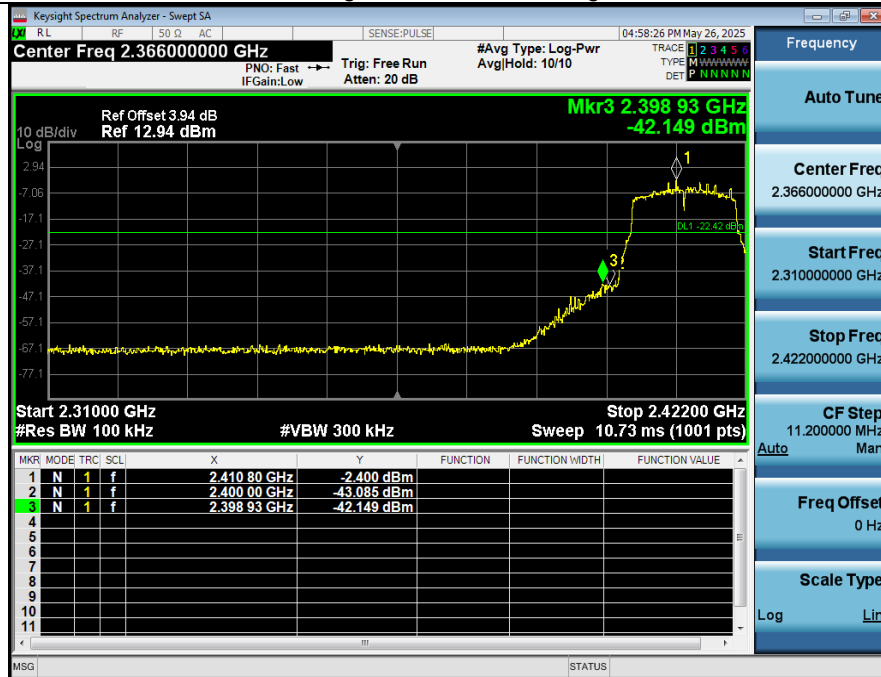


1_Reference_Level_NVNT_ANT1_802_11g_2462

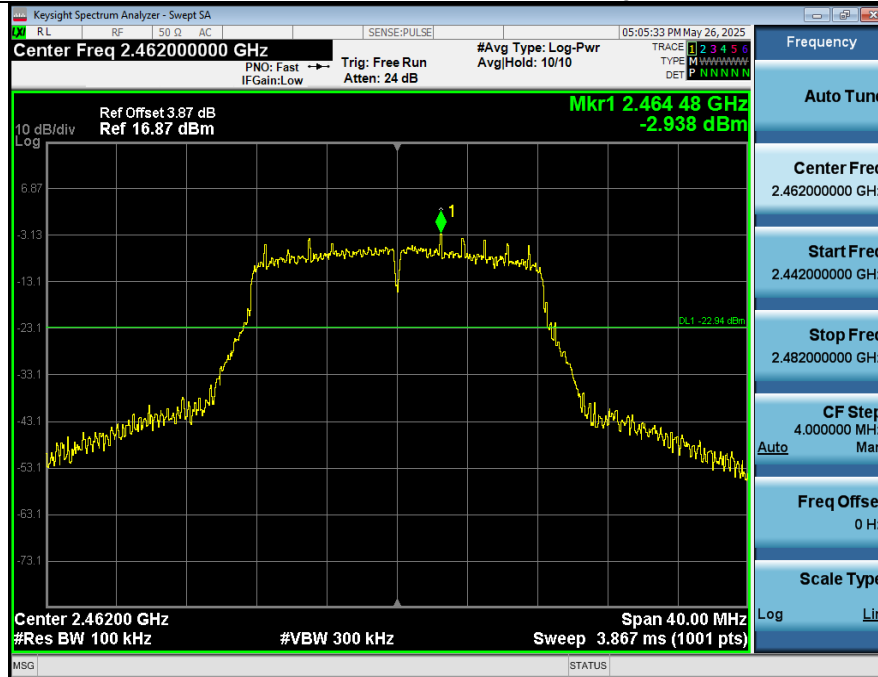

2_Bandedge_NVNT_ANT1_802_11g_2462

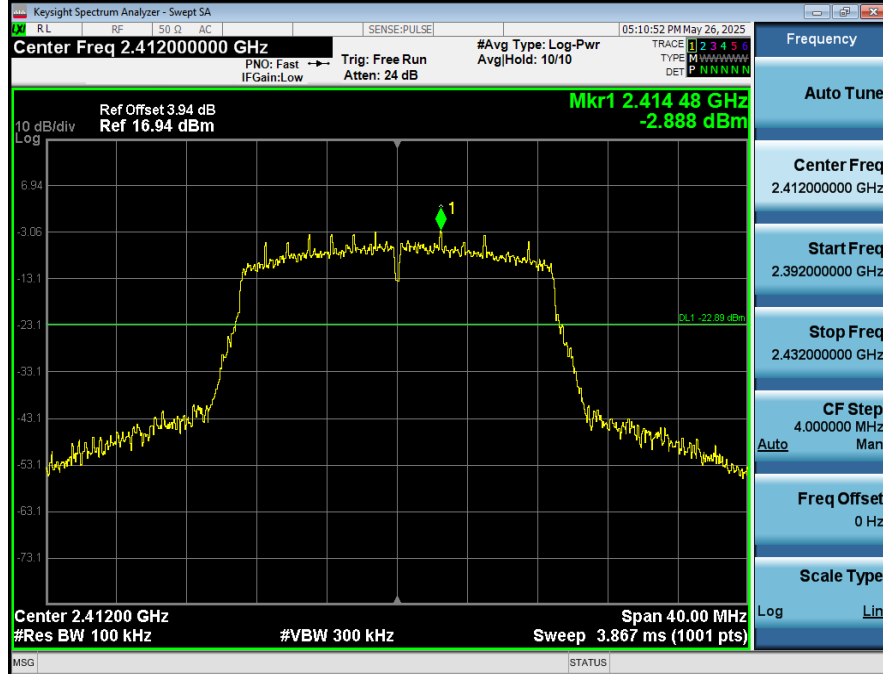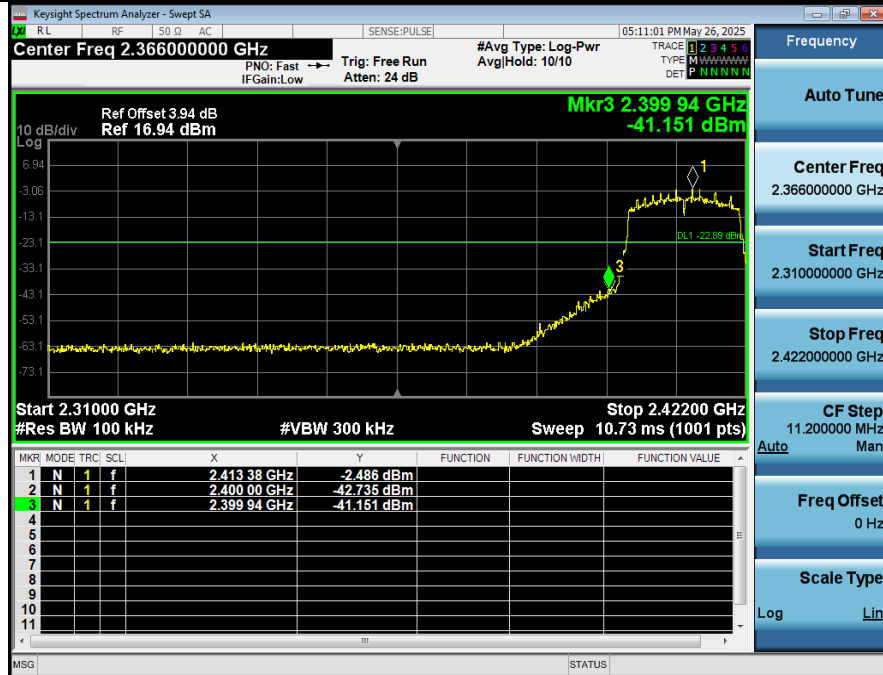


1_Reference_Level_NVNT_ANT1_802_11n(HT20)_2412**2_Bandedge_NVNT_ANT1_802_11n(HT20)_2412**


1_Reference_Level_NVNT_ANT1_802_11n(HT20)_2462




2_Bandedge_NVNT_ANT1_802_11n(HT20)_2462


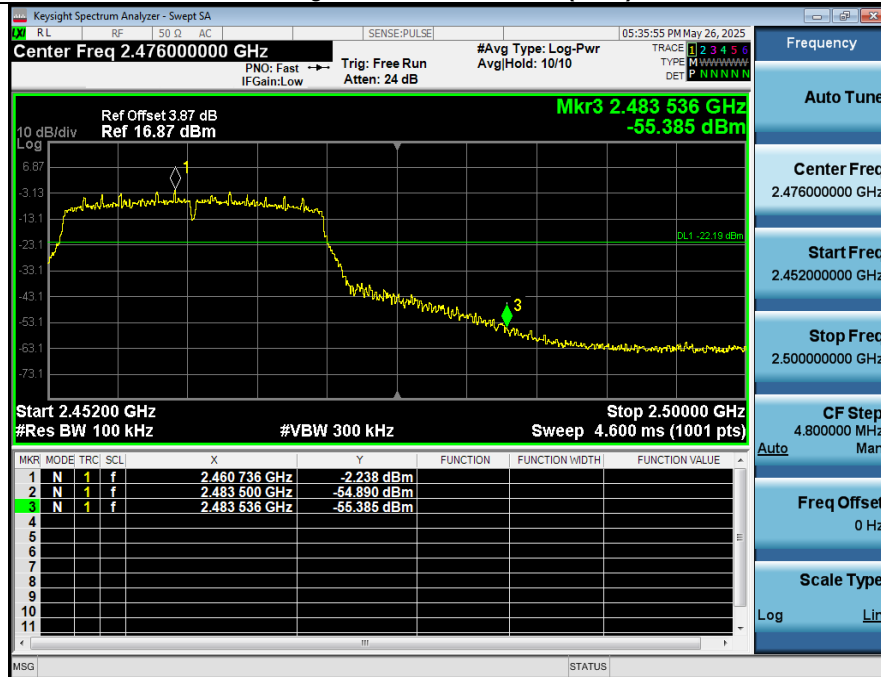


1_Reference_Level_NVNT_ANT1_802_11n(HT40)_2422

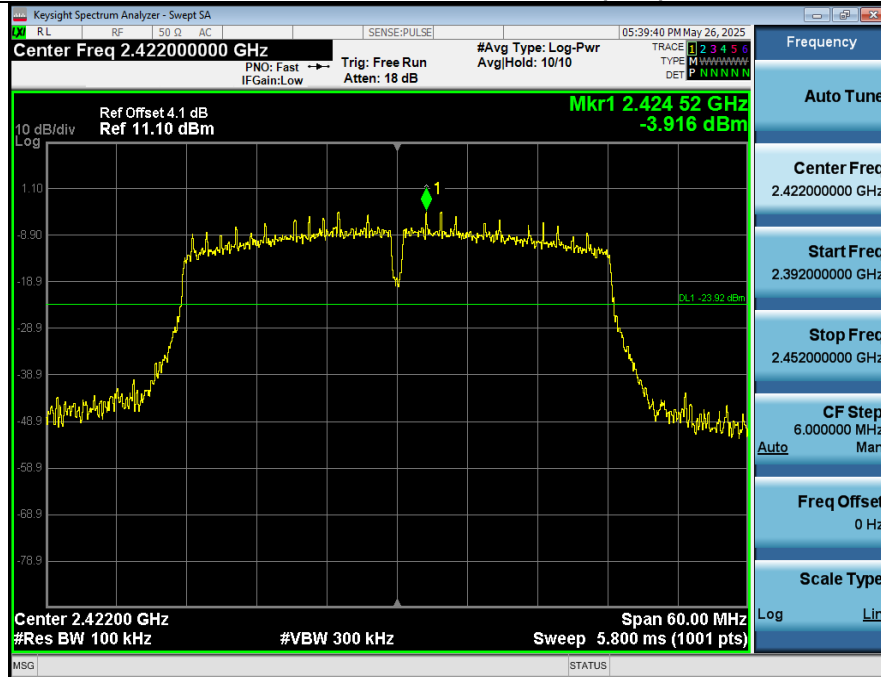

2_Bandedge_NVNT_ANT1_802_11n(HT40)_2422

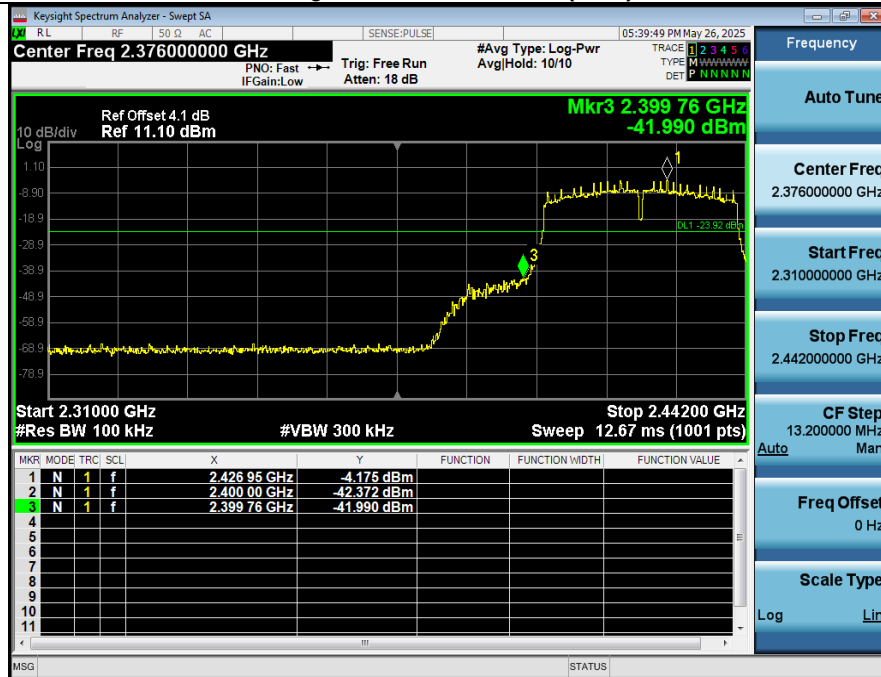

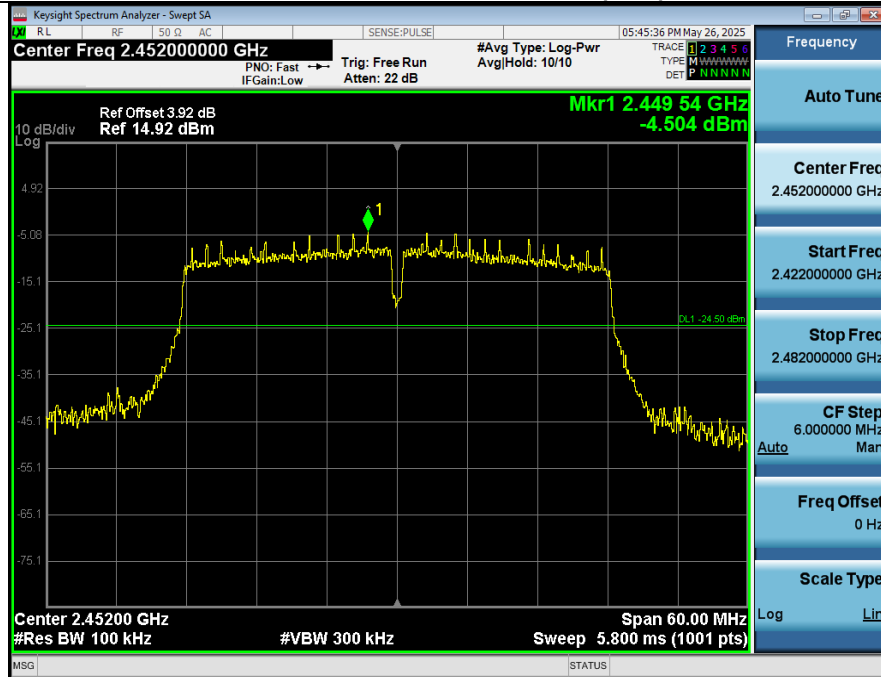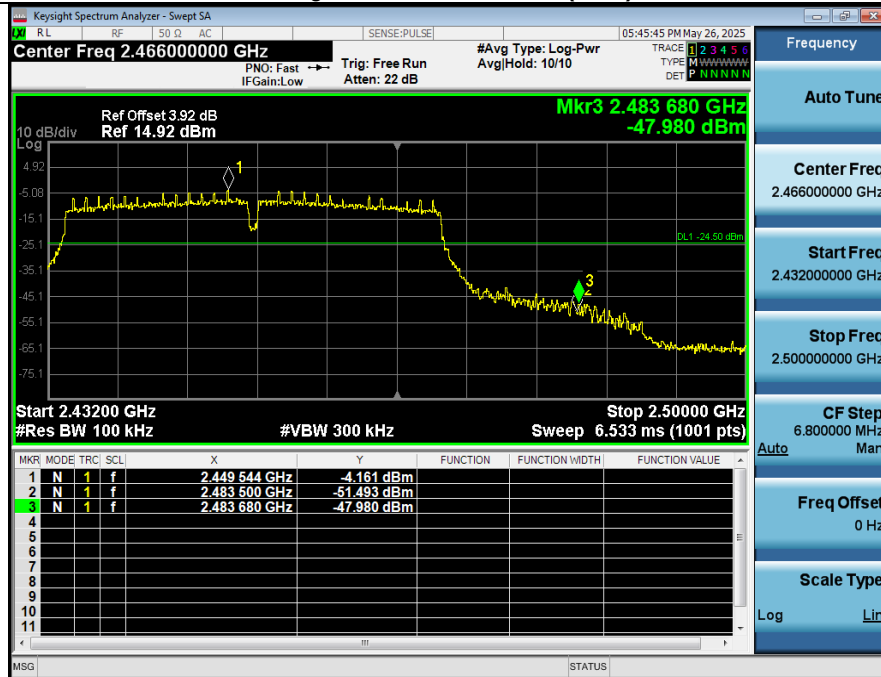
1_Reference_Level_NVNT_ANT1_802_11n(HT40)_2452**2_Bandedge_NVNT_ANT1_802_11n(HT40)_2452**

Conducted spurious emission: Pass


Note: Both antennas have been tested and only the worst data of antenna 1 is shown.

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_freq(MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	24395.726	4.515	-47.158	-15.485	Pass
NVNT	ANT1	802.11b	2437.00	24333.301	4.810	-43.312	-15.190	Pass
NVNT	ANT1	802.11b	2462.00	24390.732	3.969	-47.410	-16.031	Pass
NVNT	ANT1	802.11g	2412.00	24390.732	-2.418	-53.235	-22.418	Pass
NVNT	ANT1	802.11g	2437.00	23973.733	-2.847	-49.096	-22.847	Pass
NVNT	ANT1	802.11g	2462.00	24413.205	-2.938	-49.748	-22.938	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	24972.533	-2.888	-49.491	-22.888	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	24390.732	-2.028	-49.653	-22.028	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	24550.540	-2.190	-49.503	-22.190	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	24513.085	-3.916	-55.286	-23.916	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	24545.546	-3.880	-55.092	-23.880	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	24792.749	-4.504	-51.443	-24.504	Pass

1_Reference_Level_NVNT_ANT1_802_11b_2412

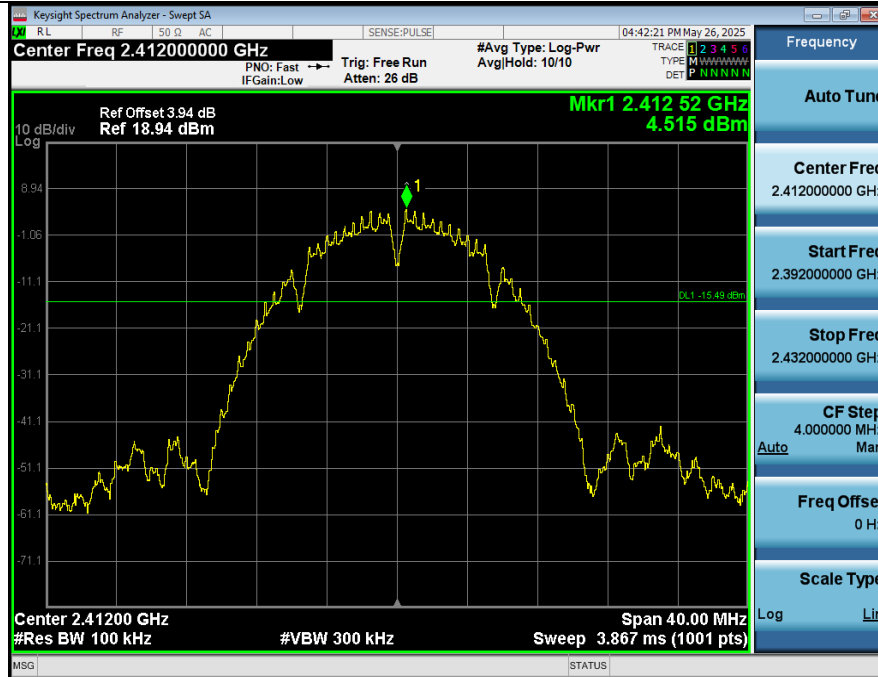


2_Spurious_Emission_NVNT_ANT1_802_11b_2412

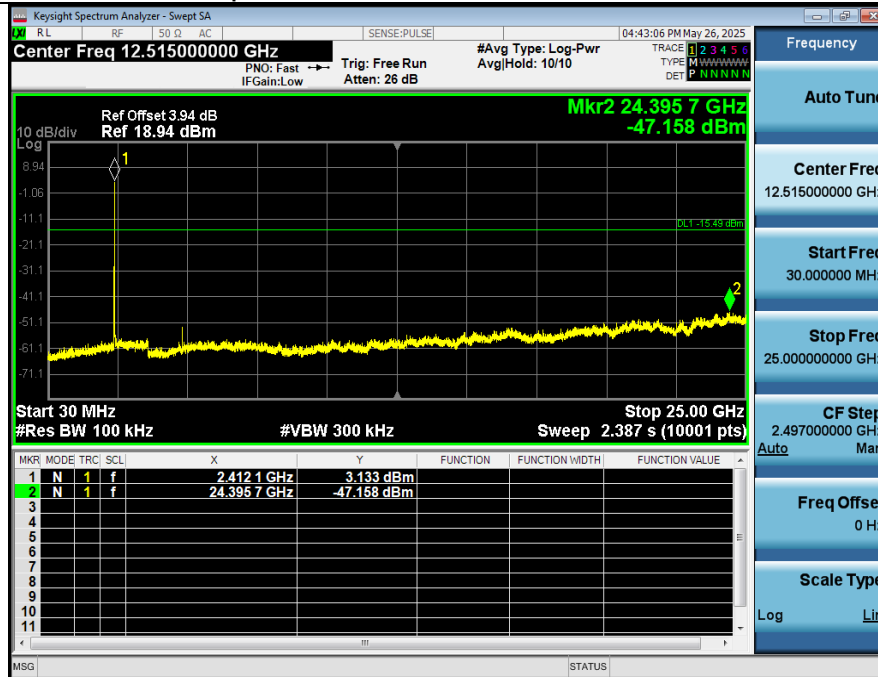


1_Reference_Level_NVNT_ANT1_802_11b_2437




2_Spurious_Emission_NVNT_ANT1_802_11b_2437

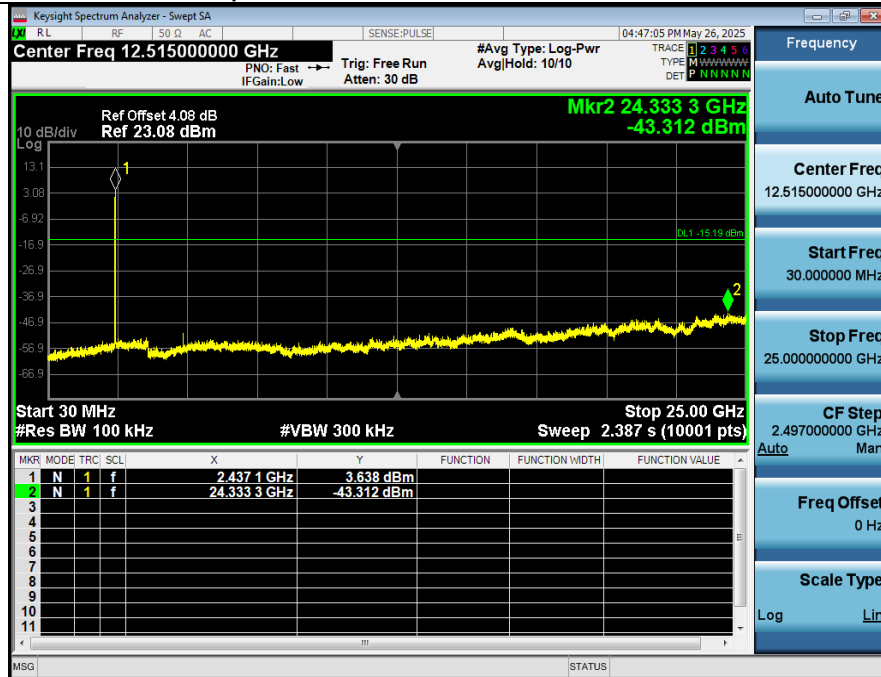


1_Reference_Level_NVNT_ANT1_802_11b_2462

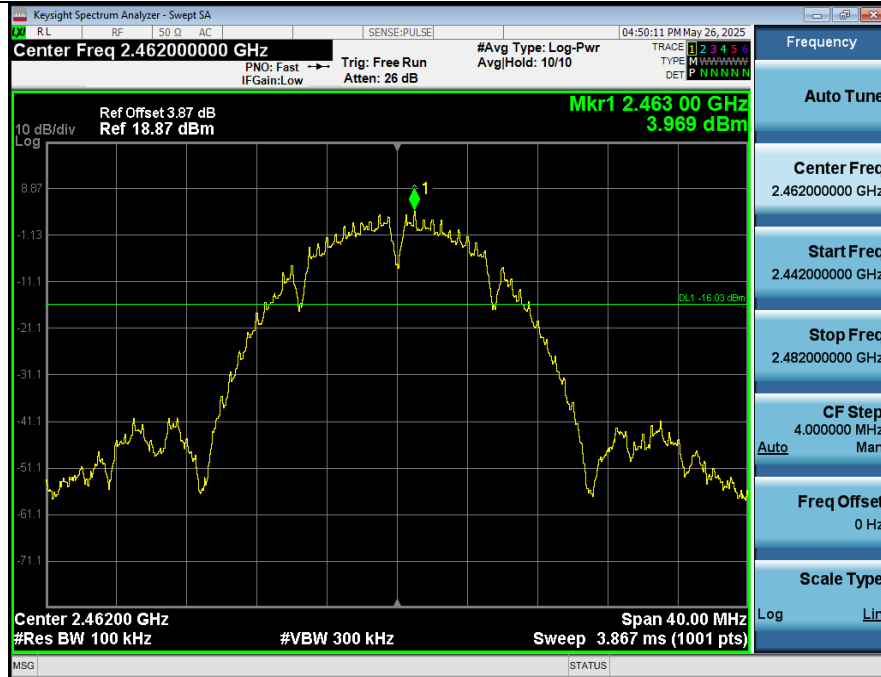


2_Spurious_Emission_NVNT_ANT1_802_11b_2462

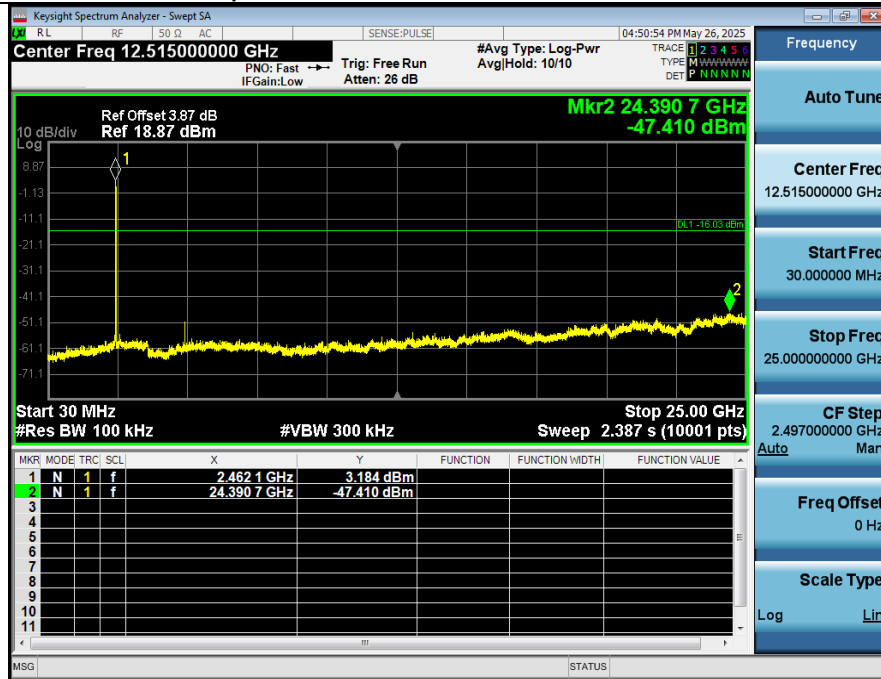


1_Reference_Level_NVNT_ANT1_802_11g_2412

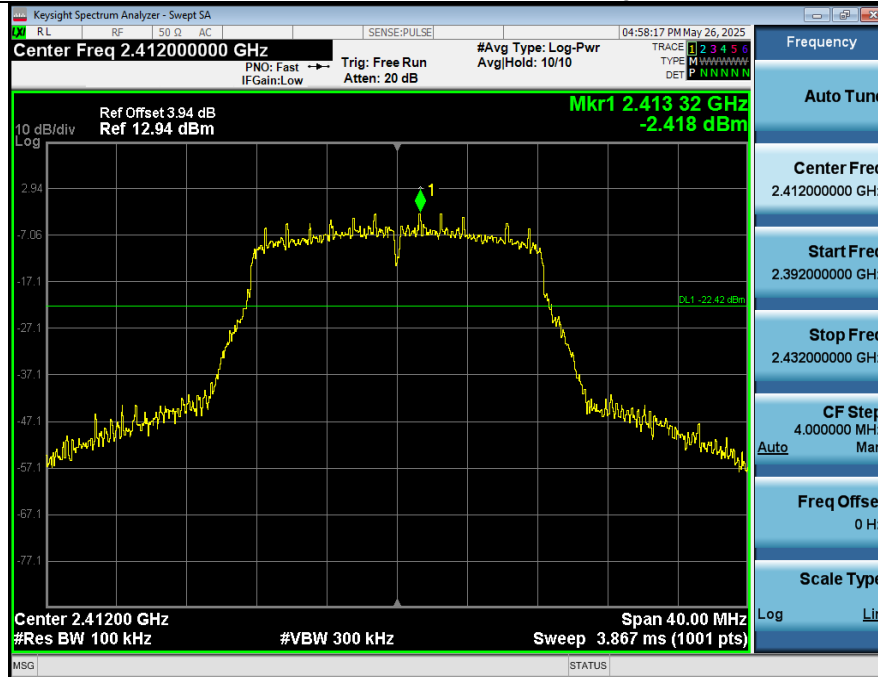


2_Spurious_Emission_NVNT_ANT1_802_11g_2412

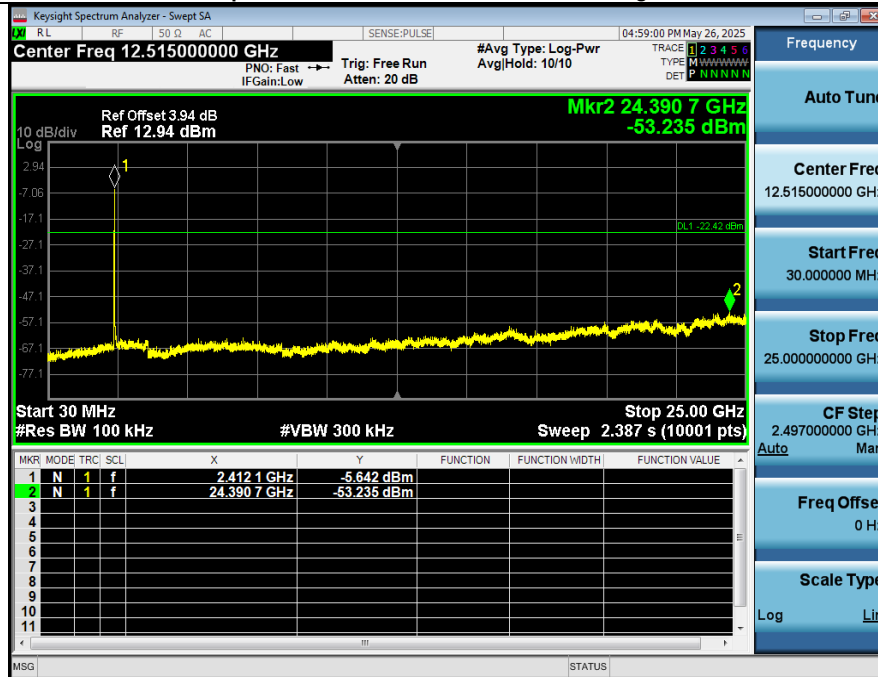


1_Reference_Level_NVNT_ANT1_802_11g_2437

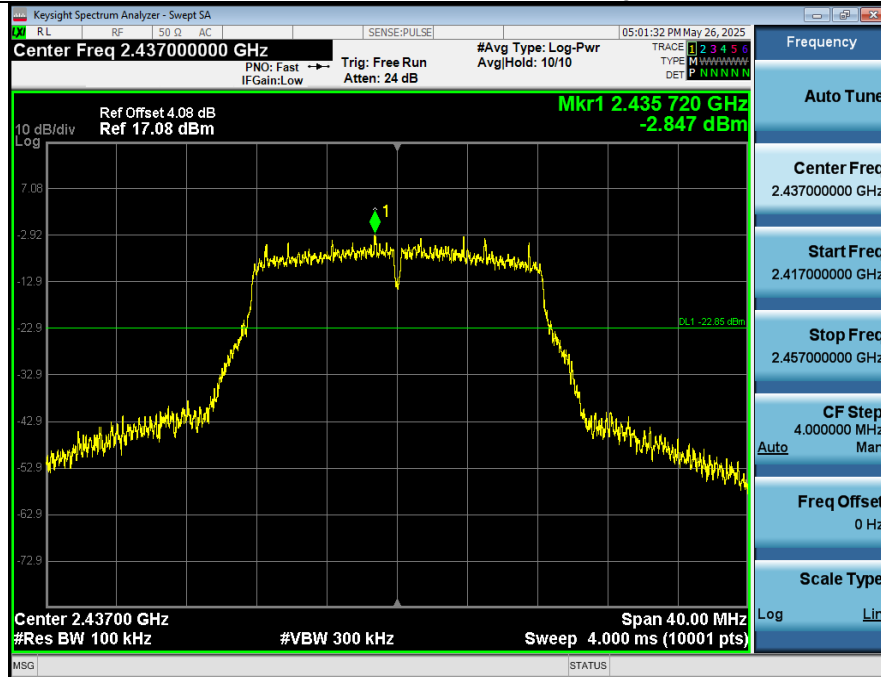


2_Spurious_Emission_NVNT_ANT1_802_11g_2437

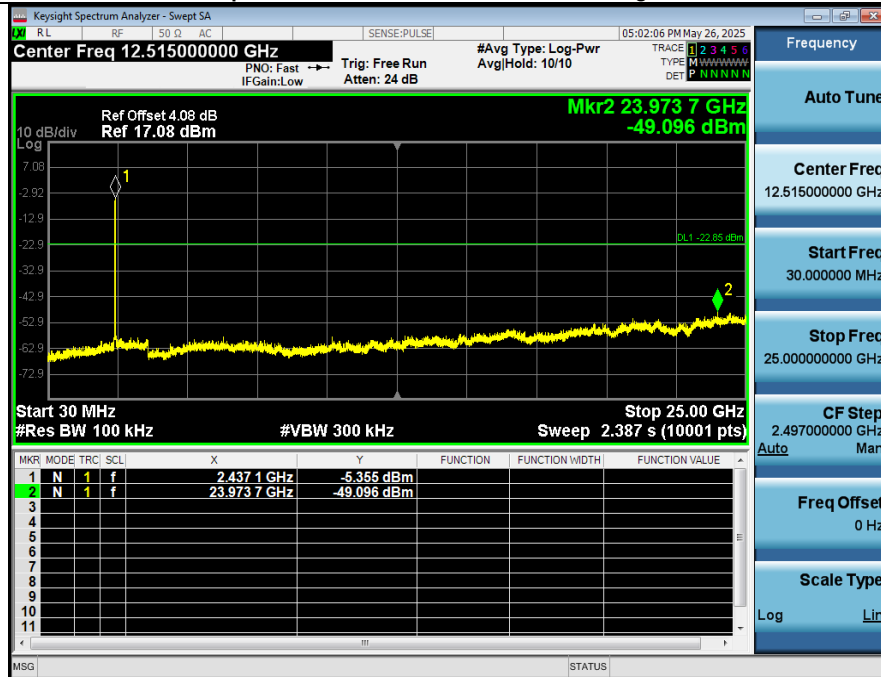




1_Reference_Level_NVNT_ANT1_802_11g_2462

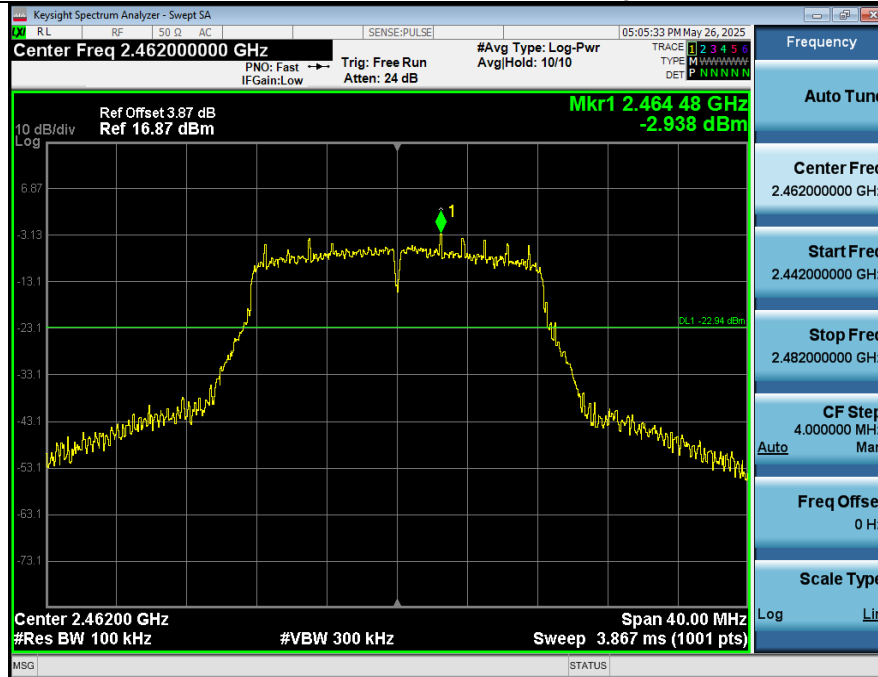




2_Spurious_Emission_NVNT_ANT1_802_11g_2462


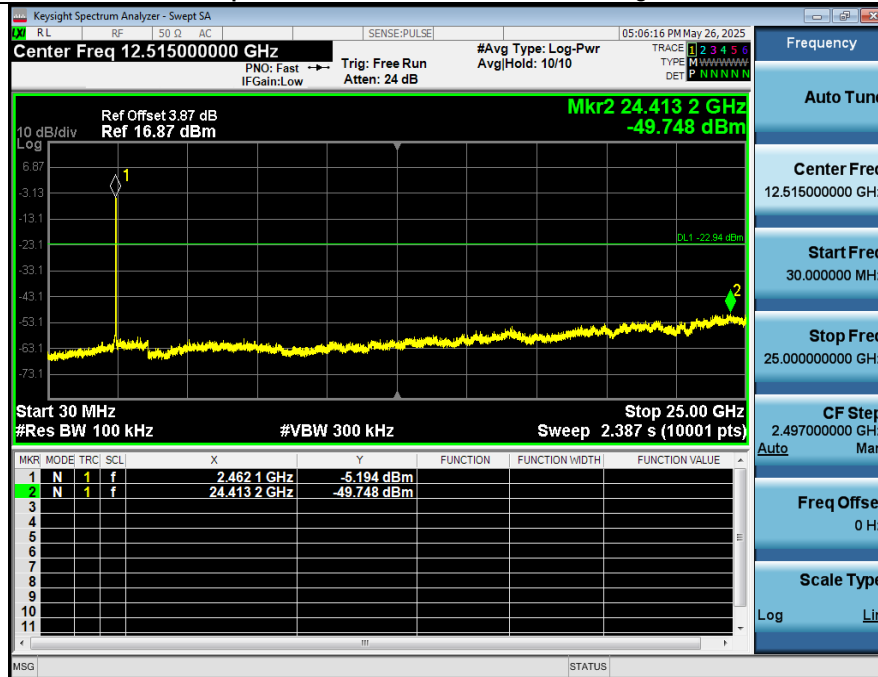



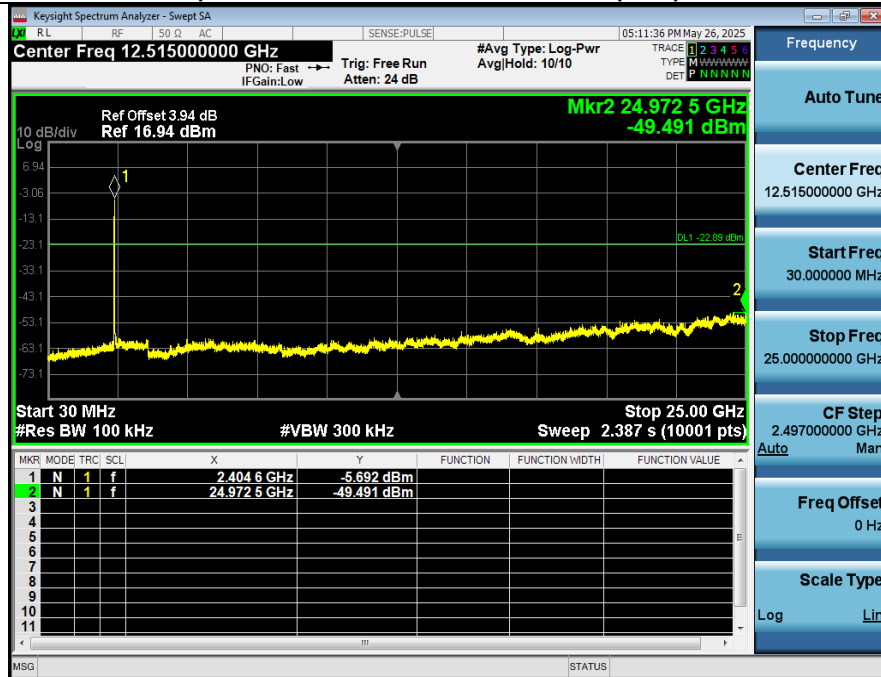
1_Reference_Level_NVNT_ANT1_802_11n(HT20)_2412**2_Spurious_Emission_NVNT_ANT1_802_11n(HT20)_2412**

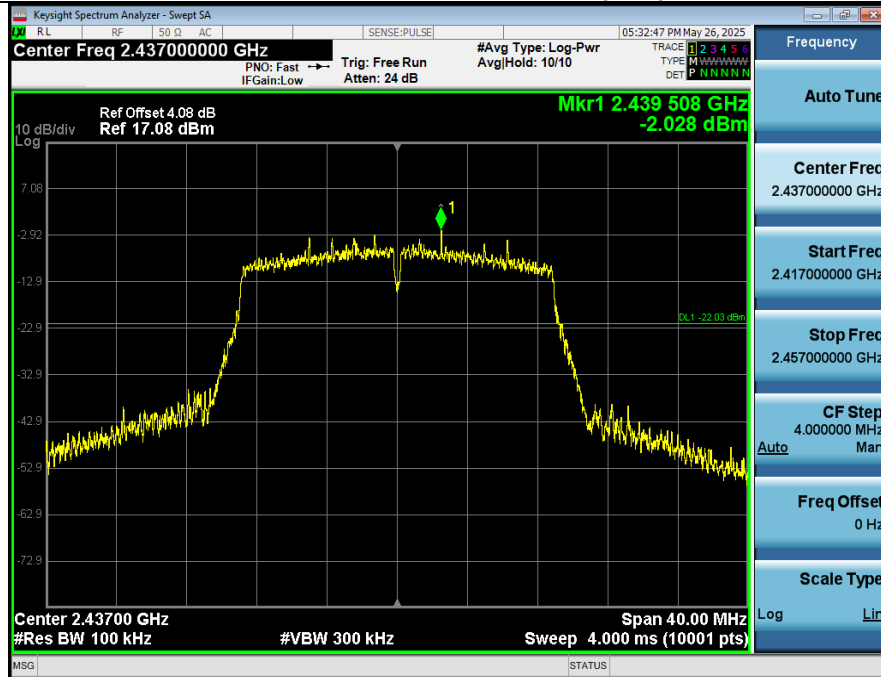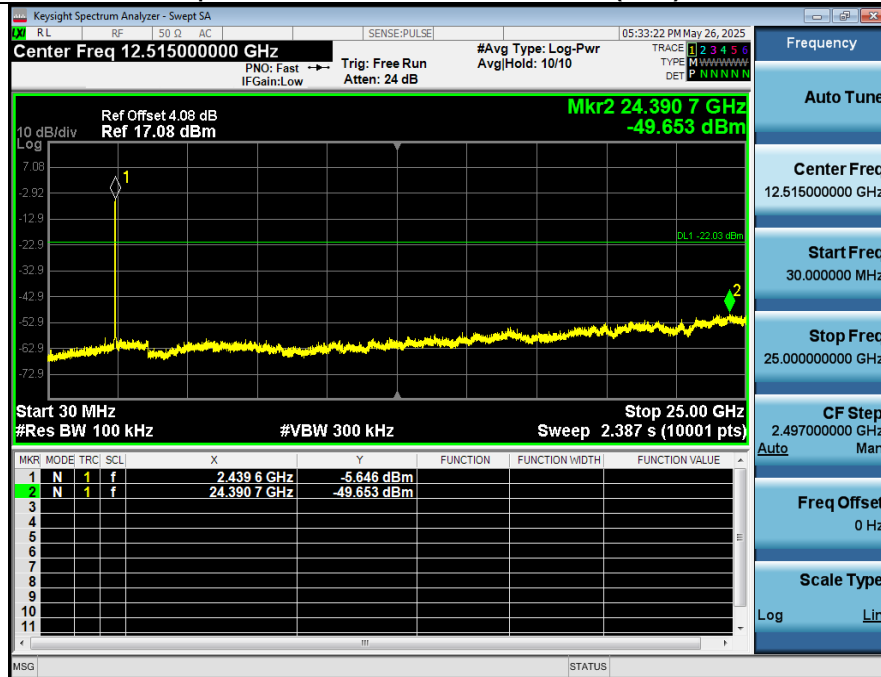1_Reference_Level_NVNT_ANT1_802_11n(HT20)_2437**2_Spurious Emission_NVNT_ANT1_802_11n(HT20)_2437**

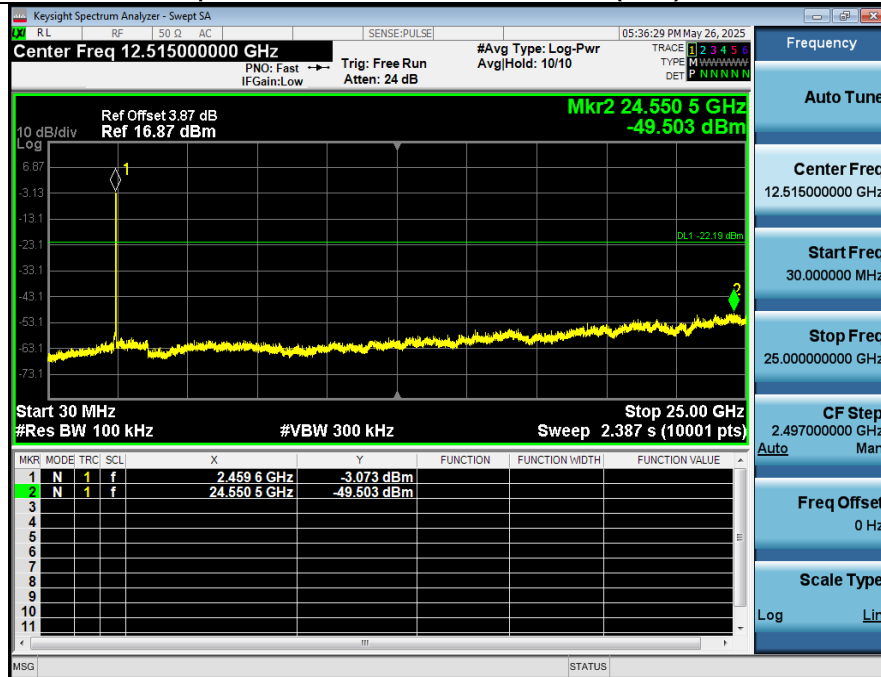1_Reference_Level_NVNT_ANT1_802_11n(HT20)_2462**2_Spurious_Emission_NVNT_ANT1_802_11n(HT20)_2462**

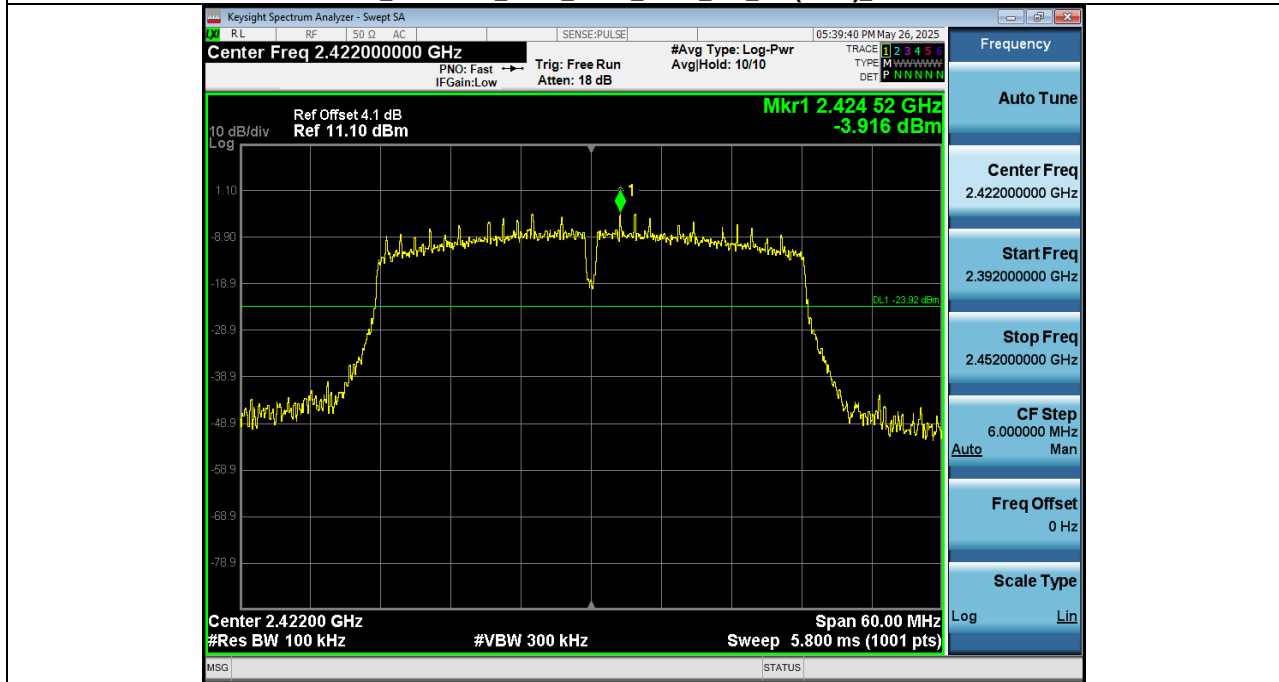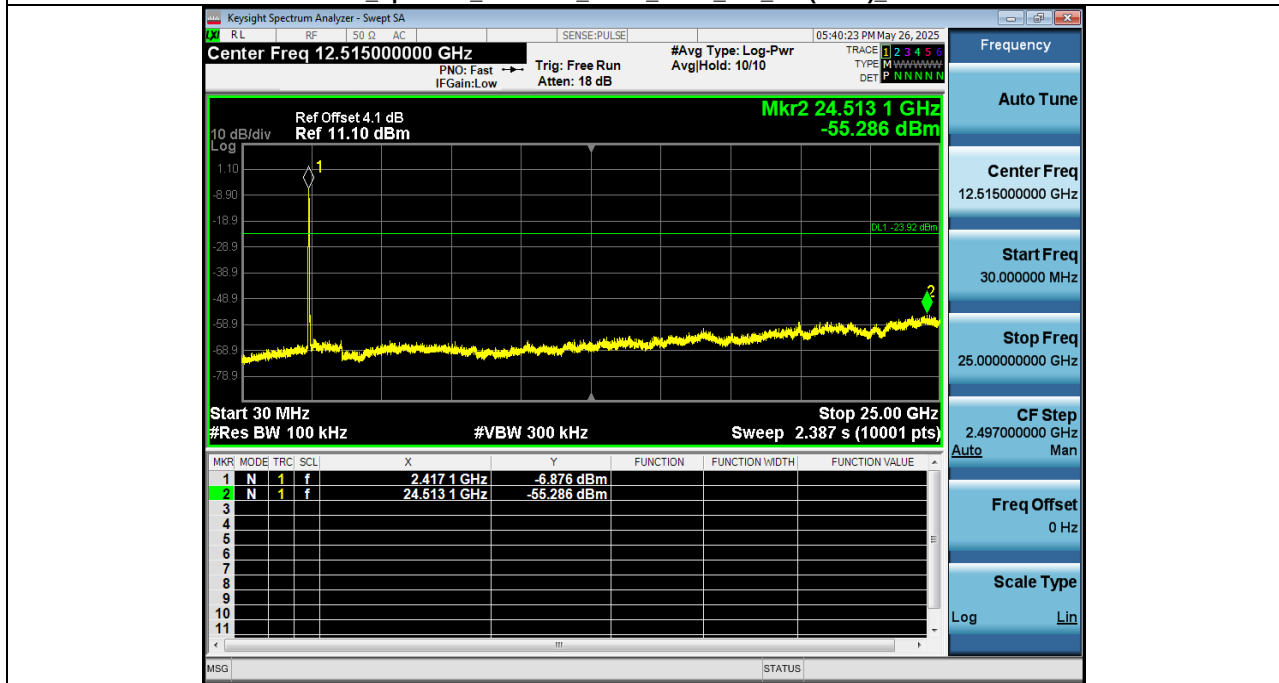1_Reference_Level_NVNT_ANT1_802_11n(HT40)_2422**2_Spurious_Emission_NVNT_ANT1_802_11n(HT40)_2422**

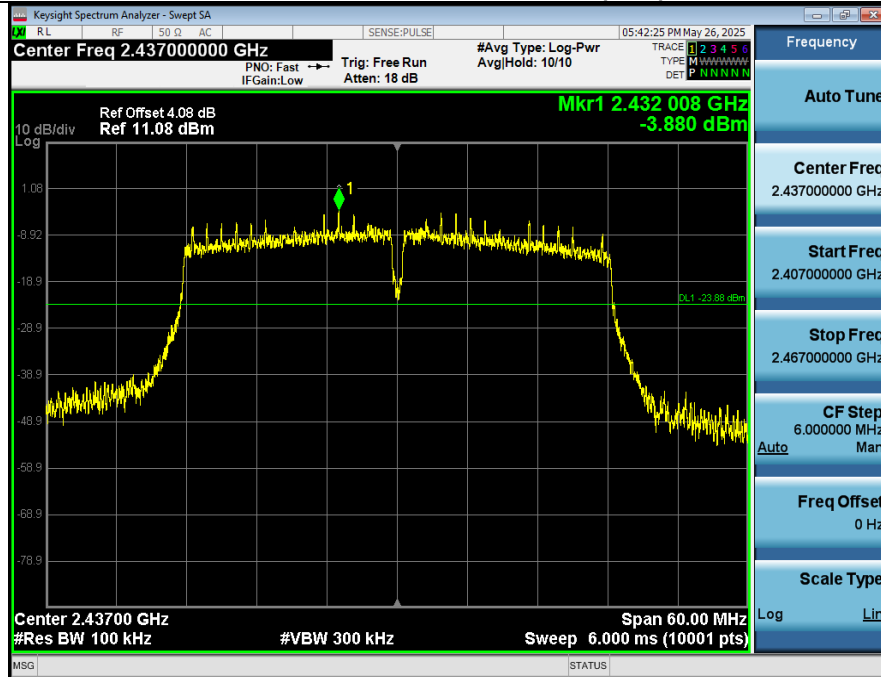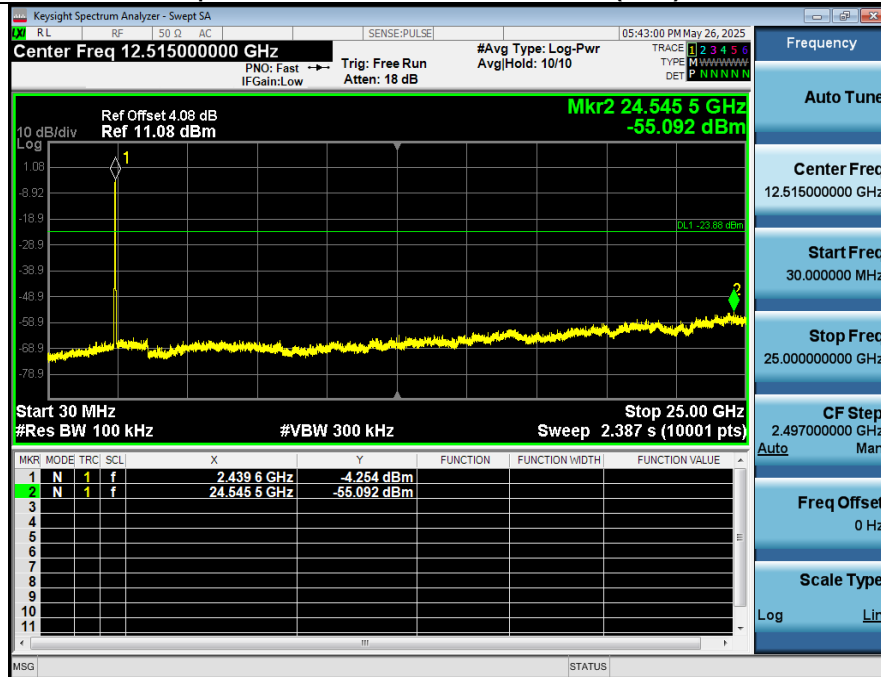1_Reference_Level_NVNT_ANT1_802_11n(HT40)_2437**2_Spurious Emission_NVNT_ANT1_802_11n(HT40)_2437**

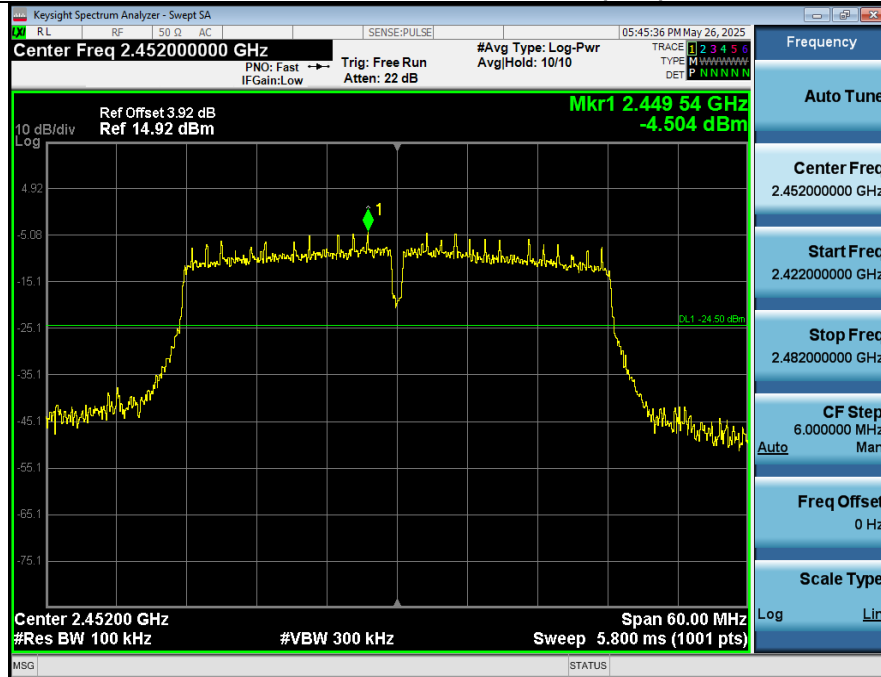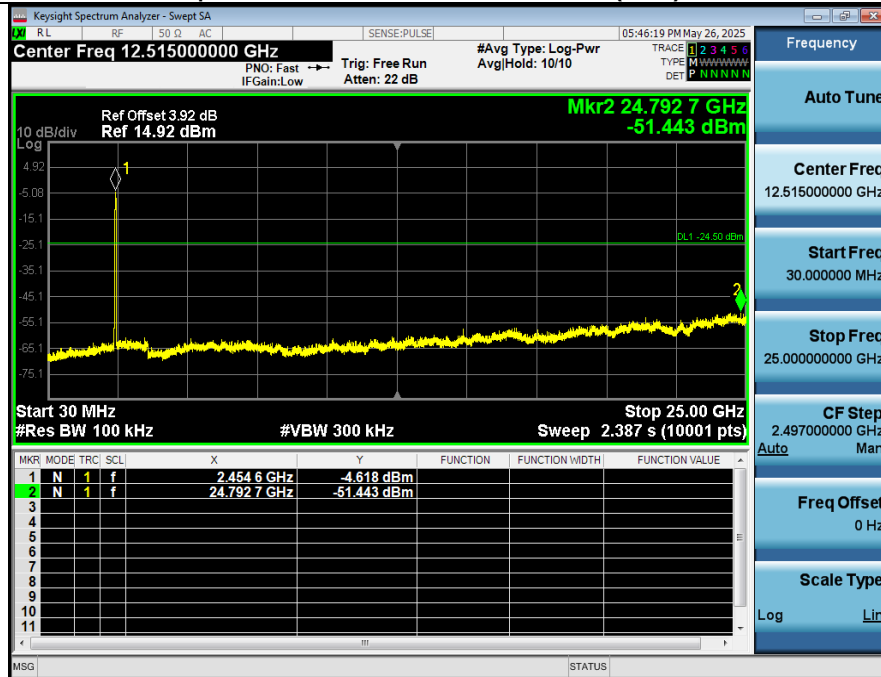1_Reference_Level_NVNT_ANT1_802_11n(HT40)_2452**2_Spurious_Emission_NVNT_ANT1_802_11n(HT40)_2452**

6. Conducted Maximum Output Power

6.1. Test limits

Please refer RSS-247 & FCC Part 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1 W(30dBm)


6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

- (1) Place the EUT on the table and set it in transmitting mode.
- (2) Connected the EUT's antenna port to peak power meter by 20dB attenuator.
- (3) Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

6.3. Test Setup

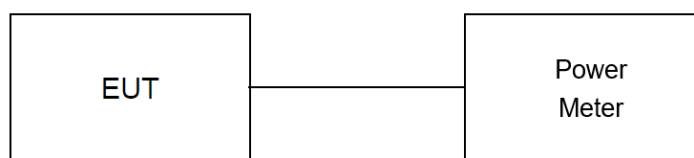

6.4. Test Results

Condition	Antenna	Modulation	Frequency (MHz)	Detector	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	Peak	16.17	N/A	16.17	30	Pass
NVNT	ANT2	802.11b	2412.00	Peak	16.27	N/A	16.27	30	Pass
NVNT	ANT1	802.11b	2437.00	Peak	15.57	N/A	15.57	30	Pass
NVNT	ANT2	802.11b	2437.00	Peak	15.30	N/A	15.30	30	Pass
NVNT	ANT1	802.11b	2462.00	Peak	11.16	N/A	11.16	30	Pass
NVNT	ANT2	802.11b	2462.00	Peak	10.54	N/A	10.54	30	Pass
NVNT	ANT1	802.11g	2412.00	Peak	15.34	N/A	15.34	30	Pass
NVNT	ANT2	802.11g	2412.00	Peak	15.36	N/A	15.36	30	Pass
NVNT	ANT1	802.11g	2437.00	Peak	14.05	N/A	14.05	30	Pass
NVNT	ANT2	802.11g	2437.00	Peak	14.24	N/A	14.24	30	Pass
NVNT	ANT1	802.11g	2462.00	Peak	10.25	N/A	10.25	30	Pass
NVNT	ANT2	802.11g	2462.00	Peak	10.07	N/A	10.07	30	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	Peak	12.82	N/A	12.82	30	Pass
NVNT	ANT2	802.11n(HT20)	2412.00	Peak	12.77	N/A	12.77	30	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	Peak	16.19	N/A	16.19	30	Pass
NVNT	ANT2	802.11n(HT20)	2437.00	Peak	15.80	N/A	15.80	30	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	Peak	11.91	N/A	11.91	30	Pass
NVNT	ANT2	802.11n(HT20)	2462.00	Peak	11.45	N/A	11.45	30	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	Peak	12.57	N/A	12.57	30	Pass
NVNT	ANT2	802.11n(HT40)	2422.00	Peak	12.72	N/A	12.72	30	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	Peak	15.28	N/A	15.28	30	Pass
NVNT	ANT2	802.11n(HT40)	2437.00	Peak	14.82	N/A	14.82	30	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	Peak	12.96	N/A	12.96	30	Pass
NVNT	ANT2	802.11n(HT40)	2452.00	Peak	12.52	N/A	12.52	30	Pass

Condition	Antenna	Mode	Frequency(MHz)	MIMO_Conducted_Power(dBm)	Limit(dBm)	Result
NVNT	MIMO_TX	802.11n(HT20)	2412.00	15.80	30	Pass
NVNT	MIMO_TX	802.11n(HT20)	2437.00	19.01	30	Pass
NVNT	MIMO_TX	802.11n(HT20)	2462.00	14.69	30	Pass
NVNT	MIMO_TX	802.11n(HT40)	2422.00	15.66	30	Pass
NVNT	MIMO_TX	802.11n(HT40)	2437.00	18.07	30	Pass
NVNT	MIMO_TX	802.11n(HT40)	2452.00	15.75	30	Pass

Note: 1. The measure-and-sum technique shall be used for measuring in-band transmit power of a device. Total power is the sum of the conducted power levels measured at the various output ports.

(First measure the power (mW) of each antenna separately, and the total power is equal to Ant1mW + Ant2mW+....)

Duty cycle

Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty factor(dB)
NVNT	ANT1	802.11b	2412.00	100	0.00
NVNT	ANT1	802.11b	2437.00	100	0.00
NVNT	ANT1	802.11b	2462.00	100	0.00
NVNT	ANT1	802.11g	2412.00	99.30	0.00
NVNT	ANT1	802.11g	2437.00	100	0.00
NVNT	ANT1	802.11g	2462.00	100	0.00
NVNT	ANT1	802.11n(HT20)	2412.00	100	0.00
NVNT	ANT1	802.11n(HT20)	2437.00	98.51	0.00
NVNT	ANT1	802.11n(HT20)	2462.00	98.51	0.00
NVNT	ANT1	802.11n(HT40)	2422.00	97.06	0.13
NVNT	ANT1	802.11n(HT40)	2437.00	97.06	0.13
NVNT	ANT1	802.11n(HT40)	2452.00	97.06	0.13

Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty factor(dB)
NVNT	ANT2	802.11b	2412.00	99.52	0.00
NVNT	ANT2	802.11b	2437.00	100	0.00
NVNT	ANT2	802.11b	2462.00	100	0.00
NVNT	ANT2	802.11g	2412.00	97.18	0.12
NVNT	ANT2	802.11g	2437.00	97.18	0.12
NVNT	ANT2	802.11g	2462.00	97.22	0.12
NVNT	ANT2	802.11n(HT20)	2412.00	97.01	0.13
NVNT	ANT2	802.11n(HT20)	2437.00	97.01	0.13
NVNT	ANT2	802.11n(HT20)	2462.00	97.01	0.13
NVNT	ANT2	802.11n(HT40)	2422.00	94.12	0.26
NVNT	ANT2	802.11n(HT40)	2437.00	94.12	0.26
NVNT	ANT2	802.11n(HT40)	2452.00	94.12	0.26

7. Peak Power Spectral Density

7.1. Test limits

- (1) Please refer RSS-247 & FCC Part 15.247.
- (2) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
- (3) The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

7.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

- (1) Place the EUT on the table and set it in transmitting mode.
- (2) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- (3) Set the spectrum analyzer as $RBW = 100\text{kHz}$ (Set the RBW to: $3\text{ kHz} \leq RBW \leq 100\text{ kHz}$), $VBW = 300\text{kHz}$ (Set the $VBW \geq 3 \times RBW$), $\text{span} \geq 1.5 \times \text{DTS bandwidth}$., detail see the test plot.
- (4) Record the max reading.
- (5) Repeat the above procedure until the measurements for all frequencies are completed.


7.3. Test Setup





7.4. Test Results


SISO Mode


Condition	Antenna	Modulation	Frequency (MHz)	SA PSD(dBm/30kHz)	RB factor(dB)	PSD(dBm/3kHz)	limit(dBm/3kHz)	Result
NVNT	ANT1	802.11b	2412.00	2.63	-10.00	-7.37	8	Pass
NVNT	ANT2	802.11b	2412.00	1.61	-10.00	-8.39	8	Pass
NVNT	ANT1	802.11b	2437.00	1.76	-10.00	-8.24	8	Pass
NVNT	ANT2	802.11b	2437.00	0.14	-10.00	-9.87	8	Pass
NVNT	ANT1	802.11b	2462.00	-1.50	-10.00	-11.50	8	Pass
NVNT	ANT2	802.11b	2462.00	-4.29	-10.00	-14.29	8	Pass
NVNT	ANT1	802.11g	2412.00	-5.37	-10.00	-15.37	8	Pass
NVNT	ANT2	802.11g	2412.00	-6.04	-10.00	-16.04	8	Pass
NVNT	ANT1	802.11g	2437.00	-7.98	-10.00	-17.98	8	Pass
NVNT	ANT2	802.11g	2437.00	-7.80	-10.00	-17.80	8	Pass
NVNT	ANT1	802.11g	2462.00	-11.90	-10.00	-21.90	8	Pass
NVNT	ANT2	802.11g	2462.00	-11.94	-10.00	-21.94	8	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	-10.44	-10.00	-20.44	8	Pass
NVNT	ANT2	802.11n(HT20)	2412.00	-10.03	-10.00	-20.03	8	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	-6.46	-10.00	-16.46	8	Pass
NVNT	ANT2	802.11n(HT20)	2437.00	-6.52	-10.00	-16.52	8	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	-11.38	-10.00	-21.38	8	Pass
NVNT	ANT2	802.11n(HT20)	2462.00	-11.77	-10.00	-21.77	8	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	-12.32	-10.00	-22.32	8	Pass
NVNT	ANT2	802.11n(HT40)	2422.00	-12.78	-10.00	-22.78	8	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	-9.41	-10.00	-19.41	8	Pass
NVNT	ANT2	802.11n(HT40)	2437.00	-9.89	-10.00	-19.89	8	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	-11.41	-10.00	-21.41	8	Pass
NVNT	ANT2	802.11n(HT40)	2452.00	-11.76	-10.00	-21.76	8	Pass

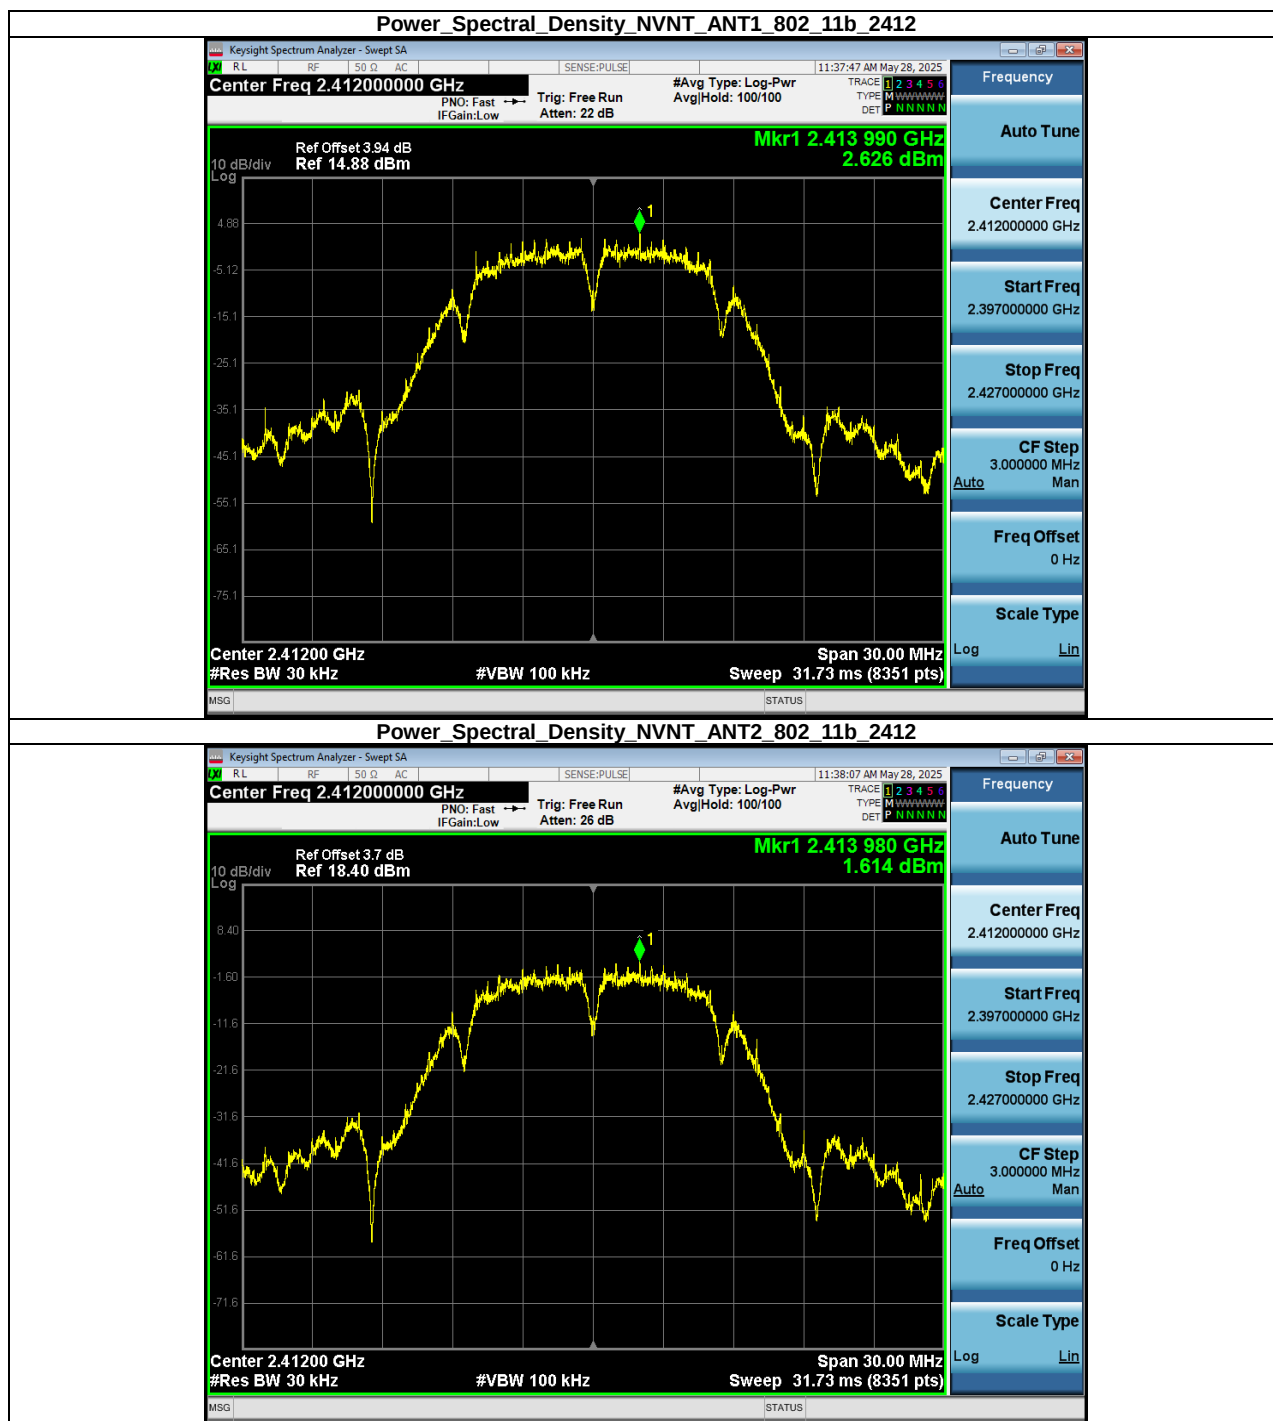

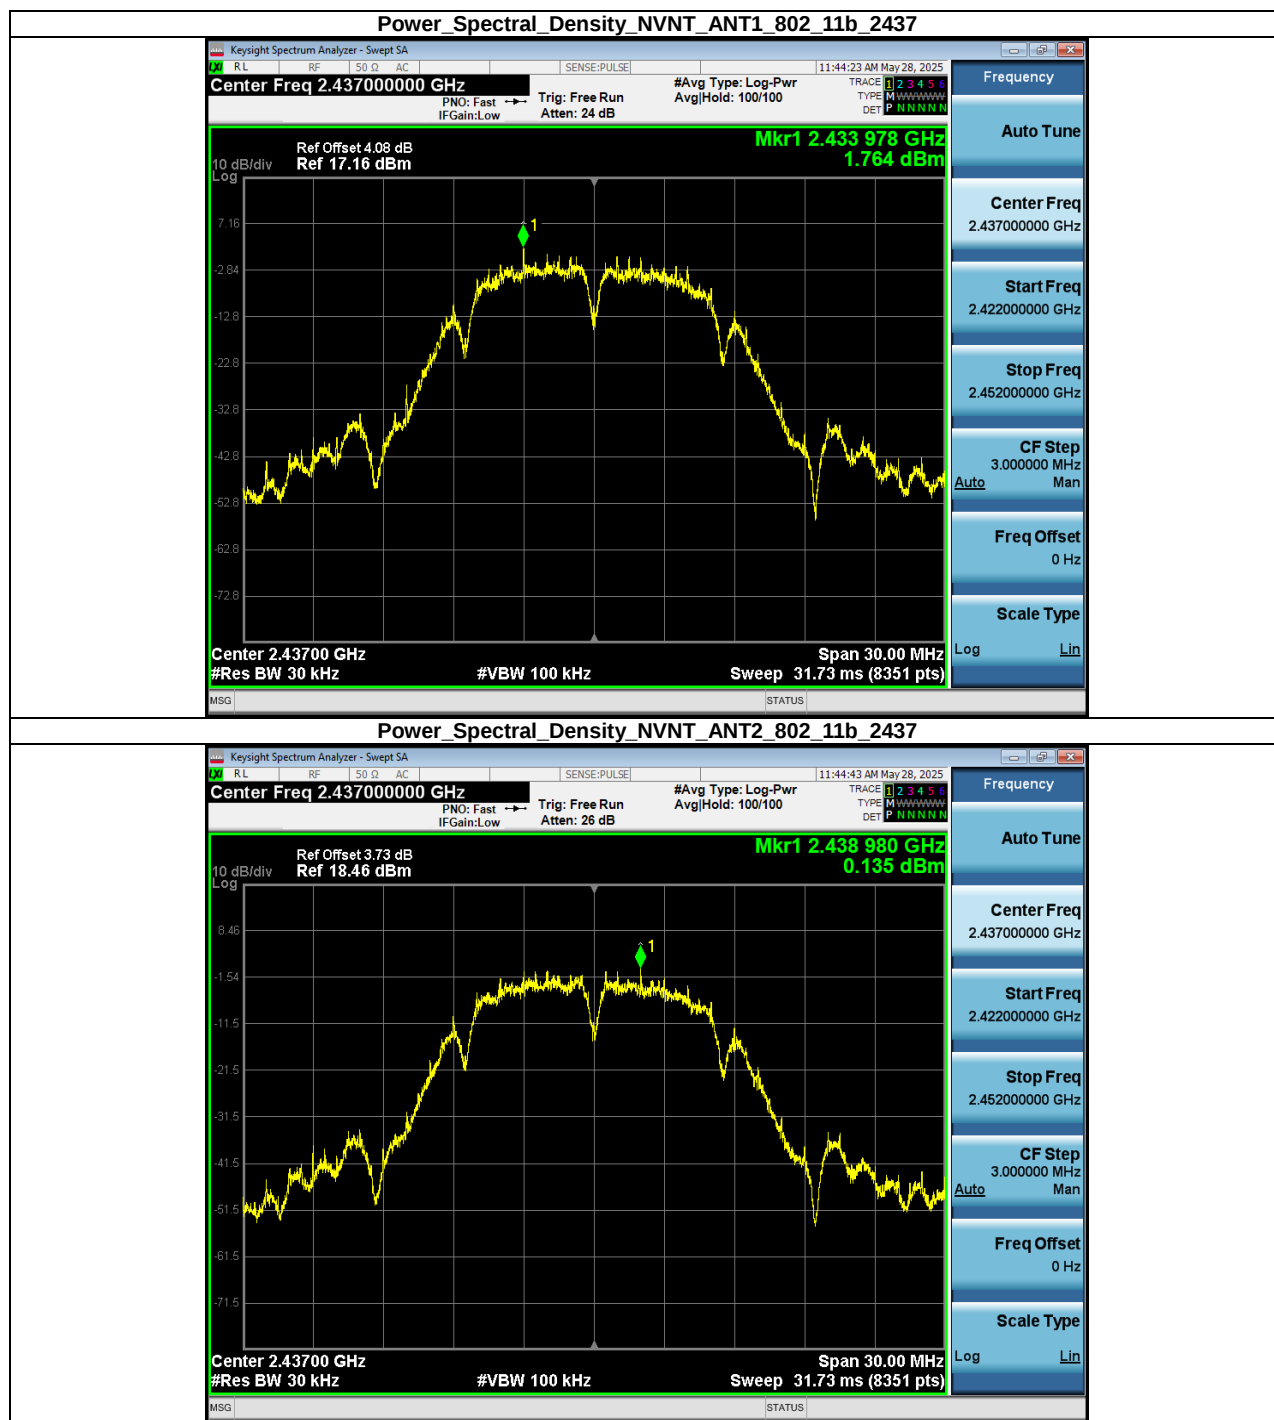


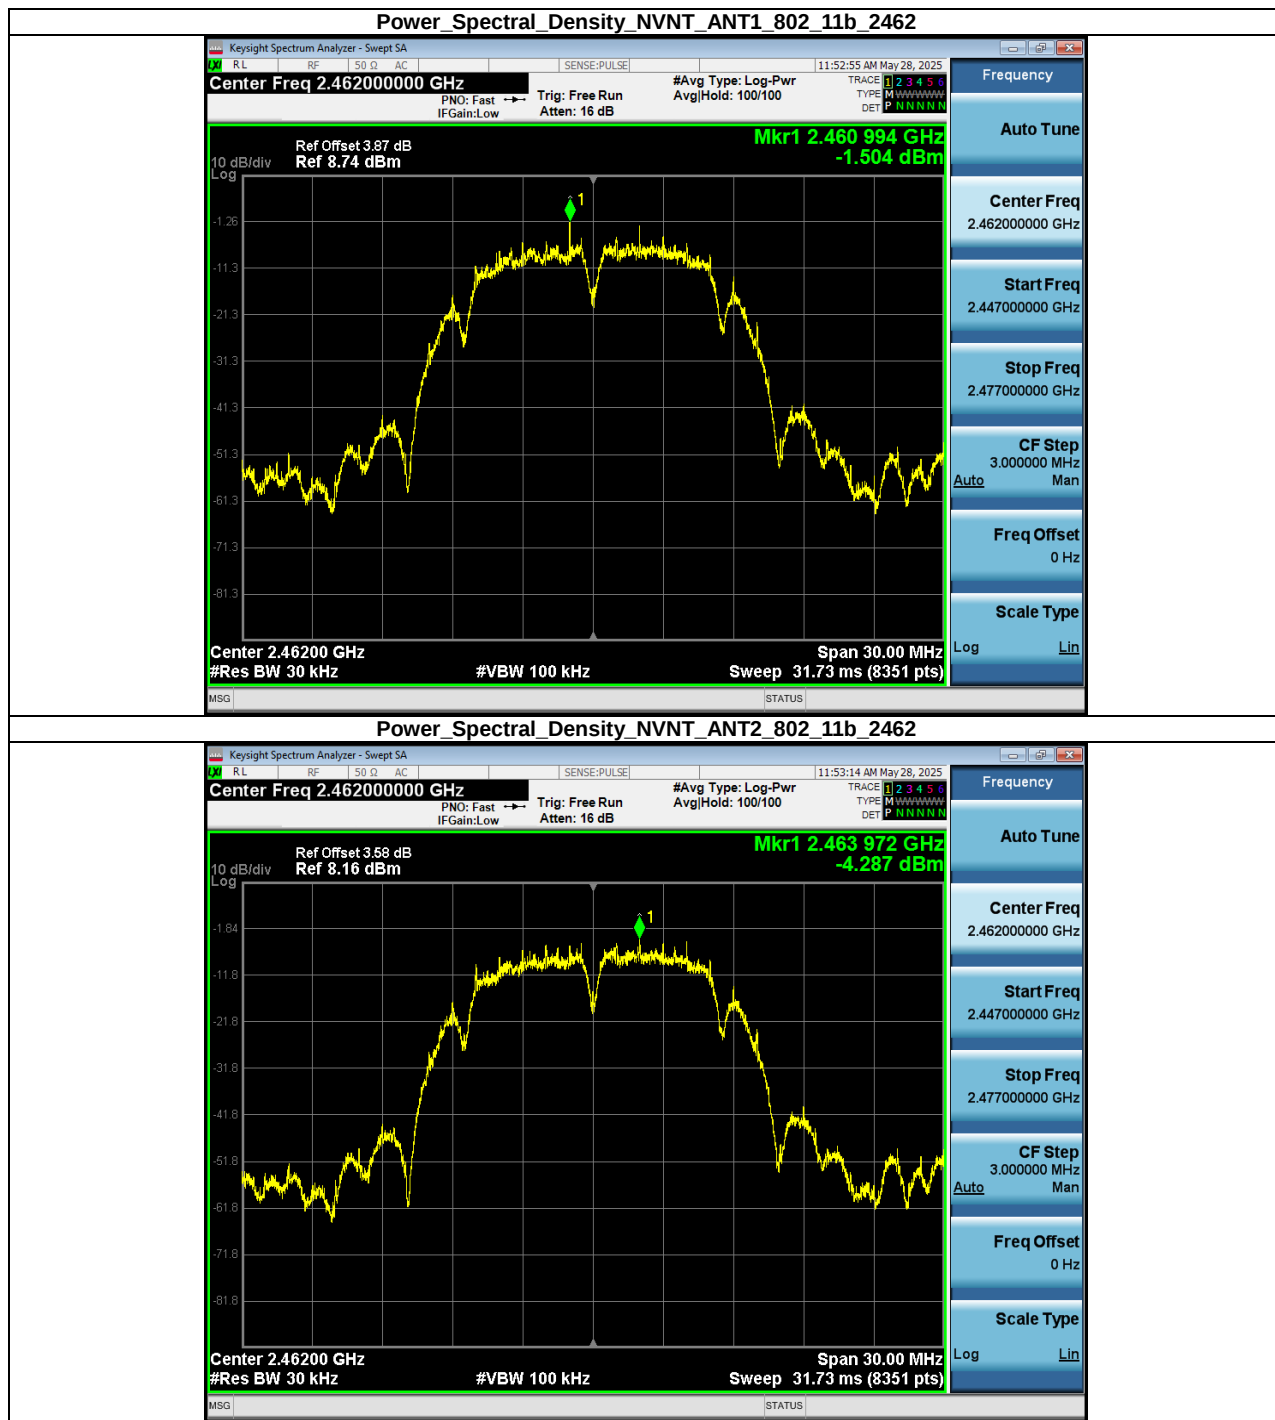

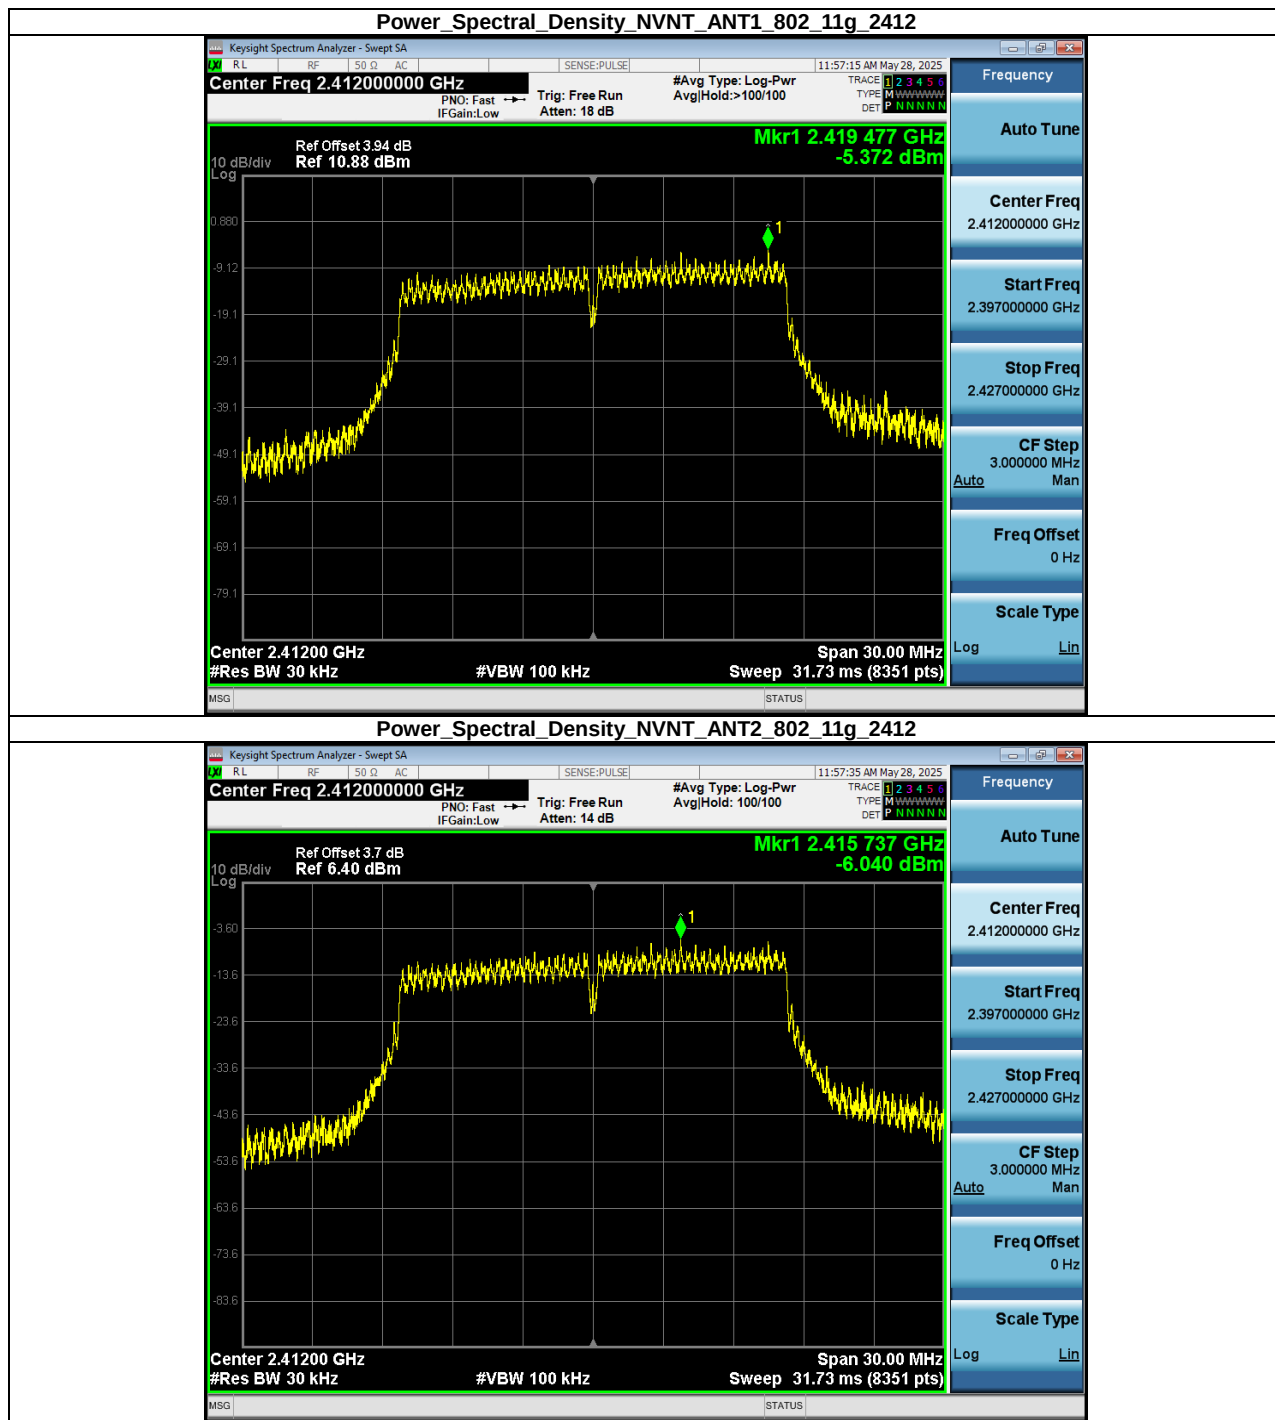


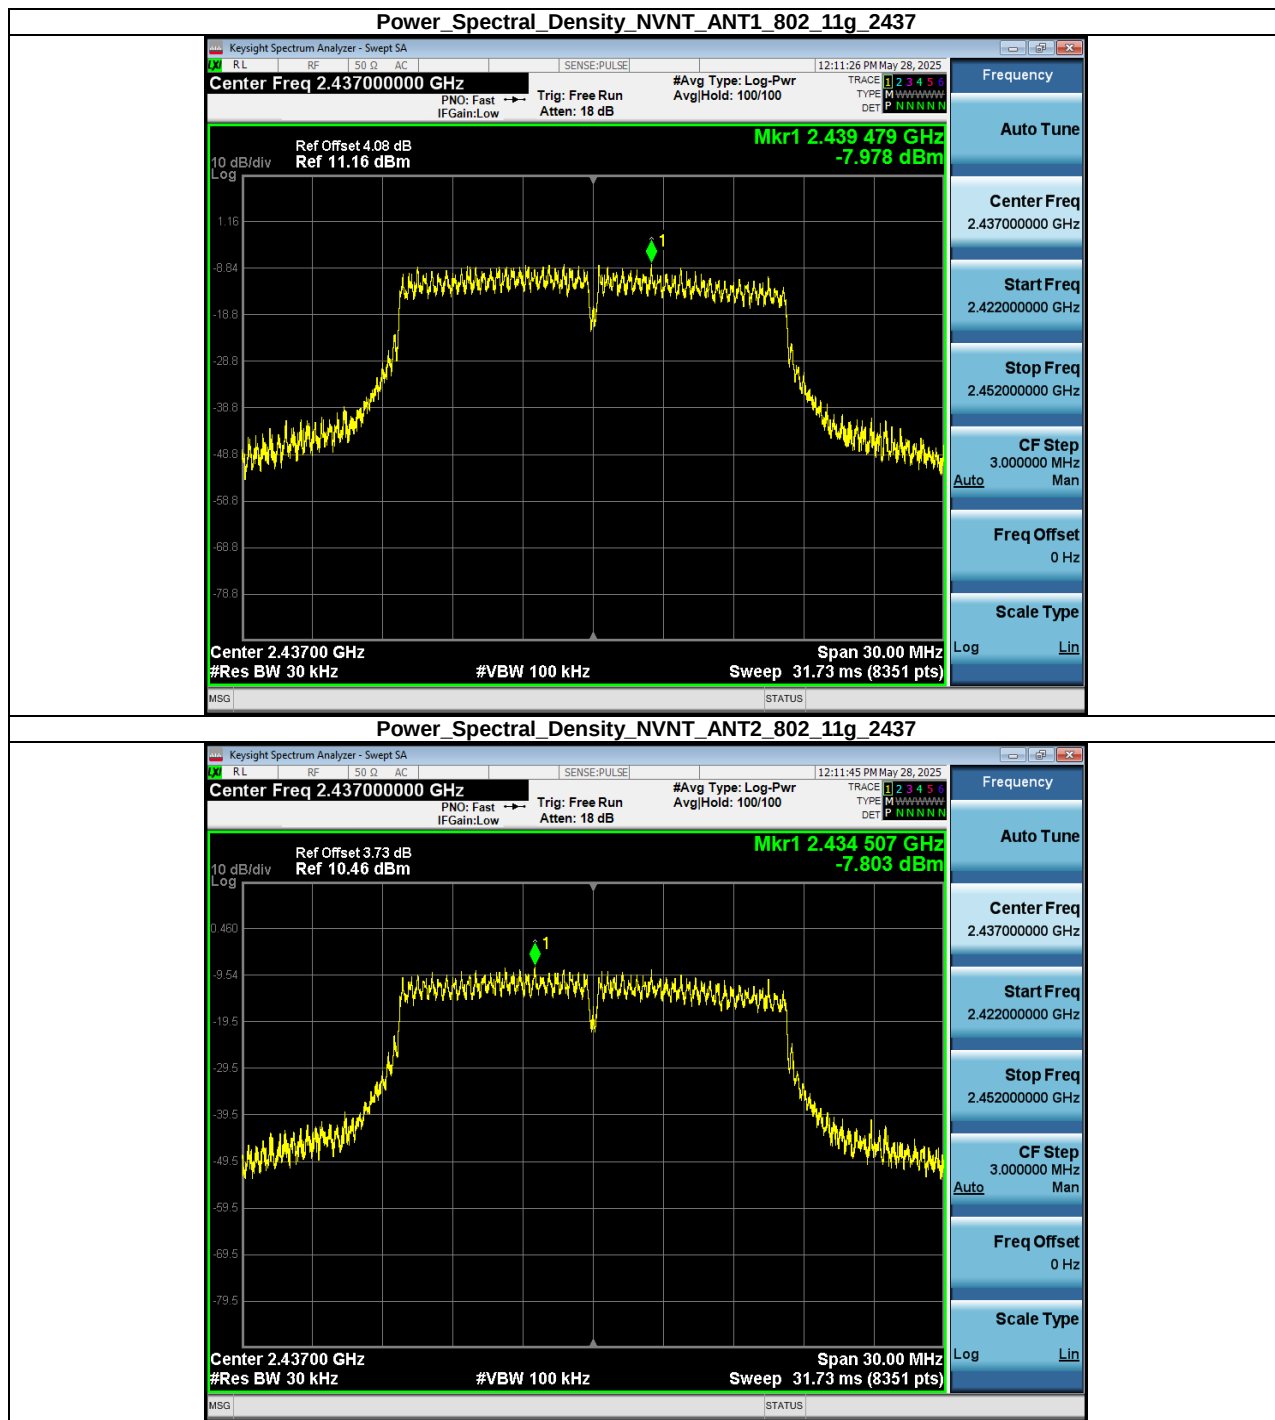



Power_Spectral_Density_NVNT_ANT1_802_11g_2462

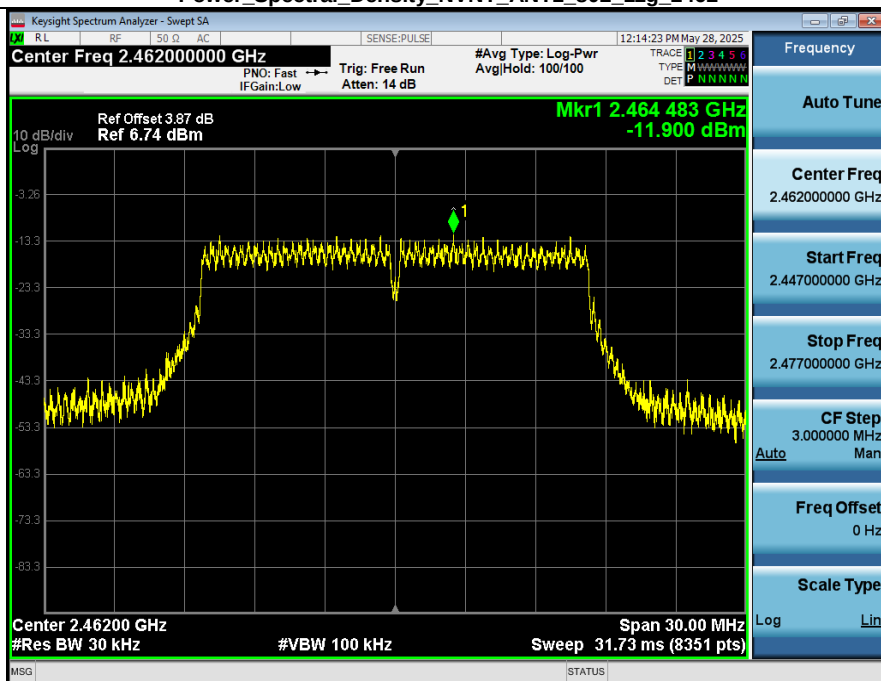



Power_Spectral_Density_NVNT_ANT2_802_11g_2462

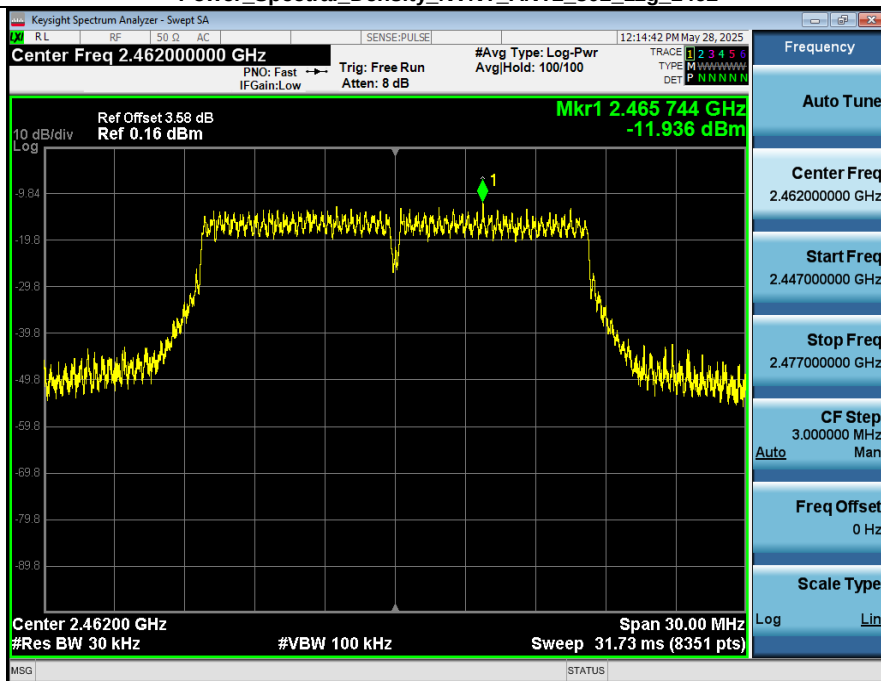


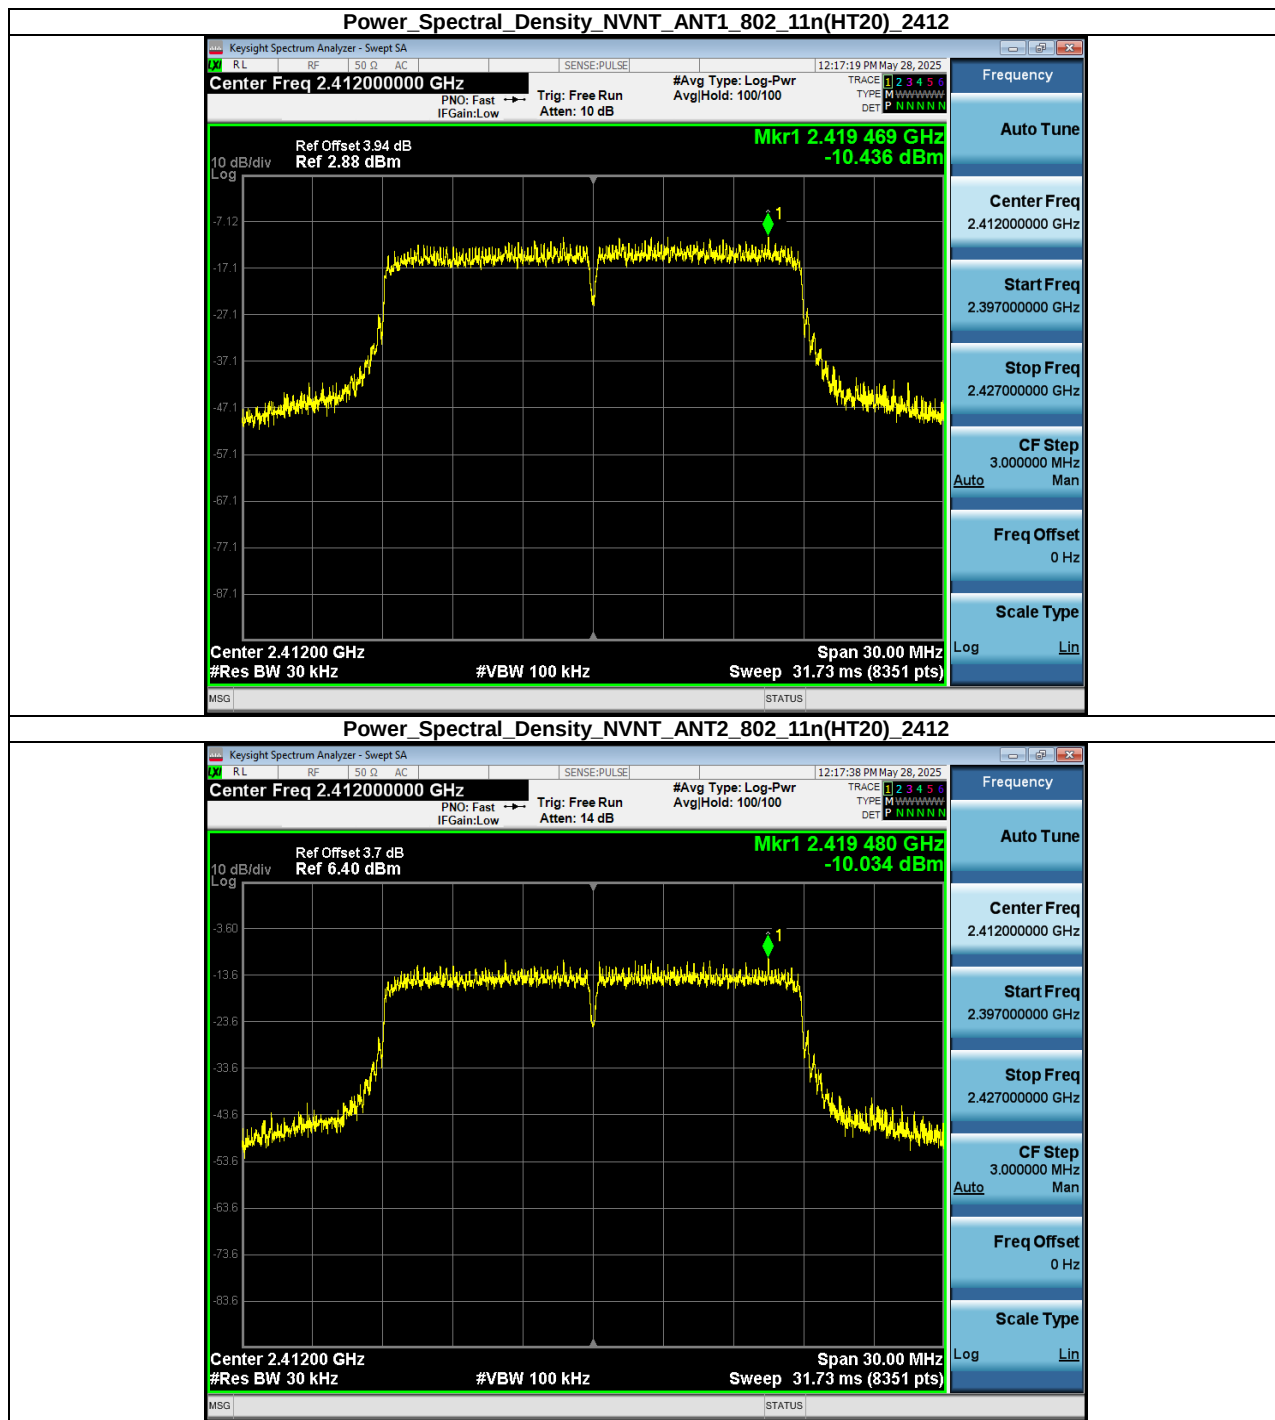

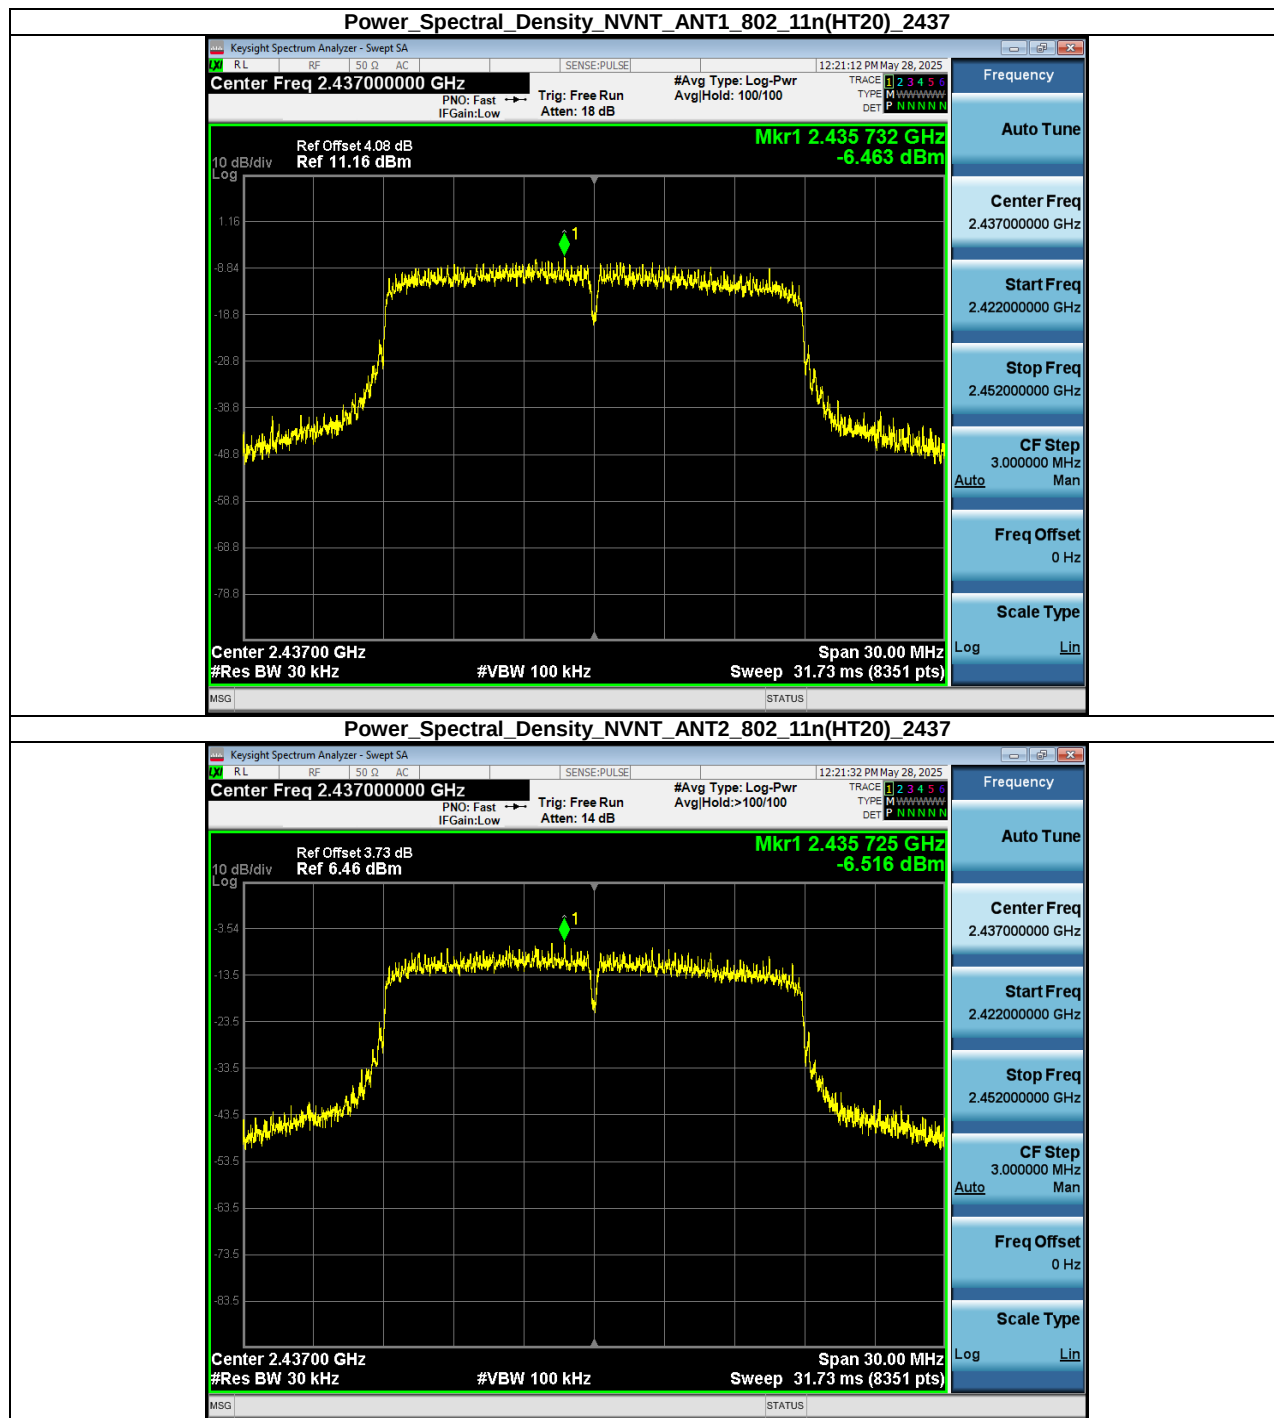

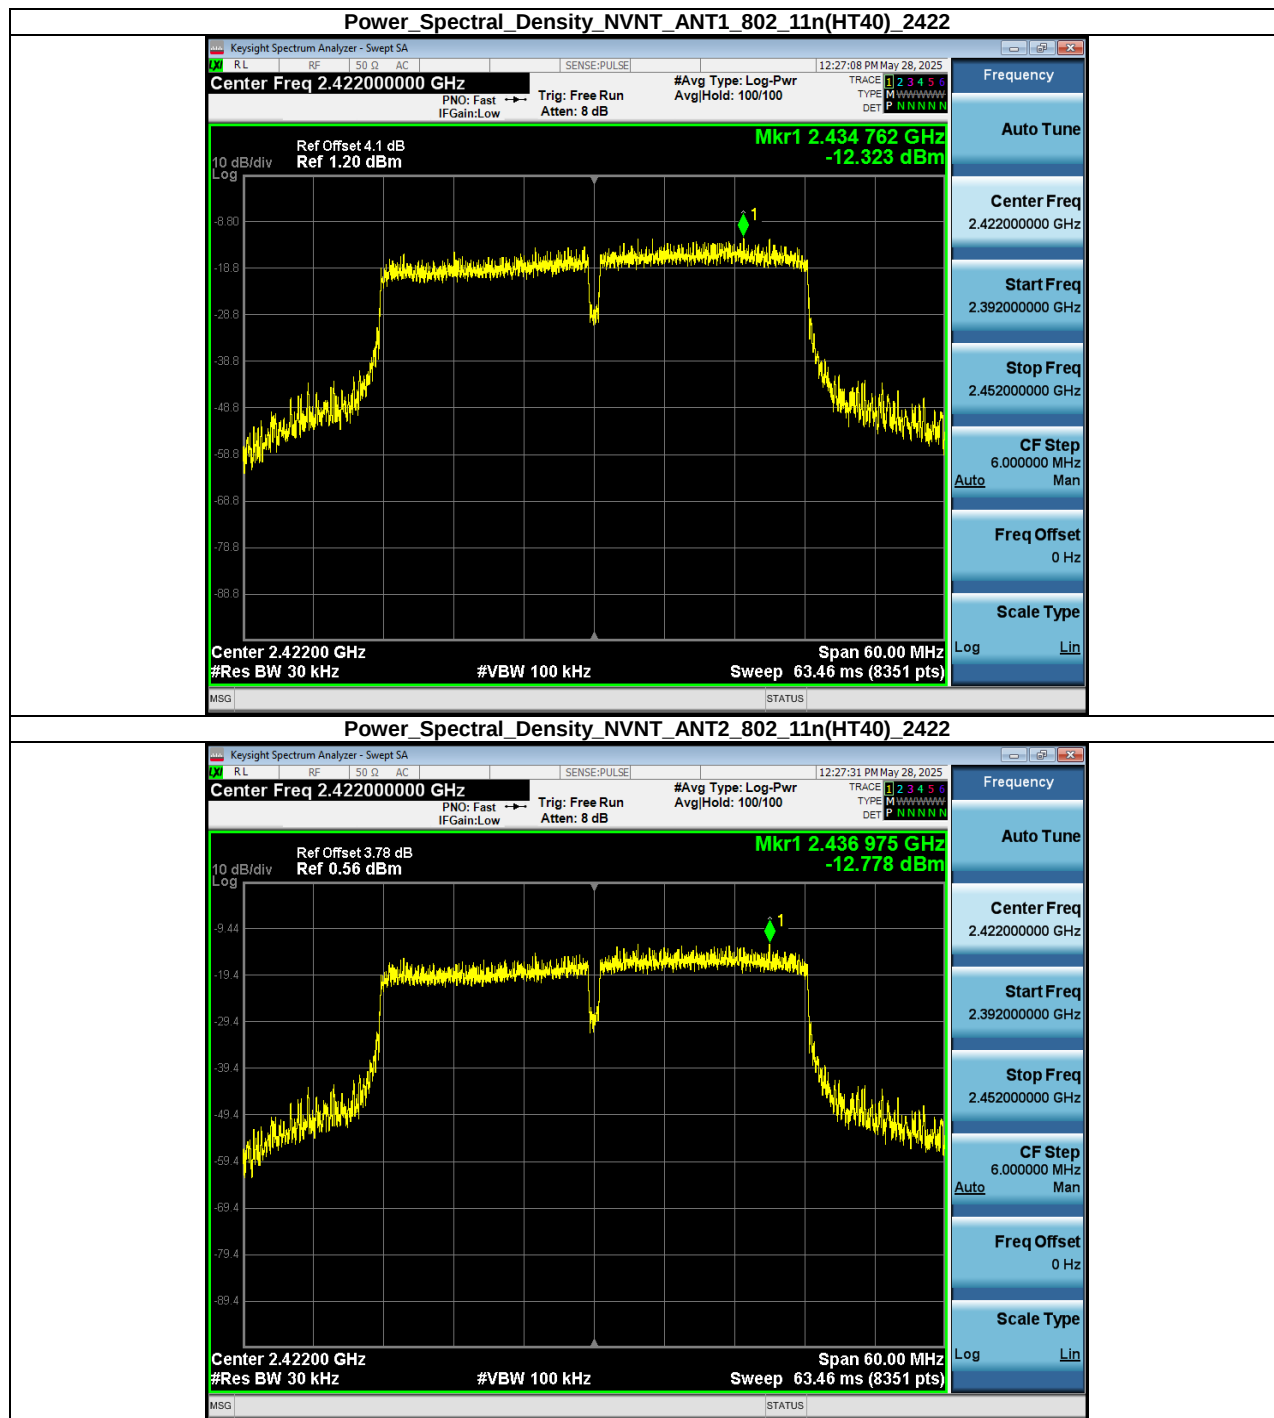

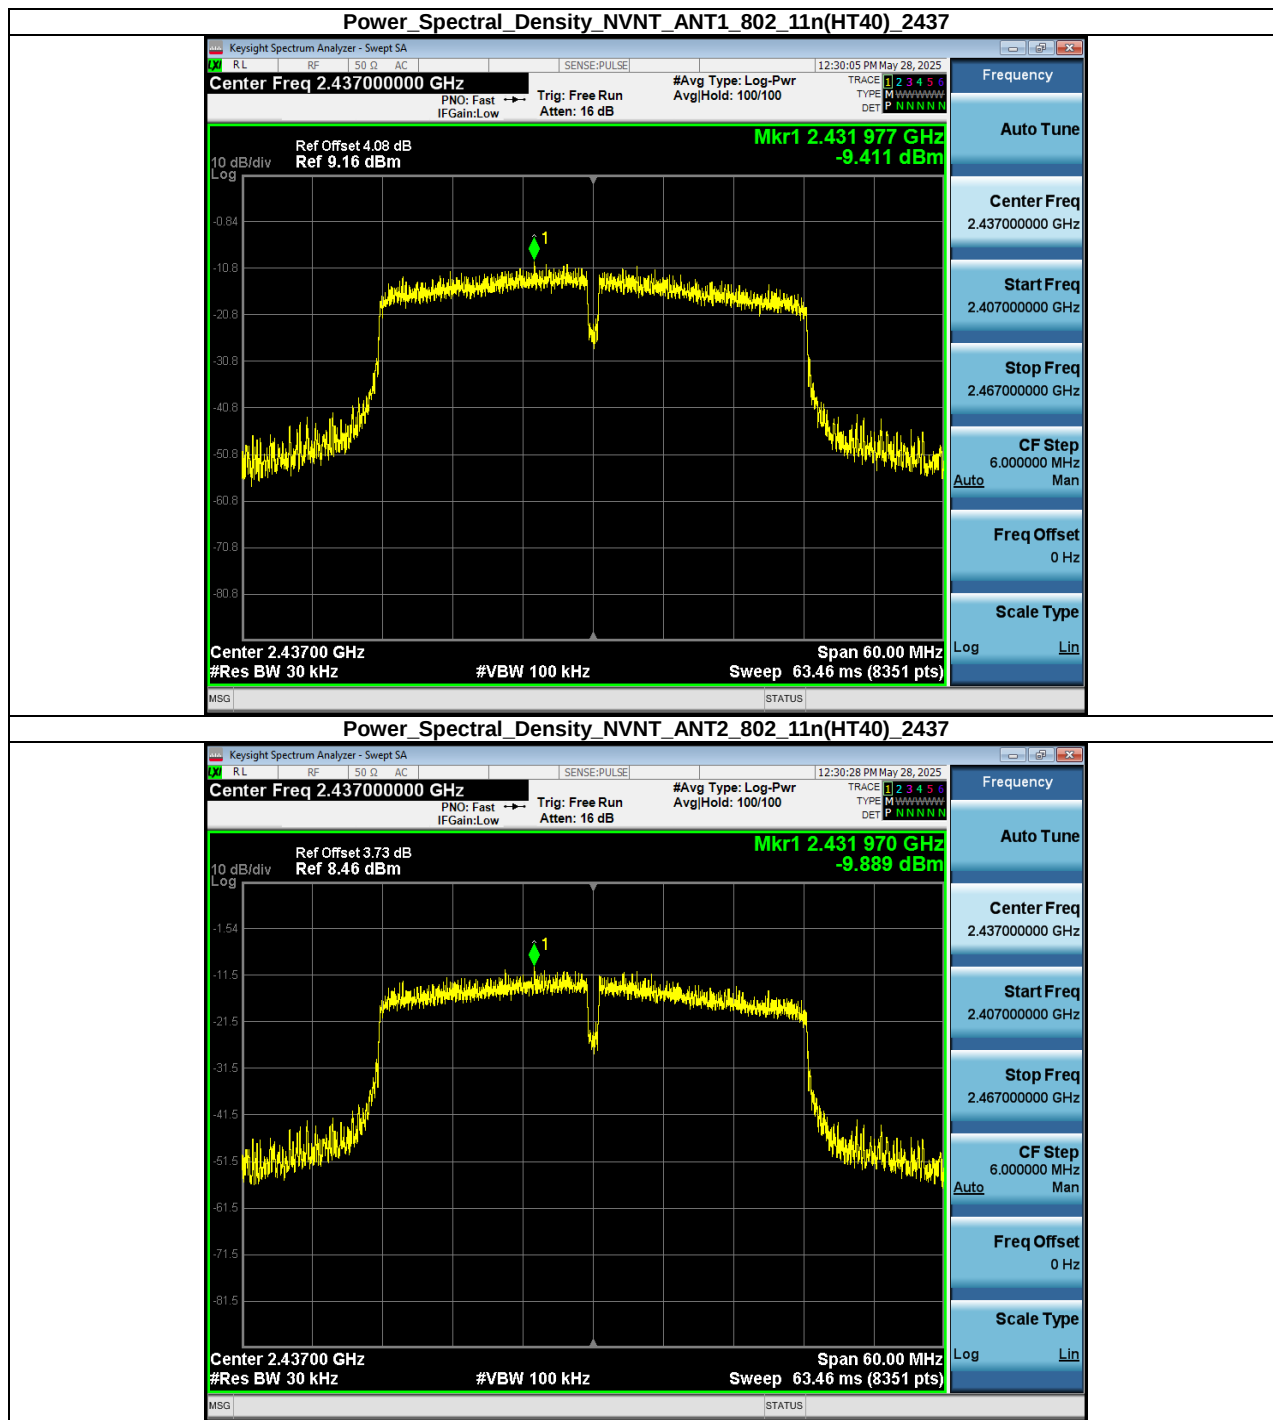



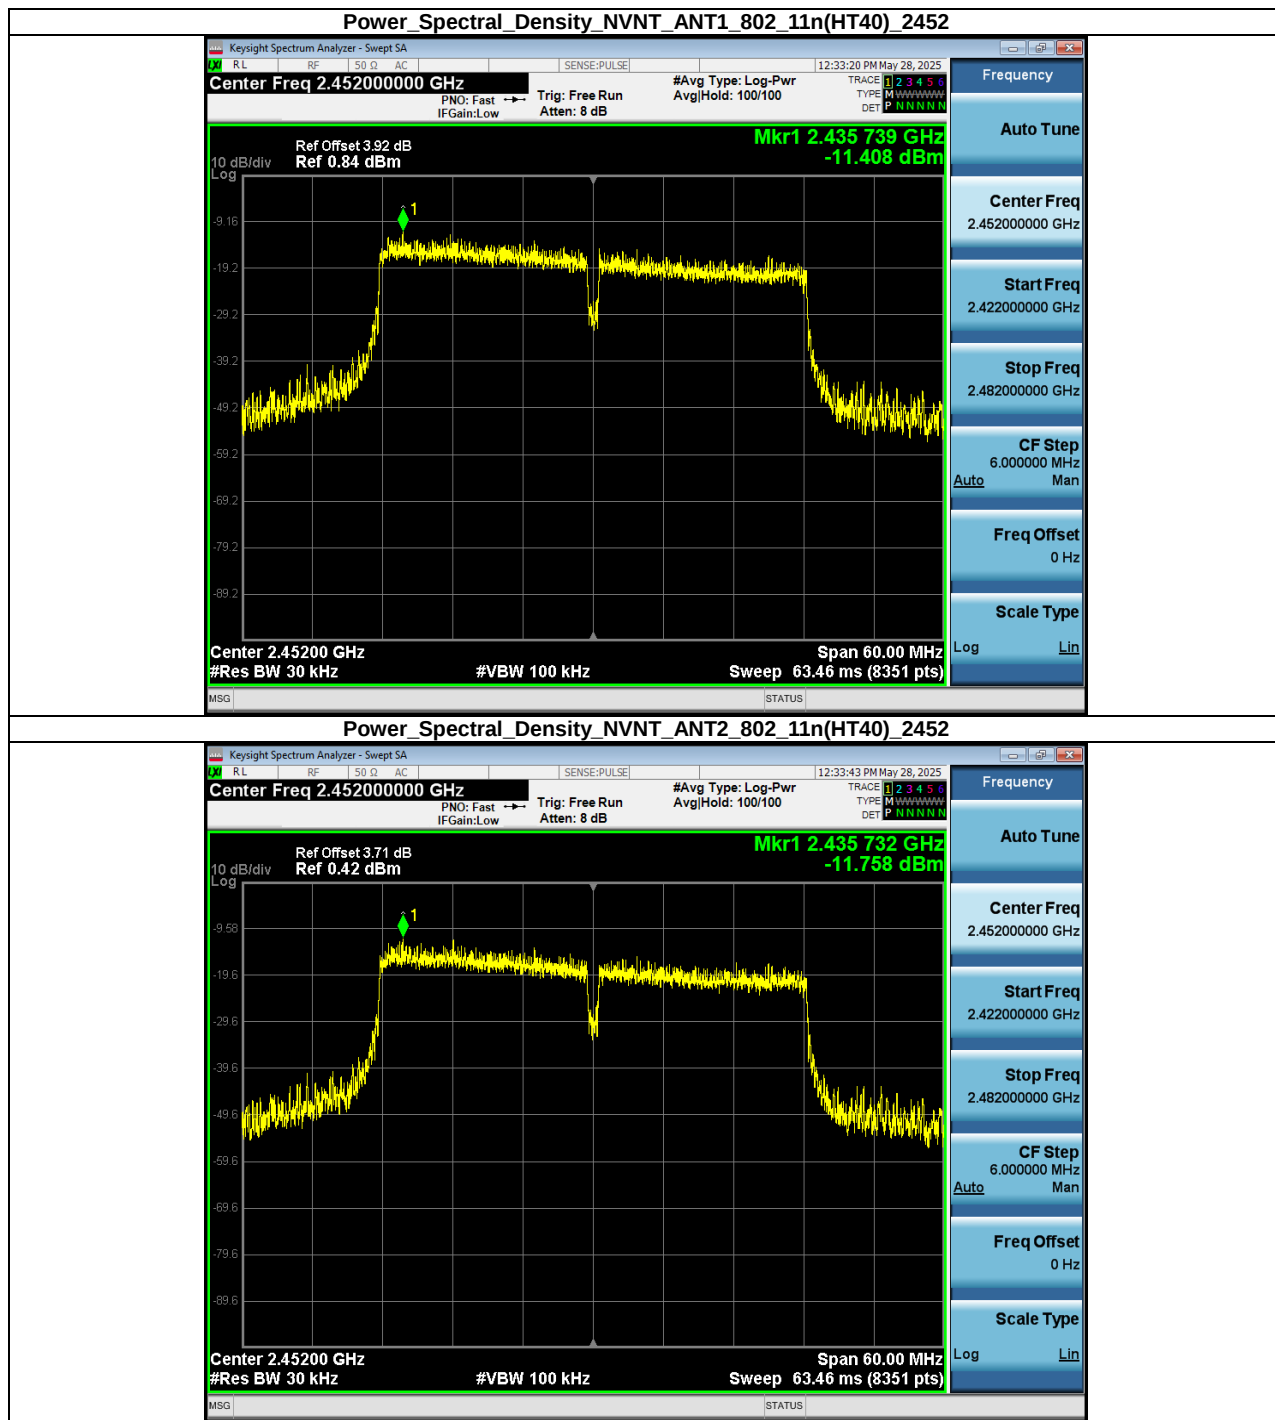




Condition	Antenna	Modulation	Frequency (MHz)	SA_MIMO_PSD (dBm/30kHz)	RB factor(dB)	MIMO_PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
NVNT	MIMO_TX	802.11n(HT20)	2412.00	-7.29	-10	-17.29	8	Pass
NVNT	MIMO_TX	802.11n(HT20)	2437.00	-3.67	-10	-13.67	8	Pass
NVNT	MIMO_TX	802.11n(HT20)	2462.00	-8.56	-10	-18.56	8	Pass
NVNT	MIMO_TX	802.11n(HT40)	2422.00	-9.63	-10	-19.63	8	Pass
NVNT	MIMO_TX	802.11n(HT40)	2437.00	-6.64	-10	-16.64	8	Pass
NVNT	MIMO_TX	802.11n(HT40)	2452.00	-8.60	-10	-18.60	8	Pass


Note: The measure-and-sum technique shall be used for measuring in-band transmit power of a device. Total power is the sum of the conducted power levels measured at the various output ports.

(First measure the power (mW) of each antenna separately, and the total power is equal to Ant1mW + Ant2mW+....)

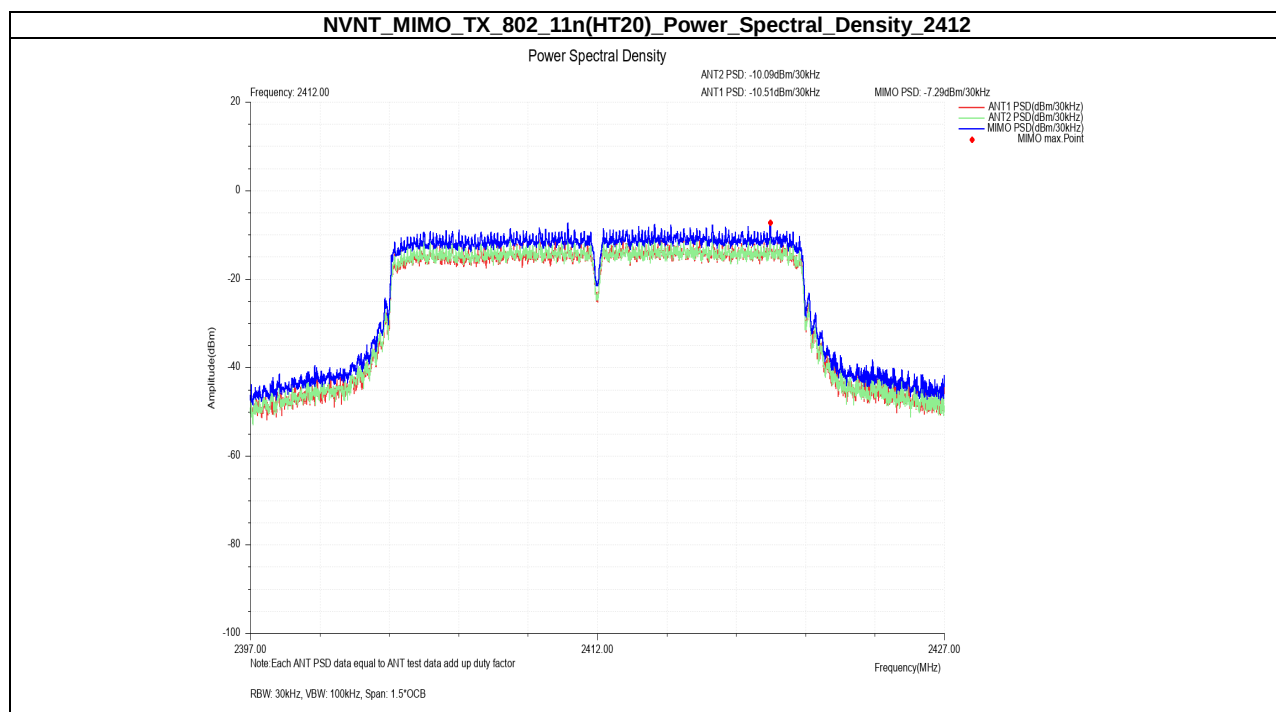

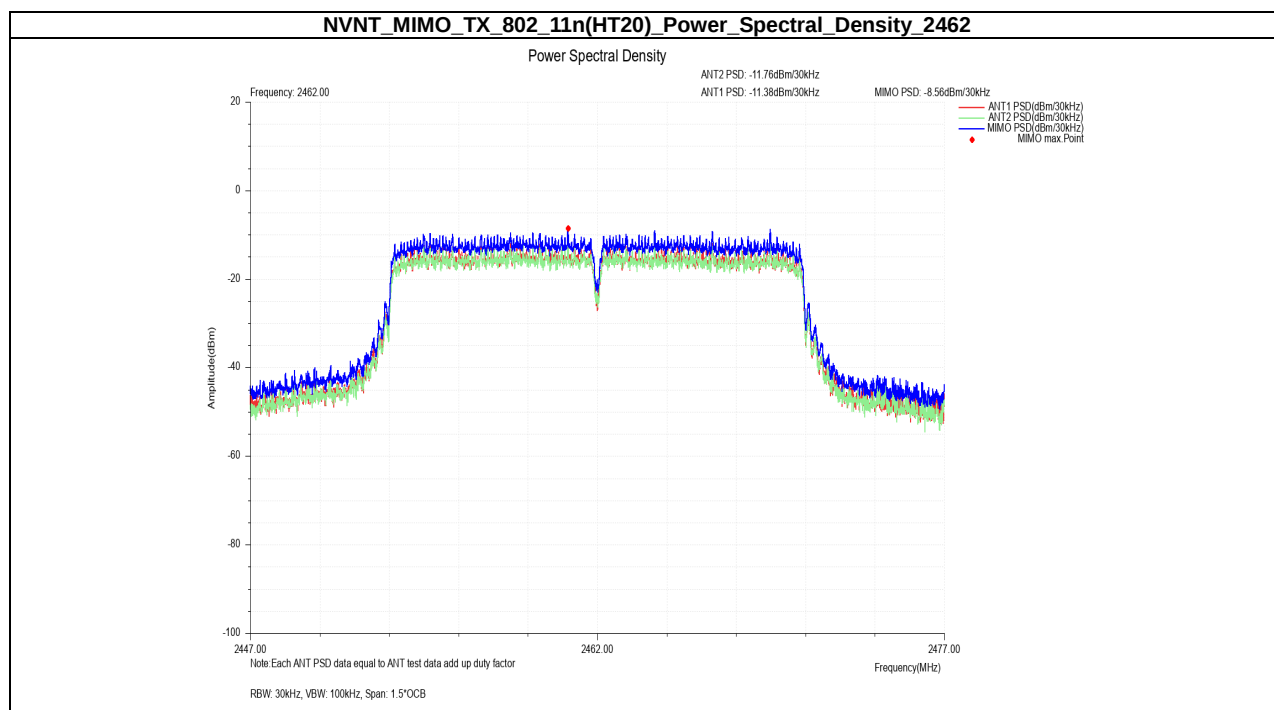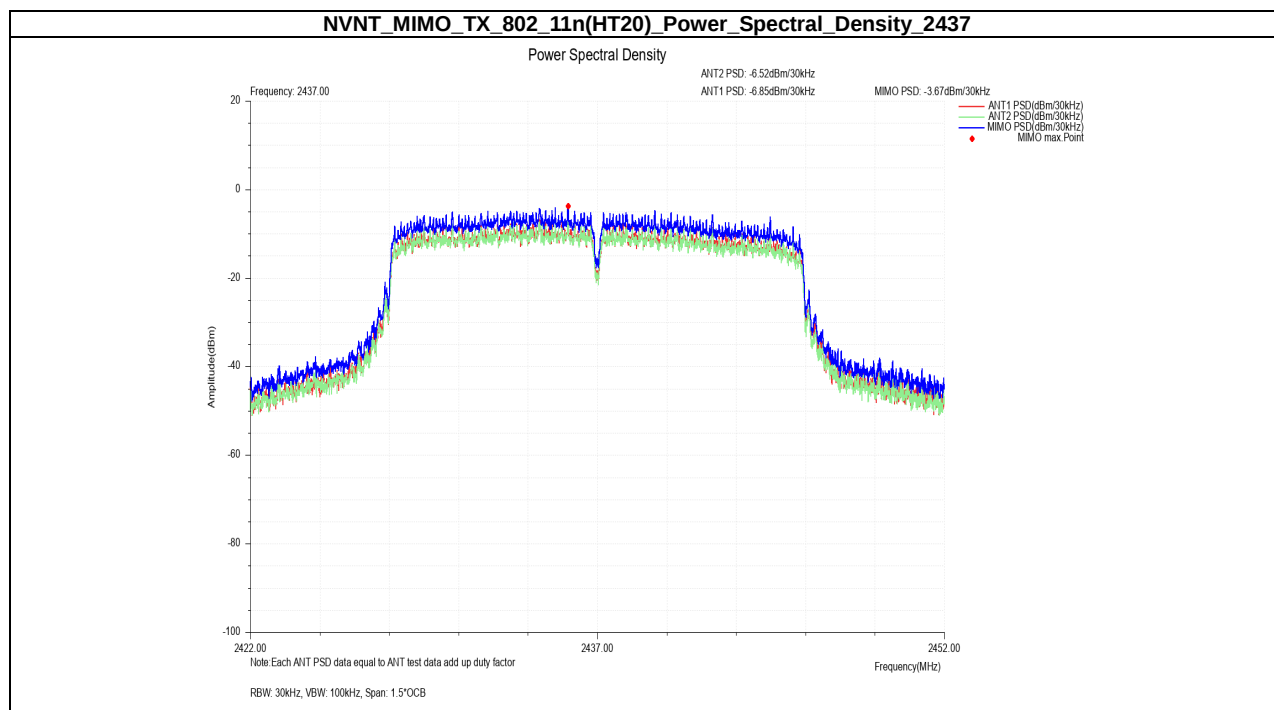

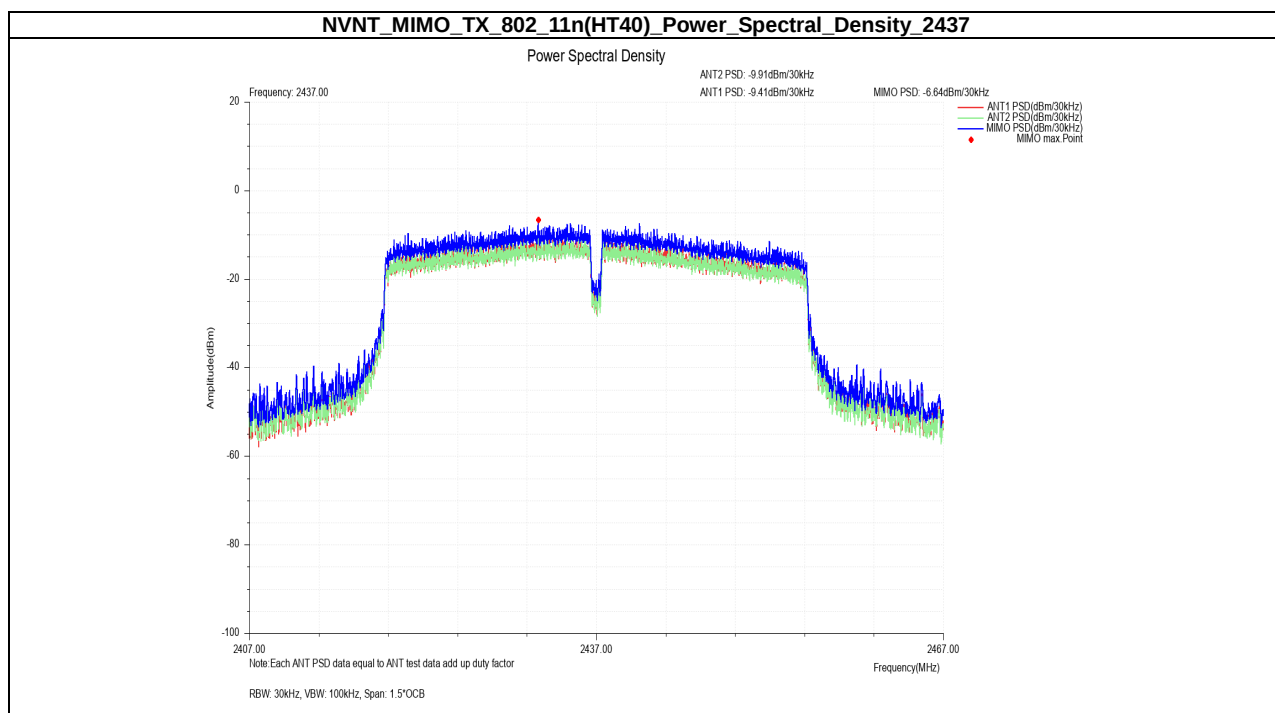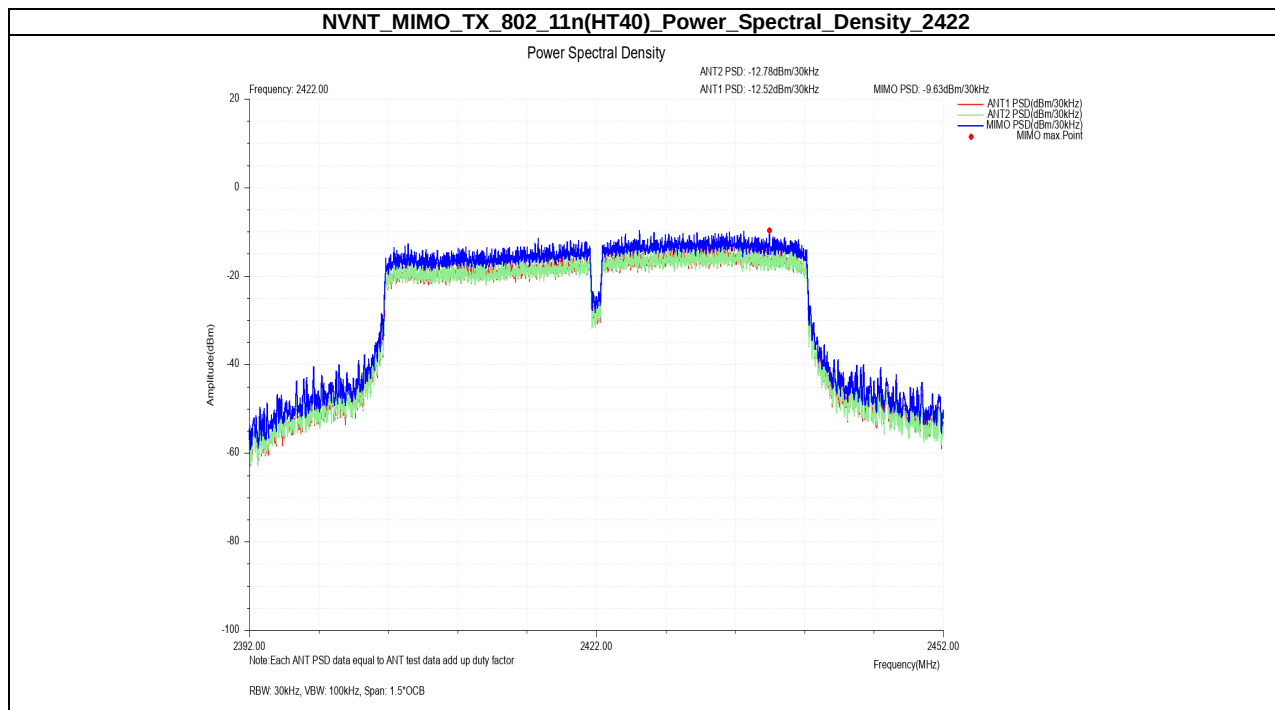

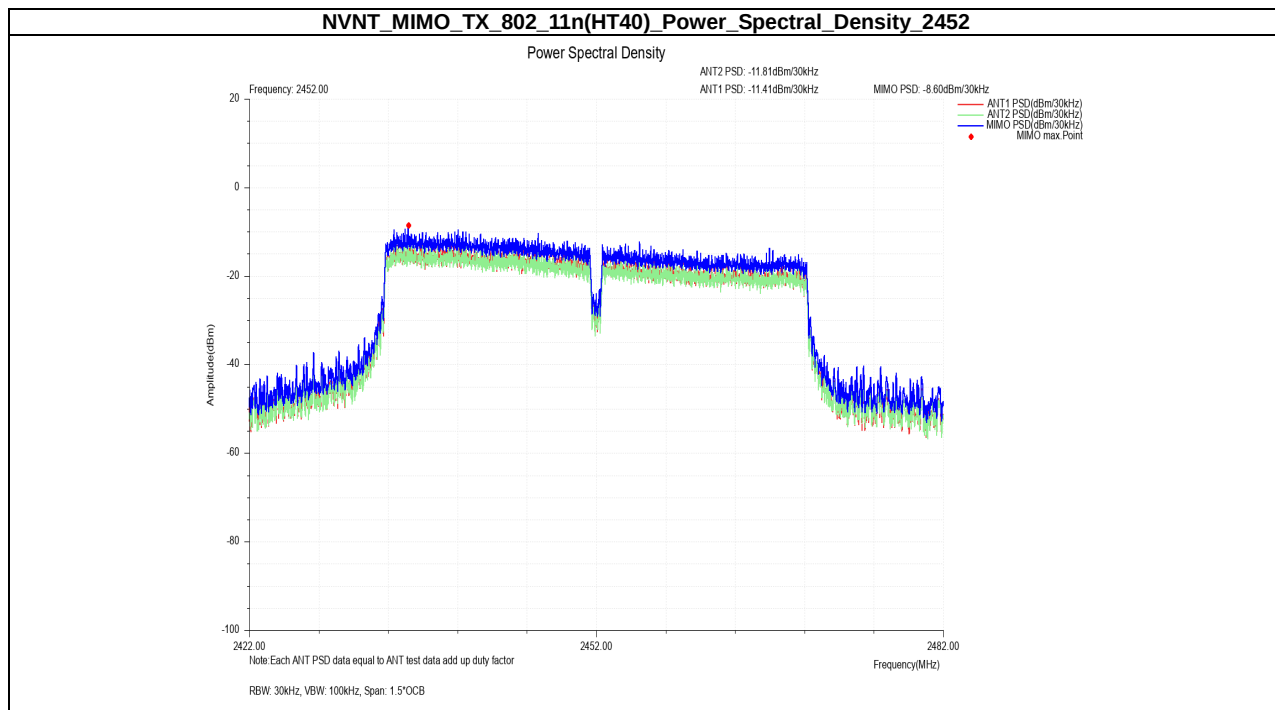

8. Bandwidth

8.1. Test limits

Please refer RSS-247 & FCC PART 15: 15.247


For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

8.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

- a) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver set RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz, Peak Detector, Sweep time set auto, detail see the test plot.



8.3. Test Setup


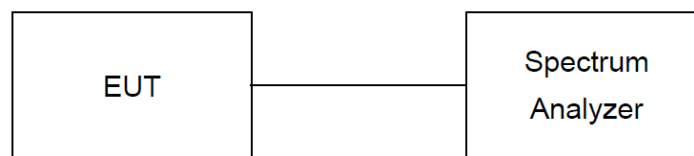




8.4. Test Results



Note: Both antennas have been tested and only the worst data of antenna 1 is shown.



Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT1	802.11b	2412.00	8.22	500	Pass
NVNT	ANT1	802.11b	2437.00	8.65	500	Pass
NVNT	ANT1	802.11b	2462.00	8.24	500	Pass
NVNT	ANT1	802.11g	2412.00	16.20	500	Pass
NVNT	ANT1	802.11g	2437.00	16.20	500	Pass
NVNT	ANT1	802.11g	2462.00	16.20	500	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	17.39	500	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	17.31	500	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	17.46	500	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	35.35	500	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	35.46	500	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	35.89	500	Pass

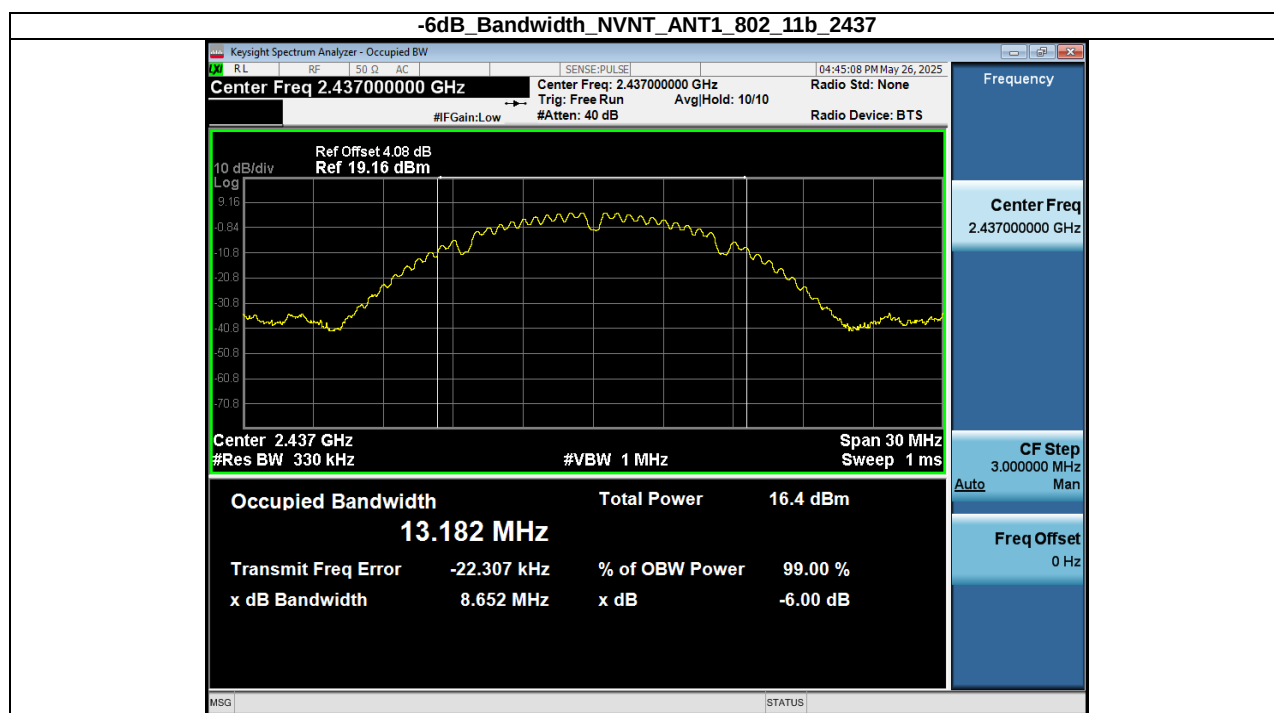
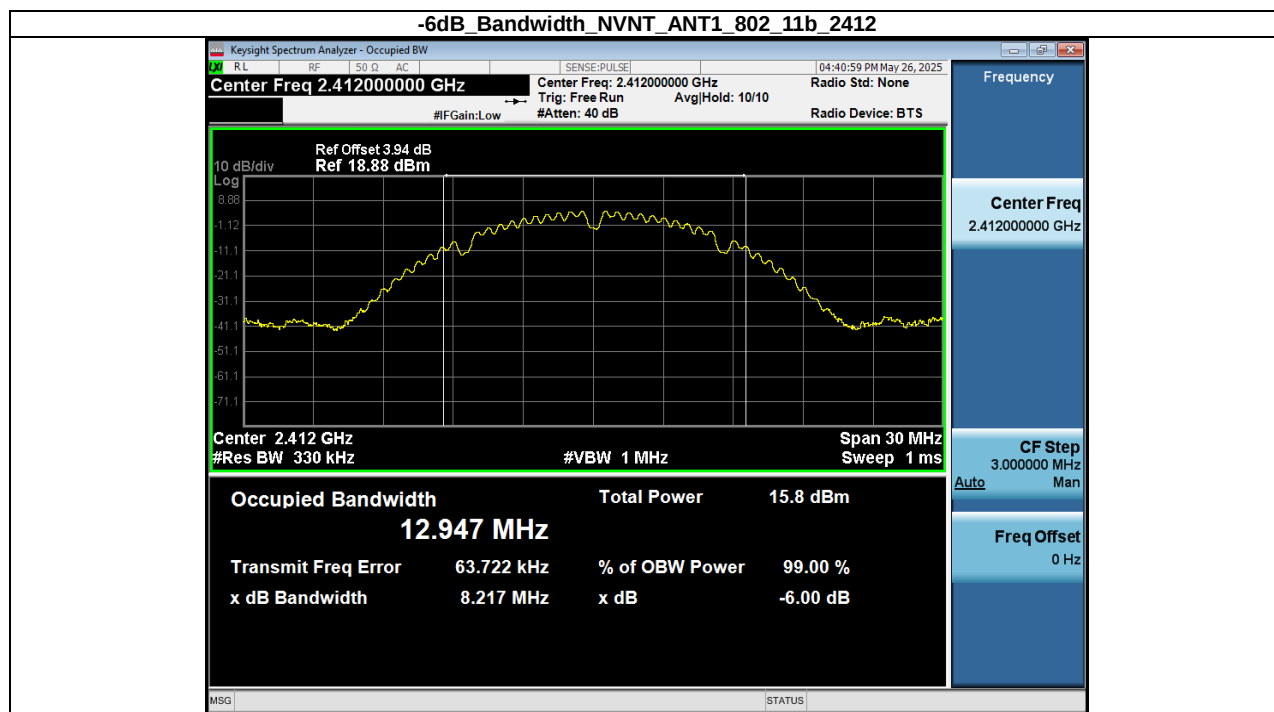


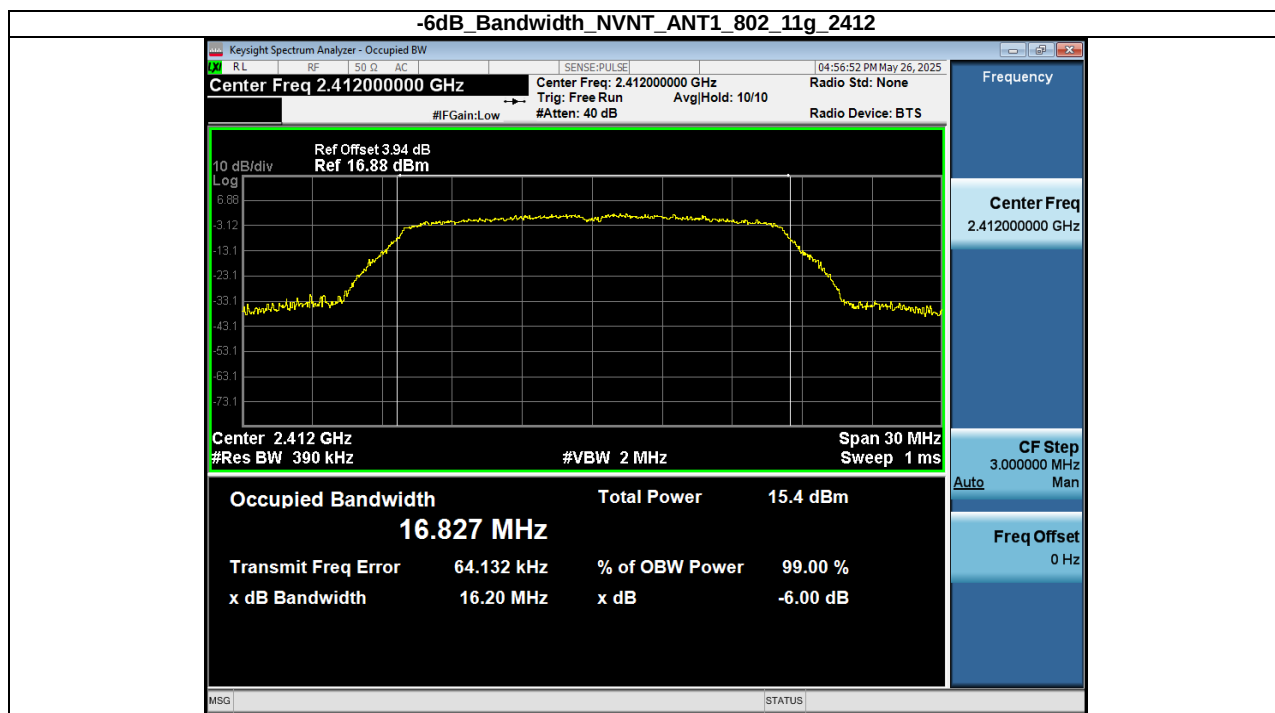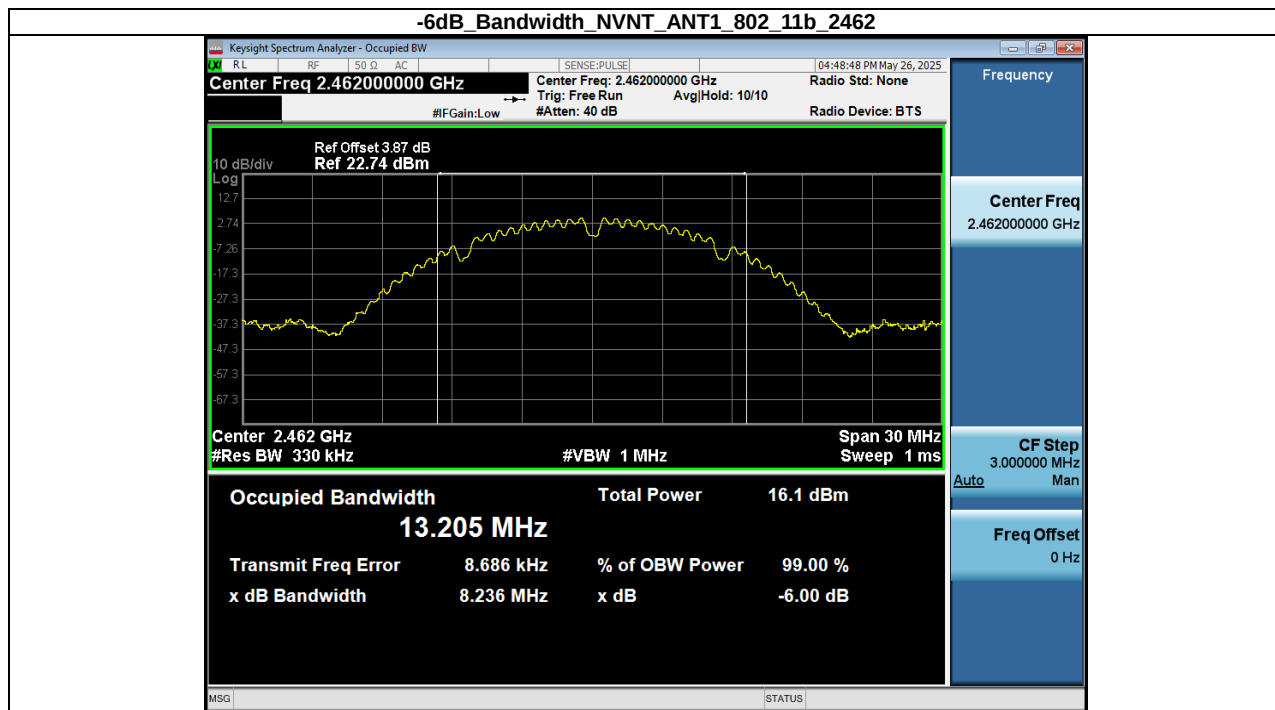

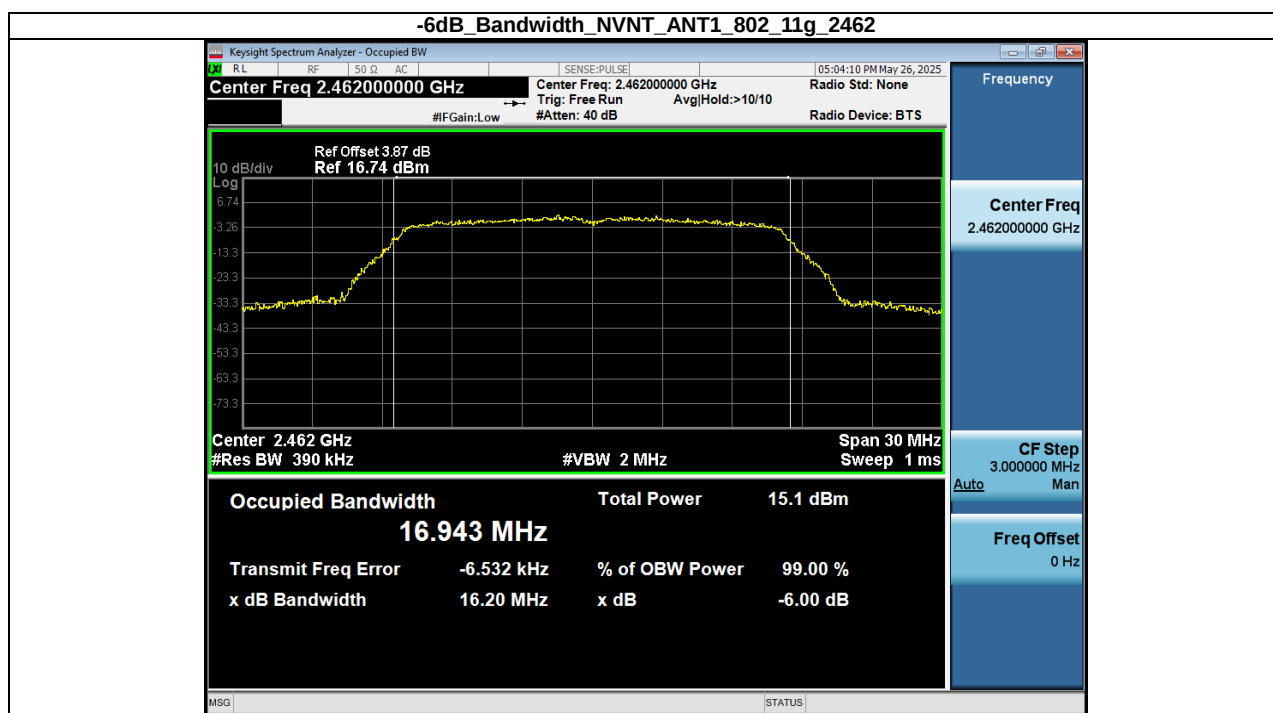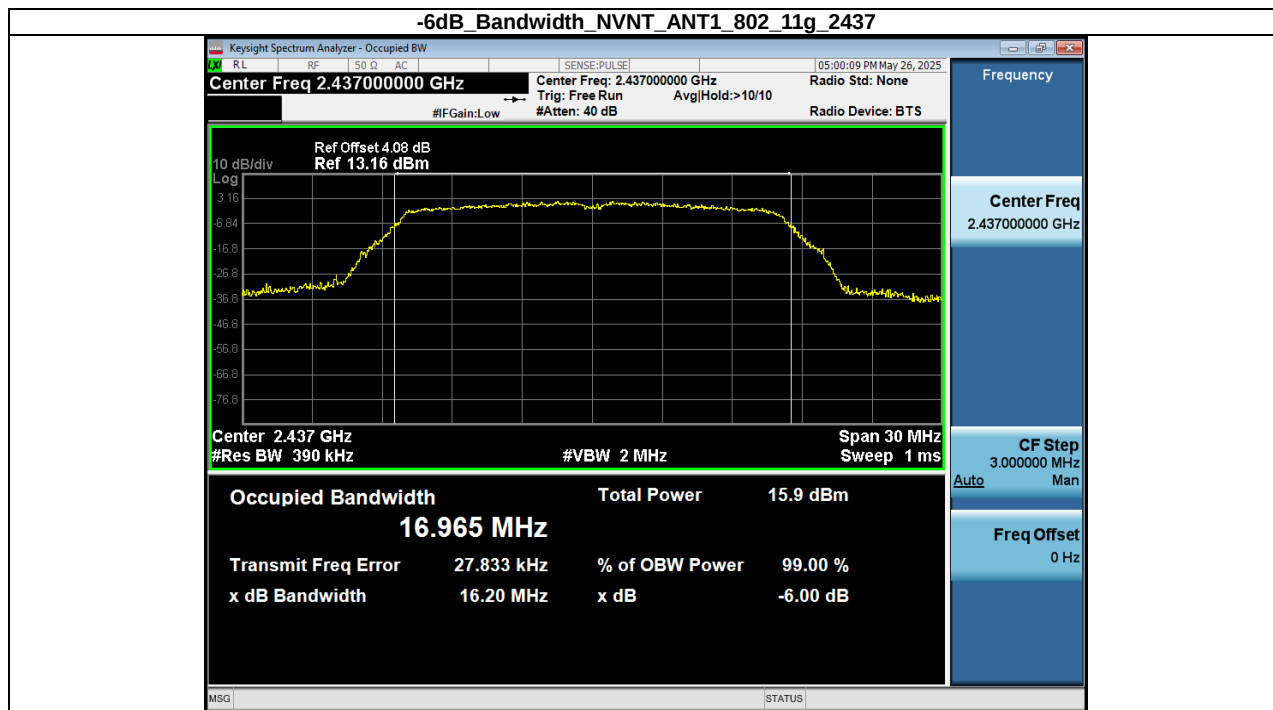


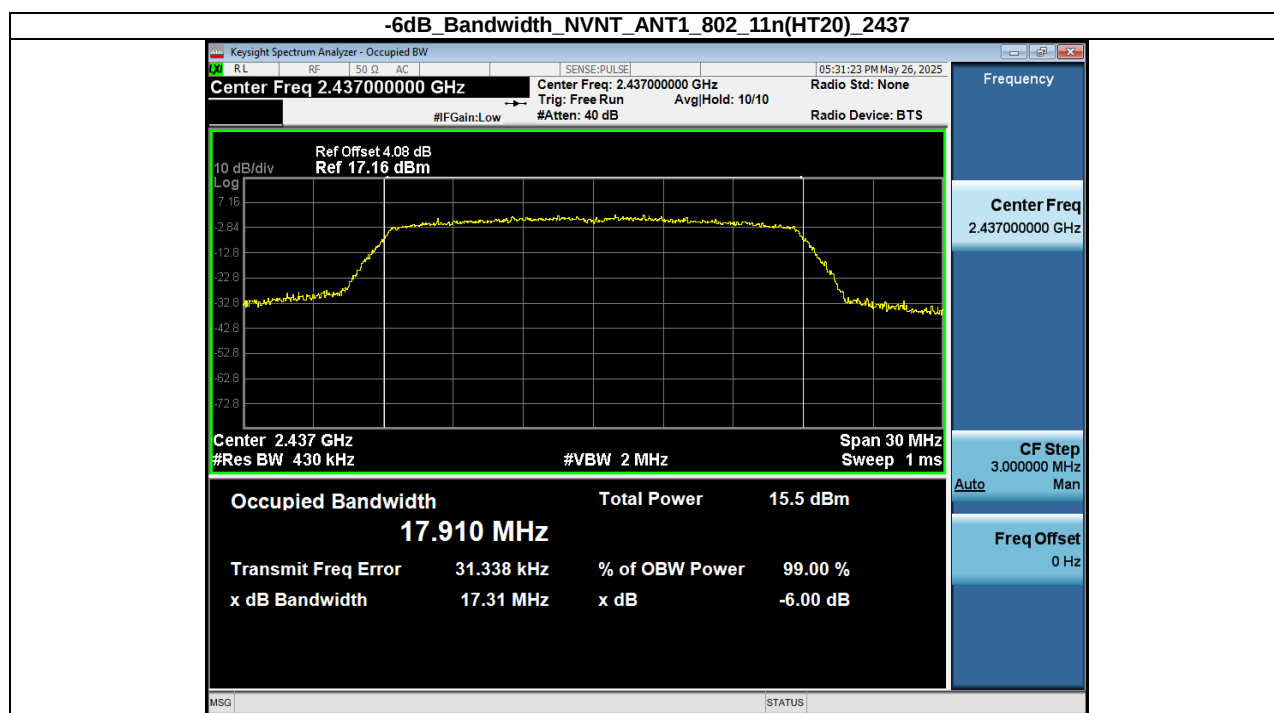
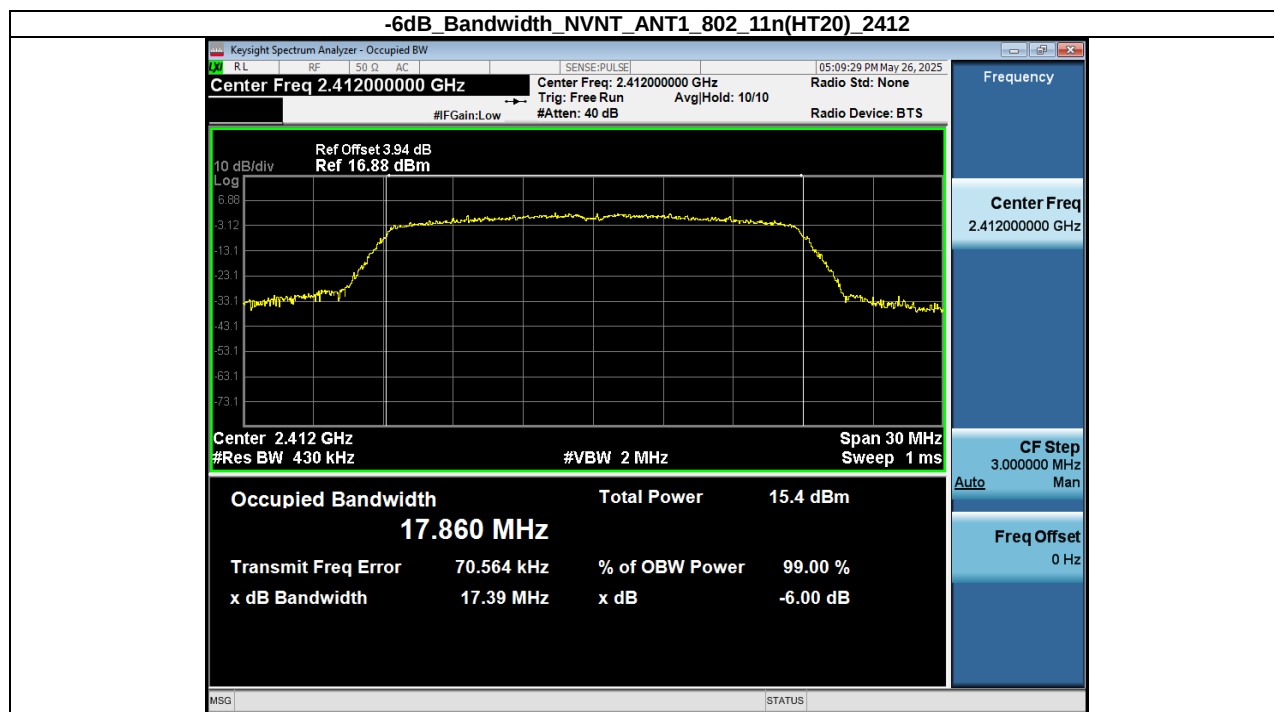


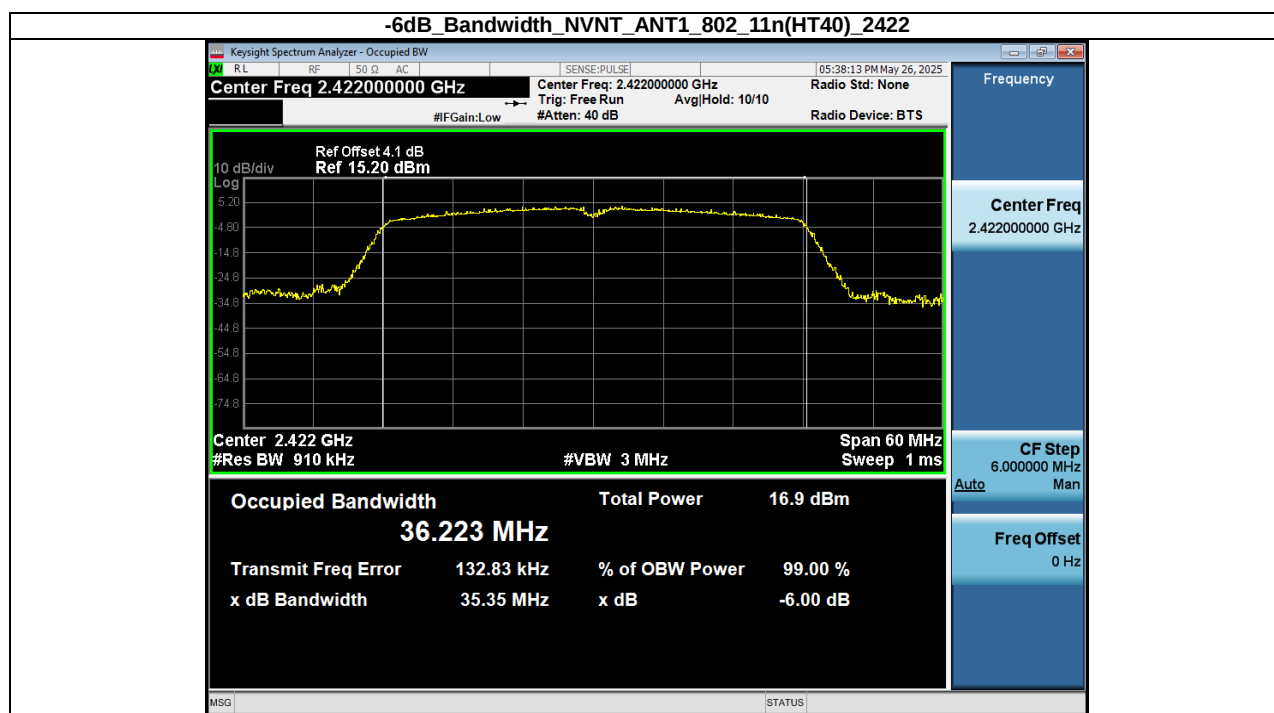
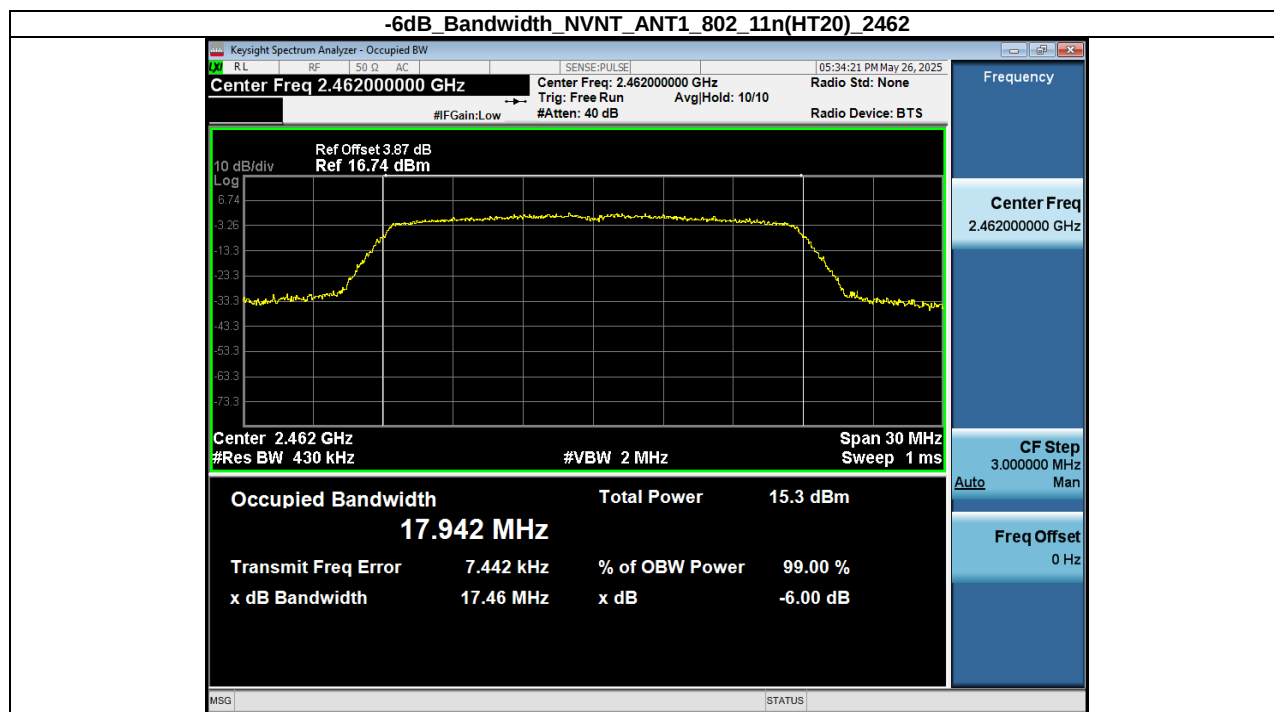


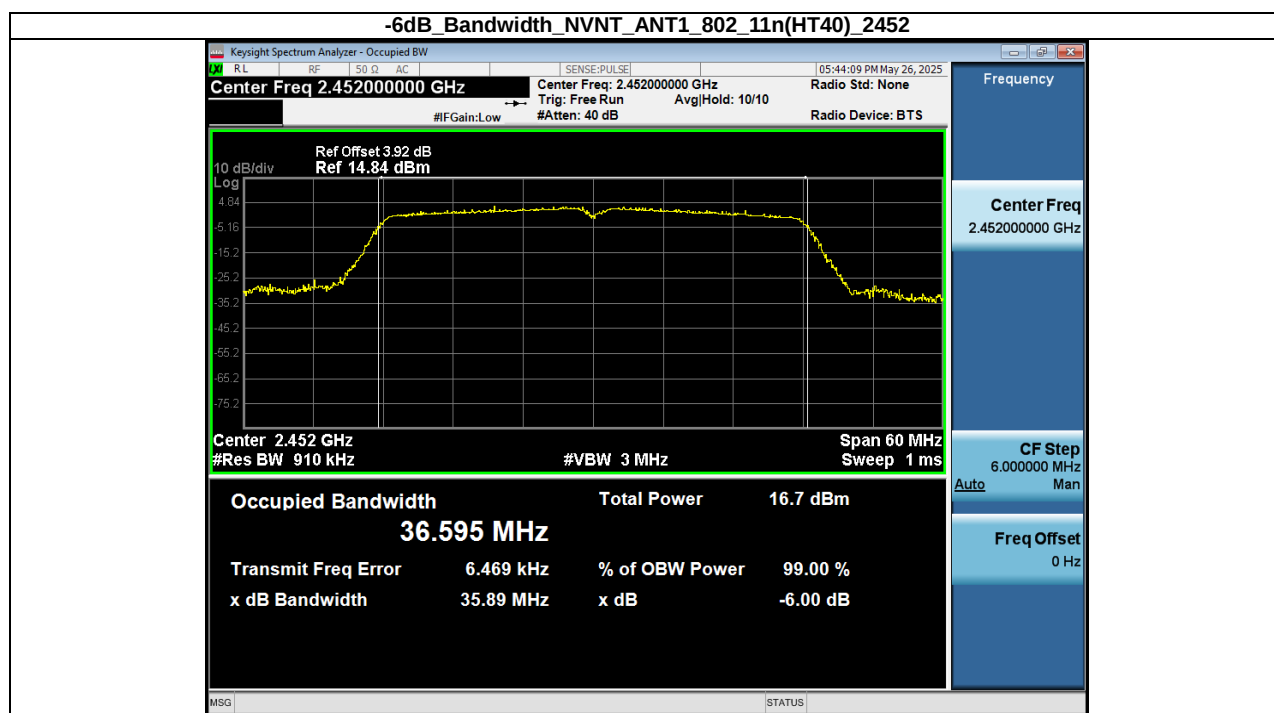
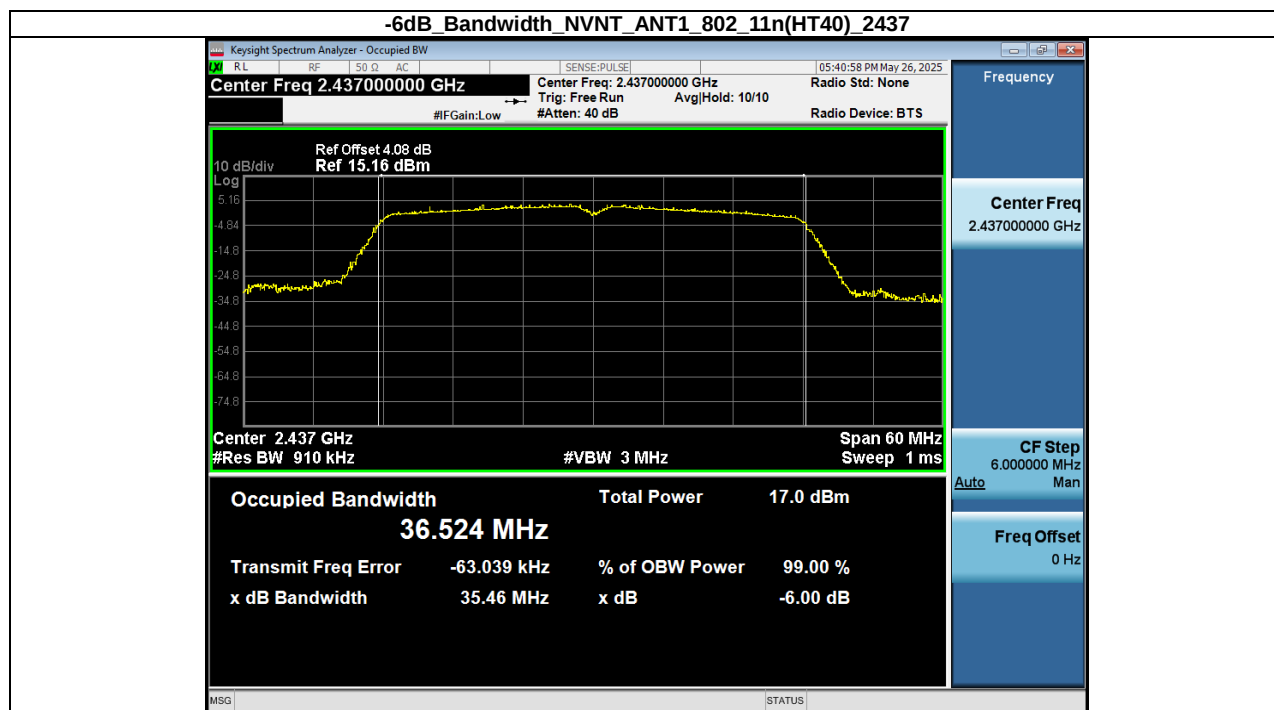




Condition	Antenna	Modulation	Frequency (MHz)	99%BW(MHz)
NVNT	ANT1	802.11b	2412.00	12.947
NVNT	ANT1	802.11b	2437.00	13.203
NVNT	ANT1	802.11b	2462.00	13.189
NVNT	ANT1	802.11g	2412.00	17.015
NVNT	ANT1	802.11g	2437.00	17.082
NVNT	ANT1	802.11g	2462.00	17.143
NVNT	ANT1	802.11n(HT20)	2412.00	17.915
NVNT	ANT1	802.11n(HT20)	2437.00	18.066
NVNT	ANT1	802.11n(HT20)	2462.00	18.012
NVNT	ANT1	802.11n(HT40)	2422.00	36.225
NVNT	ANT1	802.11n(HT40)	2437.00	36.497
NVNT	ANT1	802.11n(HT40)	2452.00	36.592


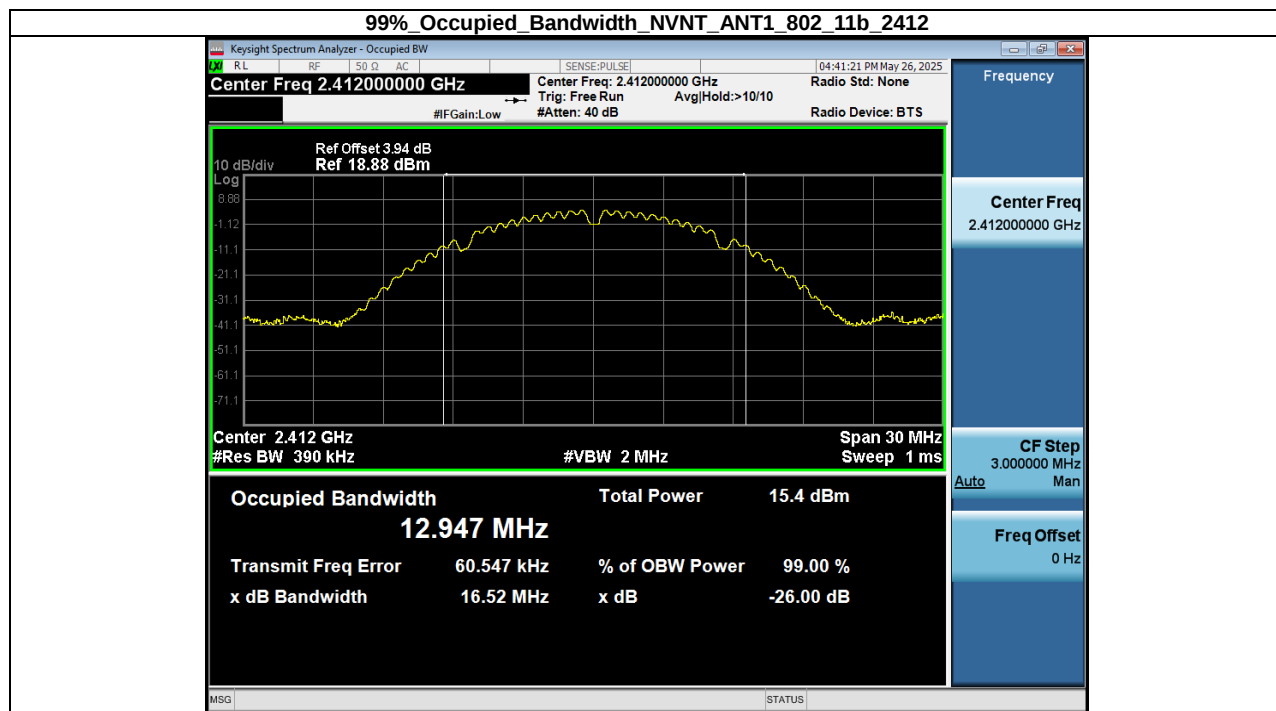


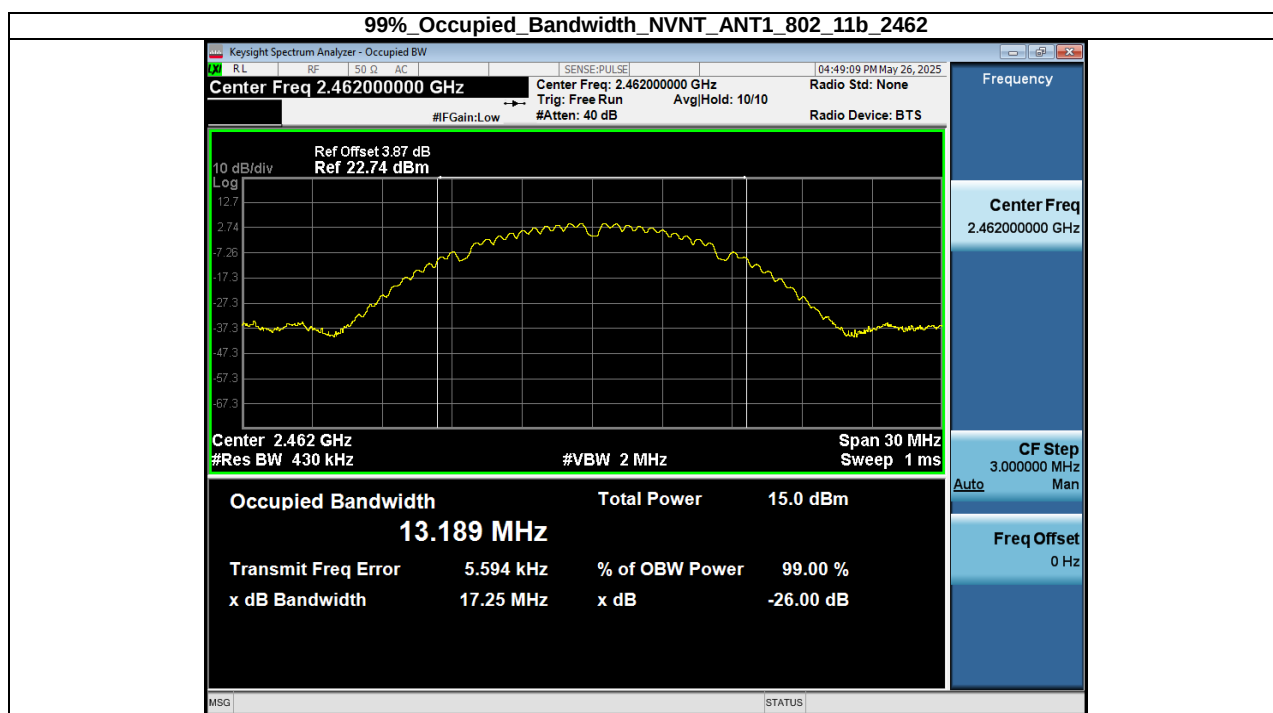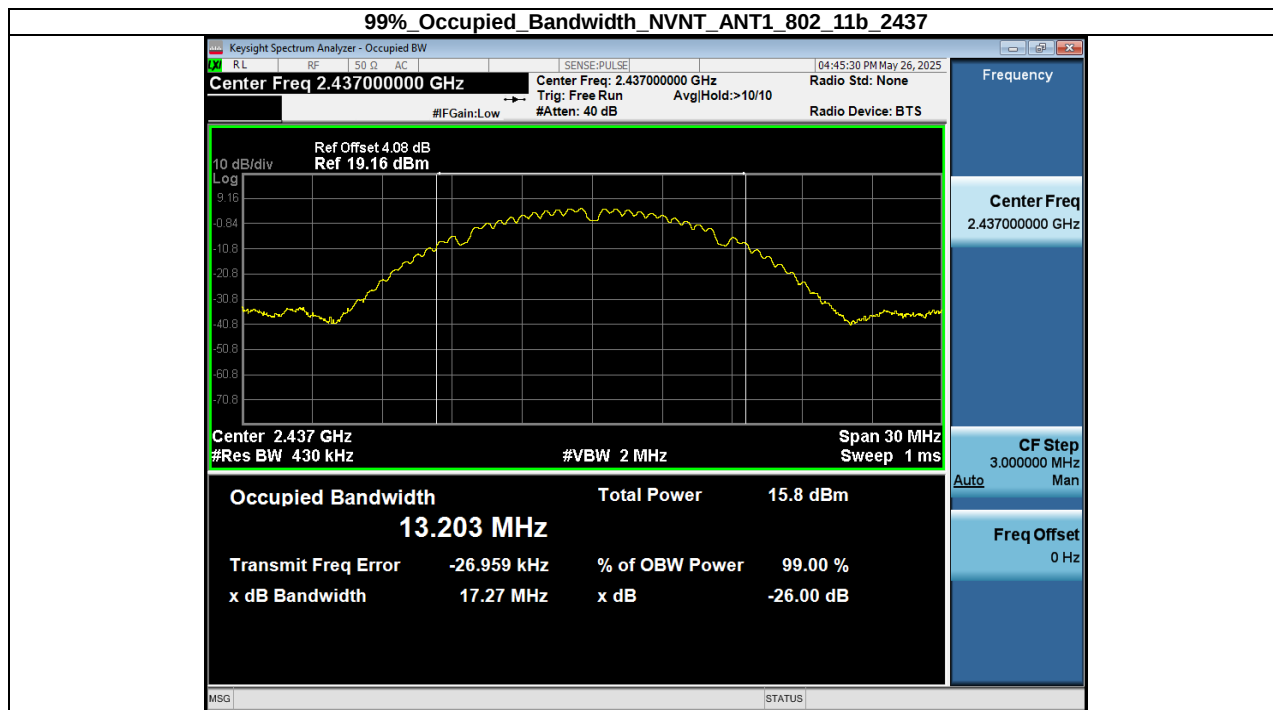


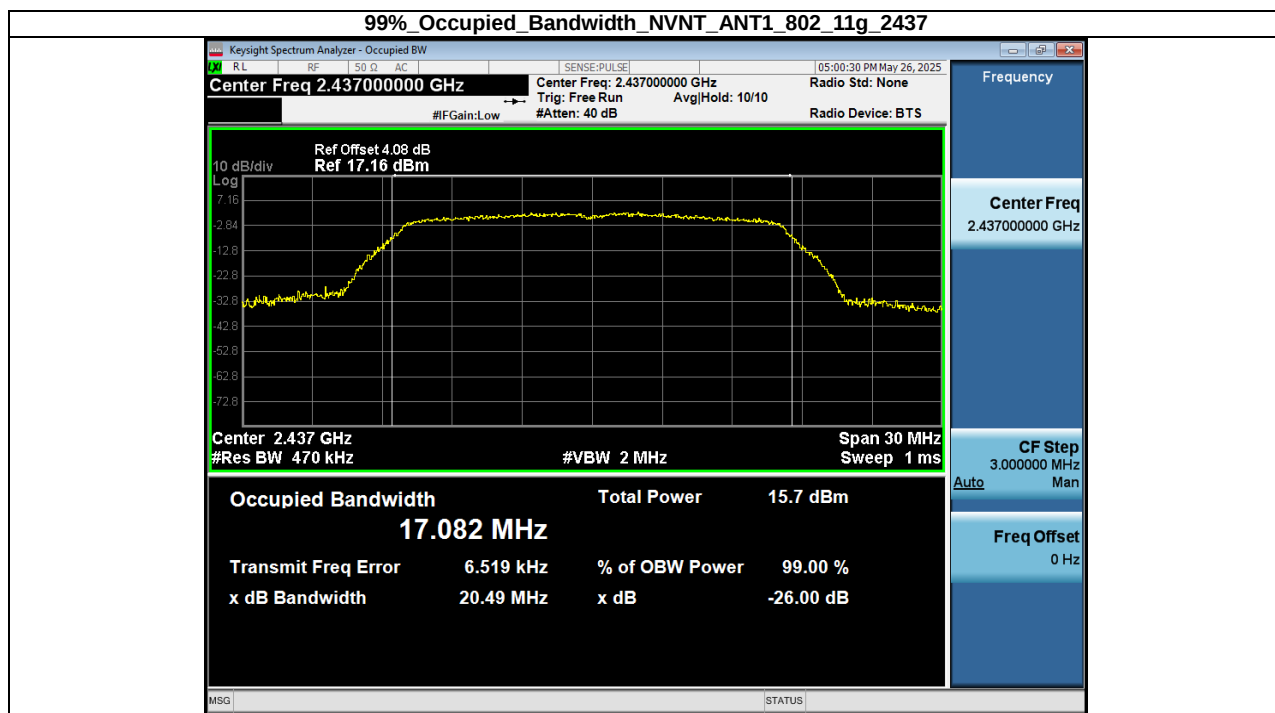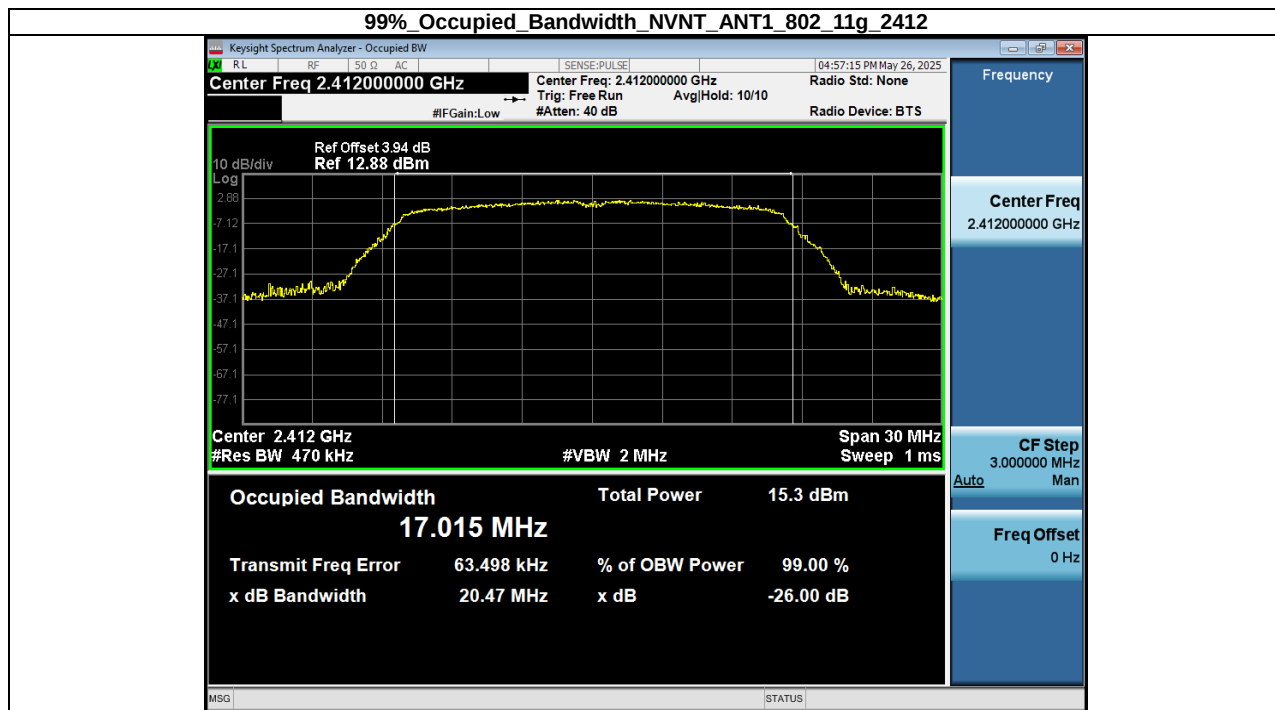

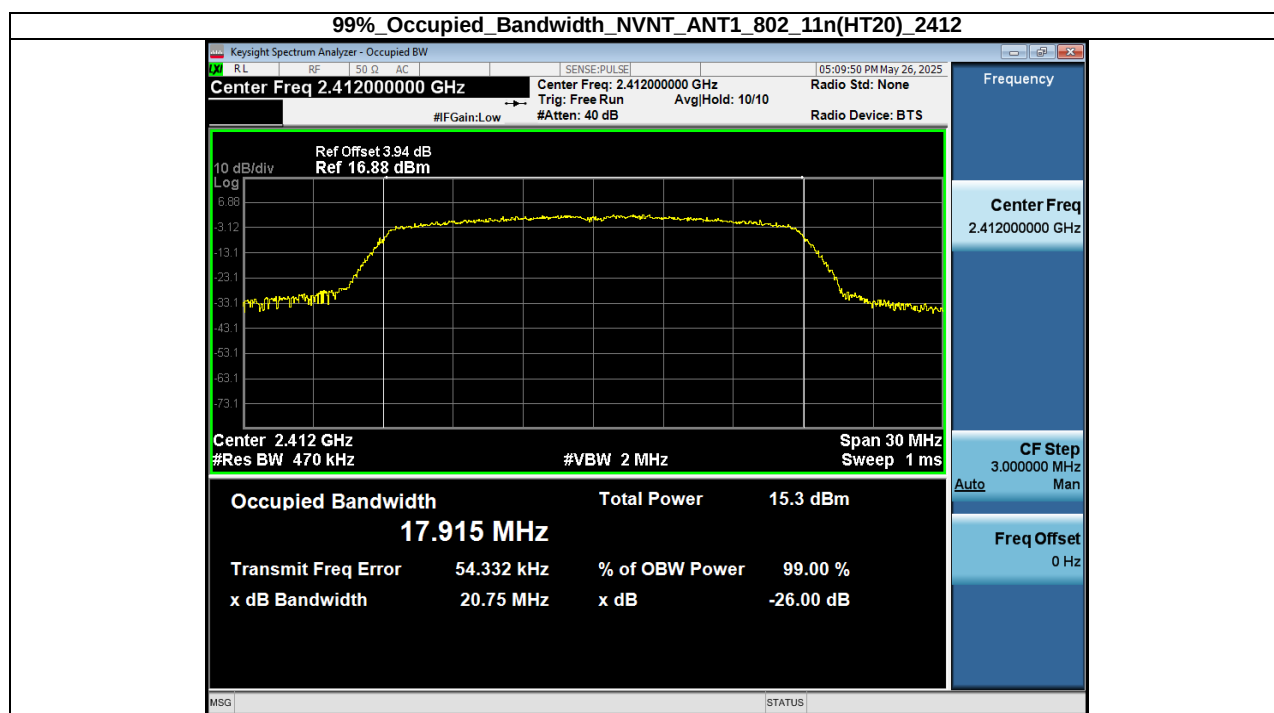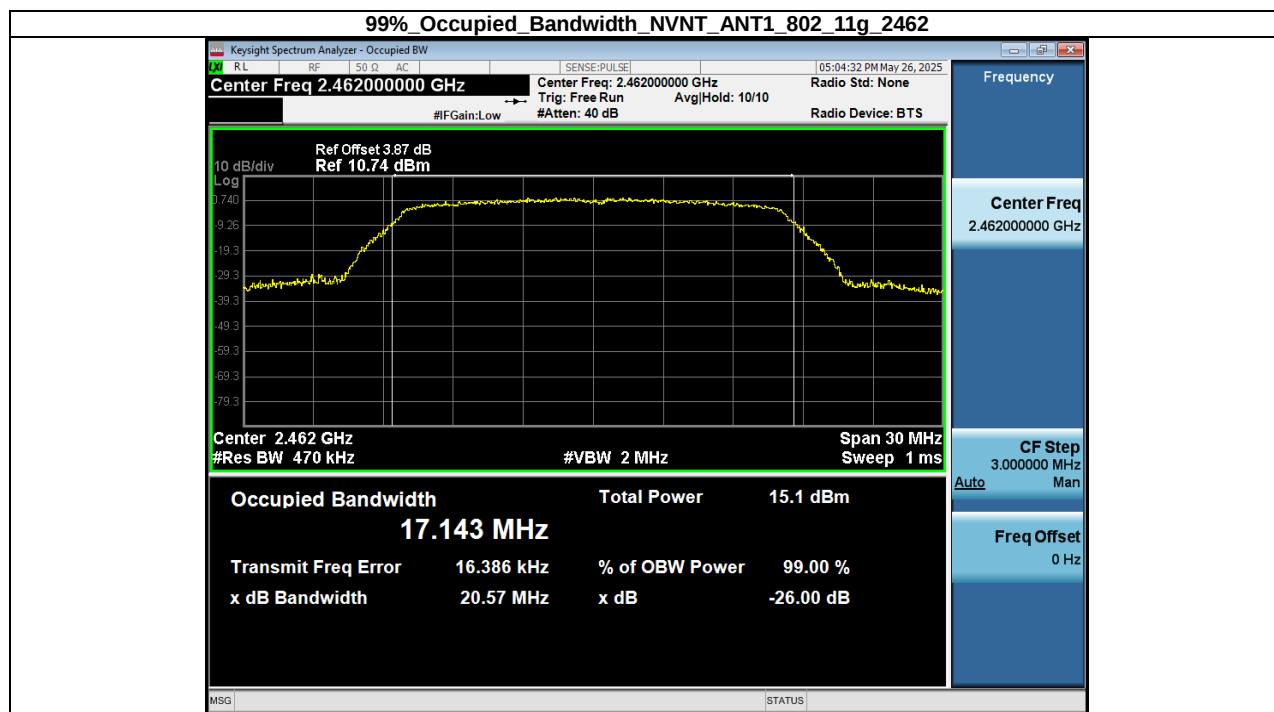

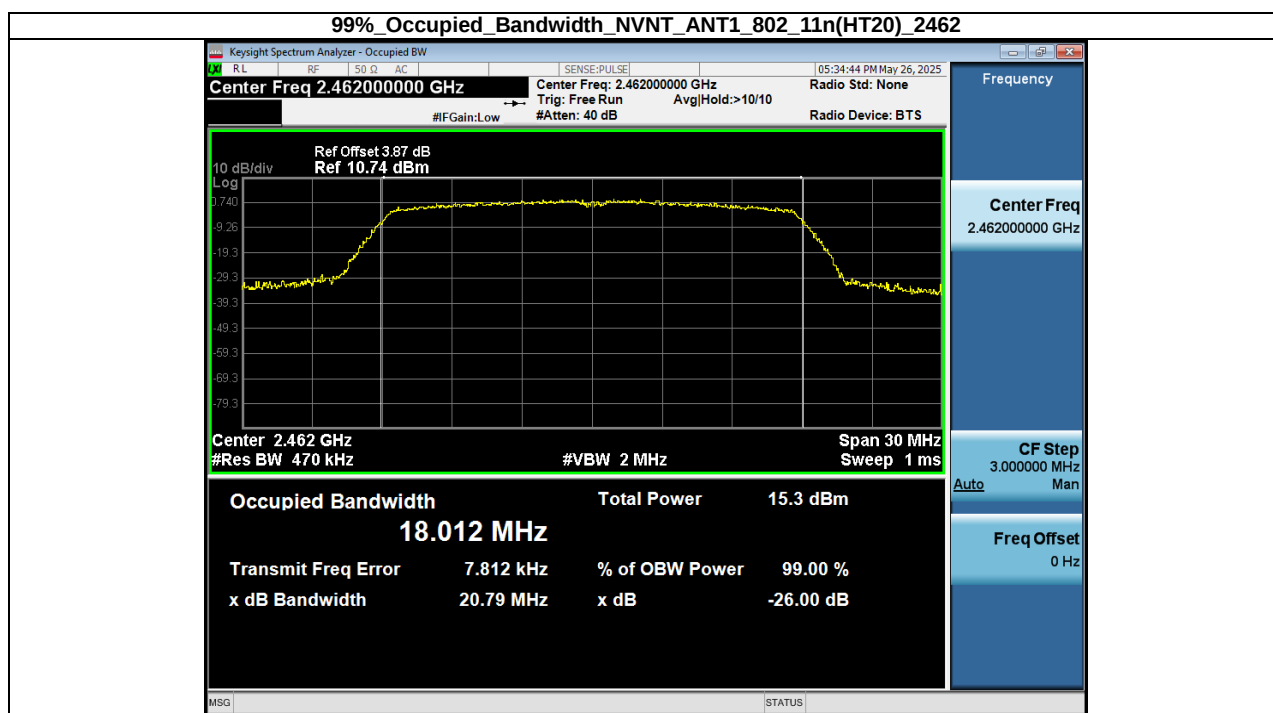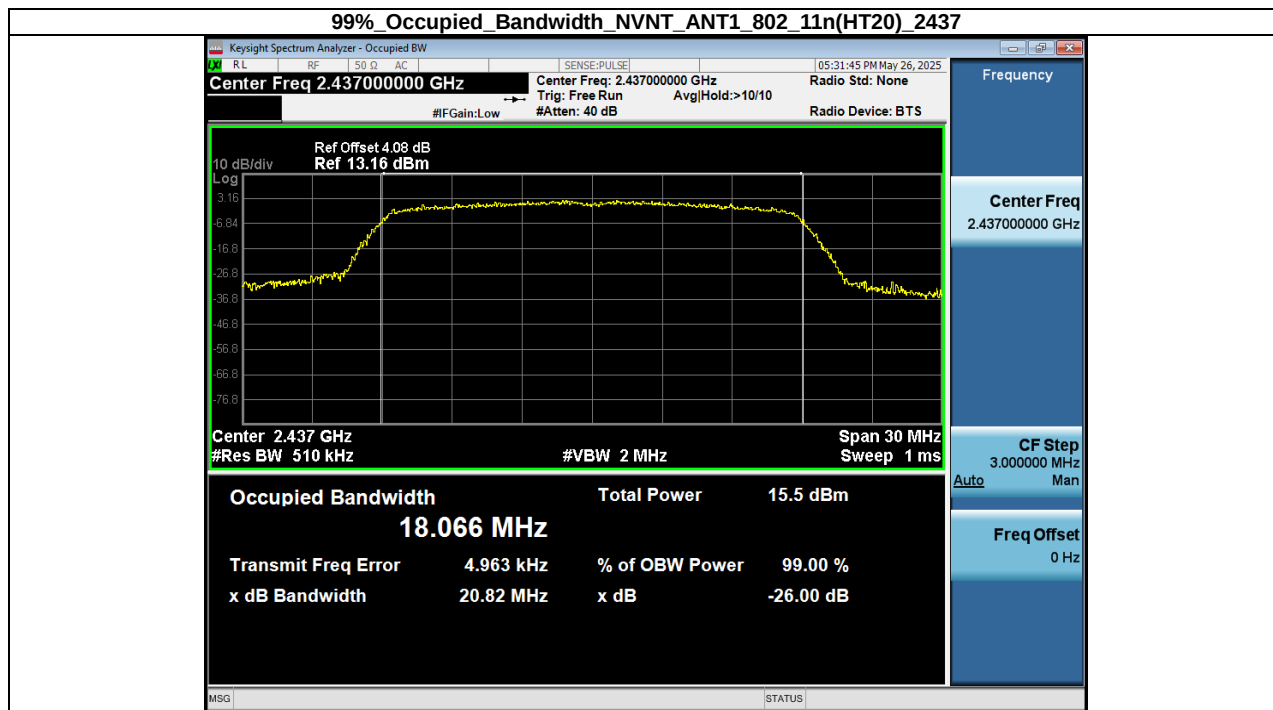


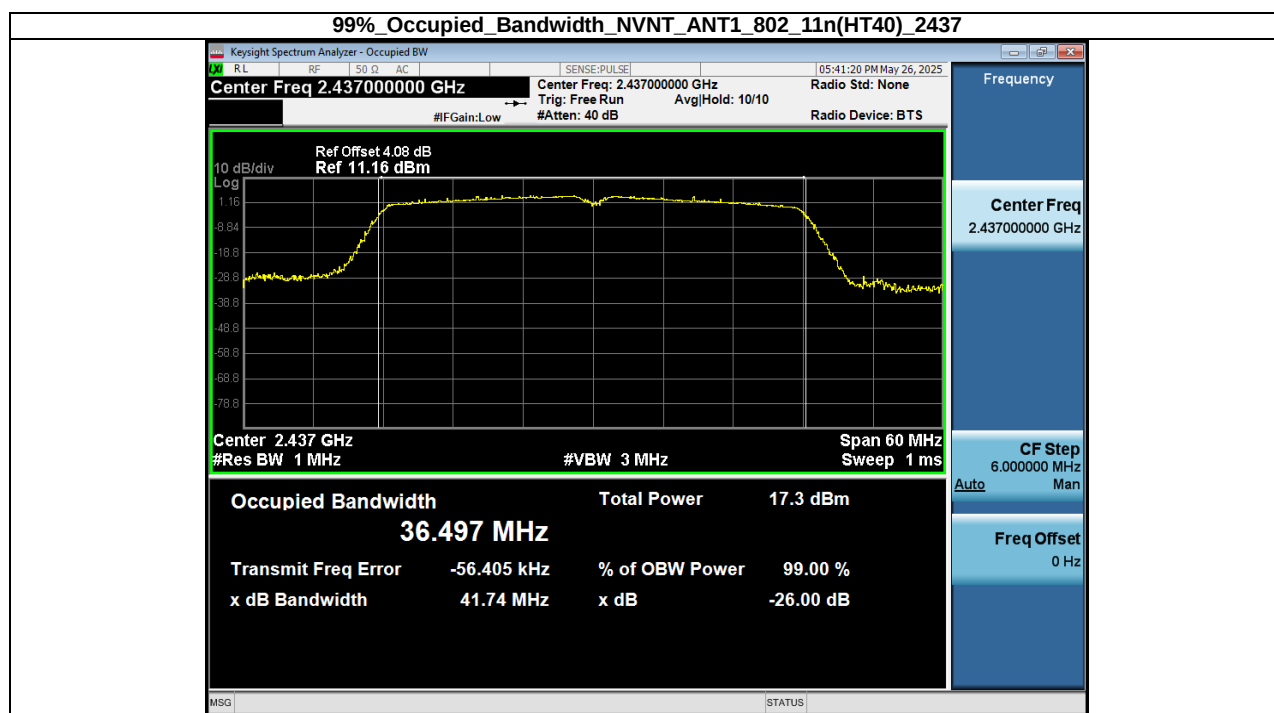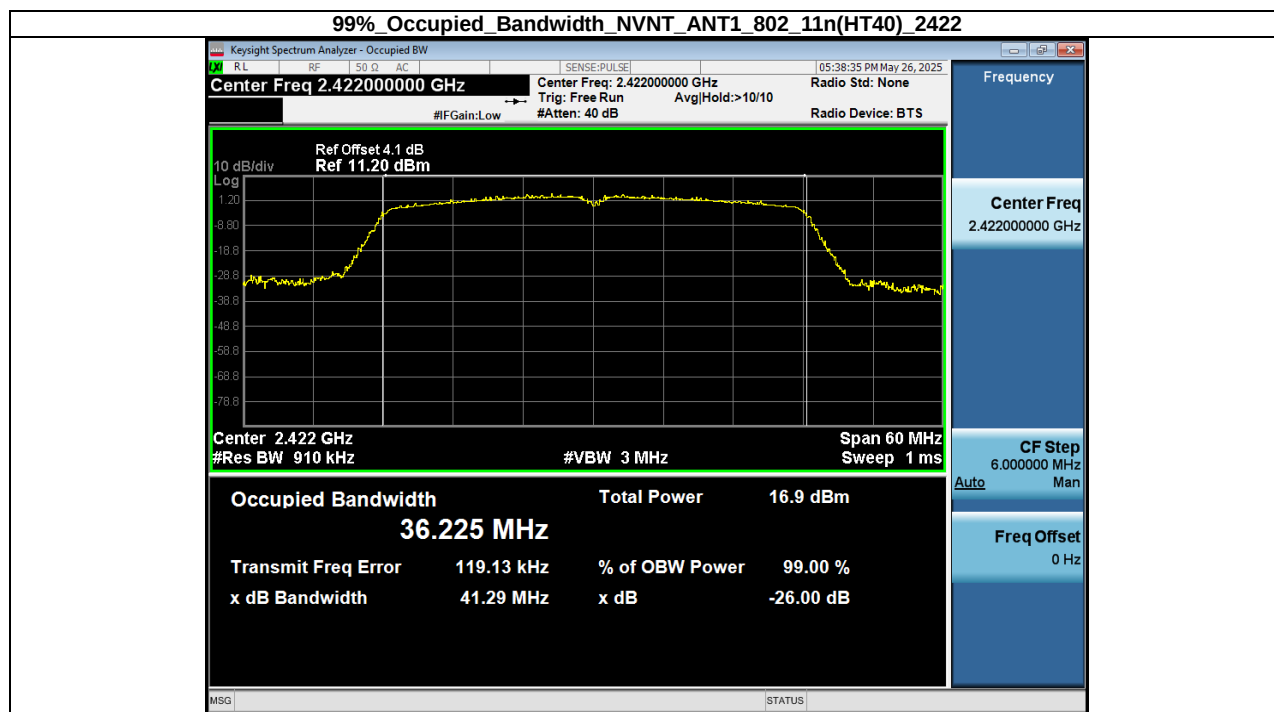

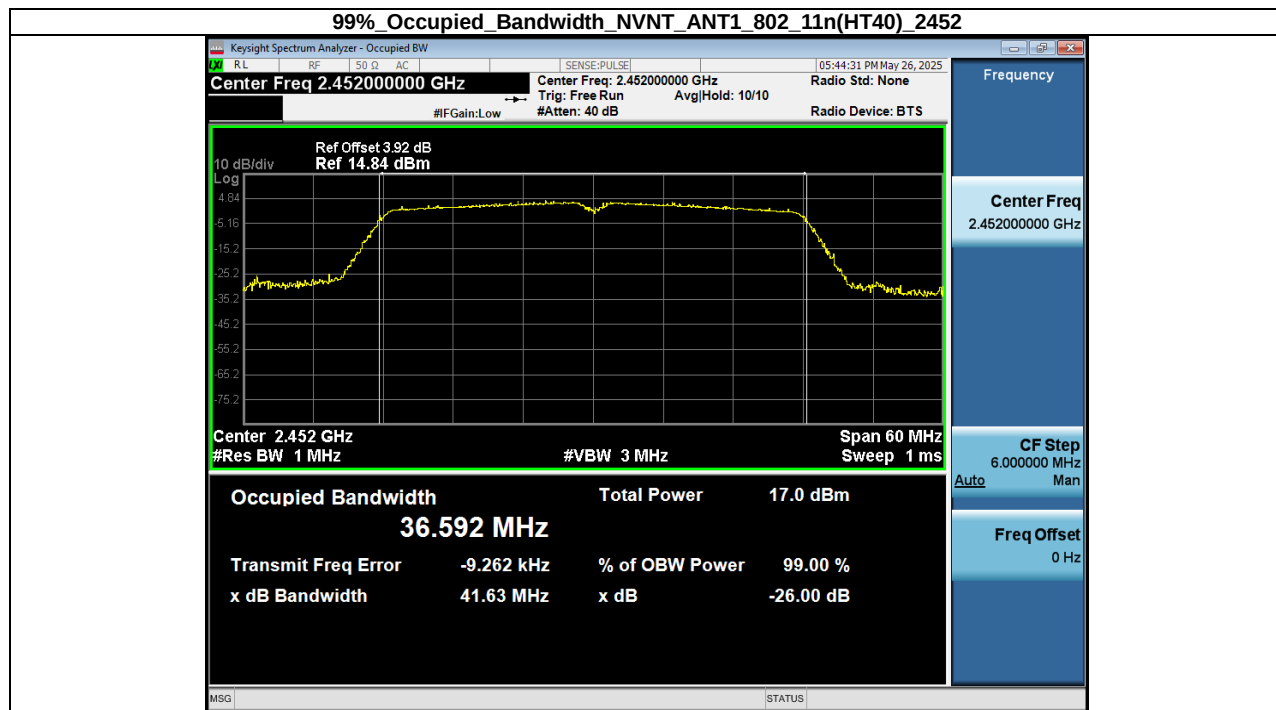

9. Band Edge Test

9.1. Block Diagram of Test Setup

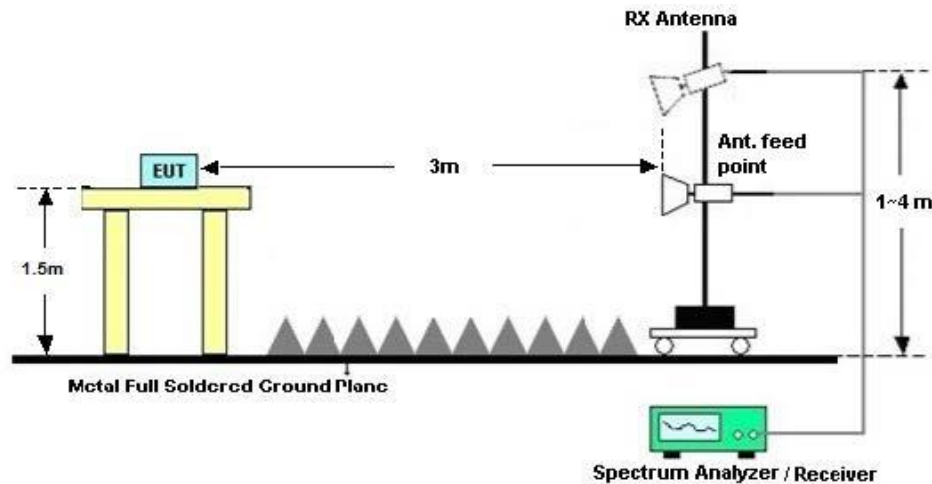

9.2. Test Limit

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Please refer RSS-GEN & FCC Part 15.247.

9.3. Test Procedure

Refer to ANSI C 63.10, Clause 6.10.

All restriction band and non- restriction band have been tested, only worse case is reported.

Details see the KDB558074 D01 Meas Guidance v05r02

- (1) Put the EUT on a 1.5m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission
- (2) Check the spurious emissions out of band.
- (3) RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 10Hz, RMS detector for AV value.

9.4. Test Results

Test Date : 2025.05.28					Temperature : 26℃			
Test Engineer : Felix Pang					Humidity : 54%			
Test Results : PASS								
Frequency Range : 2310MHz~2410MHz								
Test Mode : IEEE 802.11b TX 2412MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	59.83	-20.45	39.38	74.00	-34.62	Peak
2	2390	H	--	-20.45	39.38	54.00	-14.62	Avg
3	2400	H	62.16	-20.41	41.75	74.00	-32.25	Peak
4	2400	H	--	-20.41	41.75	54.00	-12.25	Avg
1	2390	V	60.17	-20.45	39.72	74.00	-34.28	Peak
2	2390	V	--	-20.45	39.72	54.00	-14.28	Avg
3	2400	V	65.13	-20.41	44.72	74.00	-29.28	Peak
4	2400	V	--	-20.41	44.72	54.00	-9.28	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : IEEE 802.11b TX 2462MHz								
1	2483.5	H	62.64	-20.15	42.49	74.00	-31.51	Peak
2	2483.5	H	--	-20.15	42.49	54.00	-11.51	Avg
1	2483.5	V	64.96	-20.15	44.81	74.00	-29.19	Peak
2	2483.5	V	--	-20.15	44.81	54.00	-9.19	Avg
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.							

Frequency Range : 2310MHz~2410MHz								
Test Mode : IEEE 802.11g TX 2412MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	58.34	-20.45	37.89	74.00	-36.11	Peak
2	2390	H	--	-20.45	37.89	54.00	-16.11	Avg
3	2400	H	62.20	-20.41	41.79	74.00	-32.21	Peak
4	2400	H	--	-20.41	41.79	54.00	-12.21	Avg
1	2390	V	60.46	-20.45	40.01	74.00	-33.99	Peak
2	2390	V	--	-20.45	40.01	54.00	-13.99	Avg
3	2400	V	63.38	-20.41	42.97	74.00	-31.03	Peak
4	2400	V	--	-20.41	42.97	54.00	-11.03	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : IEEE 802.11g TX 2462MHz								
1	2483.5	H	60.09	-20.15	39.94	74.00	-34.06	Peak
2	2483.5	H	--	-20.15	39.94	54.00	-14.06	Avg
1	2483.5	V	65.77	-20.15	45.62	74.00	-28.38	Peak
2	2483.5	V	--	-20.15	45.62	54.00	-8.38	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Frequency Range : 2310MHz~2410MHz								
Test Mode : IEEE 802.11n/HT20 TX 2412MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	60.66	-20.45	40.21	74.00	-33.79	Peak
2	2390	H	--	-20.45	40.21	54.00	-13.79	Avg
3	2400	H	64.08	-20.41	43.67	74.00	-30.33	Peak
4	2400	H	--	-20.41	43.67	54.00	-10.33	Avg
1	2390	V	62.98	-20.45	42.53	74.00	-31.47	Peak
2	2390	V	--	-20.45	42.53	54.00	-11.47	Avg
3	2400	V	64.23	-20.41	43.82	74.00	-30.18	Peak
4	2400	V	--	-20.41	43.82	54.00	-10.18	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : IEEE 802.11n/HT20 TX 2462MHz								
1	2483.5	H	60.92	-20.15	40.77	74.00	-33.23	Peak
2	2483.5	H	--	-20.15	40.77	54.00	-13.23	Avg
1	2483.5	V	66.98	-20.15	46.83	74.00	-27.17	Peak
2	2483.5	V	--	-20.15	46.83	54.00	-7.17	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Frequency Range : 2310MHz~2410MHz								
Test Mode : IEEE 802.11n/HT40 TX 2422MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	61.79	-20.45	41.34	74.00	-32.66	Peak
2	2390	H	--	-20.45	41.34	54.00	-12.66	Avg
3	2400	H	62.84	-20.41	42.43	74.00	-31.57	Peak
4	2400	H	--	-20.41	42.43	54.00	-11.57	Avg
1	2390	V	63.01	-20.45	42.56	74.00	-31.44	Peak
2	2390	V	--	-20.45	42.56	54.00	-11.44	Avg
3	2400	V	62.04	-20.41	41.63	74.00	-32.37	Peak
4	2400	V	--	-20.41	41.63	54.00	-12.37	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : IEEE 802.11n/HT40 TX 2452MHz								
1	2483.5	H	60.11	-20.15	39.96	74.00	-34.04	Peak
2	2483.5	H	--	-20.15	39.96	54.00	-14.04	Avg
1	2483.5	V	65.03	-20.15	44.88	74.00	-29.12	Peak
2	2483.5	V	--	-20.15	44.88	54.00	-9.12	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

10. Frequency stability

10.1. Test limit


Please refer section RSS-Gen.

Regulation RSS-Gen If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

10.2. Test Procedure

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3. Test Setup

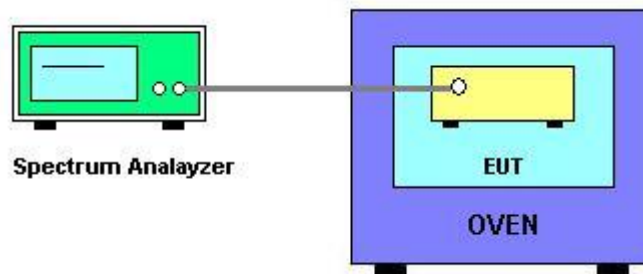

10.4. Test Results

Not Applicable

11. Antenna Requirement

11.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

11.2. Antenna Connected Construction

The antenna connector is unique antenna and no consideration of replacement. Please see EUT photo for details.

11.3. Results

The EUT antenna is internal antenna. It complies with the standard requirement.

12. Photos of test setup

Reference to the **appendix I Test Setup Photo** for details.

13. Photos of EUT

Reference to the **appendix II external photos** and **appendix III internal photos** for details.

----- END OF REPORT-----