
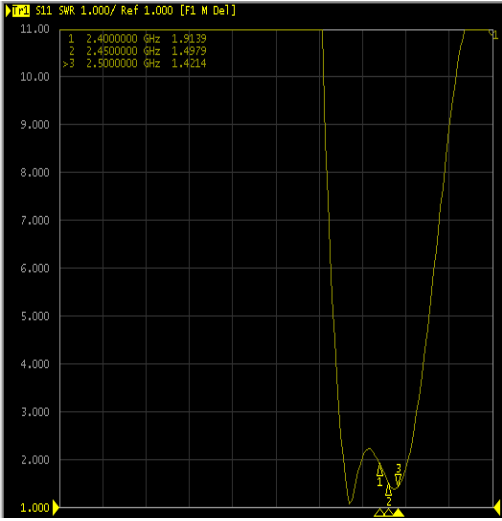
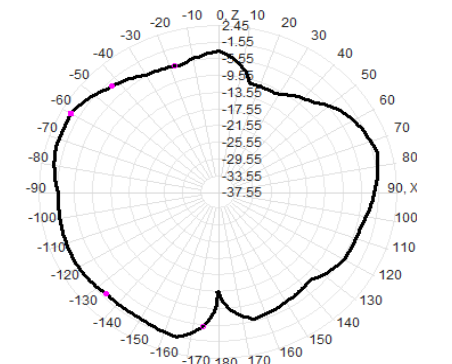
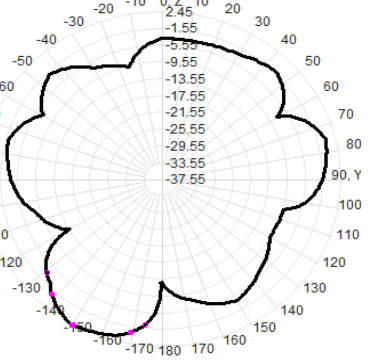
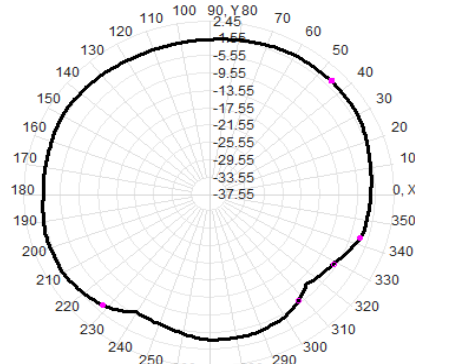



Company: Shenzhen guangyuan send electronid co., LTD
Address: D Building, Innovation Park, No. 16 Langshan Road, Songping Mountain Community, Xili Street, Nanshan District, Shenzhen City

LingDu_V630_20240712 1,The test requires that the temperature in the OTA darkroom is 25±5 °C, a standard atmospheric pressure, and the humidity is greater than 45% and less than 75%. 2, DUT placement and turntable center, laser center through the center of the DUT. The coaxial line is on the other side of the antenna, avoid overlaying the antenna. 3. In the test frequency band, passives are tested every 2.4G every 5M points, 5G every 20M points, and theta and phi axes are tested every 30°. 4, The test results retain % efficiency dB efficiency and Gain value LingDu_V630 FreeSpace WIFI <table><tr><th>Frequency MHz</th><th>Standard %</th><th>Effective (%)</th><th>GAIN dBi</th></tr><tr><td>2400</td><td>40</td><td>44.54</td><td>0.50</td></tr><tr><td>2405</td><td>40</td><td>49.80</td><td>0.95</td></tr><tr><td>2410</td><td>40</td><td>51.75</td><td>1.12</td></tr><tr><td>2415</td><td>40</td><td>51.35</td><td>1.12</td></tr><tr><td>2420</td><td>40</td><td>54.39</td><td>1.38</td></tr><tr><td>2425</td><td>40</td><td>55.22</td><td>1.43</td></tr><tr><td>2430</td><td>40</td><td>55.60</td><td>1.46</td></tr><tr><td>2435</td><td>40</td><td>56.08</td><td>1.47</td></tr><tr><td>2440</td><td>40</td><td>55.90</td><td>1.42</td></tr><tr><td>2445</td><td>40</td><td>56.55</td><td>1.43</td></tr><tr><td>2450</td><td>40</td><td>56.53</td><td>1.39</td></tr><tr><td>2455</td><td>40</td><td>55.66</td><td>1.37</td></tr><tr><td>2460</td><td>40</td><td>56.04</td><td>1.46</td></tr><tr><td>2465</td><td>40</td><td>59.87</td><td>1.82</td></tr><tr><td>2470</td><td>40</td><td>61.30</td><td>2.02</td></tr><tr><td>2475</td><td>40</td><td>57.84</td><td>1.84</td></tr><tr><td>2480</td><td>40</td><td>58.02</td><td>1.95</td></tr><tr><td>2485</td><td>40</td><td>57.28</td><td>1.94</td></tr><tr><td>2490</td><td>40</td><td>51.61</td><td>1.55</td></tr><tr><td>2495</td><td>40</td><td>55.15</td><td>1.90</td></tr><tr><td>2500</td><td>40</td><td>60.73</td><td>2.32</td></tr></table>				Frequency MHz	Standard %	Effective (%)	GAIN dBi	2400	40	44.54	0.50	2405	40	49.80	0.95	2410	40	51.75	1.12	2415	40	51.35	1.12	2420	40	54.39	1.38	2425	40	55.22	1.43	2430	40	55.60	1.46	2435	40	56.08	1.47	2440	40	55.90	1.42	2445	40	56.55	1.43	2450	40	56.53	1.39	2455	40	55.66	1.37	2460	40	56.04	1.46	2465	40	59.87	1.82	2470	40	61.30	2.02	2475	40	57.84	1.84	2480	40	58.02	1.95	2485	40	57.28	1.94	2490	40	51.61	1.55	2495	40	55.15	1.90	2500	40	60.73	2.32	Antenna	Setup photo	驻波照片
Frequency MHz	Standard %	Effective (%)	GAIN dBi																																																																																											
2400	40	44.54	0.50																																																																																											
2405	40	49.80	0.95																																																																																											
2410	40	51.75	1.12																																																																																											
2415	40	51.35	1.12																																																																																											
2420	40	54.39	1.38																																																																																											
2425	40	55.22	1.43																																																																																											
2430	40	55.60	1.46																																																																																											
2435	40	56.08	1.47																																																																																											
2440	40	55.90	1.42																																																																																											
2445	40	56.55	1.43																																																																																											
2450	40	56.53	1.39																																																																																											
2455	40	55.66	1.37																																																																																											
2460	40	56.04	1.46																																																																																											
2465	40	59.87	1.82																																																																																											
2470	40	61.30	2.02																																																																																											
2475	40	57.84	1.84																																																																																											
2480	40	58.02	1.95																																																																																											
2485	40	57.28	1.94																																																																																											
2490	40	51.61	1.55																																																																																											
2495	40	55.15	1.90																																																																																											
2500	40	60.73	2.32																																																																																											
																																																																																														
				2500MHz	2500MHz	2500MHz																																																																																								
																																																																																														
				2500MHz 3D chart	2500MHz 3D chart	2500MHz 3D chart																																																																																								
																																																																																														

Company: Shenzhen guangyuan send electronid co., LTD
Address: D Building, Innovation Park, No. 16 Langshan Road, Songping Mountain Community, Xili
Street, Nanshan District, Shenzhen City

