

acknowledgement

Supplier name: Shenzhen Zhongtianxun Communication Technology Co., Ltd

Supplier material name: OB. P. SCSD16

Supplier specification and model: The WIFI antenna assembly

The CVTE item code: 004. 032. 0052762

Admit the book edition: A1

Drawing version number (no filling in if no drawings): V1

The CVTE admission column

具体见系统的承认记录

Supplier acknowledgement column

lay down Auditing

Ratify

Le. Qin Yiqing. Lin

Guohua. Zou

Address: No.192, Kezhu Road, Science City,
Guangzhou city

Tel.: 020-82075661

Fax: 020-32085197

Address: No.34, Shilong Avenue, Shilong Zai,
Baoan District, Shenzhen City (Tengda
Industrial Park)

Tel.: 0755-27588320

Fax: 0755-27588045

Copyright CVTE, the content of this document is a trade secret. No organization or individual shall copy or disseminate it in any form without permission

规格承认书

SPECIFICATIONFORAPPROVAL

客 户 Customer	CVTE
项目名称 Project Name	OB. P. SCSD16
客户料号 Customer NO.	004. 032. 0052762
规 格 specification	BT Antenna components
供方料号 Supplier NO.	2. 00000644
规格书编号 specification NO.	
编写人 Write by	Le. Qin
版本 REV.	A1
日期 Date	2023/12/01
备注 Note	

客户确认 CUSTOMERAPPROVEDBY		
批准 Approved by	审核 checked by	制表 prepared by
供方确认 SUPPLIERAPPROVEDBY		
批准 Approved by	审核 checked by	制表 prepared by
Guohua.Zou	Yiqing.Lin	Le.Qin



ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components

Application Date:Dec,01,2023

Rev: R:A1

ZTX P/N : 0B. P. SCSD16_BT Antenna components

Editor:

Page 1 of 14

Document revision resume form

edition	edition	Develop / modify / repeal the content	prepared by	checked
A1	2023-12-01	The first edition	Le. Qin	Yiqing. Lin



ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components

Application Date:Dec,01,2023

Rev: R:A1

ZTX P/N : 0B. P. SCSD16_BT Antenna components

Editor:

Page 2 of 14

1. Index

Order	Content	page
-	Cover	-
-	Version change record	1
1	Index	2
2	Test Equipment & Conditions	3~6
3	Antenna physical picture	7
4	S11	8
5	Drawing	9
6	Package	10
7	FAI	11
8	Reliability Report	12
9	Raw Material Detection List	13






ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components
ZTX P/N :0B. P. SCSD16_BT Antenna components

Application Date:Dec,01,2023
Editor:

Rev: R:A1
Page 3 of 14


2. Test Equipment & Conditions

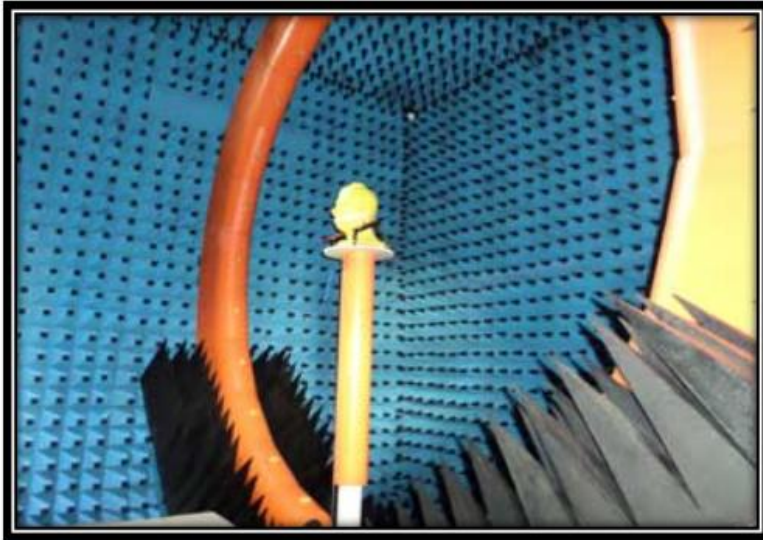

Owned 6 microwave dark room, equipped 2 sets world leading France Satimo SG24 OTA certification test systems (one in SHENZHEN, another one in Shanghai), ETS OTA Standard test system, Blue test reverberation test system which is High repeatability, high accuracy and high resolution. It can quickly provide accurate test reports, fully meet the CITA standards.

Testing range:

Support active, passive testing of
GSM/CDMA/WCDMA/TD-
SCDMA/LTE/WIFI/WLAN/WiMax/BT
/GPS/MIMO/UWB within 0.4-6G.

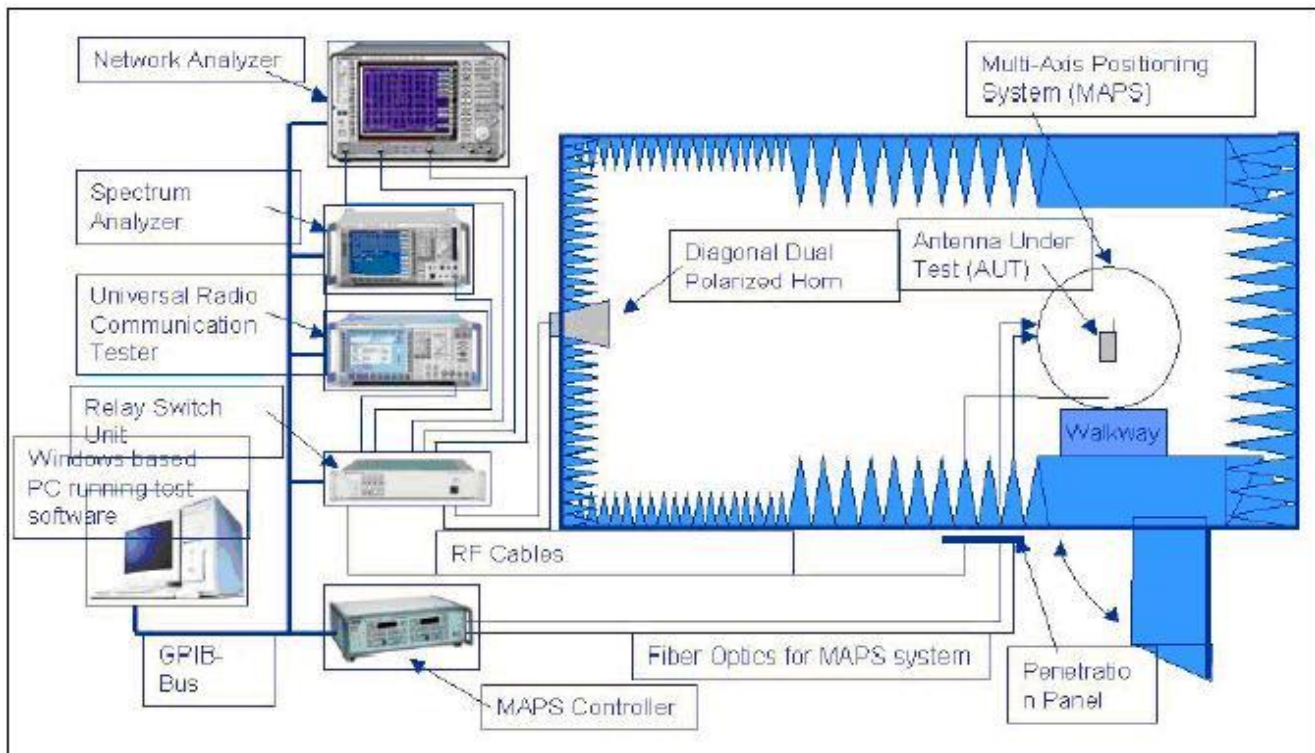

ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components
ZTX P/N : 0B. P. SCSD16_BT Antenna components

Application Date:Dec,01,2023
Editor:

Rev: R:A1
Page 4 of 14

2-1 Passive Test

Frequency (MHz)	Efficiency	Efficiency. dB	Gain . dBi
2400	59%	-2.31	2.07
2410	59%	-2.31	2.06
2420	61%	-2.15	2.20
2430	61%	-2.15	2.19
2440	61%	-2.18	2.08
2450	61%	-2.18	1.94
2460	57%	-2.45	1.71
2470	57%	-2.43	2.05
2480	57%	-2.47	1.89
2490	55%	-2.61	1.78
2500	53%	-2.76	1.97



ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components

Application Date:Dec,01,2023

Rev: R:A1


ZTX P/N : 0B. P. SCSD16_BT Antenna components

Editor:


Page 5 of 14

2-3 insulation

WIFI 0&WIFI 1

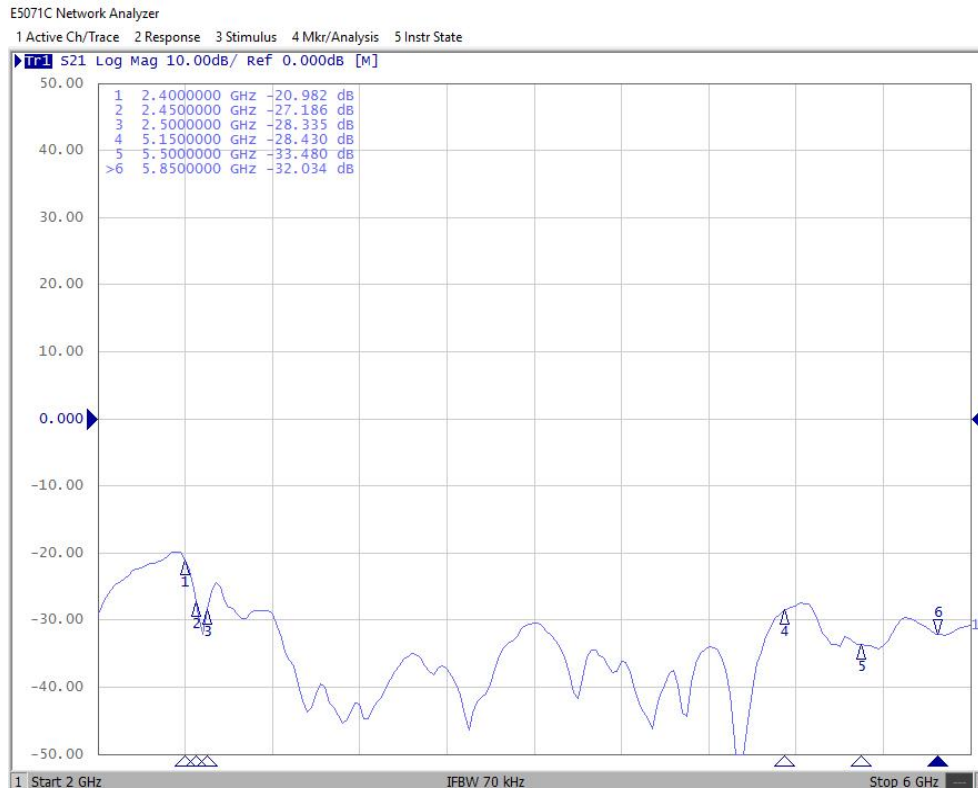

WIFI 0&BT

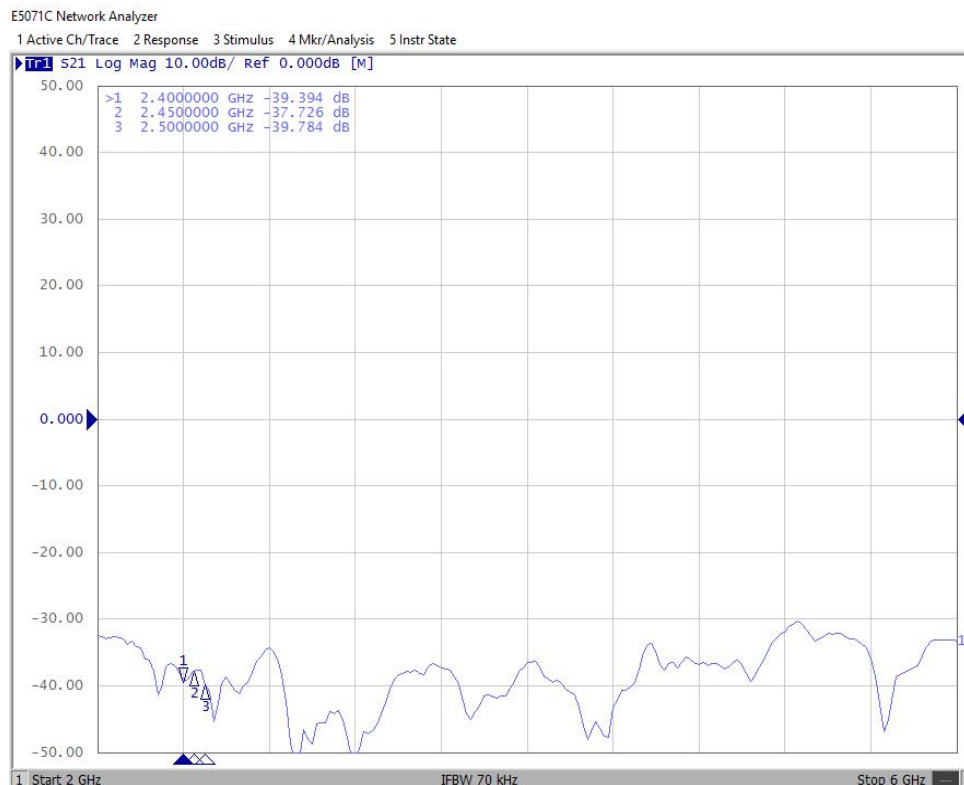


ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components
ZTX P/N :0B. P. SCSD16_BT Antenna components


Application Date:Dec,01,2023
Editor:

Rev: R:A1
Page 6 of 14

WIFI 1&BT

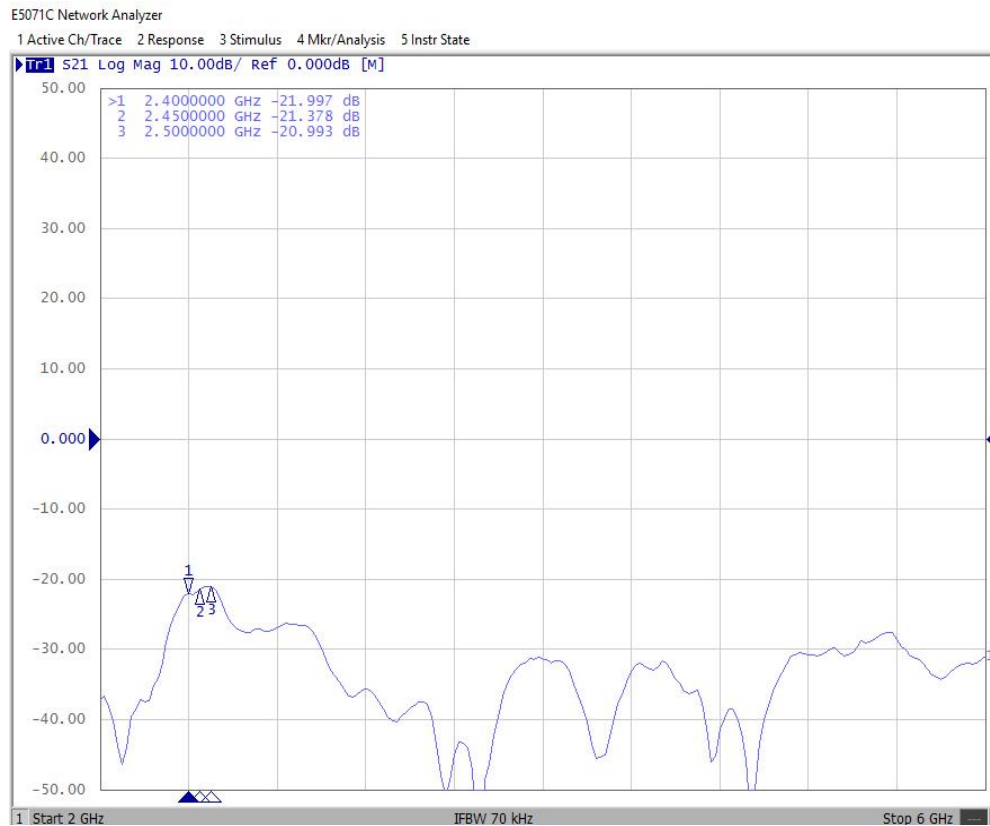

2-4 Environmental treatment

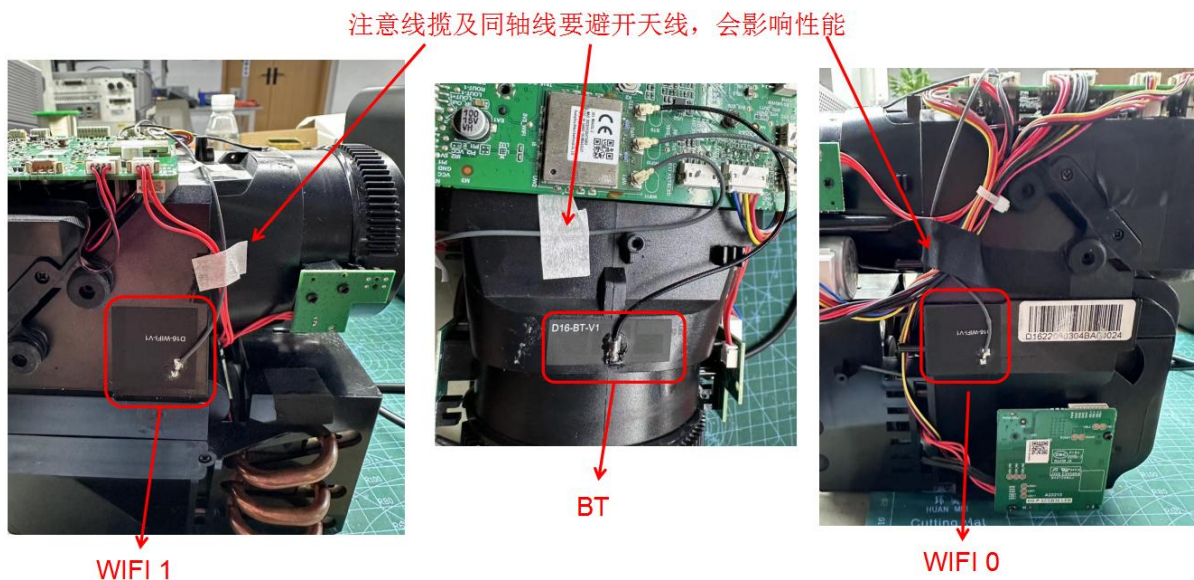

ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components

Application Date:Dec,01,2023

Rev: R:A1

ZTX P/N : 0B. P. SCSD16_BT Antenna components

Editor:

Page 7 of 14

3.Antenna physical picture




ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components
ZTX P/N :0B. P. SCSD16_BT Antenna components

Application Date:Dec,01,2023
Editor:

Rev: R:A1
Page 8 of 14

4.VSWR

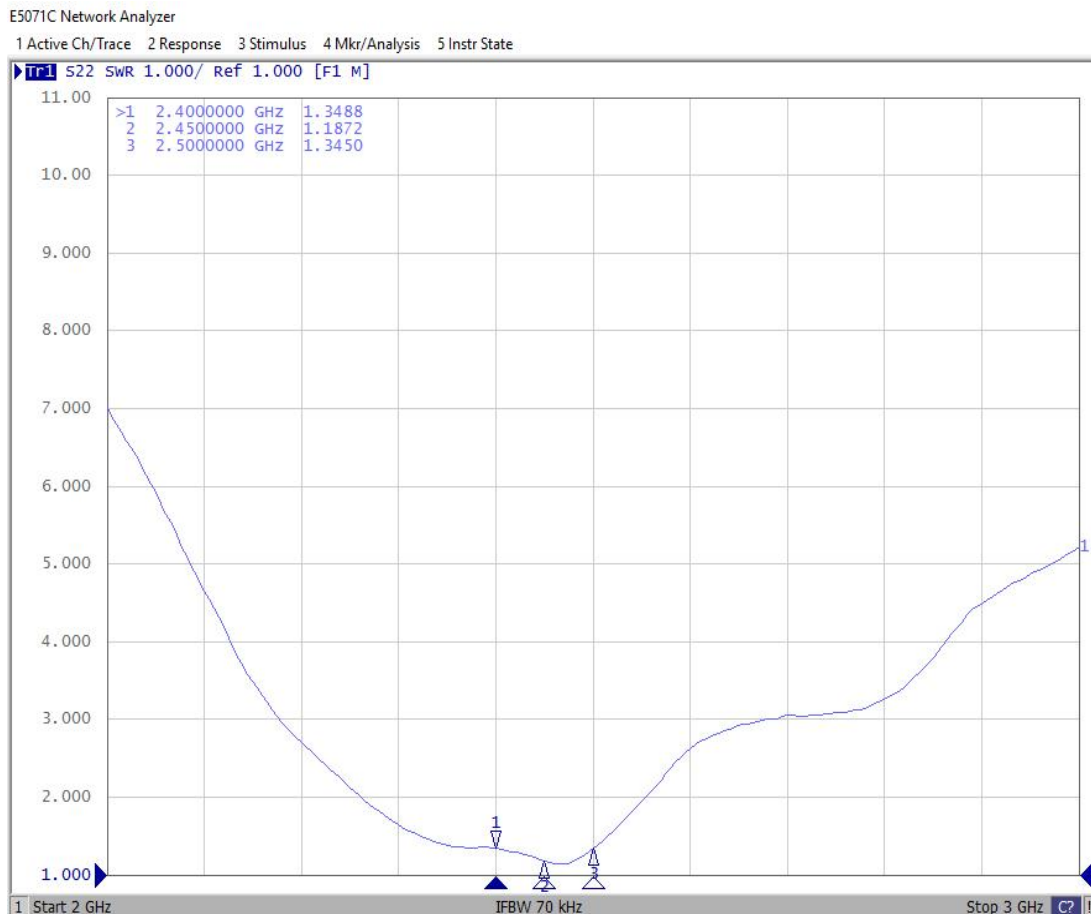


ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components
ZTX P/N :0B. P. SCSD16_BT Antenna components

Application Date:Dec,01,2023
Editor:

Rev: R:A1
Page 9 of 14

5.Drawing

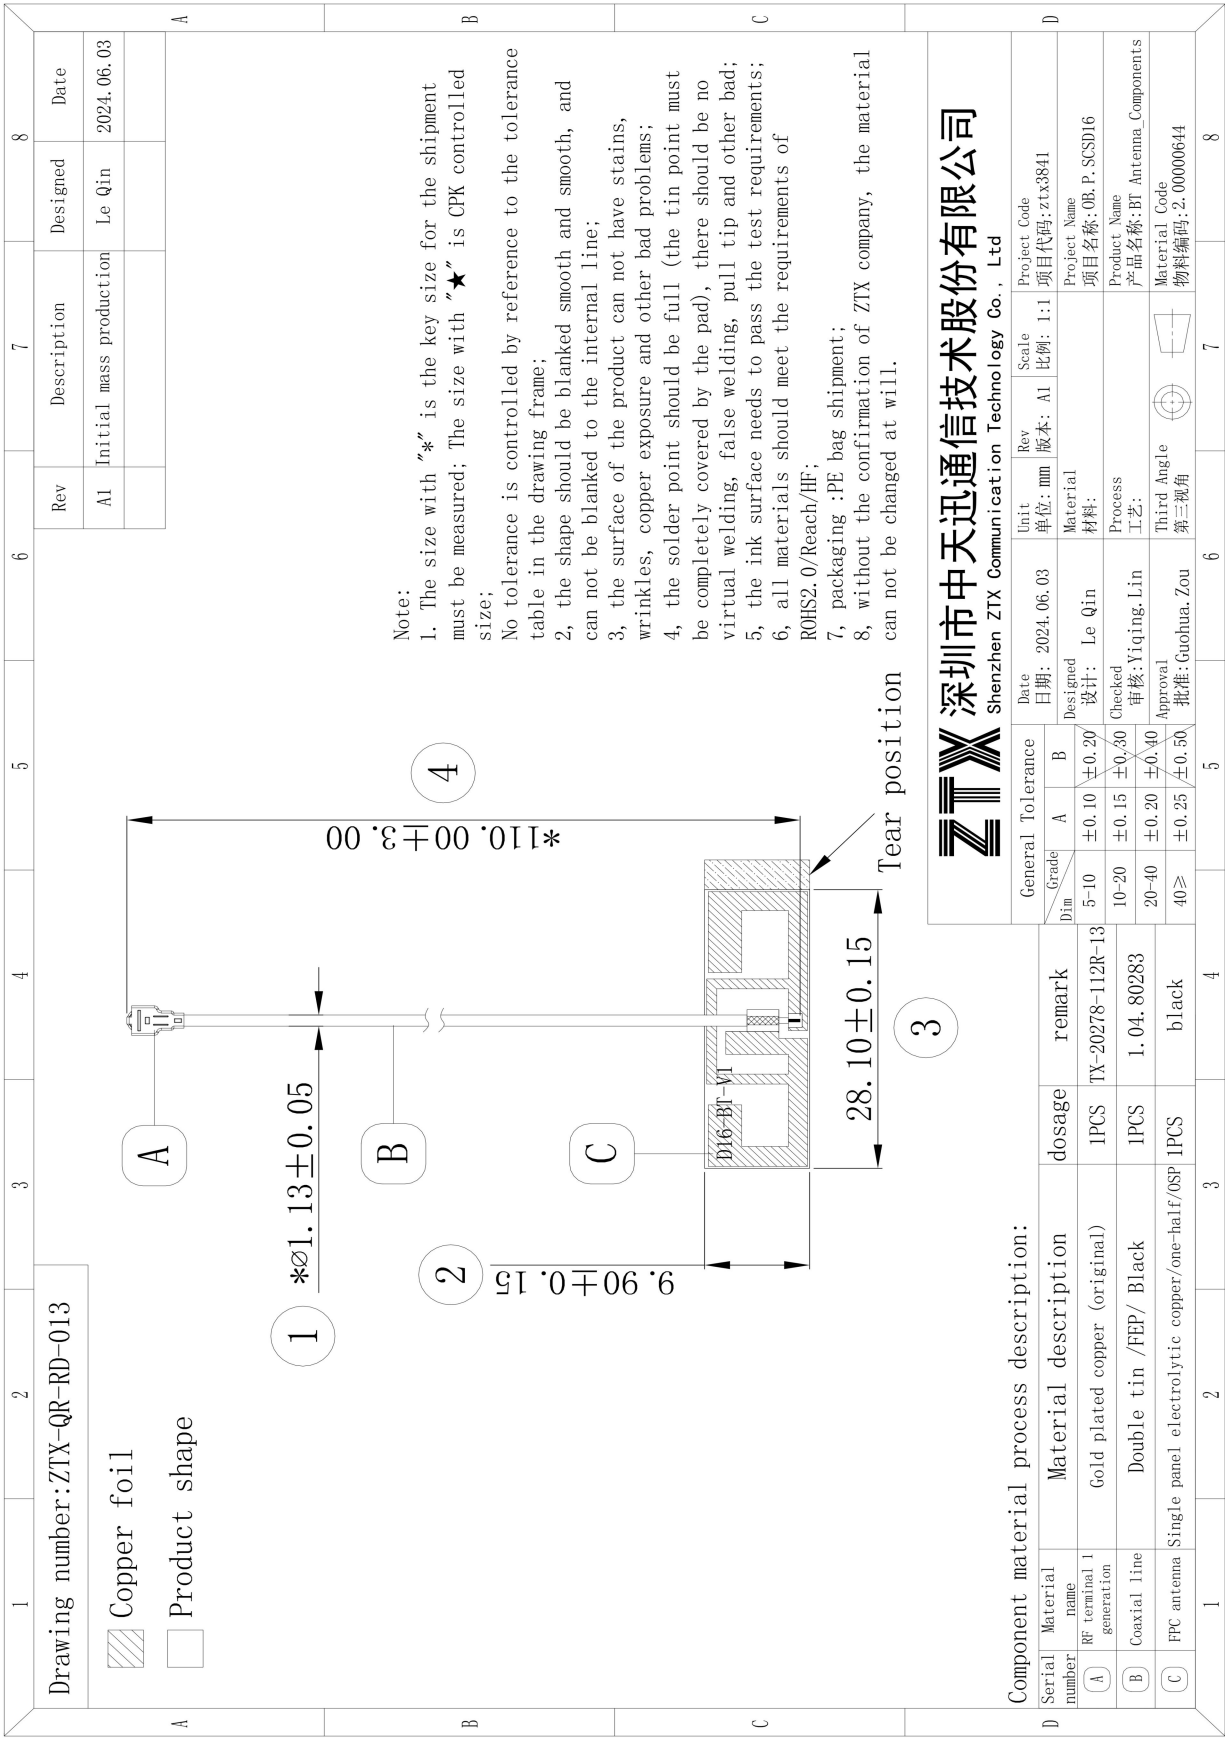

ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components
ZTX P/N :0B. P. SCSD16_BT Antenna components

Application Date:Dec,01,2023
Editor:

Rev: R:A1
Page 10 of 14

6.Package

深圳市中天迅通信技术有限公司

SHENZHEN ZHONGTIAN XUN Communication Technology Co., Ltd.


Work instructions

Document number


ZTX-QD-WI-ASSY-751

Product model		Product name		Proceed to the process		Version		Operation No./Name		Post number	
OB.P.SCSD16		BT Antenna components		Appearance		A1		Packing		B05	
Detailed list of materials (refer to ERP system for detailed list of materials)											
NO		Part number		Material name		Material/Specification		Dosage		Unit	
1		1.12.000029		PE seal pocket		230*330*0.05mm		500pcs/bag		pcs	
2		1.12.000030		PE open pocket		240*160*0.05mm		50pcs/bag		pcs	
3		1.12.000002		Cartons		K = K 46 * 32.5 * 21 CM (without 1000 silk-		5000pcs/box		pcs	
4		1.13.000003		Pinka		A3B 42*30CM		2pcs/box		pcs	
Fixture tool list											
NO		equipment/Tool No		Name of equipment/tool		equipment/tool specification		Dosage		Unit	
1		/		Electronic scale		/		/		/	
2											
3											
4											
Environmental requirements											
1. Temperature control of group test workshop: 15 °C -28 °C; humidity: 35% -70%. 2. Illumination requirement of worktable in test area: 800Lux-1200Lux. 3. Illumination requirement of worktable in operation area: 400Lux-800 Lux.											
Operation precautions											
1) The operator shall wear finger cots or gloves for operation, and operation with bare hands is prohibited; 2) The product shall be handled with care during operation to prevent scratches and bruises on the surface of the product; 3) In the packaging process or warehouse, the label information of the material and the inner box (or packaging bag) must be compared and checked; 4) It is not allowed to paste, replace or retain labels in the informal packaging process;											
		Version		Revised content		Date of revision		Revised by			
		A1		New issue		11月30日		Xiang Hengfeng			
		Production review		Quality audit		Fang Qiang		Engineering approval			
								Yu Hongshu		Dang Feifei	




Step 1:Before production, conduct 5S to ensure that the workbench is free of other products or sundries, and prepare the







Step 2:Take 50 PCs as 1 bundle, take 1 bundle and put it into the open bag, fold it inward in the original opening direction and








Step 4:Each box is packed with 10 bags (5000 PCs) except for the mantissa; the product label shall be affixed in the upper right









Step 2:Take 50 PCs as 1 bundle, take 1 bundle and put it into the open bag, fold it inward in the original opening direction and



Step 4:Each box is packed with 10 bags (5000 PCs) except for the mantissa; the product label shall be affixed in the upper right



Step 2:Take 50 PCs as 1 bundle, take 1 bundle and put it into the open bag, fold it inward in the original opening direction and



Step 4:Each box is packed with 10 bags (5000 PCs) except for the mantissa; the product label shall be affixed in the upper right

Revised by

Xiang Hengfeng

Date of revision

11月30日

Engineering approval

Yu Hongshu

Version: A1

Page 6 of 7

Version: A1 Page 6 of 7

ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components
ZTX P/N : 0B. P. SCSD16_BT Antenna components

Application Date:Dec,01,2023
Editor:

Rev: R:A1
Page 11 of 14

7.FAI

Sample test report

Customer Name	IB169052				Product Name	0B P SCSD16 BT Antenna module				Amount	10PCS						
Product Material	FPC+Coaxial line+RF terminal				Color	Black				Date	2023/11/8						
product type: ☒ New appearance product ☐ Modified shape product ☐ Production ☐ Product style																	
NO	type	Required size	+Tolerance	-Tolerance	measured size										Decision	comment	
					1	2	3	4	5	6	7	8	9	10			
1	*Ø	1.13	0.05	0.05	1.14	1.13	1.13	1.13	1.12	1.14	1.13	1.13	1.12	1.13	OK		
2		9.90	0.15	0.15	9.88	9.89	9.85	9.87	9.89	9.88	9.84	9.91	9.86	9.89	OK		
3		28.10	0.15	0.15	28.02	28.01	28.01	28.03	28.02	28.03	28.01	28.03	28.02	28.03	OK		
4	*	110.00	3.00	3.00	109.00	109.00	109.00	109.00	109.00	109.00	109.00	109.00	109.00	109.00	OK		
5																	
6																	
7																	
8																	
9																	
10																	
11																	
12																	
13																	
Exterior:																	
Other:																	
Total judgment: ☒ OK ☐ NG																	
ratify: Lai Ningping check: Yi Ailing make: Li Li Hua																	
comment:																	

Form number :ZTX-QR-QA-016 Version: A1



ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components

Application Date:Dec,01,2023

Rev: R:A1

ZTX P/N :0B. P. SCSD16_BT Antenna components

Editor:

Page 12 of 14

8.Reliability Report

测试报告(Test Report)							
样品名称 (Product name)		天线组件 BS antenna module		样品型号 (Part Model)		0B P SCSD16	
样品数量 (Specimens quantity)		16PCS		客户料号 (Customer number)		/	
测试原因 (Test reasons)		■新型号/材料验证 □新工艺验证 □ORT测试 □过期物料 □客户投诉/要求 □高不良率 □其他: ■New model/material verification □New process verification □ORT test □Expired Materials □Customer complaints/requirements □High defect rate □Others:		测试依据 (Test documentation)		□产品图纸 □天线可靠性检验基准书 □客户要求 □出货检验基准书 □其他: □Product Drawings □Antenna Reliability Test reference □Customer requirements □Shipping inspection reference book □Others:	
序号 (NO)	测试项目 (Test project)	样品数 (Samples Qty.)	测试仪器 (Test equipment)	测试条件与要求 (Test condition and note)	测试结果 (Test result)	结论 (Conclude) (Pass/Fail)	样品图片/实测值 Sample picture/Measured value
1	盐雾测试 Salt Spray Test	3 PCS	盐雾测试机 Salt spray tester	条件: 1.将产品以30度±5度放置于试验箱 2.调试好试验箱参数: NaCl (无水); 浓度5%±1%; pH值: 6.5~7.2; 试验箱温度: 32~38°C; 压缩空气压力:1.0±0.01(KG/M2)喷雾量: 1.0~2.0ML/80CM2/H.相对湿度:85%±2%;试验品放置角度:30度+/-10度 3.放置时间为48小时. 4.清洗后在室温条件下放置2H观察 要求: 镀(涂)层无脱落、起泡、腐蚀、氧化等不良现象; 产品表面不可有锈斑等不良现象 Conditions: 1. Place the product in the test chamber at 30° ±5° 2. Adjust the parameters of the test chamber: NaCl (no water); Concentration 5%±1%; pH value: 6.5 ~ 7.2; Laboratory temperature: 32~38°C; Compressed air pressure :1.0±0.01(KG/M2) spray volume :1.0 ~ 2.0ML/80CM2/H. Relative humidity :85%±2%; Test product placement Angle :30 degrees +/-10 degrees 3. The storage time is 48 hours. 4. After cleaning, place in room temperature for 2 hours for observation Requirements: plating (coating) layer without shedding, foaming, corrosion, oxidation and other undesirable phenomena; Product surface shall not have rust spots and other undesirable phenomena	No coating shedding and oxidation occurred.	Pass	
2	高温测试 High temperature test	3 PCS	高低温交变湿热试验箱 High and low temperature alternating humidity and heat test chamber	1.将样品放入高温 85 °C 的环境中保持48小时后取出 2.在室温条件下放置2H. 1. Put the sample into a high temperature environment of 85 °C for 48 hours and take it out 2. Store at room temperature for 2 hours.	试验后产品无变形, 无变色, 无脱落, 无起翘, 电气功能完好. After the test, the product has no deformation, no discoloration, no shedding, no warping, electrical function is intact	Pass	
3	低温测试 Low temperature test	3 PCS	低温冰箱 Cryogenic refrigerator	1.将样品放入低温 -40 °C 的环境中保持48小时后取出 2.在室温条件下放置2H. 1. Put the sample into a low temperature -40 °C environment for 48 hours before taking it out 2. Store at room temperature for 2 hours.	试验后产品无变形, 无变色, 无脱落, 无起翘, 电气功能完好. After the test, the product has no deformation, no discoloration, no shedding, no warping, electrical function is intact.	Pass	
4	高低温湿热存储测试 High temperature and high humidity storage test	3 PCS	高低温交变湿热试验箱 High and low temperature alternating humidity and heat test chamber	1.取样3pcs 2.将测试样品置于测试箱中(温度70±2°C, 湿度90%~95%RH), 放置48H后取出检查. 1. Sample 3pcs 2. Put the test sample in the test box (temperature 70±2°C, humidity 90% ~ 95% RH), and take it out for inspection after 48H.	试验后产品无变形, 无变色, 无脱落, 无起翘, 电气功能完好. After the test, the product has no deformation, no discoloration, no shedding, no warping, electrical function is intact.	Pass	
5	百格试验 Baique test	1 PCS	百格刀 Cross-Cut Tester	用百格刀在测试样本表面≥10m ² 的地方划10×10个(100个)1mm×1mm小网格, 每一条划线应深及油墨层的底层; 用毛刷将测试区域对角线方向各刷五次, 清理干净碎屑; 用3M600胶水牢牢粘住被测试小网格, 并用橡皮用力擦拭胶带, 以加大胶带与被测区域的接触面积及力度; 用手抓住胶带一端, 以90°快速扯下胶带. 涂层脱落面积≤5%为合格, 如>5%为不合格. Use a knife to draw 10×10 (100)1mm×1mm small grids on the surface of the test sample ≥10m square meters, each line should be deep and the bottom of the ink layer; Brush the test area five times in the diagonal direction with a brush to clean up debris; Stick the small grid under test firmly with 3M600 glue, and wipe the tape with a rubber to increase the contact area and strength between the tape and the tested area; Grab one end of the tape with your hand and pull it off quickly at 90 degrees. If the coating shedding area is less than 5%, it is qualified. If the coating shedding area is more than 5%, it is unqualified.	试验后涂层无脱落. The coating did not fall off after the test.	Pass	
6	端子与线材铆压后拉力 Tension between terminal and wire	3 PCS	拉力计 Tension meter	1.取样3PCS 2.拉断线材记录其最大值, 需>15N. 1. Sample 3PCS 2. Record the maximum value of a broken cable, which must be greater than 15N	端子脱落后拉力数据大于15N. After the terminal falls off, the tension data is greater than 15N.	Pass	22.8N 23.9N 25.5N

备注(Comments):

核准(Approved by): 邓翠华/Deng Cuishua 审核(Checked by): 易爱玲/Yi Ailing 测试(Name of operator): 李丽华/Li Lihua

Form number: ZTX-QR-QA-076 Version: A1



ANTENNA SPECIFICATION

CUS P/N :0B.P. SCSD16_BT Antenna components
ZTX P/N :0B.P. SCSD16_BT Antenna components

Application Date:Dec,01,2023
Editor:

Rev: R:A1
Page 13 of 14

9.Raw Material Detection List

Raw Material Detection List 原材料检测清单																					
序号 NO.	组成部件或零件 Parts or Components	材料名称或型号 Style/Item NO.	Pb 铅	Cd 镉	Hg 汞	Cr6+ 六价铬	PBBs 多溴联苯	PBDEs 多溴联苯醚	邻苯二甲 酸二(2-乙 基)酯 DEHP	邻苯二甲 酸丁酯 DBP	邻苯二甲 酸丁基酯 BBP	邻苯二甲 酸二异丁 酯DIBP	Br	C1	测试报告编号 Test Report NO.	TestLab 测试机构 名称	测试报告 日期 Test report date	测试报告 有效期 Test report validity period	测试报告 Test report		
1	FPC	基材 base material	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	SHAEC23001049106	SGS	2023/2/15	2024/2/14		
		阻焊油墨 solder resist ink	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	476	ETR23701480 ETR23701481	SGS	2023/7/13	2024/7/11		
		文字油墨 Text ink	4.86	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	560	ETR23A00862M01	SGS	2023/10/13	2024/10/11		
		表面处理 OSP	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	180	SZHEC23000119402	SGS	2023/2/27	2024/2/26		
		背胶 double faced adhesive tape	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	178	SHAEC23009060001 SHAEC23008662801	SGS	2023-7-4 2023-8-28	2024-7-3 2024-8-27		
2	Coaxial line	同轴线-镀锡铜线 Coaxial line - tinned copper wire	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	A2230496550101001C	SGS	2023/9/26	2024/9/24		
		同轴线-护套/绝缘 Coaxial line - sheathed/insulated	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	MCBMR23000169902	SGS	2023/2/6	2024/2/5	
		同轴线-色母(黑色) Coaxial line - masterbatch (Black)	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	A2230222421101001C	CTI	2023/5/23	2024/5/21	
3	RF terminal	端子金属 Terminal metal	21.6	ND	ND	ND	ND	NA	NA	NA	NA	NA	NA	NA	NA	ETR23803657M01	SGS	2023/2/8	2024/2/7		
		端子塑料 Terminal plastic	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	EKR23400747	SGS	2023/4/20	2024/4/18	
		镀镍 nickel plating	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	SGACP230000389	SGS	2023/9/20	2024/9/18	
		镀金 gold plating	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	SGACP230000388	SGS	2023/9/20	2024/9/18	



ANTENNA SPECIFICATION

CUS P/N :0B. P. SCSD16_BT Antenna components

Application Date:Dec,01,2023

Rev: R:A1

ZTX P/N : 0B. P. SCSD16_BT Antenna components

Editor:

Page 14 of 14

禁用物质保证 (Certification of Restricted substance)

我方保证所提供的物料，完全遵守签核的广州视源电子科技有限公司/或其子公司的质量和环保协议中的各项条款，物料中禁用物含量，符合最新版《有害物质管理规范》中的各项标准。

we hereby certify that all the Material fully conform to the requirements of the ShiYuan/or its affiliated companies Declaration of conformity that had been signed, and the maximum concentration value of restricted substance in Materials comply with the latest 《Regulations on the management of hazardous substances》.

