

Test plot as follows:




802.11n(VHT40)



802.11ac(VHT20)



CH38

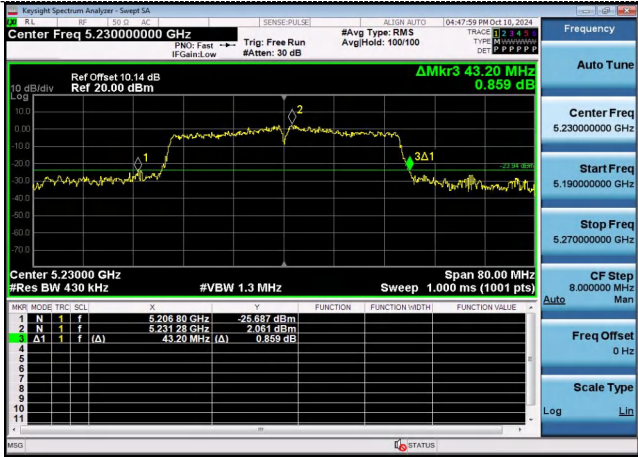

CH36



CH46



CH40



CH48

802.11ac(VHT40)



802.11ac(VHT80)



CH38



CH42



CH46

4.6 Minimum Emission Bandwidth (6dB Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration



Test Results


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.000	≥500KHz	Pass
		157	16.280		
		165	13.440		
802.11n(HT20)	U-NII 3	149	16.120		
		157	16.200		
		165	13.800		
802.11n(HT40)	U-NII 3	151	35.200		
		159	36.000		
802.11ac(VHT20)	U-NII 3	149	16.960		
		157	17.560		
		165	16.560		
802.11ac(VHT40)	U-NII 3	151	35.840		
		159	35.440		
802.11ac(VHT80)	U-NII 3	155	75.200		

Test plot as follows:

802.11a




802.11n(VHT20)

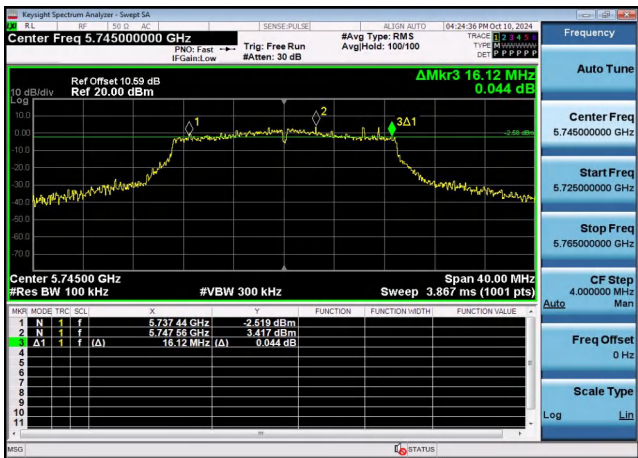

CH149



CH149

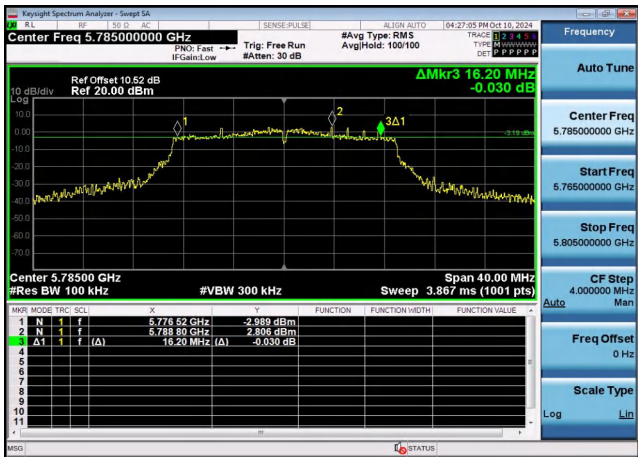

CH157



CH157




CH165




CH165


802.11n(VHT40)

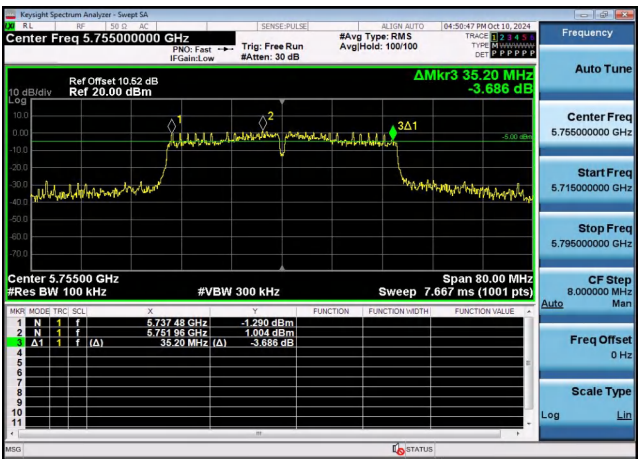


802.11ac(VHT20)

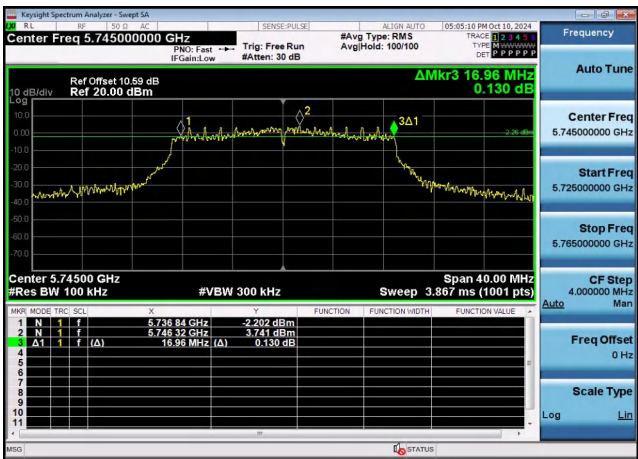

CH151

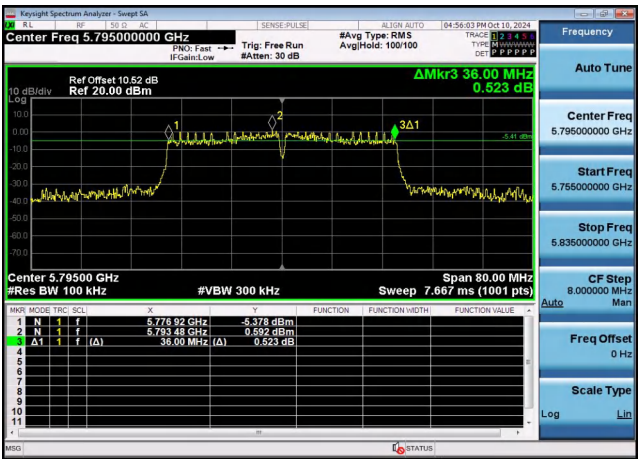

CH149

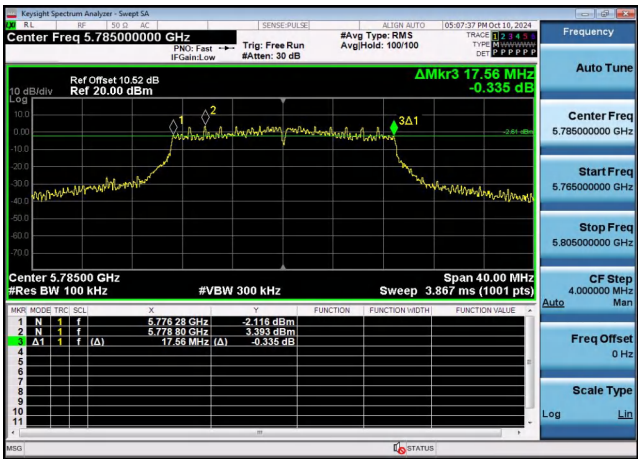

CH159





CH157



CH165


802.11ac(VHT40)

802.11ac(VHT80)

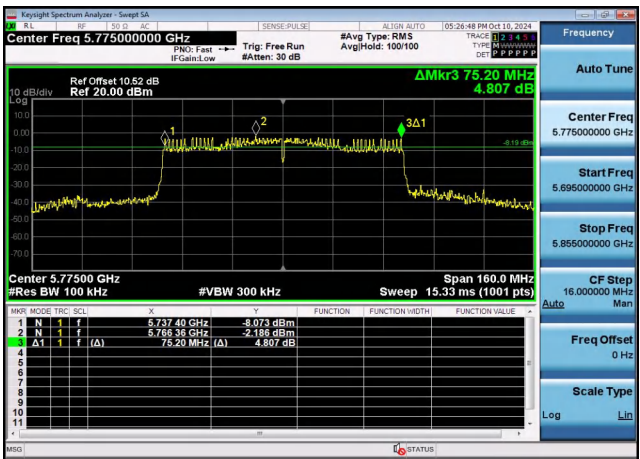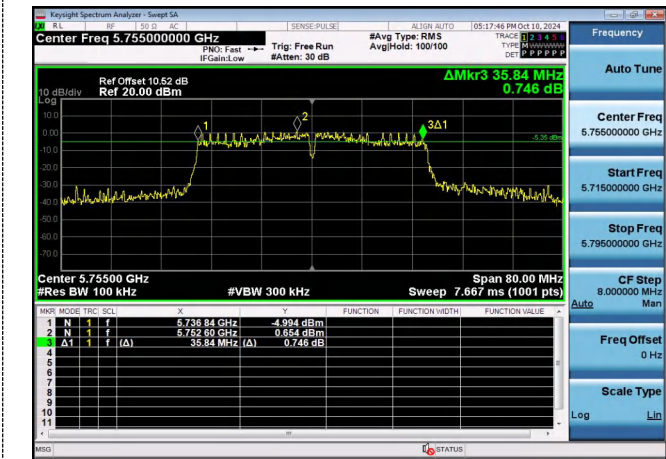

CH151

CH155

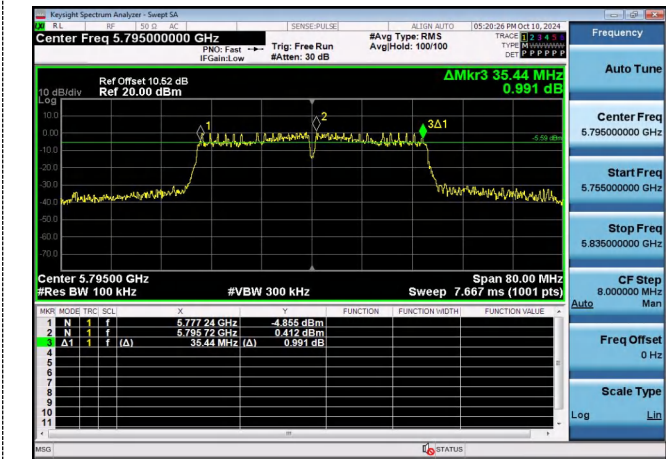


CH159

4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

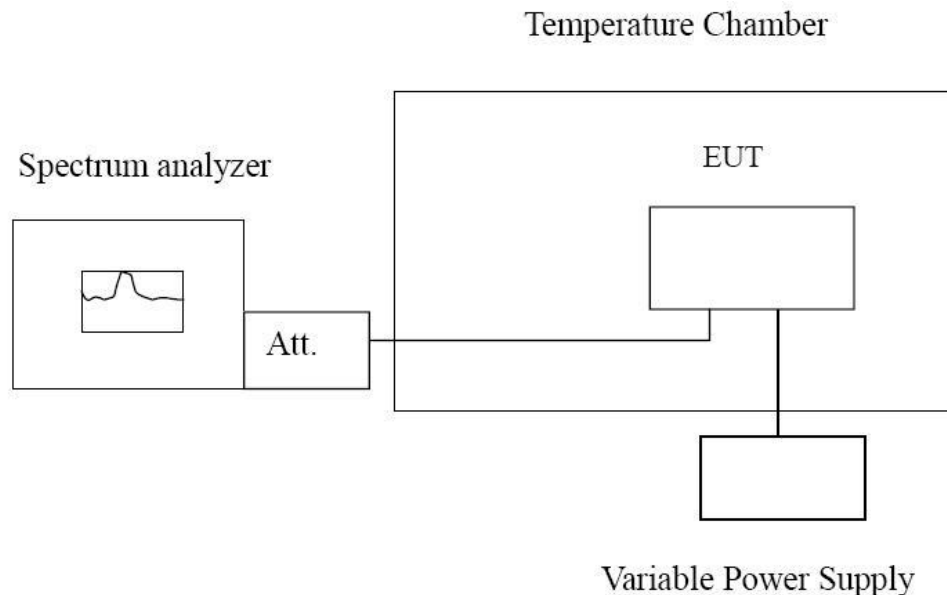

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
120	-30	130.58	0.02521	Within the band of operation	Pass
	-20	158.51	0.03060		
	-10	128.94	0.02489		
	0	162.25	0.03132		
	10	140.07	0.02704		
	20	157.82	0.03047		
	30	123.13	0.02377		
	40	151.52	0.02925		
	50	148.68	0.02870		
132	20	142.81	0.02757	Within the band of operation	Pass
108	20	139.64	0.02696		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
120	-30	138.56	0.02412	Within the band of operation	Pass
	-20	134.05	0.02333		
	-10	142.76	0.02485		
	0	146.55	0.02551		
	10	151.62	0.02639		
	20	126.89	0.02209		
	30	128.91	0.02244		
	40	132.45	0.02305		
	50	124.46	0.02166		
132	20	144.72	0.02519	Within the band of operation	Pass
108	20	150.83	0.02625		

4.8 Automatically Discontinue Transmission

Standard Applicable

FCC CFR Title 47 Part 15 Subpart C Section 15.407(c):

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

Test Result:

Declared by applicants that the device will automatically discontinue transmission in case of either absence of information to transmit or operational failure.

4.9 Band edge for RF Conducted Emissions

Limit

1) For transmitters operating in the 5.15 – 5.25 GHz band: All emissions outside of the 5.15 – 5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

2) For transmitters operating solely in the 5.725 – 5.850 GHz band.

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure


Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold.

Test Configuration




Test Results


Test plot as follows:

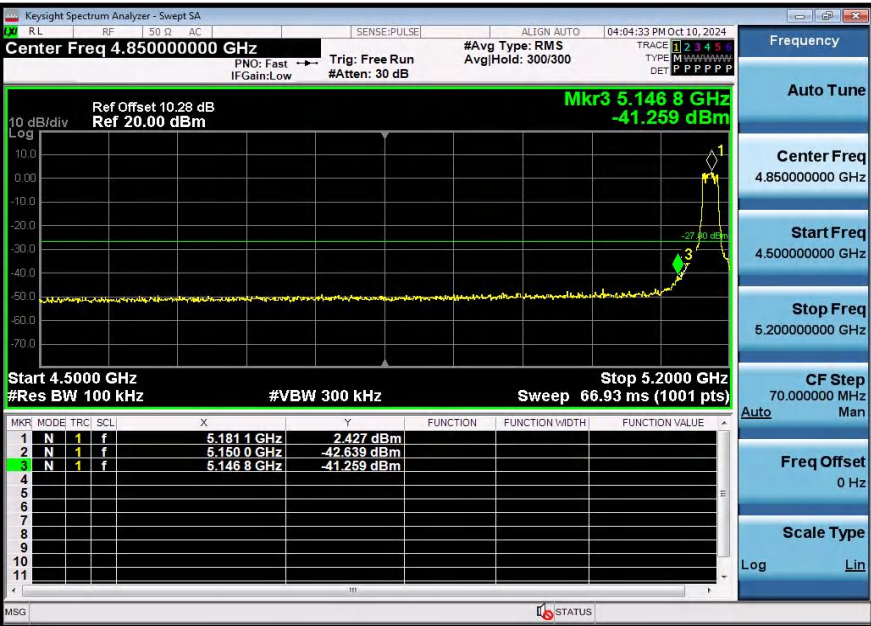


11A-Ant1-5180-PASS

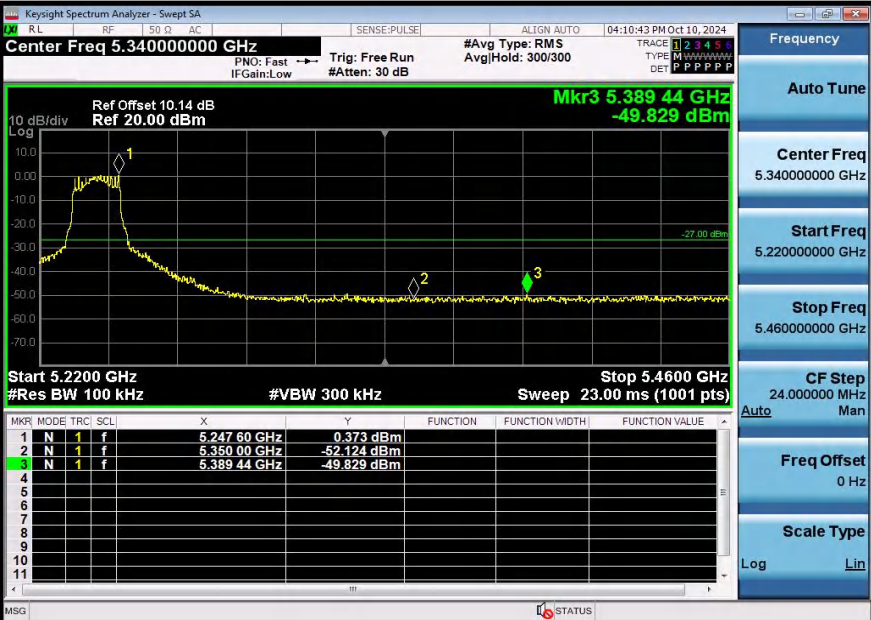


11A-Ant1-5240-PASS

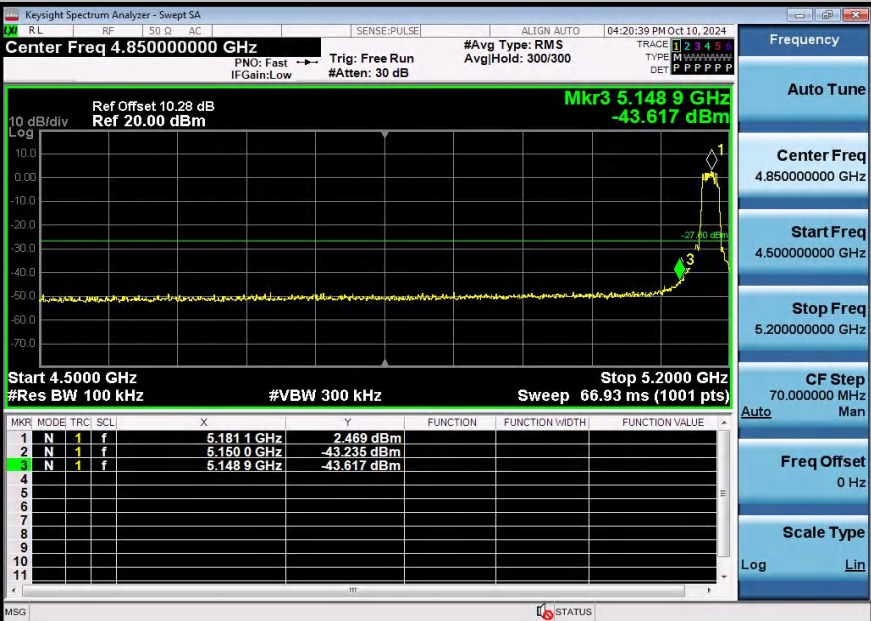

11N20SISO-Ant1-5180-PASS

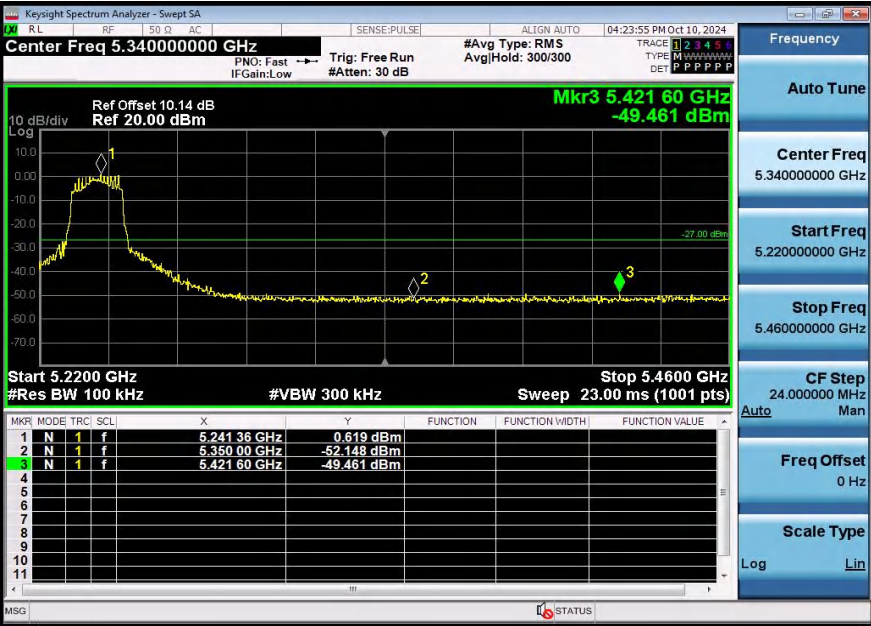


11N20SISO-Ant1-5240-PASS

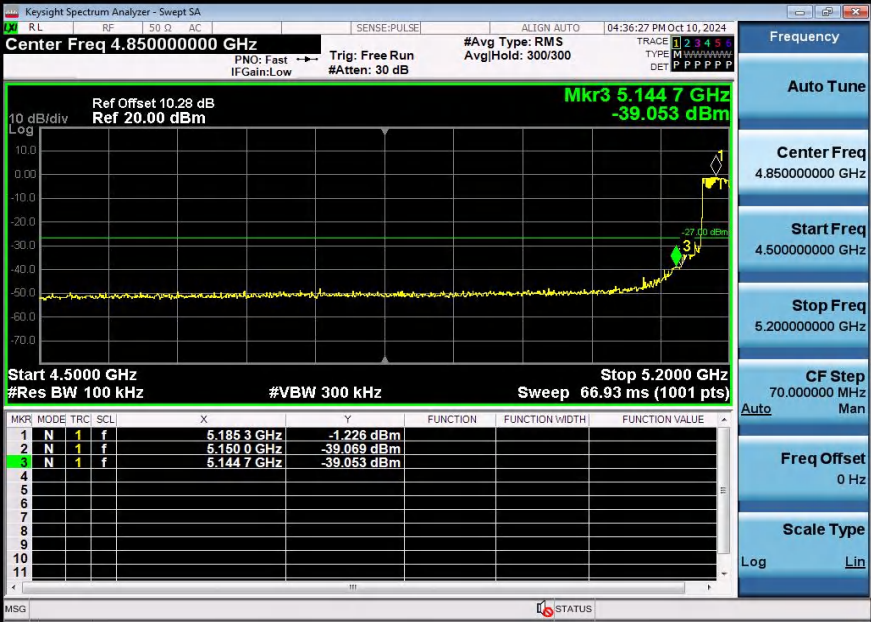


11N40SISO-Ant1-5190-PASS




11N40SISO-Ant1-5230-PASS

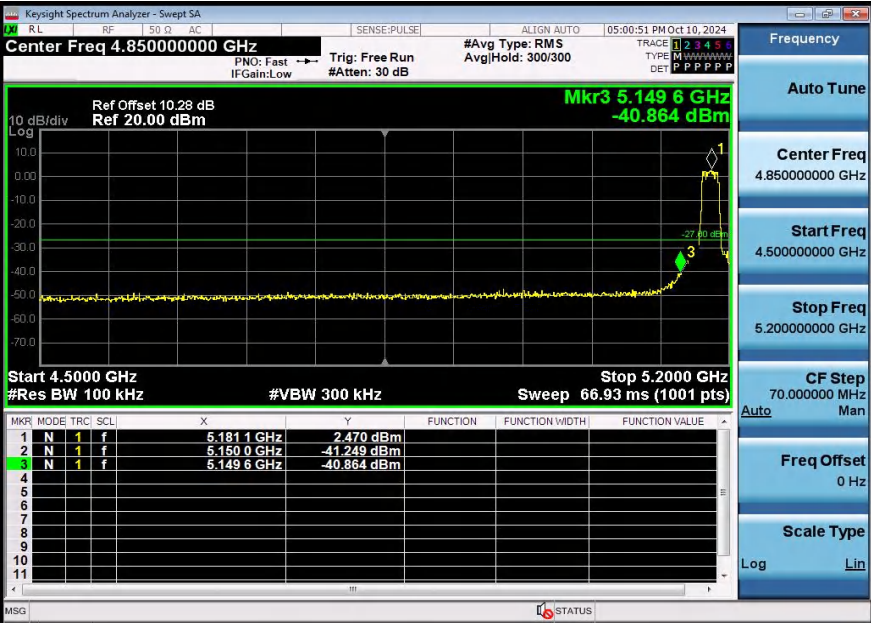


11AC20SISO-Ant1-5180-PASS

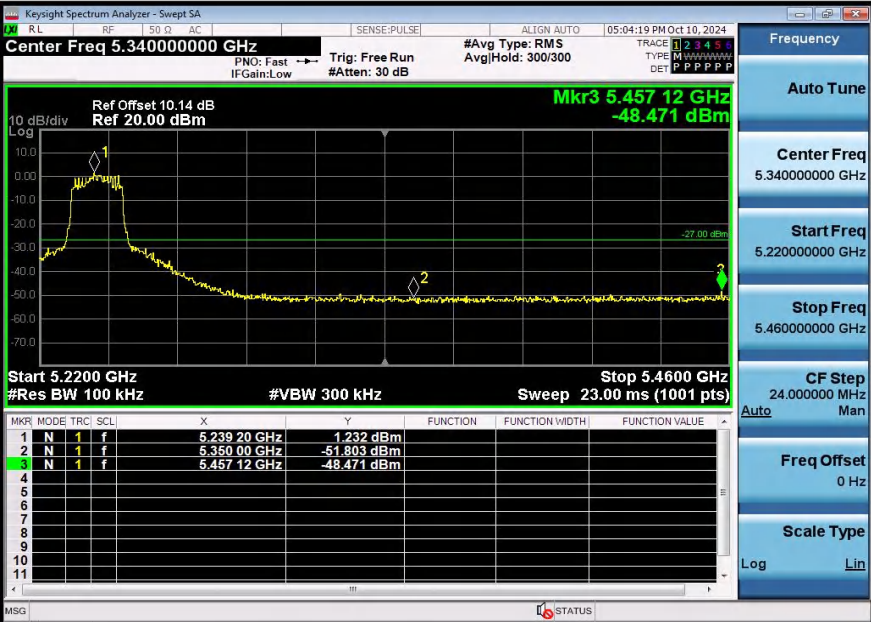

11AC20SISO-Ant1-5240-PASS

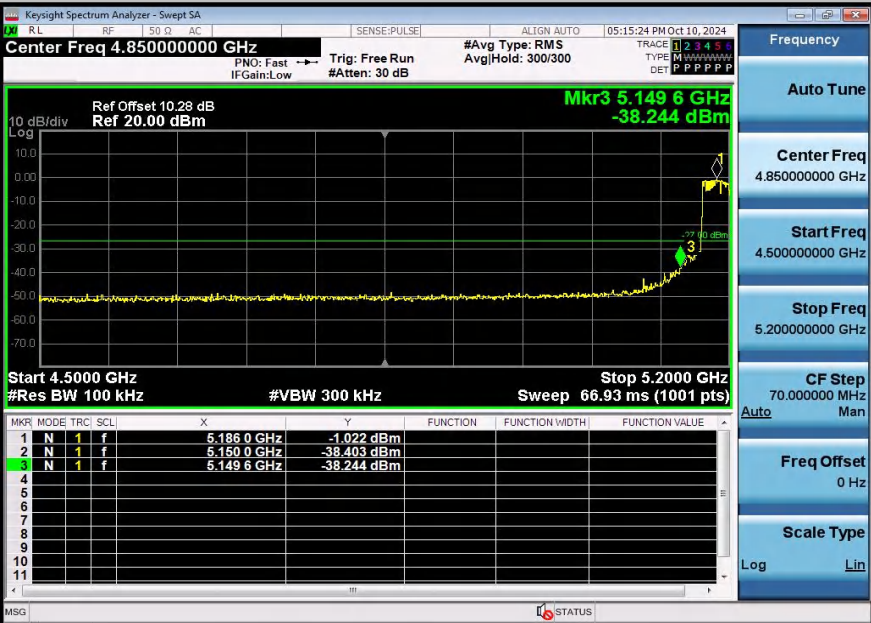


11AC40SISO-Ant1-5190-PASS

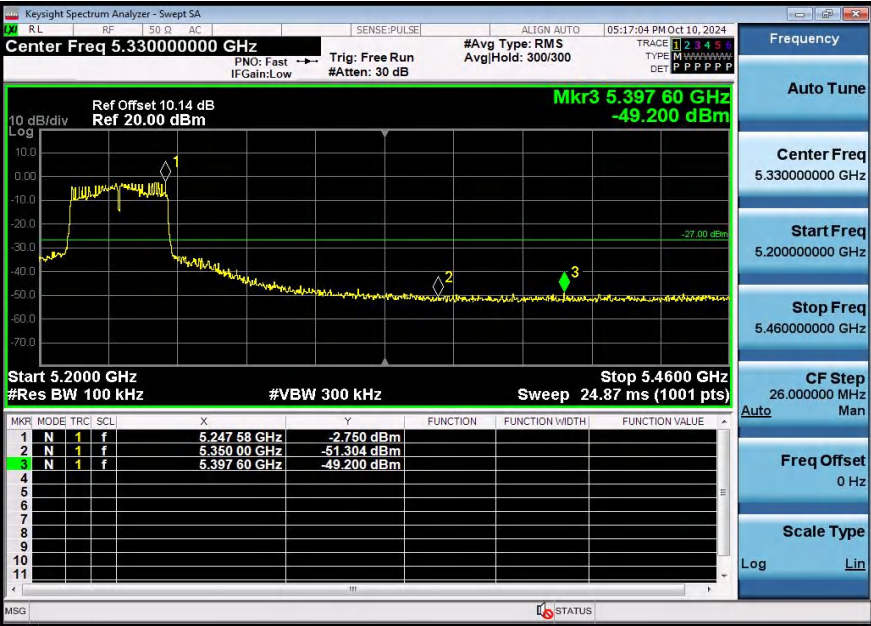

11AC40SISO-Ant1-5230-PASS



11AC80SISO-Ant1-5210-PASS

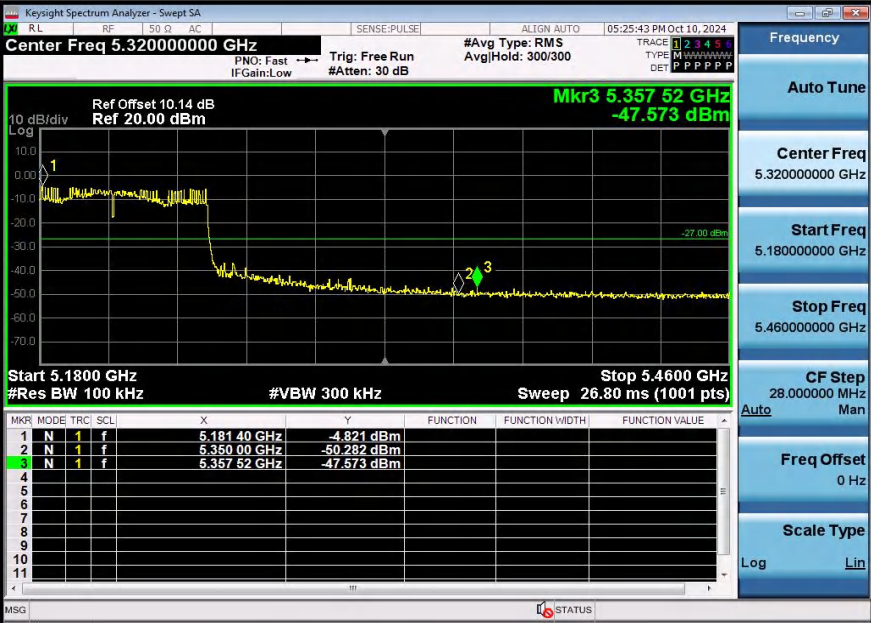

11AC80SISO-Ant1-5210-PASS



11A-Ant1-5745-PASS




11A-Ant1-5825-PASS



11N20SISO-Ant1-5745-PASS



11N20SISO-Ant1-5825-PASS

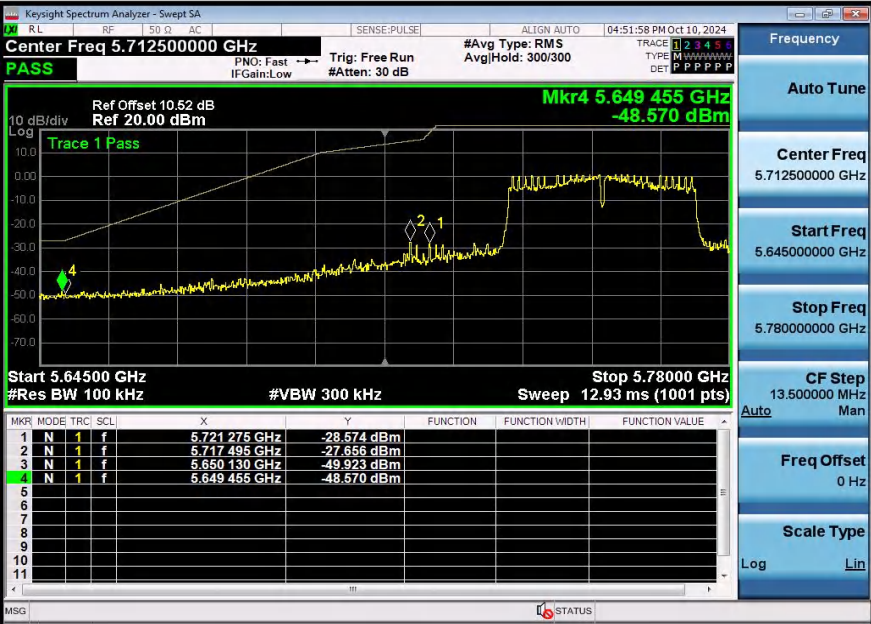

11N40SISO-Ant1-5755-PASS



11N40SISO-Ant1-5795-PASS



11AC20SISO-Ant1-5745-PASS



11AC20SISO-Ant1-5825-PASS



11AC40SISO-Ant1-5755-PASS



11AC40SISO-Ant1-5795-PASS



11AC80SISO-Ant1-5775-PASS



11AC80SISO-Ant1-5775-PASS

5 Test Setup Photos of the EUT



6 Photos of the EUT

Reference to the test report No. GRCTR240902013-01.

***** End of Report *****