


SMART PROJECTOR


MODEL VS315

User Manual

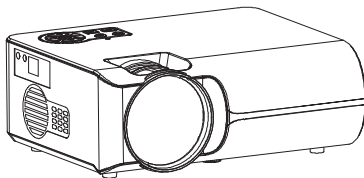

This User Manual is important to you.
Please read it before using your projector

PACKING LIST



VS315



Remote



User Manual




AV Cable



HDMI Cable



Power Cable

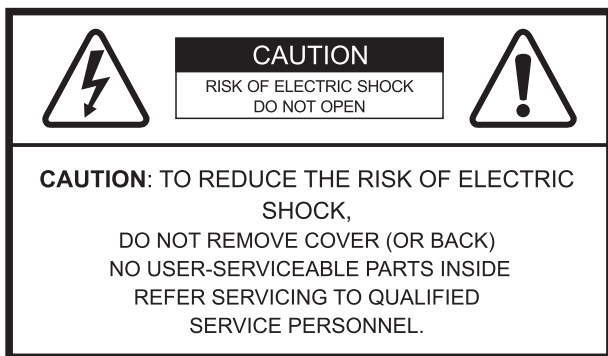

WARNING:




DO NOT LOOK DIRECTLY THE LENS WHEN THE PROJECTOR IS IN THE POWER ON MODE.

NOTICE

Recommended



Video,
Movie







NOT Recommended



PowerPoint,
Excel, Word



FUNCTION OVERVIEW

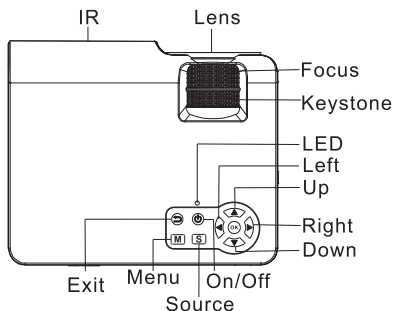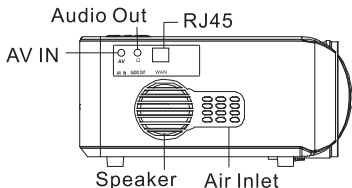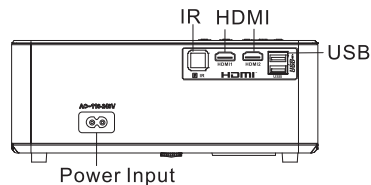

REMOTE CONTROL

POWER

Toggles the projector between standby mode

IMAGE FLIP

When not in the android system, press this key to rotate the image.

(this feature is invalid in Android interface)



Selects the desired menu items and makes adjustments.

OK

Press this key to confirm the current setting or to enter the submenu.

HOMEPAGE

Press this key to get to the homepage directly

VOL

Adjusts the sound level

MUTE

Mute volume or recover.

SOURCE

Displays the source selection bar.

MENU


Turn on the OSD menu, goes back to previous

SETTINGS

Press this key to go to Android setting interface


EXIT

Exits and saves menu settings.

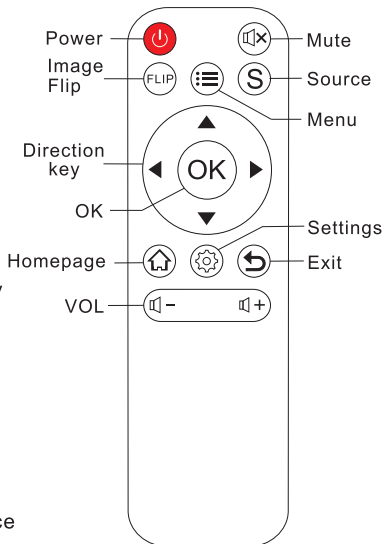


Note: Please change the batteries if the remote doesn't work after being used for a while .


QUICK START




Plug the power cord into an outlet.




Take off the lens cover.




Press power button to turn on the projector.




Select the correct input source to project your device.

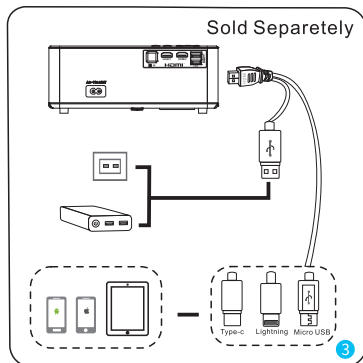


Connect your device to the projector correctly.



Adjust the kickstand accordingly.





Adjust the keystone and focus ring to get the best image performance.



Press the power button twice to turn off the projector.


PROJECTOR CONNECTION

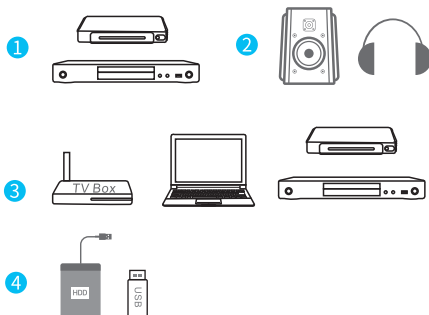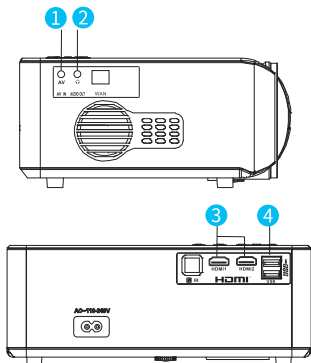


INPUT SOURCE

Press **(S)** on the projector or **(S)** on the remote to enter the interface of Input Source. Select signal input by using Direction key. Press OK to confirm. Insert USB disk or corresponding signal input cable .

A.Multimedia Connection

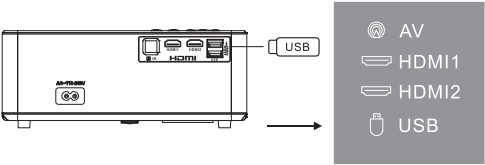

B.HD Connection

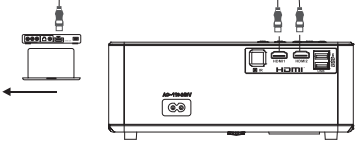

SPECIFICATION


Display Technology	LCD	Light Source	LED
Installtion Type	Front table/ Front ceiling/ Rear table/ Rear ceiling	Vertical Correction	
		Horizontal Correction	-50~50
Focus	Manual	Keystone	± 15°
Speaker	5W/4ohm	Power Supply	AC110-240V,50/60Hz
Unit Dimension	240×200×95mm (9. 5×7. 9×3. 7in)	Unit Net Weight	1.35kg(2.98lb)
Photo Format Supported	BMP/JPG/PNG/JPEG	Audio Format Supported	MP3/WMA/AAC/AC3
Video Format Supported	AVI/MP4/MKV/MOV/ MPG/VOB/RM/RMVB/ H.264/MPEG1/ MPEG2/XVID/DIVX	Ports	HDMI in×2 USB2. 0 Port×2 AV in×1/ RJ45×1 Audio Out×1

SETTINGS


Press  key on remote or move cursor to settings and press OK to enter.



Projection settings : Change the projection mode according projector installation way. Zoom in/out the images in the range of 50% to 100%.

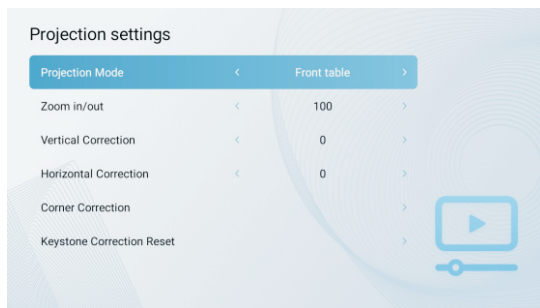


Correct the images in horizontal/vertical direction or from four corners.

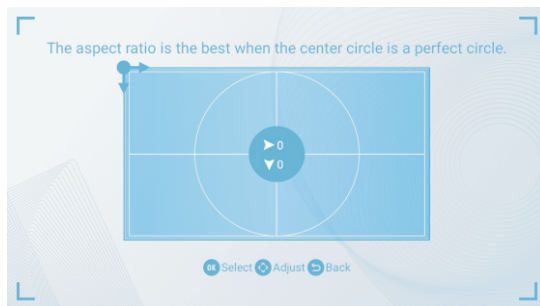

Network settings: Projector searches connectable network automatically when Wifi is turned on. Select desired Wifi. Input correct password to connect. The same Wifi will be connected spontaneously when power on the projector next time if keep Wifi switch on as projector shutdown.



Bluetooth settings: Projector searches connectable Bluetooth automatically when BT switch turned on. Select desired device to connect by pressing OK button. pressing OK. The same BT device will be connected spontaneously when power on the projector next time if keep BT switch on as projector shutdown.

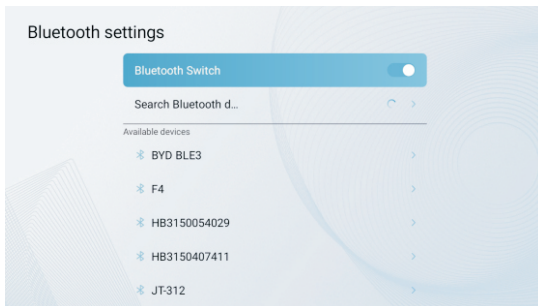


Language and input method: Select desired OS language.

Date and time: Change display Date, Time Zone and Time. It also can be obtained from network automatically.

Other settings: Change the default input signal channel and initial App when the projector turned on. Change key tone, Screen Saver start time and shutdown time.

PROJECTION DISTANCE&SIZE

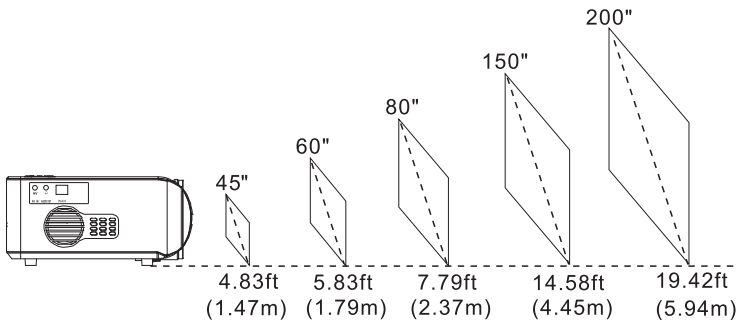

The recommended projection screen is around 80 inches with a projection distance of around 7.79ft.

Ambient darkness will improve the clarity of the projected images.

TROUBLESHOOTING GUIDE

1.Blurry Image

Adjust focus ring/keystone.

Project and screen/wall must be in effective distance.

2.Remote Unresponsive

Make sure remote points at IR receiver directly.

Do not cover IR receiver.

Try a new pair of AAA batteries.

3.Mobile Connection

iOS:Genuine lightning to HDMI cable.

Android:Micro USBto HDMI adapter/Type C to HDMI cable.

4.Up Side Down Images

Enter "Image flip" on remote to flip the projector image.

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

*RF warning

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.