



0 Hz

Span 2.370 GHz

Sweep 228.0 ms (30000 pts)





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph LE2M ANT1 2440 2Mbps Lower Band Emissions


#VBW 300 kHz

Center 1.215 GHz #Res BW 100 kHz

Freq Offset 0 Hz

Span 5.000 MHz Sweep 2.000 ms (30000 pts)



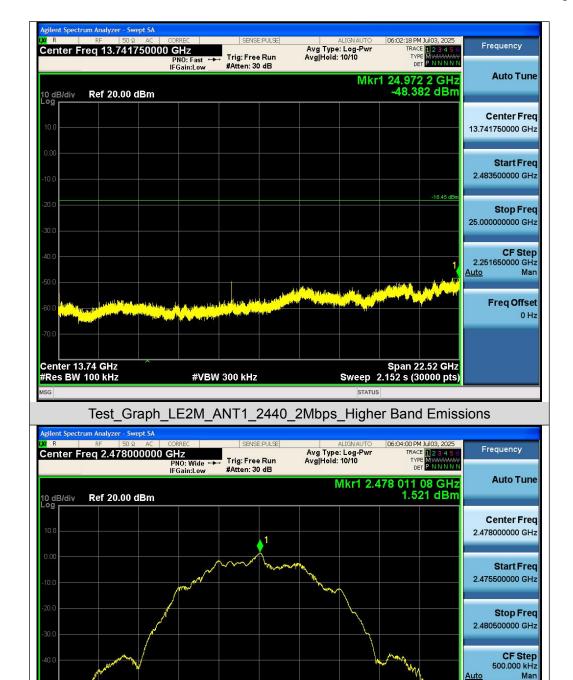


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph LE2M ANT1 2478 2Mbps Reference Level

#VBW 300 kHz

Center 2.478000 GHz #Res BW 100 kHz




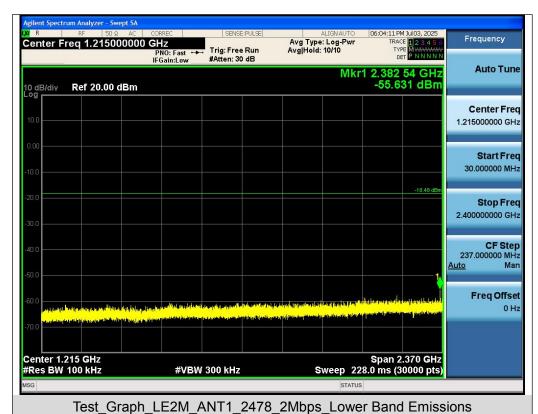



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. $Further\ enquiry\ of\ validity\ or\ verification\ of\ the\ test\ report\ should\ be\ addressed\ to\ AGC\ by\ agc 01@agccert.com.$

Web: http://www.agccert.com/






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands Agilent Spectrum


W R RF S0 Ω AC COMMA


Center Freq 2.398500000 GHz

PNO: Fast FGain: Low Frequency Avg Type: Log-Pwr Avg|Hold: 10/10 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr2 2.400 000 0 GHz -55.157 dBm Ref 20.00 dBm Center Freq 2.398500000 GHz -18.31 dE Start Fred 2.390000000 GHz Stop Freq 2.407000000 GHz Center 2.398500 GHz #Res BW 100 kHz Span 17.00 MHz Sweep 2.000 ms (30000 pts) CF Step **#VBW** 300 kHz Auto Man Freq Offset Test Graph LE1M ANT1 2402 1Mbps Lower Band Edge Emissions

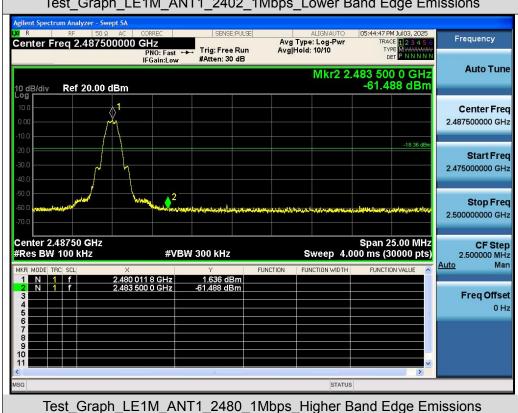



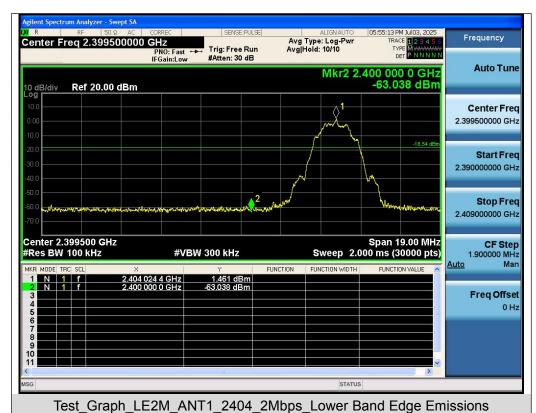

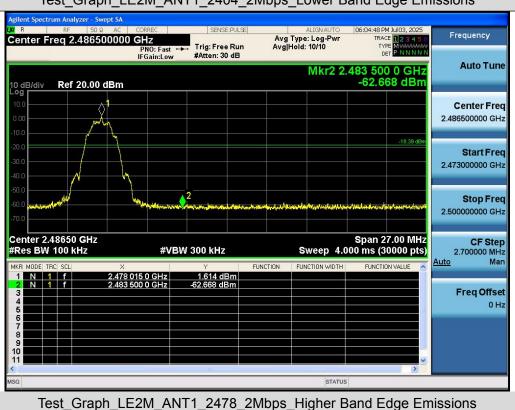



Page 46 of 61

11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



Page 47 of 61

8. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 9. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the guasi-peak method for below 1GHz.
- 10. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 11. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Otan Otop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



Page 48 of 61

Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


Average Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

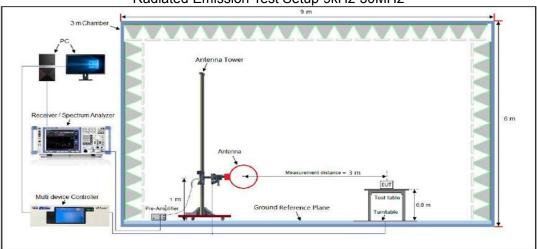

Radiated Emission Test Setup 30MHz-1000MHz

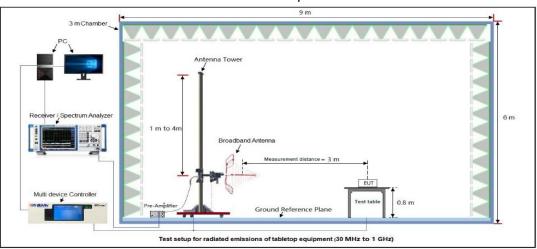

Radiated Emission Test Setup Above 1000MHz

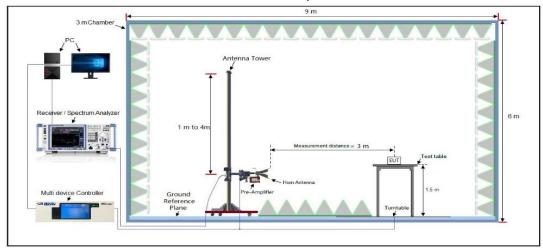




Page 50 of 61

11.4 Measurement Result


Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	Master Buds Max				
Temperature	25℃	Relative Humidity	55.4%		
Pressure	960hPa	Test Voltage	DC 3.7V by battery		
Test Mode	Mode 5	Antenna Polarity	Horizontal		

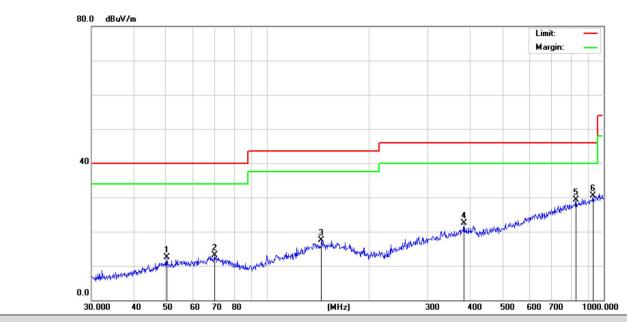


Final I	Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	50.2324	12.51	-26.77	40.00	27.49	100	190	Horizontal
2	69.8449	13.14	-25.27	40.00	26.86	100	150	Horizontal
3	144.8418	17.44	-20.83	43.50	26.06	100	80	Horizontal
4	383.9318	22.59	-17.70	46.00	23.41	100	260	Horizontal
5	827.4933	29.37	-9.60	46.00	16.63	100	140	Horizontal
6	929.0081	30.58	-8.39	46.00	15.42	100	150	Horizontal





Radiated Emission Test Results at 30MHz-1GHz					
EUT Name Wireless Headphone Model Name Master Buds Max					
Temperature	25℃	Relative Humidity	55.4%		
Pressure	960hPa	Test Voltage	DC 3.7V by battery		
Test Mode	Mode 5	Antenna Polarity	Vertical		

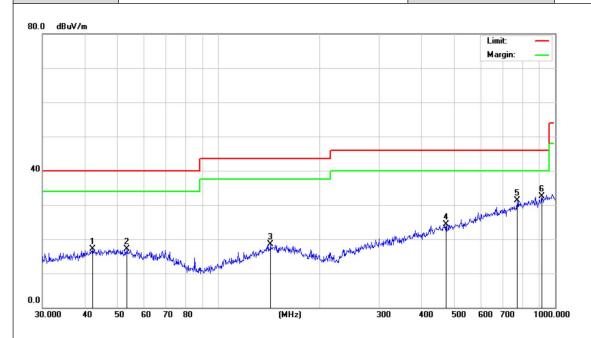

Fina	l Data	l iet

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.3022	17.14	-21.71	40.00	22.86	100	190	Vertical
2	53.5052	17.15	-21.17	40.00	22.85	100	220	Vertical
3	142.8243	18.58	-19.95	43.50	24.92	100	210	Vertical
4	473.8347	24.23	-14.85	46.00	21.77	100	230	Vertical
5	771.4486	31.31	-8.04	46.00	14.69	100	150	Vertical
6	912.8620	32.50	-6.69	46.00	13.5	100	170	Vertical

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss - Pre-amplifier, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The BLE 2Mpbs mode 5 is the worst case and recorded in the report.



Page 52 of 61

Radiated Emissions Test Results for Above 1GHz

EUT Name	Wireless Headphone	Model Name	Master Buds Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 4	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	$(dB\mu V/m)$	(dB)	Туре
4804.000	49.83	0.08	49.91	74.00	-24.09	peak
4804.000	41.00	0.08	41.08	54.00	-12.92	AVG
7206.000	50.27	2.21	52.48	74.00	-21.52	peak
7206.000	41.75	2.21	43.96	54.00	-10.04	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Wireless Headphone	Model Name Master Buds	
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 4	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	$(dB\mu V/m)$	(dB)	Туре
4804.000	49.08	0.08	49.16	74.00	-24.84	peak
4804.000	41.01	0.08	41.09	54.00	-12.91	AVG
7206.000	49.40	2.21	51.61	74.00	-22.39	peak
7206.000	41.23	2.21	43.44	54.00	-10.56	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: PASS



Page 53 of 61

Radiated Emissions Test Results for Above 1GHz

EUT Name	Wireless Headphone	Model Name	Master Buds Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 5	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4880.000	50.50	0.14	50.64	74.00	-23.36	peak
4880.000	40.09	0.14	40.23	54.00	-13.77	AVG
7320.000	49.71	2.36	52.07	74.00	-21.93	peak
7320.000	40.67	2.36	43.03	54.00	-10.97	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Wireless Headphone	Model Name	Master Buds Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 5	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4880.000	49.36	0.14	49.50	74.00	-24.50	peak
4880.000	41.32	0.14	41.46	54.00	-12.54	AVG
7320.000	50.32	2.36	52.68	74.00	-21.32	peak
7320.000	40.99	2.36	43.35	54.00	-10.65	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 54 of 61

Radiated Emissions Test Results for Above 1GHz

EUT Name	Wireless Headphone	Model Name	Master Buds Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 6	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	$(dB\mu V/m)$	(dB)	Туре
4960.000	50.09	0.22	50.31	74.00	-23.69	peak
4960.000	42.39	0.22	42.61	54.00	-11.39	AVG
7440.000	50.40	2.64	53.04	74.00	-20.96	peak
7440.000	40.68	2.64	43.32	54.00	-10.68	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Wireless Headphone	Model Name	Master Buds Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 6	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	$(dB\mu V/m)$	(dB)	Туре
4960.000	49.62	0.22	49.84	74.00	-24.16	peak
4960.000	42.03	0.22	42.25	54.00	-11.75	AVG
7440.000	49.42	2.64	52.06	74.00	-21.94	peak
7440.000	39.76	2.64	42.40	54.00	-11.60	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All test modes had been pre-tested. The BLE 2Mpbs is the worst case and recorded in the report.




Report No.: AGC07240250601FR02 Page 55 of 61

Band Edge Emission Test Results for Restricted Bands

EUT Name	Wireless Headphone	Model Name	Master Buds Max
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery

	Bluetooth Tx CH00_2402 MHz_1Mbps									
Item (Mark)	Freq. MHz	Reading dBµV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBµV/m	Limit dBµV/m	Margin dB	Detector	Pol.
1	2390.00	36.19	29.99	30.21	8.35	44.322	74	29.68	Peak	Horizontal
2	2390.00	26.52	29.99	30.21	8.35	34.648	54	19.35	AV	Horizontal
3	2390.00	34.73	29.99	30.21	8.35	42.858	74	31.14	Peak	Vertical
4	2390.00	23.97	29.99	30.21	8.35	32.095	54	21.91	AV	Vertical
			Blu	etooth T	x CH39_	_2480 MHz	_1Mbps			
Item (Mark)	Freq. MHz	Reading dB _µ V	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBµV/m	Limit dBµV/m	Margin dB	Detector	Pol.
1	2483.50	37.87	29.99	30.21	8.35	46.001	74	28.00	Peak	Horizontal
2	2483.50	27.05	29.99	30.21	8.35	35.183	54	18.82	AV	Horizontal
3	2483.50	35.38	29.99	30.21	8.35	43.511	74	30.49	Peak	Vertical
4	2483.50	25.46	29.99	30.21	8.35	33.591	54	20.41	AV	Vertical

	Bluetooth Tx CH00_2404 MHz_2Mbps									
Item (Mark)	Freq. MHz	Reading dBµV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBµV/m	Limit dBµV/m	Margin dB	Detector	Pol.
1	2390.00	36.57	29.99	30.21	8.35	44.703	74	29.30	Peak	Horizontal
2	2390.00	26.43	29.99	30.21	8.35	34.564	54	19.44	AV	Horizontal
3	2390.00	33.66	29.99	30.21	8.35	41.793	74	32.21	Peak	Vertical
4	2390.00	22.95	29.99	30.21	8.35	31.078	54	22.92	AV	Vertical
			Blu	etooth T	x CH39_	2478 MHz	_2Mbps			
Item (Mark)	Freq. MHz	Reading dB _µ V	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBµV/m	Limit dBµV/m	Margin dB	Detector	Pol.
1	2483.50	37.67	29.99	30.21	8.35	45.801	74	28.20	Peak	Horizontal
2	2483.50	26.53	29.99	30.21	8.35	34.656	54	19.34	AV	Horizontal
3	2483.50	33.68	29.99	30.21	8.35	41.812	74	32.19	Peak	Vertical
4	2483.50	23.65	29.99	30.21	8.35	31.776	54	22.22	AV	Vertical





12. AC Power Line Conducted Emission Test


12.1 Measurement Limit

Fraguency	Maximum RF Line Voltage					
Frequency	Q.P. (dBμV)	Average (dBµV)				
150kHz~500kHz	66-56	56-46				
500kHz~5MHz	56	46				
5MHz~30MHz	60	50				

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

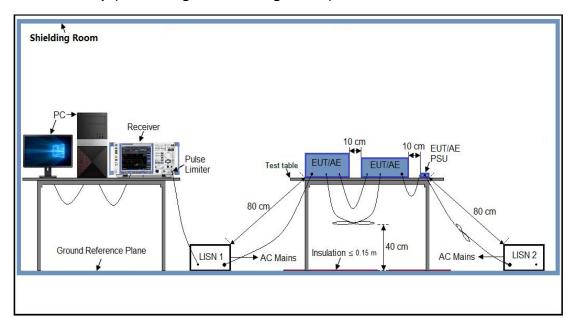



Page 57 of 61

12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side).
- 7. Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 8. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 9. During the above scans, the emissions were maximized by cable manipulation.
- 10. The test mode(s) were scanned during the preliminary test.
- 11. Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
 Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- 3. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 4. The test data of the worst case condition(s) was reported on the Summary Data page.
- 5. A conducted emission is calculated by the following equation:
 - Measurement Level (dBμV) = Receiver reading (dBμV) + Transd (dB)
 - Transd (dB)= AMN Factor(dB)+Cable Loss(dB)+Attenuation(dB)
 - Margin= Limit-Level

12.5 Measurement Result

QP

QP

QP

QP

QP

31.7

37.9

39.8

38.0

L1


L1

L1

L1

L1



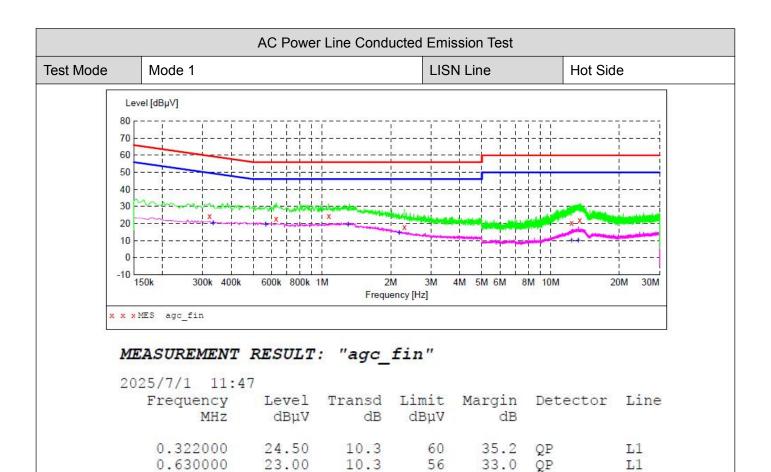

MEASUREMENT	RESULT:	"agc	fin2"
		9-	

24.30

18.10

20.20

22.00

2025/7/1 11:47	7					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.334000	20.50	10.3	49	28.9	VA	L1
0.566000	19.70	10.3	46	26.3	AV	L1
1.302000	19.60	10.4	46	26.4	AV	L1
2.178000	14.60	10.5	46	31.4	AV	L1
12.366000	10.10	12.7	50	39.9	AV	L1
13.222000	10.40	12.9	50	39.6	AV	L1

10.4

10.5

12.7

12.9

56

56

60

60

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

1.070000


2.294000

12.358000

13.414000

Web: http://www.agccert.com/



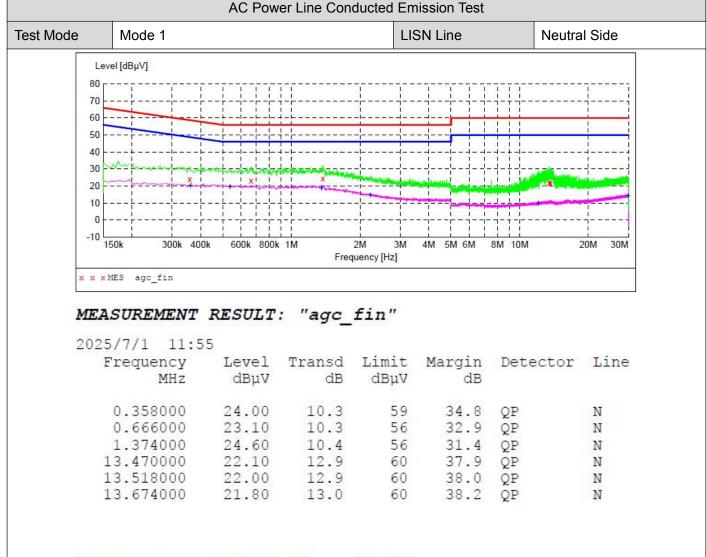

MEASUREMENT RESULT: "agc_fin2"

2025/7/1 11:55 Frequency	Level	Transd	Limit	Margin	Detector	Line
MHz	dBµV	dB	dBµV	dB		
0.362000	20.40	10.3	49	28.3	AV	N
0.538000	19.80	10.3	46	26.2	AV	N
1.358000	18.90	10.4	46	27.1	AV	N
2.218000	14.70	10.5	46	31.3	AV	N
12.062000	9.90	12.7	50	40.1	VA	N
29.814000	14.30	18.1	50	35.7	VA	N

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 60 of 61

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC07240250601AP02

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC07240250601AP03



Page 61 of 61

Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

 3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

----End of Report----