

RF Test Report

For

Applicant name: SimplyTech Electronics Inc
Address: 1407 Broadway, New York, NY 10018
EUT name: Portable Hook Speaker
Brand name: N/A
Model number: HOOK-SPKR-RED
Series model number: HOOK-SPKR-BLACK, HOOK-SPKR-NAVY, HOOK-SPKR-GRAY, HPN-SPK-GIFT-NAVY, HPN-SPK-GIFT-BLAC
FCC ID: 2BKTL-SPLHOOK

Issued By

Company name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: 101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Report number: BTF250903R00501
Test standards: 47 CFR Part 15.247
Test conclusion: Pass

Date of sample receipt: 2025-09-03
Test date: 2025-09-03 to 2025-09-10
Date of issue: 2025-09-17

Prepared by: *Chris Liu*
Chris.Liu / Project engineer

Approved by:  *Ryan CJ*
Ryan CJ / EMC Manager

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd.. All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2025-09-17	Original

Note:

Once the revision has been made, then previous versions reports are invalid.

Table of Contents

1 Introduction	4
1.1 Laboratory Location	4
1.2 Laboratory Facility	4
1.3 Announcement	4
2 Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Technical Information	6
3 Summary of Test Results	7
3.1 Test Standards	7
3.2 Uncertainty of Test	7
3.3 Summary of Test Result	7
3.4 Additions to, deviations from, or exclusions from the method	8
4 Test Configuration	9
4.1 Test Equipment List	9
4.2 Test Auxiliary Equipment	10
4.3 Test Modes	10
4.4 Test Channel of EUT	10
4.5 Test software	10
5 Evaluation Results (Evaluation)	11
5.1 Antenna requirement	11
6 Radio Spectrum Matter Test Results (RF)	11
6.1 Conducted Emission at AC power line	11
6.1.1 Test Data	13
6.2 20dB Bandwidth	15
6.2.1 Test Data	16
6.3 Maximum Conducted Output Power	17
6.3.1 Test Data	18
6.4 Channel Separation	19
6.4.1 Test Data	20
6.5 Number of Hopping Frequencies	21
6.5.1 Test Data	22
6.6 Dwell Time	23
6.6.1 Test Data	24
6.7 Emissions in non-restricted frequency bands	25
6.7.1 Test Data	26
6.8 Band edge emissions (Radiated)	27
6.8.1 Test Data	28
6.9 Emissions in frequency bands (below 1GHz)	29
6.9.1 Test Data	30
6.10 Emissions in frequency bands (above 1GHz)	32
6.10.1 Test Data	33
7 Test Setup Photos	35
8 EUT Constructional Details (EUT Photos)	35
Appendix-BT	36

1 Introduction

1.1 Laboratory Location

Test location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Phone number:	+86-0755-23146130
Fax number:	+86-0755-23146130

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**

BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 695374.

- **CNAS - Registration No.: CNAS L17568**

BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.

- **A2LA - Registration No.: 6660.01**

BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.
- (7) All entrusted information in this report is provided by the client and has been confirmed through consultation with the client; The testing items for this report have been discussed and confirmed with the client, and our company is only responsible for the content reflected in the report.

2 Product Information

2.1 Application Information

Company name:	SimplyTech Electronics Inc
Address:	1407 Broadway, New York, NY 10018

2.2 Manufacturer Information

Company name:	Shenzhen Bogoodwill Industrial Co., Limited
Address:	302, Building L, No.17 Wan'an Road, Ma'anshan Community, ShajingStreet, Bao'an District, Shenzhen, Guangdong Province, China 518104

2.3 Factory Information

Company name:	Shenzhen Bogoodwill Industrial Co., Limited
Address:	302, Building L, No.17 Wan'an Road, Ma'anshan Community, ShajingStreet, Bao'an District, Shenzhen, Guangdong Province, China 518104

2.4 General Description of Equipment under Test (EUT)

EUT name:	Portable Hook Speaker
Under test model name:	HOOK-SPKR-RED
Series model name:	HOOK-SPKR-BLACK, HOOK-SPKR-NAVY, HOOK-SPKR-GRAY, HPN-SPK-GIFT-NAVY, HPN-SPK-GIFT-BLACK
Description of model name differentiation:	Only the model name and color is different, everything else is the same
Hardware version:	N/A
Software version:	N/A
Rating:	INPUT: 3.7V 500mAh 1.85Wh

2.5 Technical Information

Operation Frequency:	2402MHz to 2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation technology:	GFSK, $\pi/4$ DQPSK, 8DPSK
Max. Conducted Power:	-6.09dBm
Antenna type:	PCB Antenna
Antenna gain:	-0.58dBi

Channel List:

Channel	Frequency (MHz)						
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

3 Summary of Test Results

3.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

3.2 Uncertainty of Test

Measurement	Value
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.45 dB
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Time	±5 %
Unwanted Emissions, conducted	±3.0 dB

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15.247	47 CFR 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
20dB Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(1)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(1)	Pass
Channel Separation	47 CFR Part 15.247	47 CFR 15.247(a)(1)	Pass
Number of Hopping Frequencies	47 CFR Part 15.247	47 CFR 15.247(a)(1)(iii)	Pass
Dwell Time	47 CFR Part 15.247	47 CFR 15.247(a)(1)(iii)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass

Remark:

1. *Pass: Meet the requirements.*
2. *N/A: not applicable.*

3.4 Additions to, deviations from, or exclusions from the method

None

4 Test Configuration

4.1 Test Equipment List

Conducted Emission at AC power line					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI3	101422	2024-10-25	2025-10-24
V-LISN	Schwarzbeck	NSLK 8127	01073	2024-10-25	2025-10-24
Coaxial Switcher	Schwarzbeck	CX210	CX210	/	/
Pulse Limiter	Schwarzbeck	VTSD 9561-F	00953	/	/
Test Software	Frad	EZ_EMC	Version: EMC-CON 3A1.1+	/	/

Emissions in non-restricted frequency bands 20dB Bandwidth Maximum Conducted Output Power Channel Separation Number of Hopping Frequencies Dwell Time					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020A	MY50410020	2024-10-25	2025-10-24
ESG Vector Signal Generator	Agilent	E4438C	MY45094854	2024-10-25	2025-10-24
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2024-10-25	2025-10-24
Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	161997	2024-10-25	2025-10-24
Temperature Humidity Chamber	ZZCKONG	ZZ-K02A	20210928007	2024-10-25	2025-10-24
DC Power Supply	Tongmen	etm-6050c	20211026123	2024-10-25	2025-10-24
RF Control Unit	Techy	TR1029-1	/	2024-10-25	2025-10-24
RF Sensor Unit	Techy	TR1029-2	/	2024-10-25	2025-10-24
Test Software	TST Pass	/	Version: 2.0	/	/

Emissions in frequency bands (below 1GHz) Emissions in frequency bands (above 1GHz) Band edge emissions (Radiated)					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI7	101032	2024-10-25	2025-10-24
Signal Analyzer	Rohde & Schwarz	FSQ40	100010	2024-10-25	2025-10-24
Log periodic antenna	Schwarzbeck	VULB 9168	01328	2024-10-28	2025-10-27
Preamplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9744	00246	2024-09-24	2025-09-23
Horn Antenna	Schwarzbeck	BBHA9120D	2597	2024-10-30	2025-10-29
Preamplifier (1GHz ~ 18GHz)	Schwarzbeck	BBV9718D	00008	2024-09-24	2025-09-23
Test Software	Frad	EZ_EMCA	Version: FA-03A2 RE+	/	/

4.2 Test Auxiliary Equipment

No.	Description	Manufacturer	Model	Serial Number	Certification
1	USB-C Power Adapter	Apple Inc.	A2166	/	

4.3 Test Modes

No.	Test Modes
TM1	TX-GFSK (Non-Hopping)
TM2	TX-Pi/4DQPSK (Non-Hopping)
TM3	TX-8DPSK (Non-Hopping)
TM4	TX-GFSK (Hopping)
TM5	TX-Pi/4DQPSK (Hopping)
TM6	TX-8DPSK (Hopping)

4.4 Test Channel of EUT

Operation Band: 2400-2483.5 MHz

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
1	2402	2440	2480

4.5 Test software

Test software:	Version:	Power Class:
FCC_assist_1.0.2.2.exe	v1.0.2.2	10

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

§15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

§15.247(b) (4) requirement:

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


E.U.T Antenna:	The Bluetooth antenna is an PCB antenna which permanently attached, and the best case gain of the antenna is -0.58 dBi. See product internal photos for details.
-----------------------	--

6 Radio Spectrum Matter Test Results (RF)

6.1 Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).					
Test Method:	ANSI C63.10-2020 section 6.2					
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)				
		Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
Procedure:	5-30	60	50			
	*Decreases with the logarithm of the frequency.					
	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices					

Test Setup:

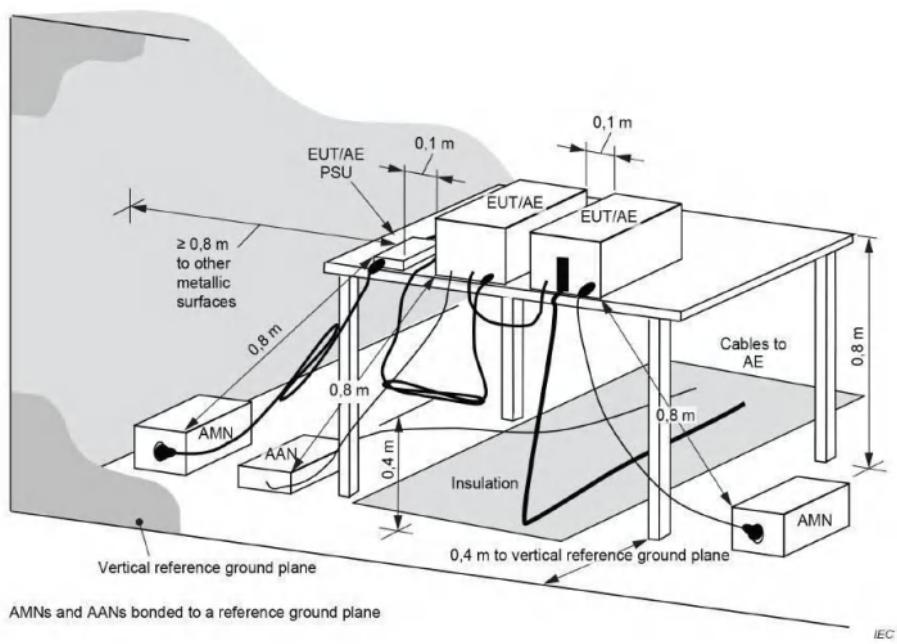


Operating Environment:

Temperature:	25.9 °C
Humidity:	47.8 %
Atmospheric Pressure:	1010 mbar
Test voltage:	AC 120V 60Hz

6.1.1 Test Data


Remark: The report only reflects the test data of worst mode.

TM1 / Line: Line / Band: 2400-2483.5 MHz / BW: 1 / CH: M

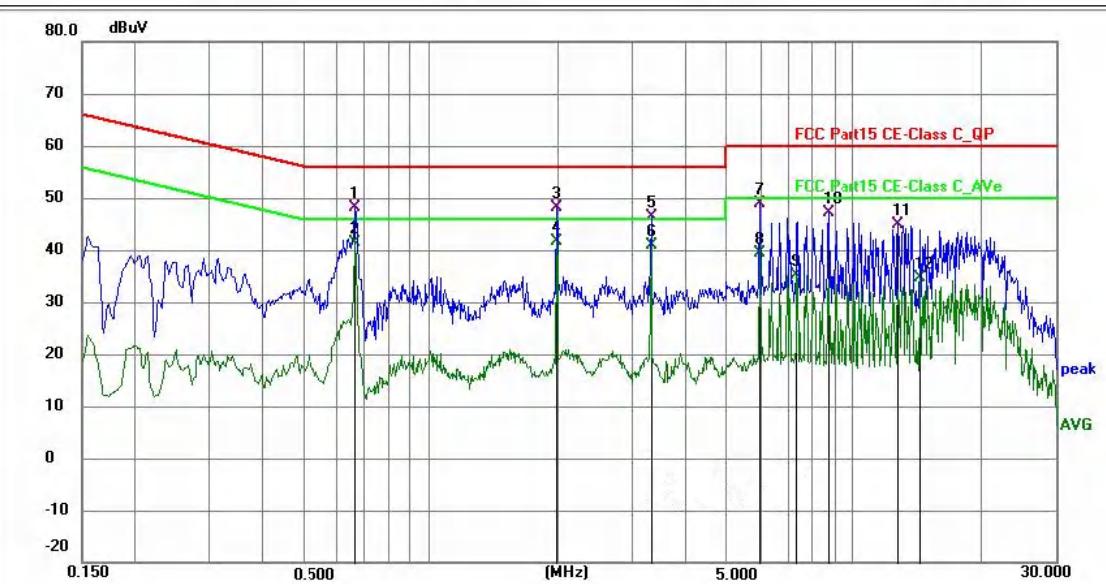

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.6630	37.45	10.60	48.05	56.00	-7.95	QP	P	
2	0.6630	30.82	10.60	41.42	46.00	-4.58	AVG	P	
3	1.9904	37.51	10.68	48.19	56.00	-7.81	QP	P	
4 *	1.9904	30.96	10.68	41.64	46.00	-4.36	AVG	P	
5	3.3134	35.72	10.72	46.44	56.00	-9.56	QP	P	
6	3.3134	30.19	10.72	40.91	46.00	-5.09	AVG	P	
7	5.9865	37.54	11.27	48.81	60.00	-11.19	QP	P	
8	5.9865	28.03	11.27	39.30	50.00	-10.70	AVG	P	
9	7.3274	23.76	11.40	35.16	50.00	-14.84	AVG	P	
10	8.6865	36.08	11.08	47.16	60.00	-12.84	QP	P	
11	12.7680	33.92	10.95	44.87	60.00	-15.13	QP	P	
12	14.3925	23.67	11.05	34.72	50.00	-15.28	AVG	P	


TM1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 1 / CH: M

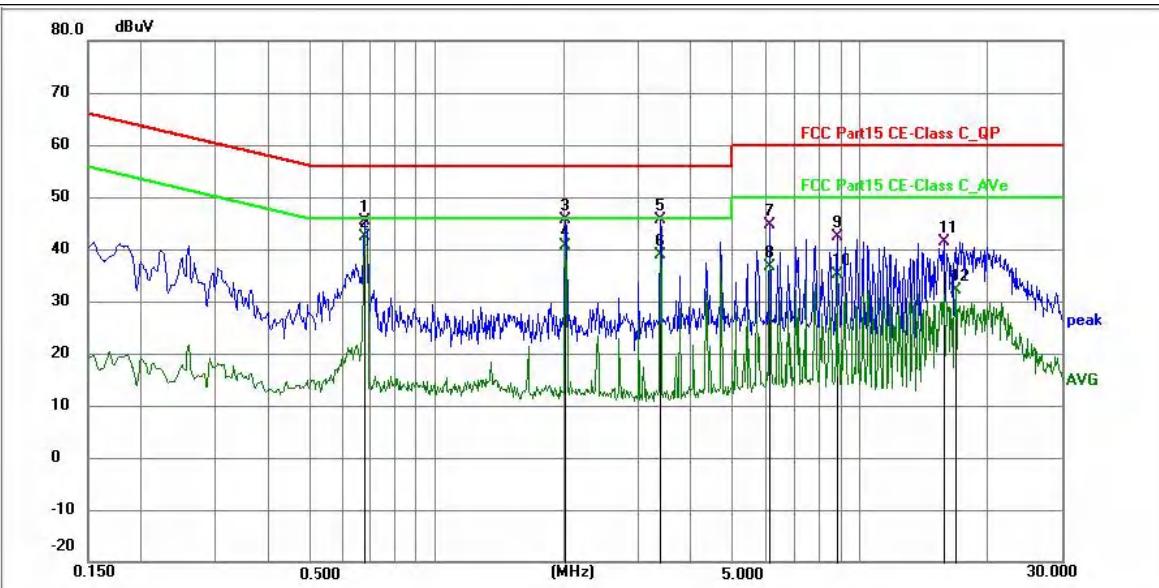

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.6765	34.40	10.87	45.27	56.00	-10.73	QP	P	
2 *	0.6765	31.41	10.87	42.28	46.00	-3.72	AVG	P	
3	2.0220	34.67	10.98	45.65	56.00	-10.35	QP	P	
4	2.0220	29.60	10.98	40.58	46.00	-5.42	AVG	P	
5	3.3810	34.64	10.87	45.51	56.00	-10.49	QP	P	
6	3.3810	28.06	10.87	38.93	46.00	-7.07	AVG	P	
7	6.0990	33.38	11.32	44.70	60.00	-15.30	QP	P	
8	6.0990	25.30	11.32	36.62	50.00	-13.38	AVG	P	
9	8.8170	31.15	11.22	42.37	60.00	-17.63	QP	P	
10	8.8170	23.79	11.22	35.01	50.00	-14.99	AVG	P	
11	15.8685	30.35	10.98	41.33	60.00	-18.67	QP	P	
12	16.9035	20.95	11.07	32.02	50.00	-17.98	AVG	P	

6.2 20dB Bandwidth


Test Requirement:	47 CFR 15.247(a)(1)
Test Method:	ANSI C63.10-2020, section 7.8.6, For occupied bandwidth measurements, use the procedure in 6.9.3. Frequency hopping shall be disabled for this test.
Test Limit:	Refer to 47 CFR 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Procedure:	<p>The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:</p> <ul style="list-style-type: none"> a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.6.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used. f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth. g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies. h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).
Test Setup:	

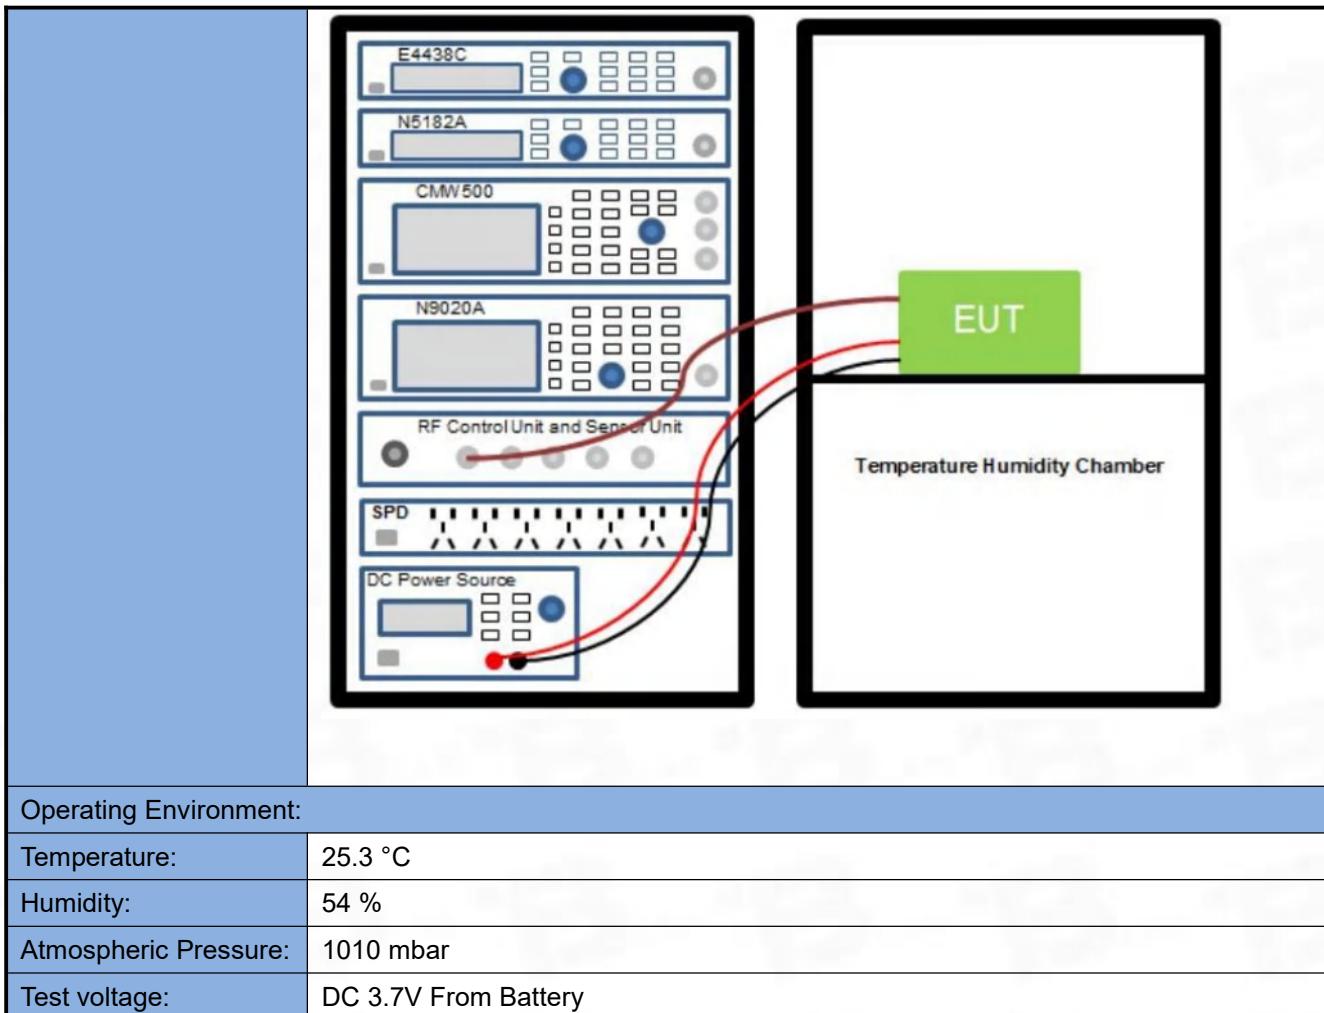

6.2.1 Test Data

Please Refer to Appendix-BT for Details.

6.3 Maximum Conducted Output Power

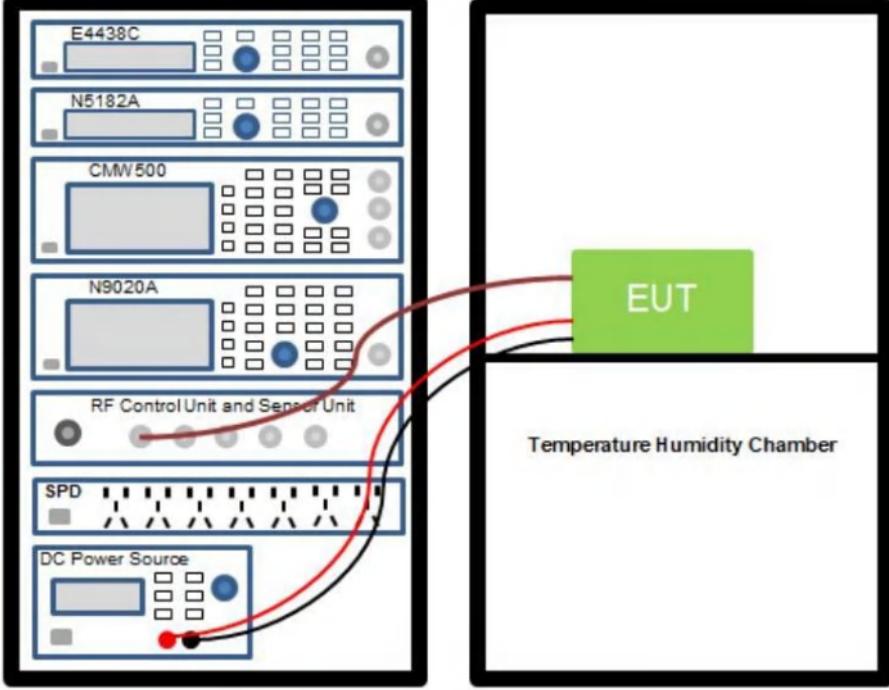
Test Requirement:	47 CFR 15.247(b)(1)
Test Method:	ANSI C63.10-2020, section 7.8.5
Test Limit:	Refer to 47 CFR 15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Procedure:	<p>This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. Frequency hopping shall be disabled for this test. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> a) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel. b) RBW > 20 dB bandwidth of the emission being measured. c) VBW \geq RBW. d) Sweep: No faster than coupled (auto) time. e) Detector function: Peak. f) Trace: Max-hold. g) Allow trace to stabilize. h) Use the marker-to-peak function to set the marker to the peak of the emission. i) The indicated level is the peak output power, after any corrections for external attenuators and cables. j) A spectral plot of the test results and setup description shall be included in the test report. <p>NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.</p>
Test Setup:	
Operating Environment:	

Temperature:	25.3 °C
Humidity:	54 %
Atmospheric Pressure:	1010 mbar
Test voltage:	DC 3.7V From Battery

6.3.1 Test Data

Please Refer to Appendix-BT for Details.

6.4 Channel Separation

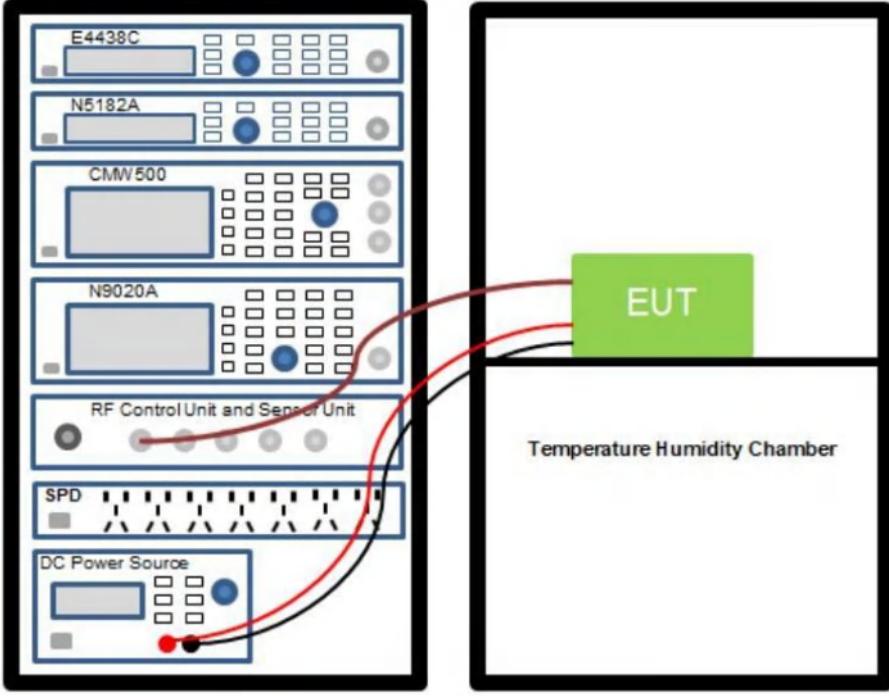
Test Requirement:	47 CFR 15.247(a)(1)
Test Method:	ANSI C63.10-2020, section 7.8.2
Test Limit:	Refer to 47 CFR 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Procedure:	<p>The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> a) Span: Wide enough to capture the peaks of two adjacent channels. b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. c) Video (or average) bandwidth (VBW) \geq RBW. d) Sweep: No faster than coupled (auto) time. e) Detector function: Peak. f) Trace: Max-hold. g) Allow the trace to stabilize. <p>Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A spectral plot of the data shall be included in the test report.</p>
Test Setup:	
Operating Environment:	
Temperature:	25.3 °C
Humidity:	54 %

Atmospheric Pressure:	1010 mbar
Test voltage:	DC 3.7V From Battery

6.4.1 Test Data

Please Refer to Appendix-BT for Details.

6.5 Number of Hopping Frequencies

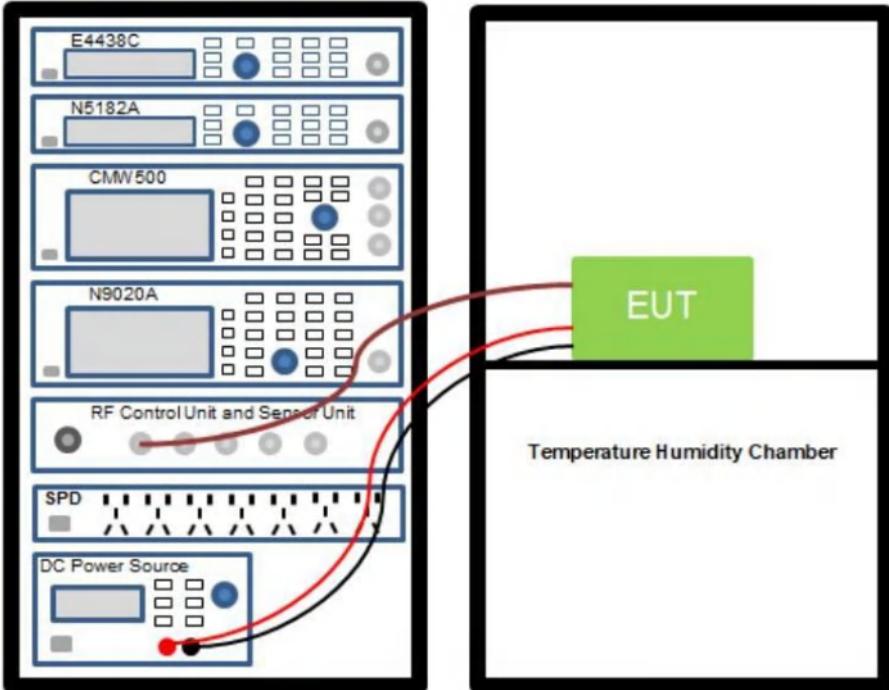Test Requirement:	47 CFR 15.247(a)(1)(iii)
Test Method:	ANSI C63.10-2020, section 7.8.3
Test Limit:	Refer to 47 CFR 15.247(a)(1)(iii), Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Procedure:	<p>The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> a) Span: The frequency band of operation. Depending on the number of channels the device supports, it could be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen. b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. c) VBW \geq RBW. d) Sweep: No faster than coupled (auto) time. e) Detector function: Peak. f) Trace: Max-hold. g) Allow the trace to stabilize. <p>It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A spectral plot of the data shall be included in the test report.</p>
Test Setup:	
Operating Environment:	
Temperature:	25.3 °C


Humidity:	54 %
Atmospheric Pressure:	1010 mbar
Test voltage:	DC 3.7V From Battery

6.5.1 Test Data

Please Refer to Appendix-BT for Details.

6.6 Dwell Time

Test Requirement:	47 CFR 15.247(a)(1)(iii)
Test Method:	ANSI C63.10-2020, section 7.8.4
Test Limit:	<p>Refer to 47 CFR 15.247(a)(1)(iii), Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.</p>
Procedure:	<p>The dwell time per hop on a channel is the time from the start of the first transmission to the end of the last transmission for that hop. If the device has a single transmission per hop then the dwell time is the duration of that transmission. If the device has a multiple transmissions per hop then the dwell time is measured from the start of the first transmission to the end of the last transmission.</p> <p>The time of occupancy is the total time that the device dwells on a channel over an observation period specified in the regulatory requirement. To determine the time of occupancy the spectrum analyzer will be configured to measure both the dwell time per hop and the number of times the device transmits on a specific channel in a given period.</p> <p>The EUT shall have its hopping function enabled. Compliance with the requirements shall be made with the minimum and with the maximum number of channels enabled. If the dwell time per channel does not vary with the number of channels than compliance with the requirements may be based on the minimum number of channels. If the device supports different dwell times per channel (example Bluetooth devices can dwell on a channel for 1, 3 or 5 time slots) then measurements can be limited to the longest dwell time with the minimum number of channels.</p> <p>Use the following spectrum analyzer settings to determine the dwell time per hop:</p> <ul style="list-style-type: none"> a) Span: Zero span, centered on a hopping channel. b) RBW shall be \leq channel spacing and where possible RBW should be set $>> 1 / T$, where T is the expected transmission time per hop. c) Sweep time: Set so that the start of the first transmission and end of the last transmission for the hop are clearly captured. Setting the sweep time to be slightly longer than the hopping period per channel (hopping period = 1/hopping rate) should achieve this. d) Use a video trigger, where possible with a trigger delay, so that the start of the transmission is clearly observed. The trigger level might need adjustment to reduce the chance of triggering when the system hops on an adjacent channel. e) Detector function: Peak. f) Trace: Clear-write, single sweep. g) Place markers at the start of the first transmission on the channel and at the end of the last transmission. The dwell time per hop is the time between these two markers. <p>To determine the number of hops on a channel in the regulatory observation period repeat the measurement using a longer sweep time. When the device uses a single hopping sequence the period of measurement should be sufficient to capture at least 2 hops. When the device uses a dynamic hopping sequence, or the sequence varies, the period of measurement may need to capture multiple hops to better determine the average time of occupancy. Count the number of hops on the channel across the sweep time.</p>

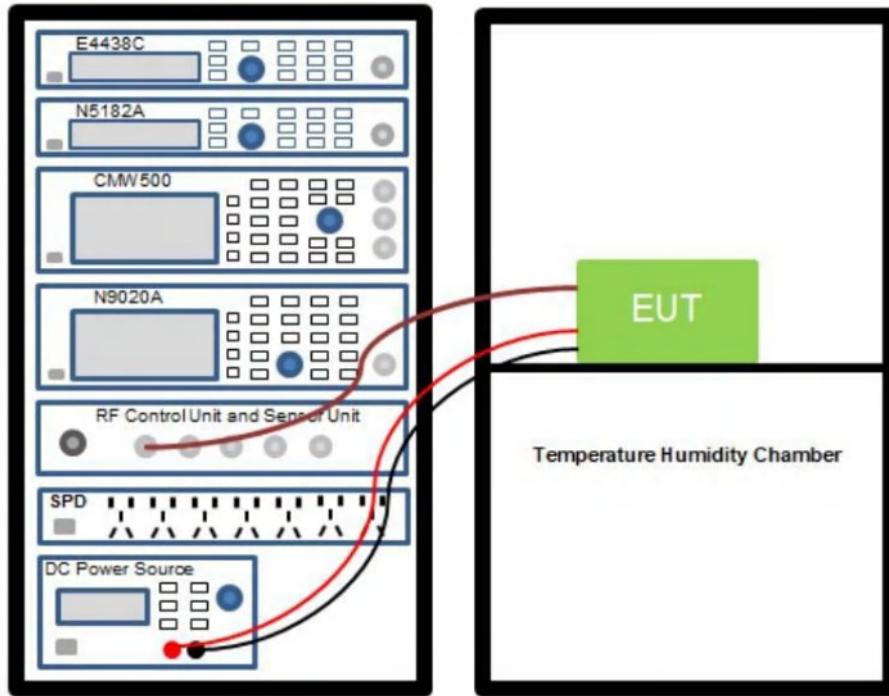
	<p>The average number of hops on the same channel within the regulatory observation period is calculated from the number of hops on the channel divided by the spectrum analyzer sweep time multiplied by the regulatory observation period. For example, if three hops are counted with an analyzer sweep time of 500 ms and the regulatory observation period is 10 s, then the number of hops in that ten seconds is $3 / 0.5 \times 10$, or 60 hops.</p> <p>The average time of occupancy is calculated by multiplying the dwell time per hop by the number of hops in the observation period.</p>
Test Setup:	 <p>The diagram illustrates the test setup. On the left, a rack-mounted test system is shown with the following components from top to bottom: E4438C, N5182A, CMW500, N9020A, RF Control Unit and Sensor Unit, SPD, and DC Power Source. Red lines connect the RF Control Unit and Sensor Unit to a green box labeled 'EUT' (Equipment Under Test), which is positioned inside a large black rectangular frame labeled 'Temperature Humidity Chamber'.</p>
Operating Environment:	
Temperature:	25.3 °C
Humidity:	54 %
Atmospheric Pressure:	1010 mbar
Test voltage:	DC 3.7V From Battery

6.6.1 Test Data

Please Refer to Appendix-BT for Details.

6.7 Emissions in non-restricted frequency bands


Test Requirement:	47 CFR 15.247(d)
Test Method:	ANSI C63.10-2020 section 7.8.7
Test Limit:	<p>Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.</p>
Procedure:	<p>7.8.7.1 General considerations To demonstrate compliance with the relative out-of-band emissions requirements conducted spurious emissions shall be measured for the transmit frequencies, per 5.5 and 5.6, and at the maximum transmit powers. Frequency hopping shall be disabled for this test with the exception of measurements at the allocated band-edges which shall be repeated with hopping enabled.</p> <p>Connect the primary antenna port through an attenuator to the spectrum analyzer input; in the results, account for all losses between the unlicensed wireless device output and the spectrum analyzer. The frequency range of testing shall span 30 MHz to 10 times the operating frequency and this may be done in a single sweep or, to aid resolution, across a number of sweeps. The resolution bandwidth shall be 100 kHz, video bandwidth 300 kHz, and a coupled sweep time with a peak detector.</p> <p>The limit is based on the highest in-band level across all channels measured using the same instrument settings (resolution bandwidth of 100 kHz, video bandwidth of 300 kHz, and a coupled sweep time with a peak detector). To help clearly demonstrate compliance a display line may be set at the required offset (typically 20 dB) below the highest in-band level. Where the highest in-band level is not clearly identified in the out-of-band measurements a separate spectral plot showing the in-band level shall be provided.</p> <p>When conducted measurements cannot be made (for example a device with integrated, non-removable antenna) radiated measurements shall be used. The reference level for determining the limit shall be established by maximizing the field strength from the highest power channel and measuring using the resolution and video bandwidth settings and peak detector as described above. The field strength limit for spurious emissions outside of restricted-bands shall then be set at the required offset (typically 20 dB) below the highest in-band level. Radiated measurements will follow the standards measurement procedures described in Clause 6 with the exception that the resolution bandwidth shall be 100 kHz, video bandwidth 300 kHz, and a coupled sweep time with a peak detector. Note that use of wider measurement bandwidths are acceptable for measuring the spurious emissions provided that the peak detector is used and that the measured value of spurious emissions are compared to the highest in-band level measured with the 100 kHz / 300 kHz bandwidth settings to determine compliance.</p> <p>7.8.7.2 Band-edges Compliance with a relative limit at the band-edges (e.g., -20 dBc) shall be made on the lowest and on the highest channels with frequency hopping disabled and repeated with frequency hopping enabled. For the latter test the hopping sequence shall include the lowest and highest channels.</p>

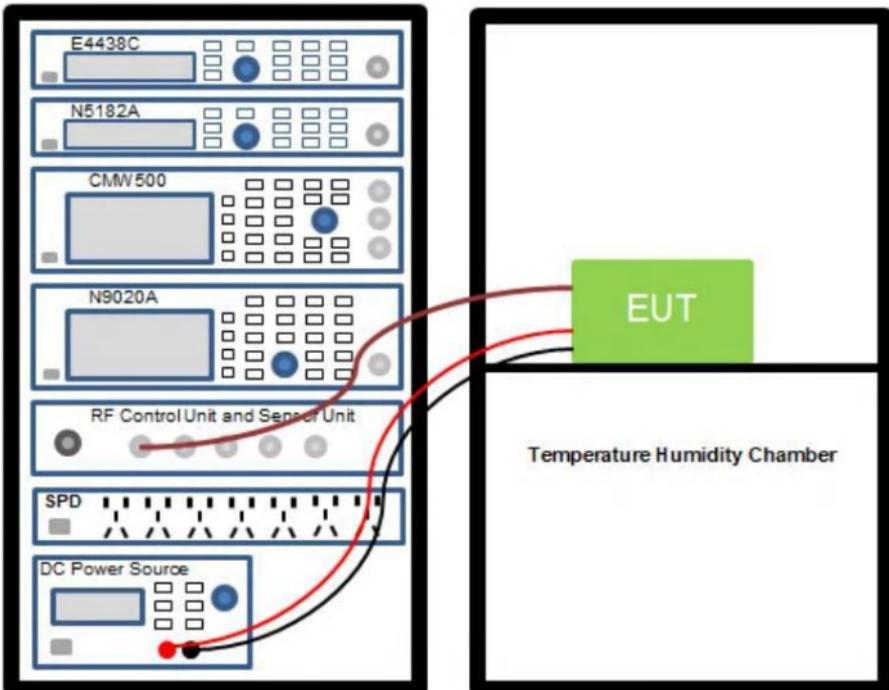	<p>For measurements with the hopping disabled the analyzer screen shall clearly show compliance with the requirement within 10 MHz of the allocated band-edge.</p> <p>For measurements with the hopping enabled the analyzer screen shall clearly show compliance with the requirement within 10 MHz of both of the allocated band-edges. This could require separate spectral plots for each band-edge.</p>
Test Setup:	 <p>The diagram illustrates the test setup. On the left, a rack-mounted test system is shown with the following components from top to bottom: E4438C, N5182A, CMV 500, N9020A, RF Control Unit and Sensor Unit, SPD, and DC Power Source. Red lines connect the RF Control Unit and Sensor Unit to a green box labeled 'EUT' (Equipment Under Test), which is positioned inside a large black rectangular frame labeled 'Temperature Humidity Chamber'.</p>
Operating Environment:	
Temperature:	25.3 °C
Humidity:	54 %
Atmospheric Pressure:	1010 mbar
Test voltage:	DC 3.7V From Battery

6.7.1 Test Data

Please Refer to Appendix-BT for Details.

6.8 Band edge emissions (Radiated)

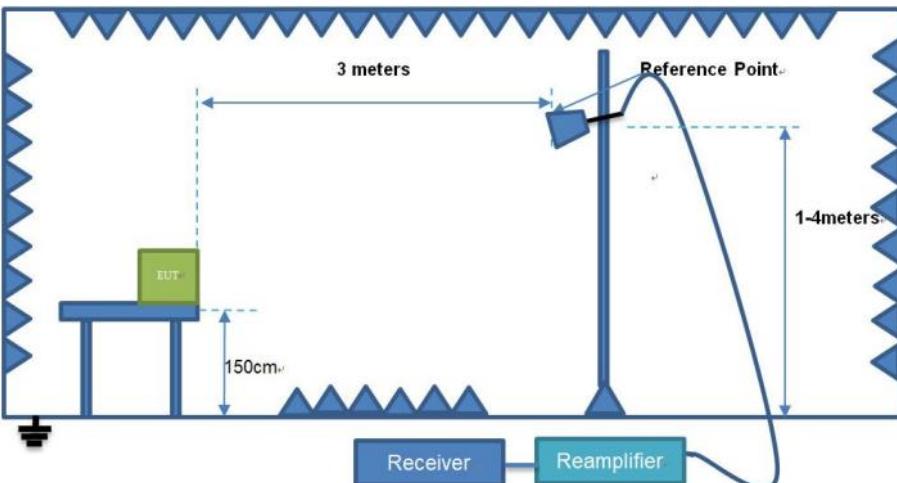
Test Requirement:	Refer to 47 CFR 15.247(d). In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).			
Test Method:	ANSI C63.10-2020 section 6.10			
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	
	0.009-0.490	2400/F(kHz)	300	
	0.490-1.705	24000/F(kHz)	30	
	1.705-30.0	30	30	
	30-88	100 **	3	
	88-216	150 **	3	
	216-960	200 **	3	
	Above 960	500	3	
<p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>				
Procedure:	ANSI C63.10-2020 section 6.10.5.2			
Test Setup:				
Operating Environment:				
Temperature:	25.3 °C			
Humidity:	54 %			
Atmospheric Pressure:	1010 mbar			
Test voltage:	DC 3.7V From Battery			

6.8.1 Test Data

Remark: The report only reflects the test data of worst mode.


Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
2310.000	50.73	3.85	54.58	74.00	-19.42	Peak	Pass
2310.000	40.24	3.85	44.09	54.00	-9.91	AVG	Pass
2390.000	52.20	3.91	56.11	74.00	-17.89	Peak	Pass
2390.000	42.43	3.91	46.34	54.00	-7.66	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
2310.000	51.13	3.85	54.98	74.00	-19.02	Peak	Pass
2310.000	41.53	3.85	45.38	54.00	-8.62	AVG	Pass
2390.000	52.65	3.91	56.56	74.00	-17.44	Peak	Pass
2390.000	42.18	3.91	46.09	54.00	-7.91	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
2483.500	50.71	3.99	54.69	74.00	-19.31	Peak	Pass
2483.500	40.99	3.99	44.98	54.00	-9.02	AVG	Pass
2500.000	51.19	4.00	55.19	74.00	-18.81	Peak	Pass
2500.000	40.29	4.00	44.29	54.00	-9.71	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
2483.500	51.81	3.99	55.80	74.00	-18.20	Peak	Pass
2483.500	41.45	3.99	45.44	54.00	-8.56	AVG	Pass
2500.000	51.23	4.00	55.23	74.00	-18.77	Peak	Pass
2500.000	41.25	4.00	45.25	54.00	-8.75	AVG	Pass

6.9 Emissions in frequency bands (below 1GHz)

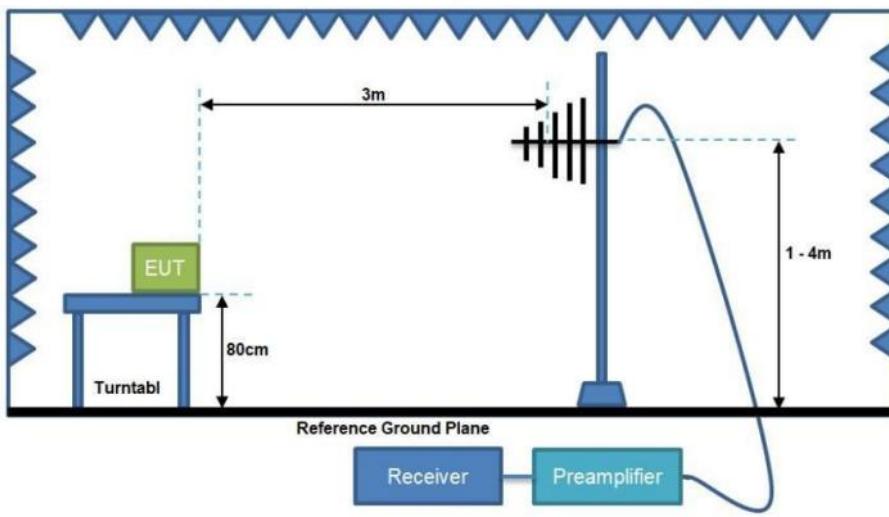Test Requirement:	Refer to 47 CFR 15.247(d). In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).			
Test Method:	ANSI C63.10-2020 section 6.6.4			
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	
	0.009-0.490	2400/F(kHz)	300	
	0.490-1.705	24000/F(kHz)	30	
	1.705-30.0	30	30	
	30-88	100 **	3	
	88-216	150 **	3	
	216-960	200 **	3	
	Above 960	500	3	
<p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>				
Procedure:	ANSI C63.10-2020 section 6.6.4			
Test Setup:				
Operating Environment:				
Temperature:	24.6 °C			
Humidity:	49.8 %			
Atmospheric Pressure:	1010 mbar			
Test voltage:	DC 3.7V From Battery			


6.9.1 Test Data

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

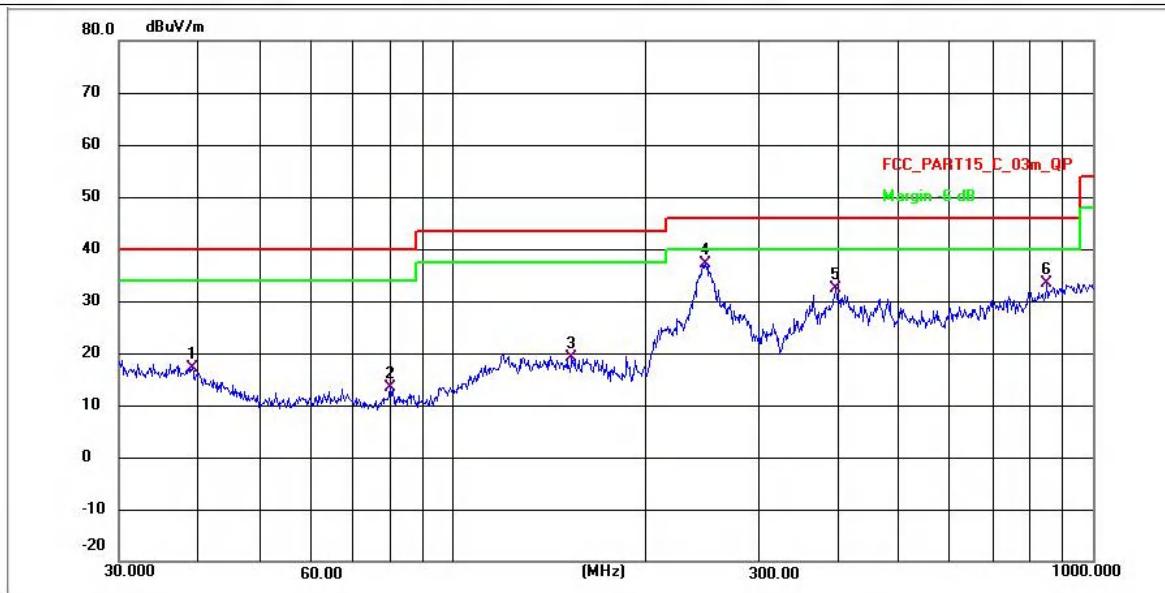


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	39.0245	26.89	-9.64	17.25	40.00	-22.75	QP	P
2	79.9402	22.72	-9.26	13.46	40.00	-26.54	QP	P
3	153.4692	41.17	-21.98	19.19	43.50	-24.31	QP	P
4 *	248.1165	58.28	-21.06	37.22	46.00	-8.78	QP	P
5	396.2415	52.22	-19.86	32.36	46.00	-13.64	QP	P
6	849.5445	50.34	-17.05	33.29	46.00	-12.71	QP	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

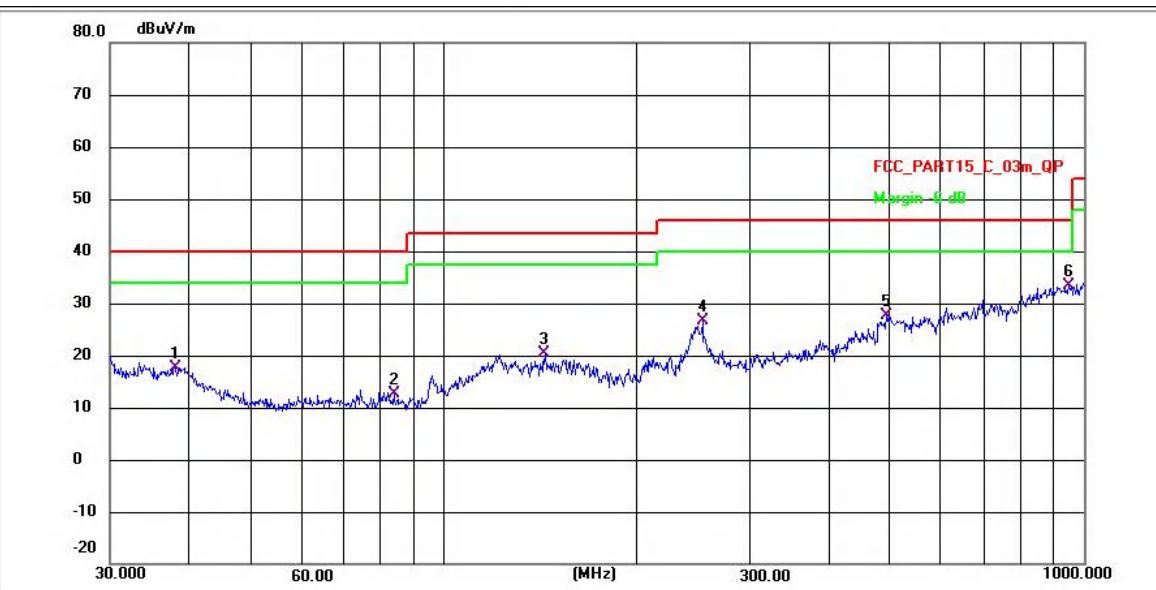

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	38.0115	27.37	-9.65	17.72	40.00	-22.28	QP	P
2	83.6688	22.31	-9.59	12.72	40.00	-27.28	QP	P
3	144.0819	35.05	-14.56	20.49	43.50	-23.01	QP	P
4	253.3920	40.55	-13.89	26.66	46.00	-19.34	QP	P
5	492.4685	39.79	-12.18	27.61	46.00	-18.39	QP	P
6 *	948.7610	49.37	-15.91	33.46	46.00	-12.54	QP	P

6.10 Emissions in frequency bands (above 1GHz)

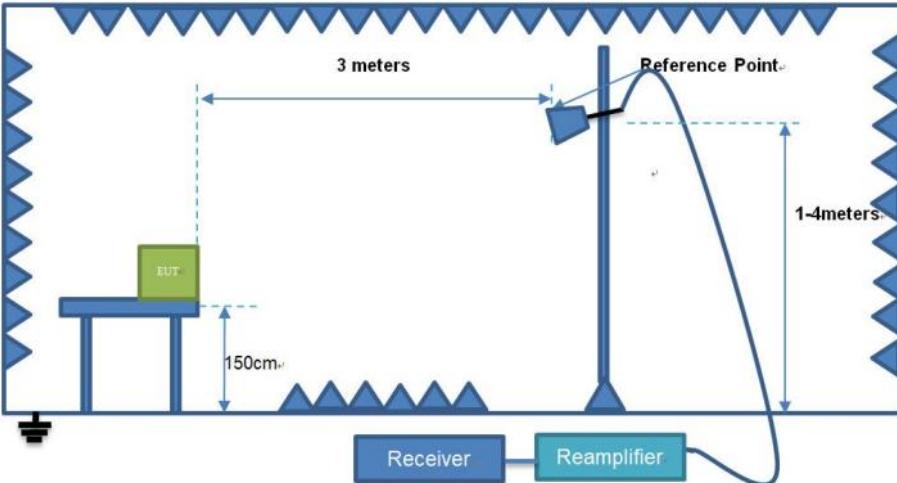Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).			
Test Method:	ANSI C63.10-2020 section 6.6.4			
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	
	0.009-0.490	2400/F(kHz)	300	
	0.490-1.705	24000/F(kHz)	30	
	1.705-30.0	30	30	
	30-88	100 **	3	
	88-216	150 **	3	
	216-960	200 **	3	
Above 960				3
<p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>				
Procedure:	ANSI C63.10-2020 section 6.6.4			
Test Setup:				
Operating Environment:				
Temperature:	24.6 °C			
Humidity:	50 %			
Atmospheric Pressure:	1010 mbar			
Test voltage:	DC 3.7V From Battery			

6.10.1 Test Data

Remark: The report only reflects the test data of worst mode.

Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4804.000	75.93	-48.89	27.04	74.00	-46.96	Peak	Pass
4804.000	65.64	-48.89	16.75	54.00	-37.25	AVG	Pass
7206.000	76.81	-47.02	29.79	74.00	-44.21	Peak	Pass
7206.000	66.61	-47.02	19.59	54.00	-34.41	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4804.000	61.36	-48.89	12.47	74.00	-61.53	Peak	Pass
4804.000	51.57	-48.89	2.69	54.00	-51.31	AVG	Pass
7206.000	76.14	-47.02	29.12	74.00	-44.88	Peak	Pass
7206.000	66.05	-47.02	19.02	54.00	-34.98	AVG	Pass
Test Channel: Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4882.000	77.80	-48.84	28.97	74.00	-45.03	Peak	Pass
4882.000	68.04	-48.84	19.21	54.00	-34.79	AVG	Pass
7323.000	75.15	-46.88	28.26	74.00	-45.74	Peak	Pass
7323.000	64.17	-46.88	17.28	54.00	-36.72	AVG	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4882.000	61.53	-48.84	12.69	74.00	-61.31	Peak	Pass
4882.000	51.66	-48.84	2.82	54.00	-51.18	AVG	Pass
7323.000	76.11	-46.88	29.22	74.00	-44.78	Peak	Pass
7323.000	65.12	-46.88	18.23	54.00	-35.77	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4960.000	76.58	-48.79	27.80	74.00	-46.20	Peak	Pass

4960.000	65.64	-48.79	16.86	54.00	-37.14	AVG	Pass
7440.000	76.46	-46.74	29.71	74.00	-44.29	Peak	Pass
7440.000	66.88	-46.74	20.14	54.00	-33.86	AVG	Pass

Test Channel: Highest channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4960.000	60.39	-48.79	11.60	74.00	-62.40	Peak	Pass
4960.000	50.16	-48.79	1.37	54.00	-52.63	AVG	Pass
7440.000	75.25	-46.74	28.50	74.00	-45.50	Peak	Pass
7440.000	64.50	-46.74	17.76	54.00	-36.24	AVG	Pass

7 Test Setup Photos

Please refer to the Appendix I Test Setup Photos

8 EUT Constructional Details (EUT Photos)

Please refer to the Appendix II External Photos & Appendix III External Photos

Appendix - BT

1. Bandwidth

1.1 Test Result

1.1.1 OBW


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.909	/	Pass
		2441	DH5	1	0.930	/	Pass
		2480	DH5	1	0.935	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.213	/	Pass
		2441	2DH5	1	1.209	/	Pass
		2480	2DH5	1	1.217	/	Pass
8DPSK	SISO	2402	3DH5	1	1.204	/	Pass
		2441	3DH5	1	1.218	/	Pass
		2480	3DH5	1	1.201	/	Pass


1.1.2 20dB BW


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	1.036	/	Pass
		2441	DH5	1	1.039	/	Pass
		2480	DH5	1	1.044	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.325	/	Pass
		2441	2DH5	1	1.329	/	Pass
		2480	2DH5	1	1.335	/	Pass
8DPSK	SISO	2402	3DH5	1	1.309	/	Pass
		2441	3DH5	1	1.317	/	Pass
		2480	3DH5	1	1.302	/	Pass


1.2 Test Graph


1.2.1 OBW

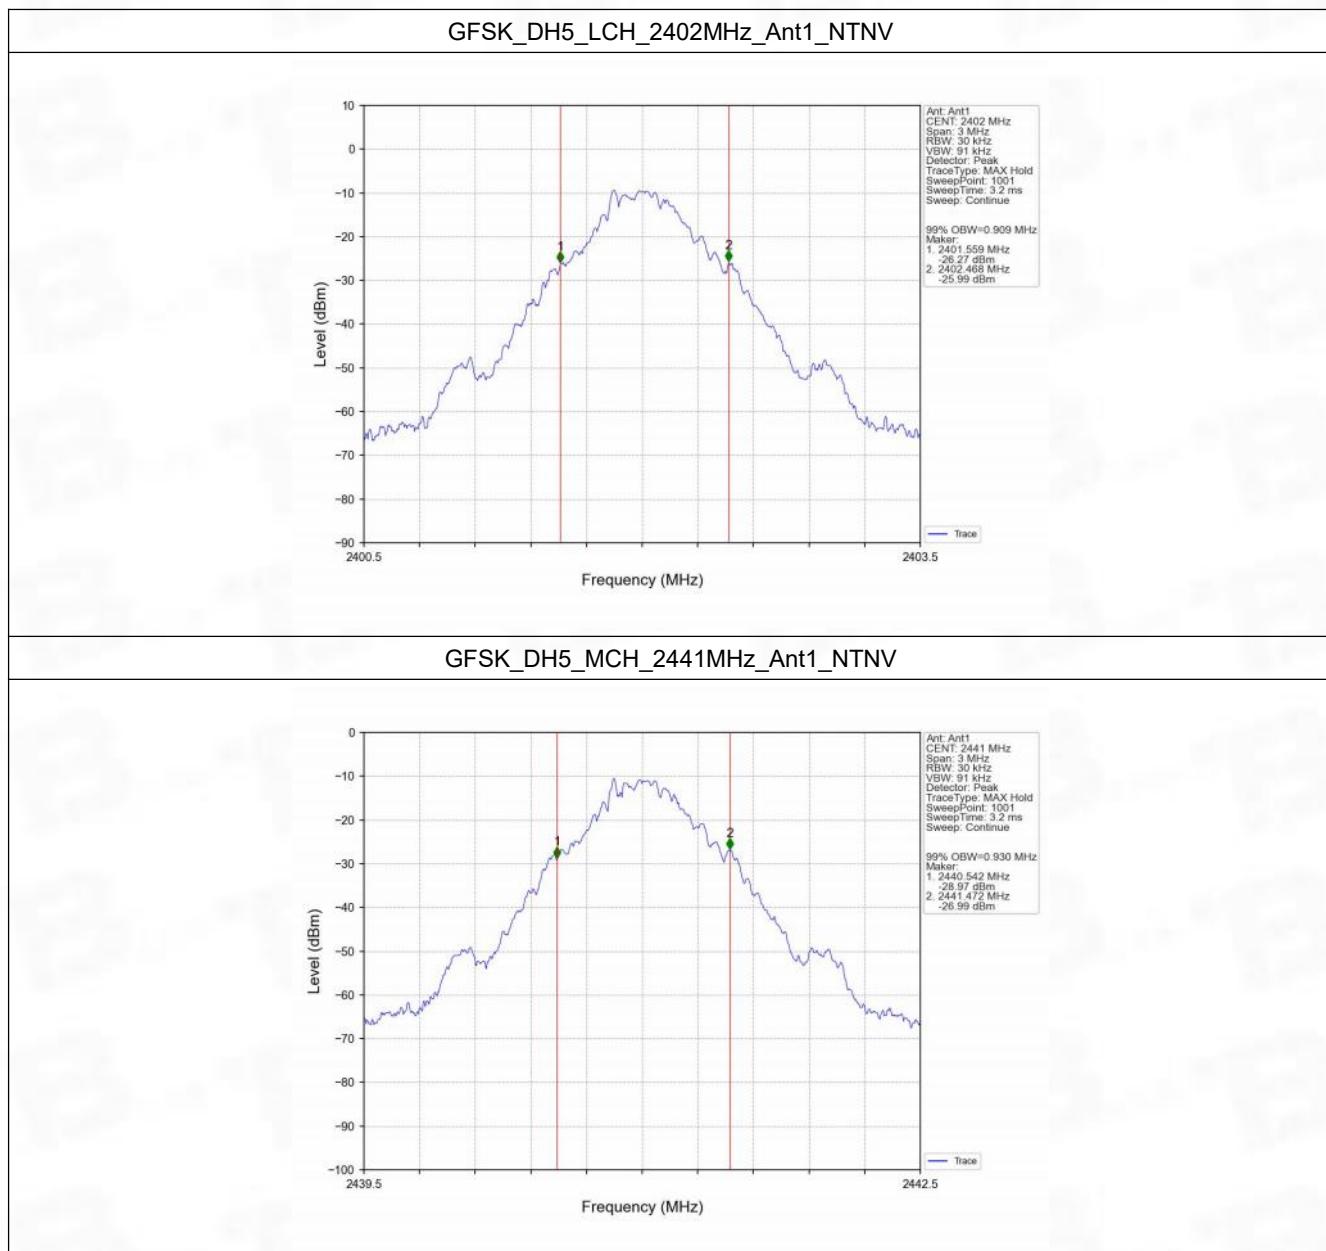

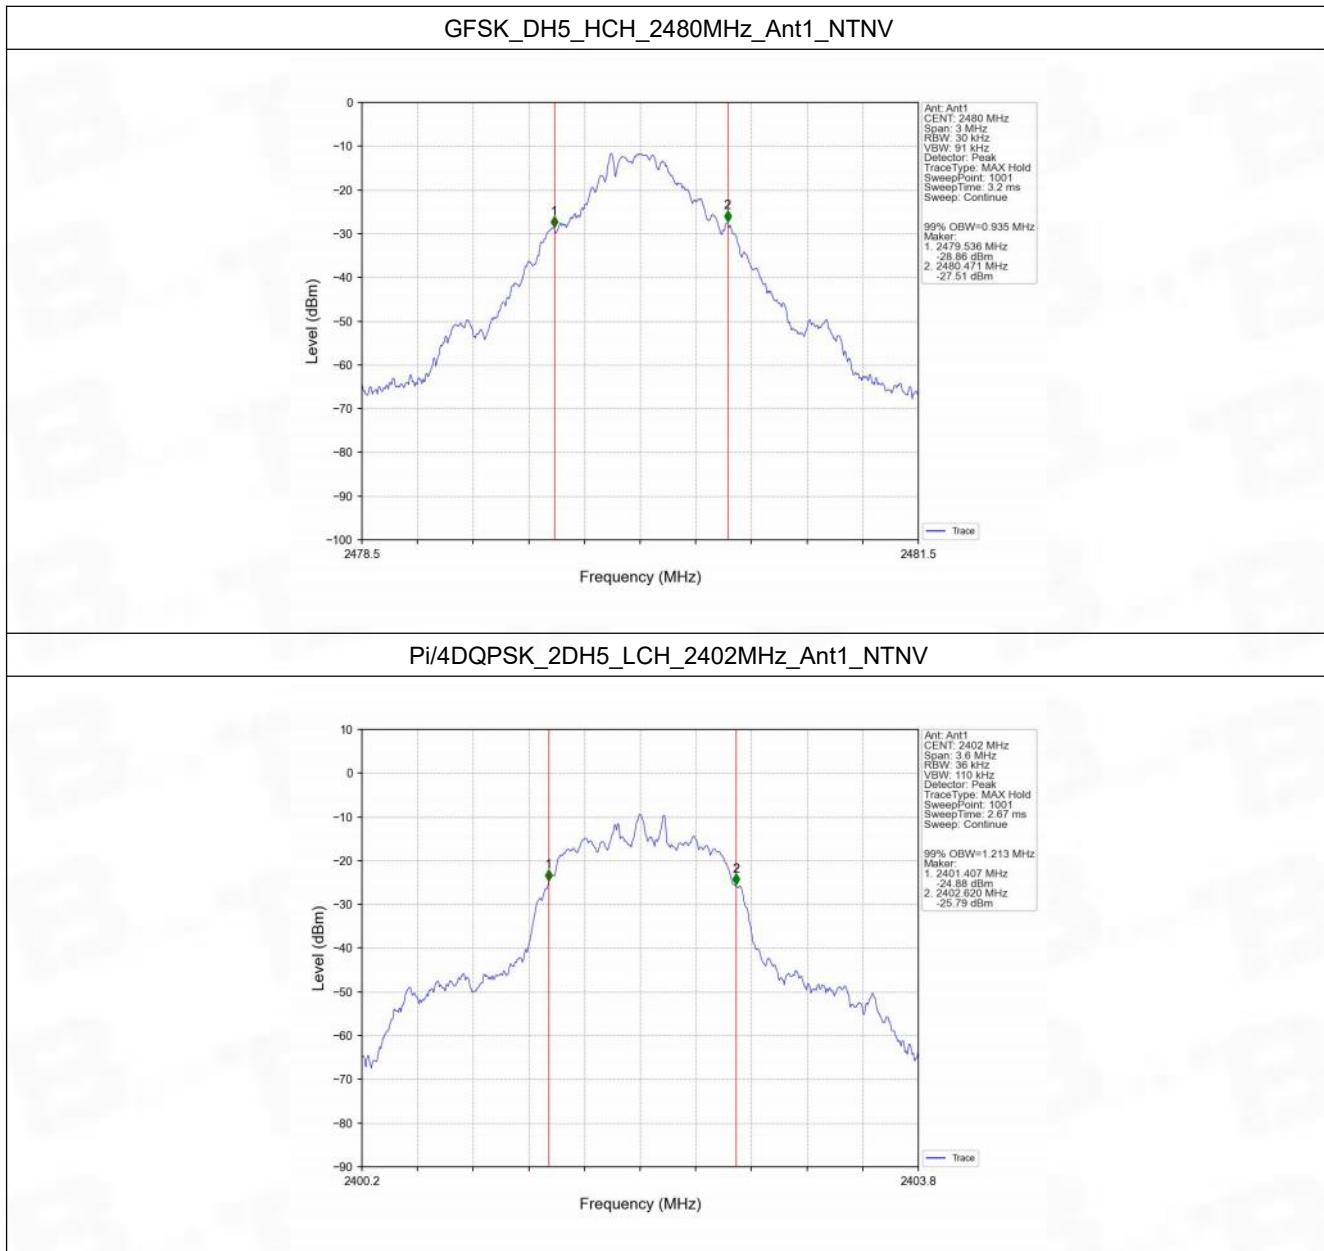


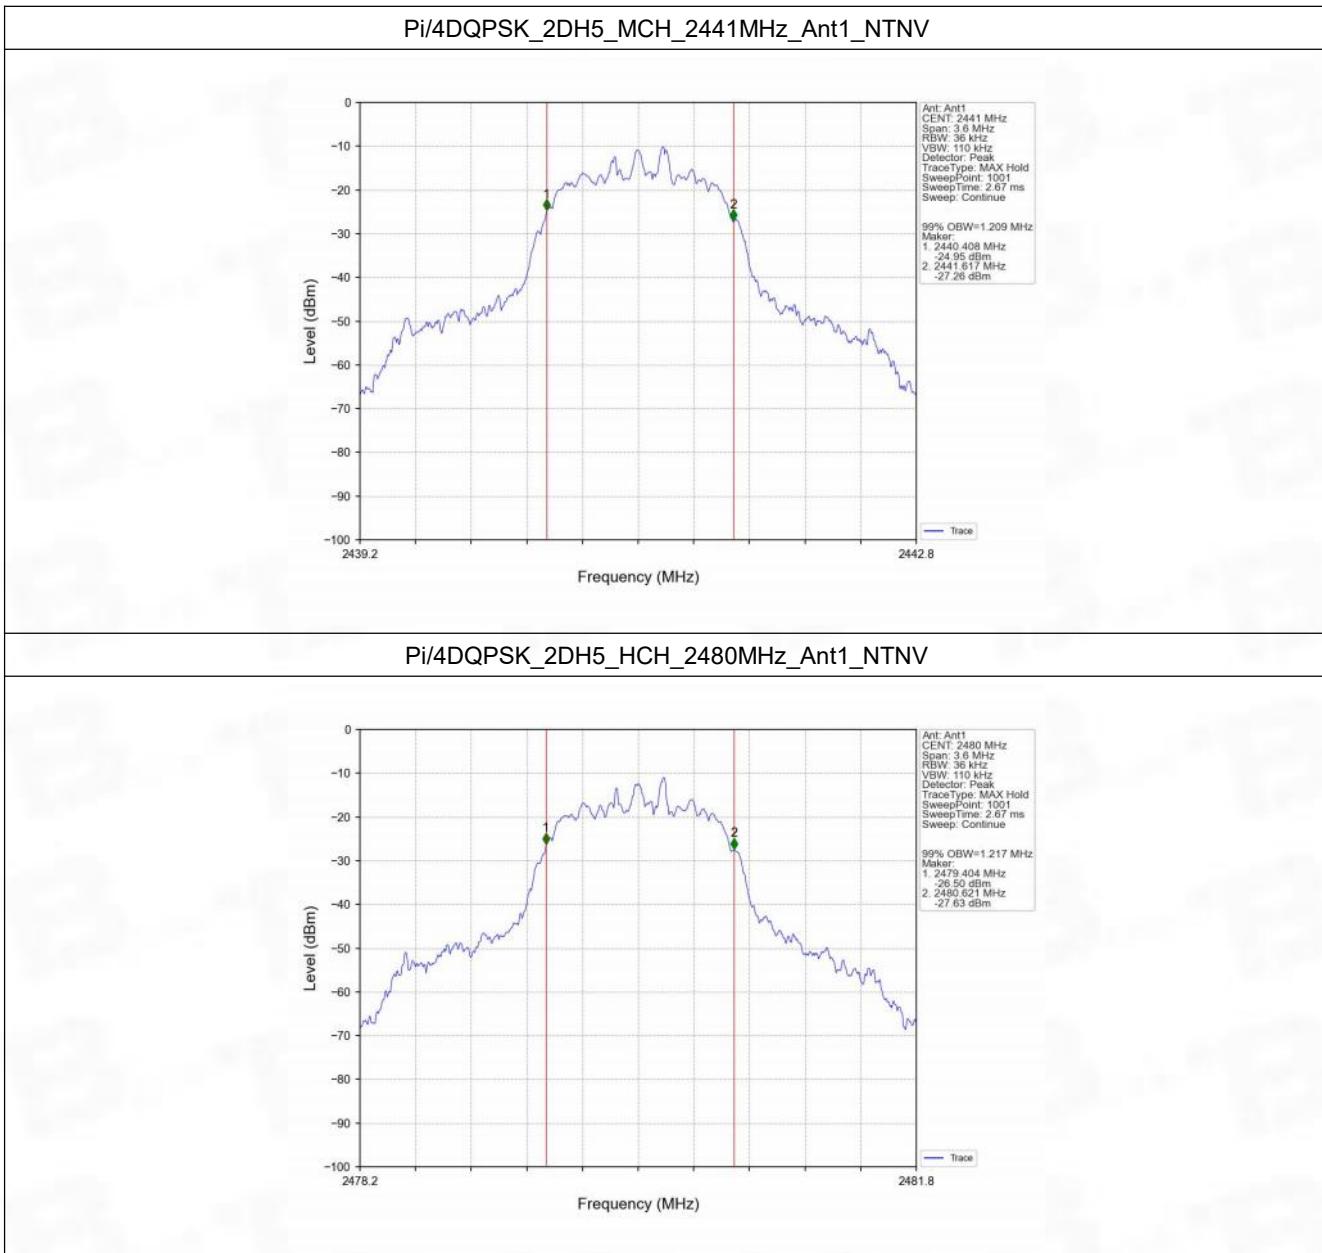


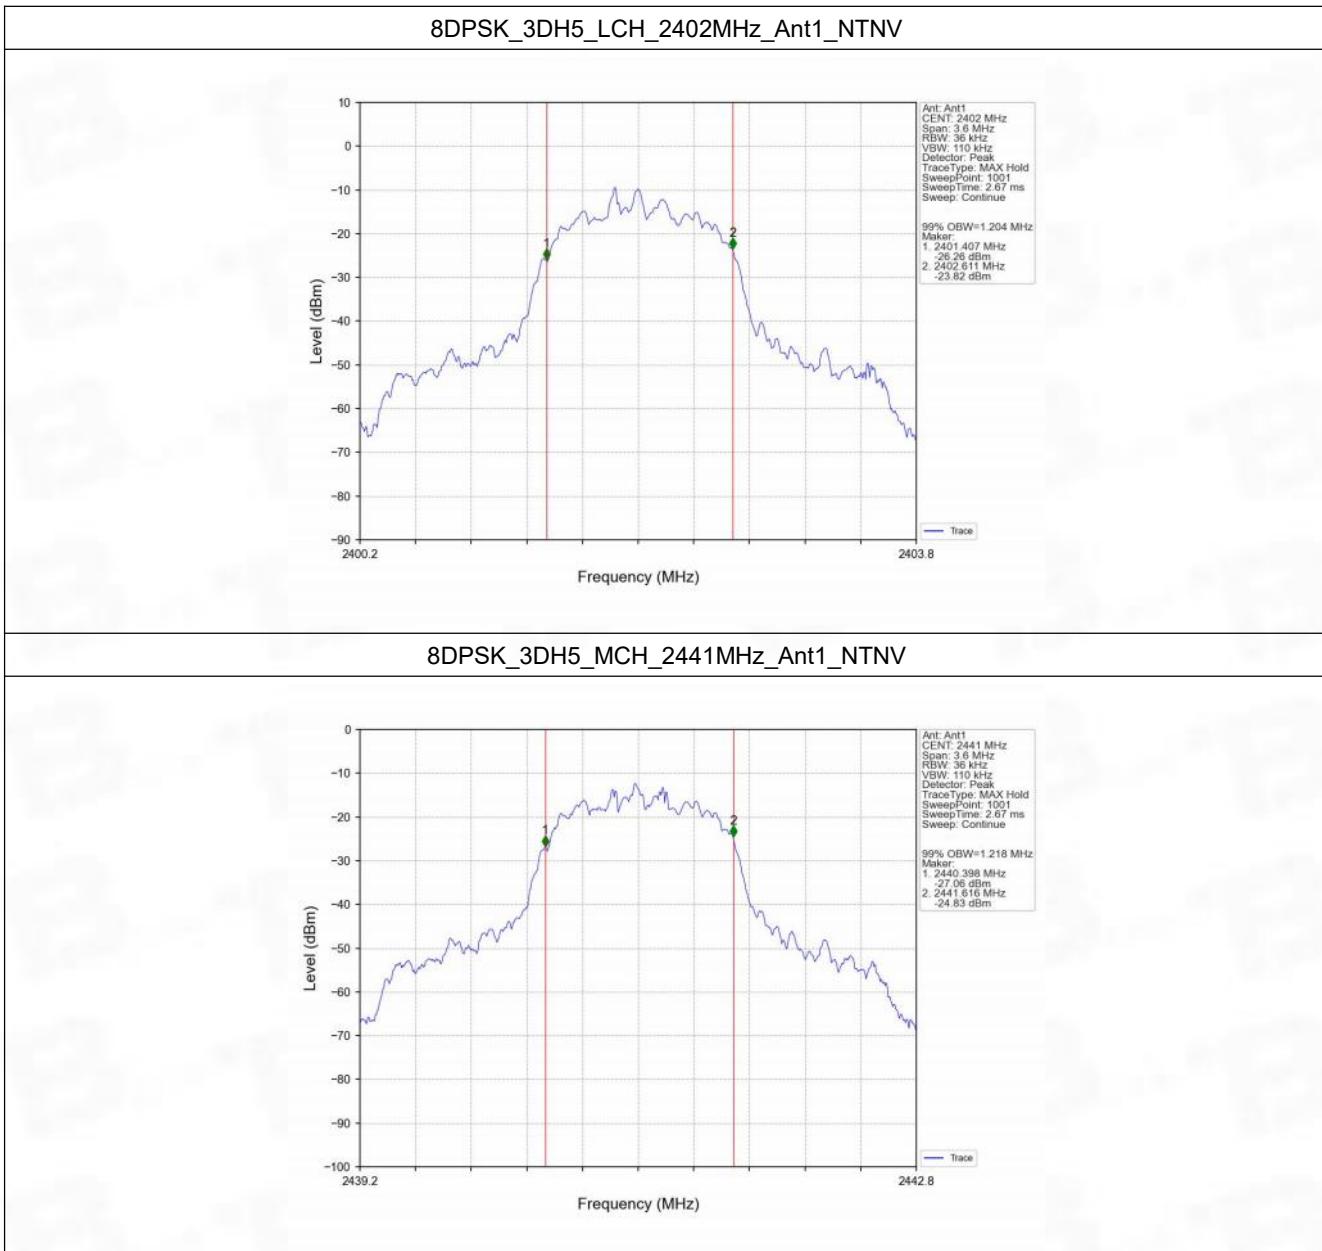


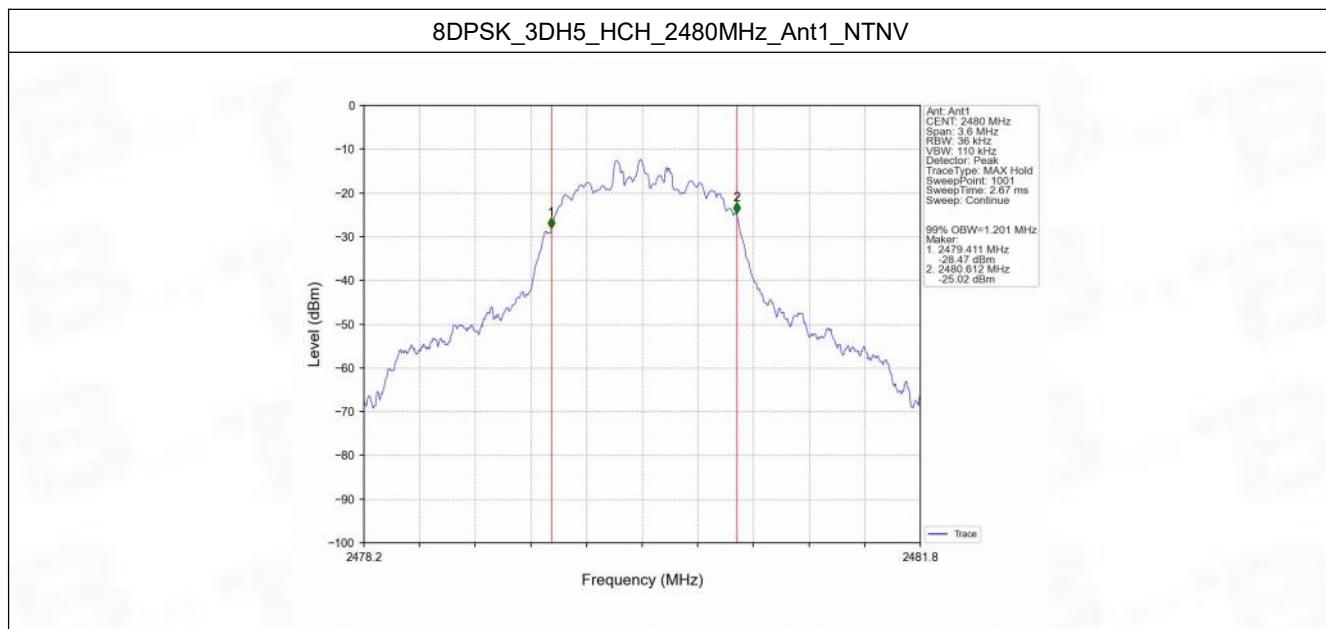



1.2.2 20dB BW

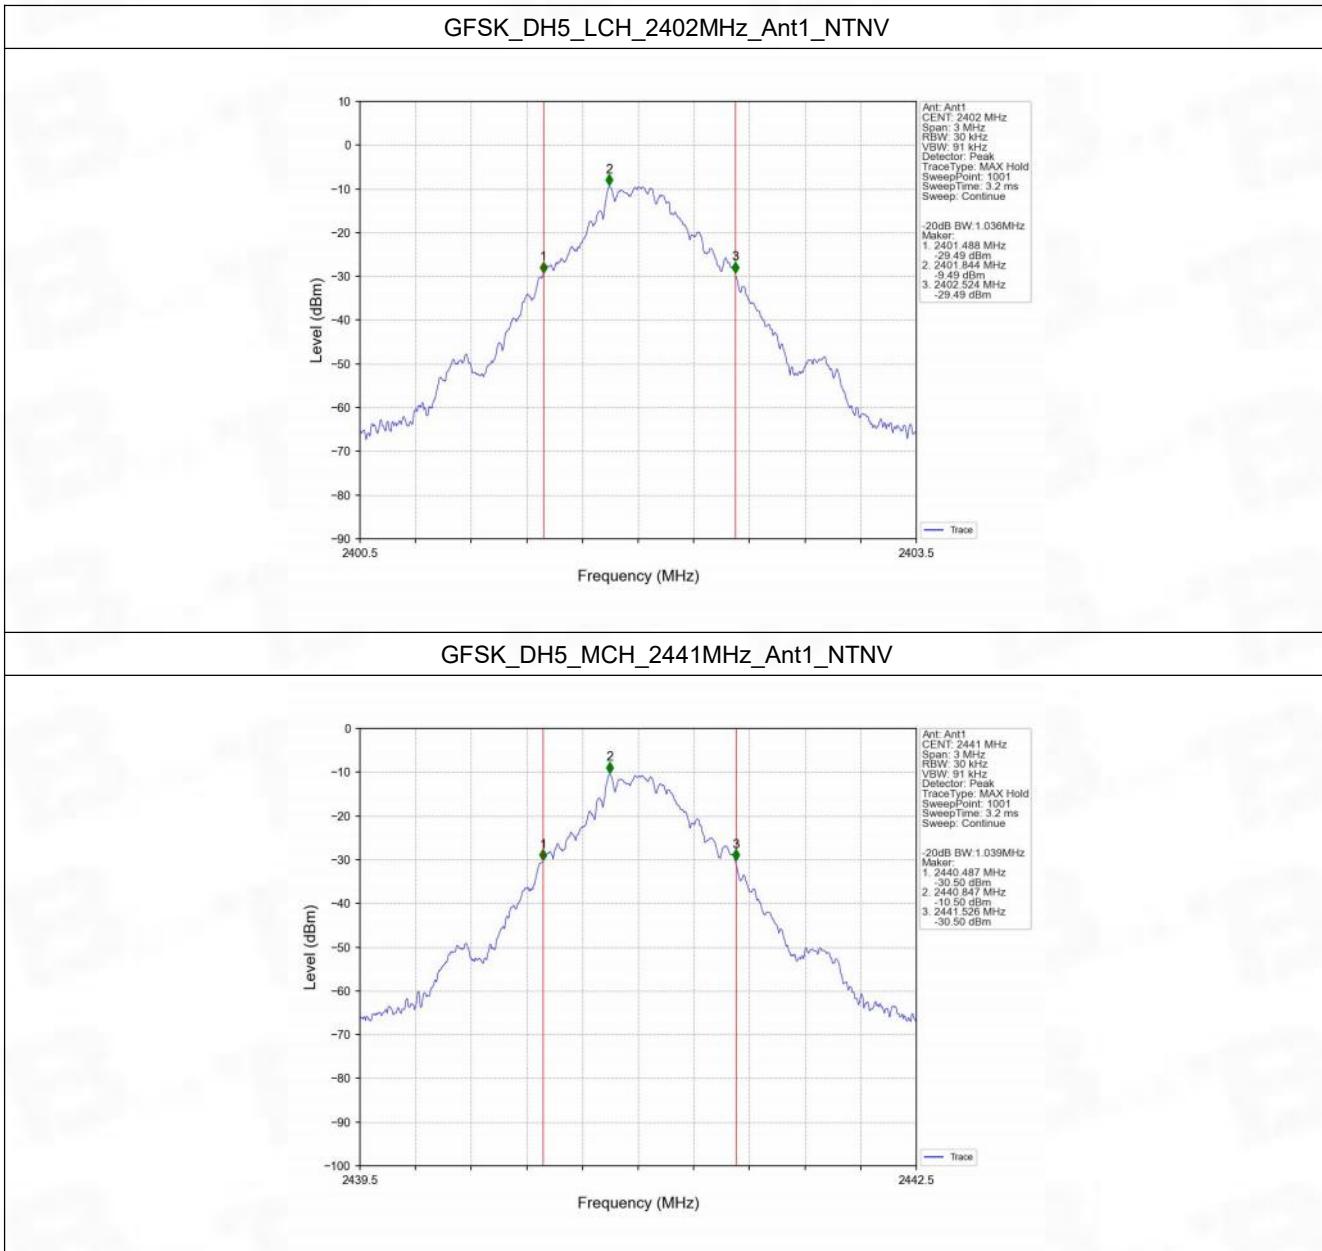

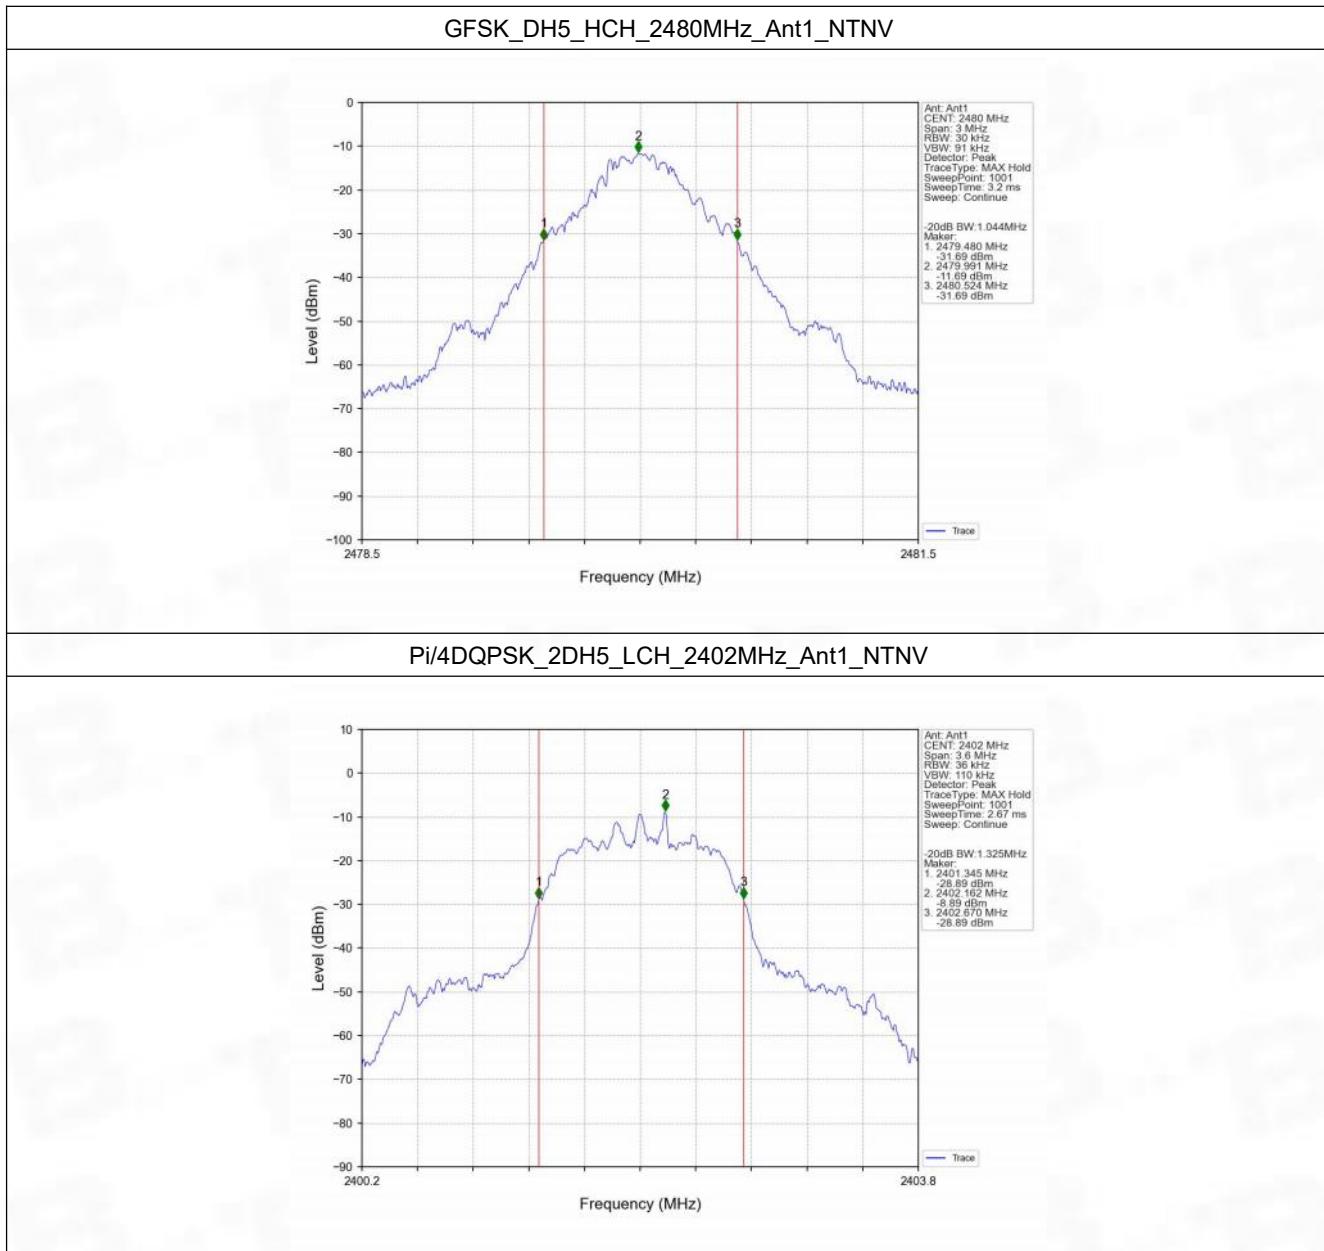

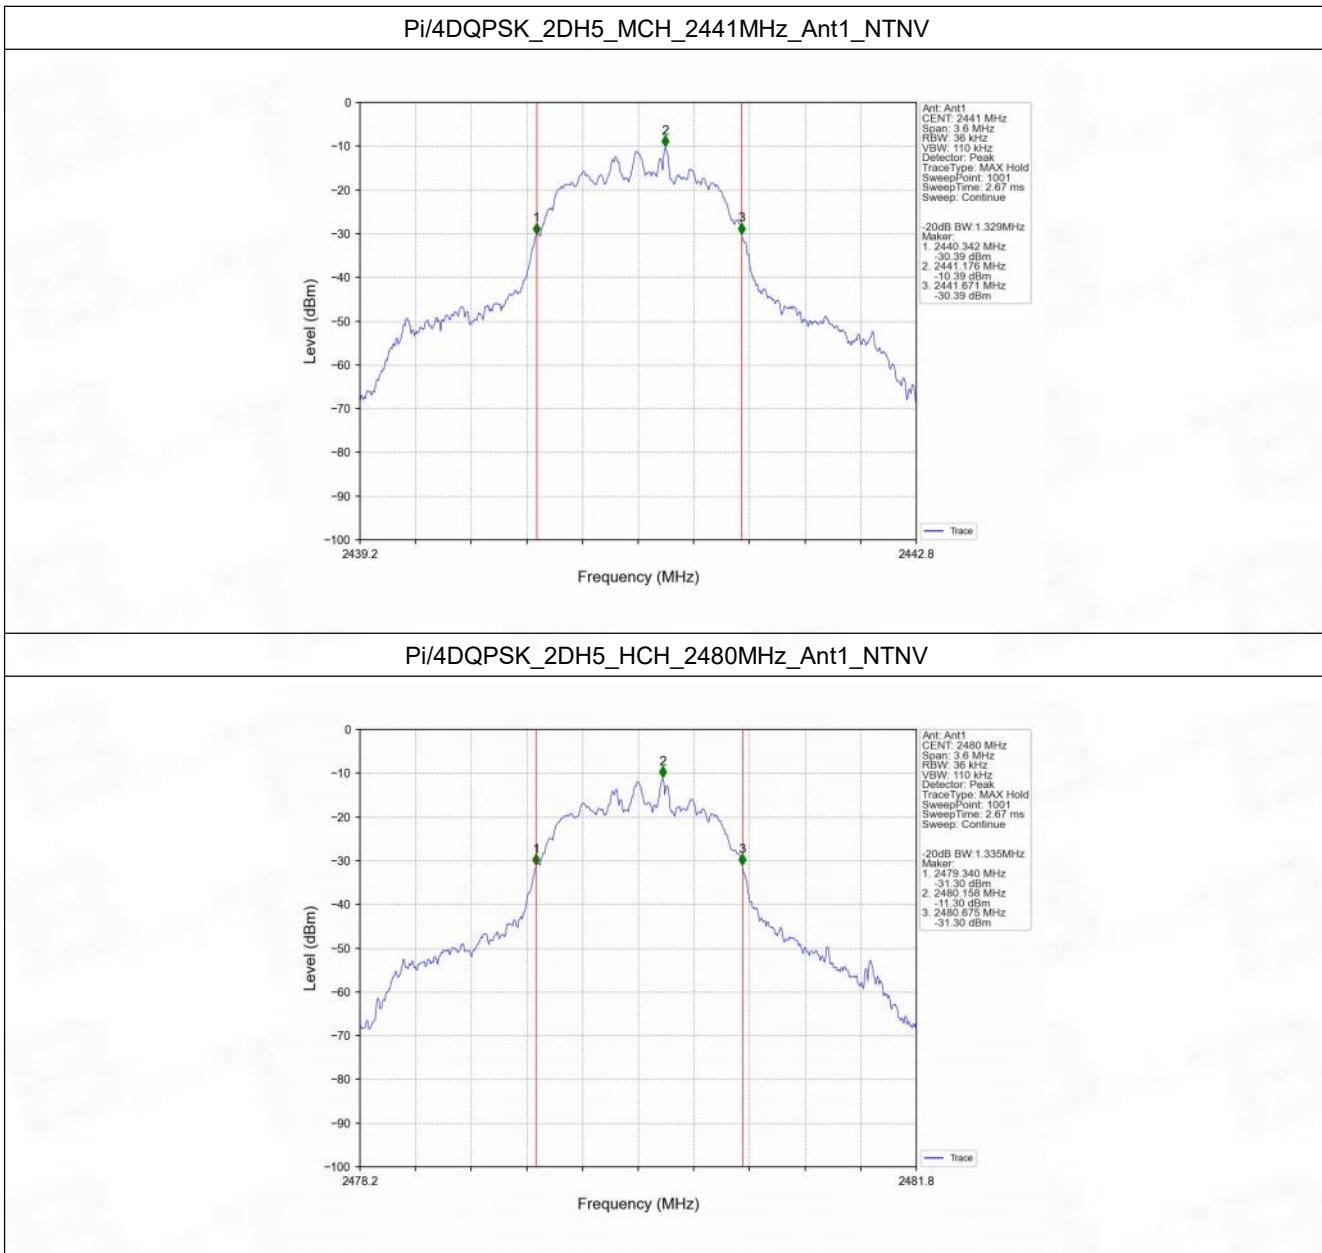

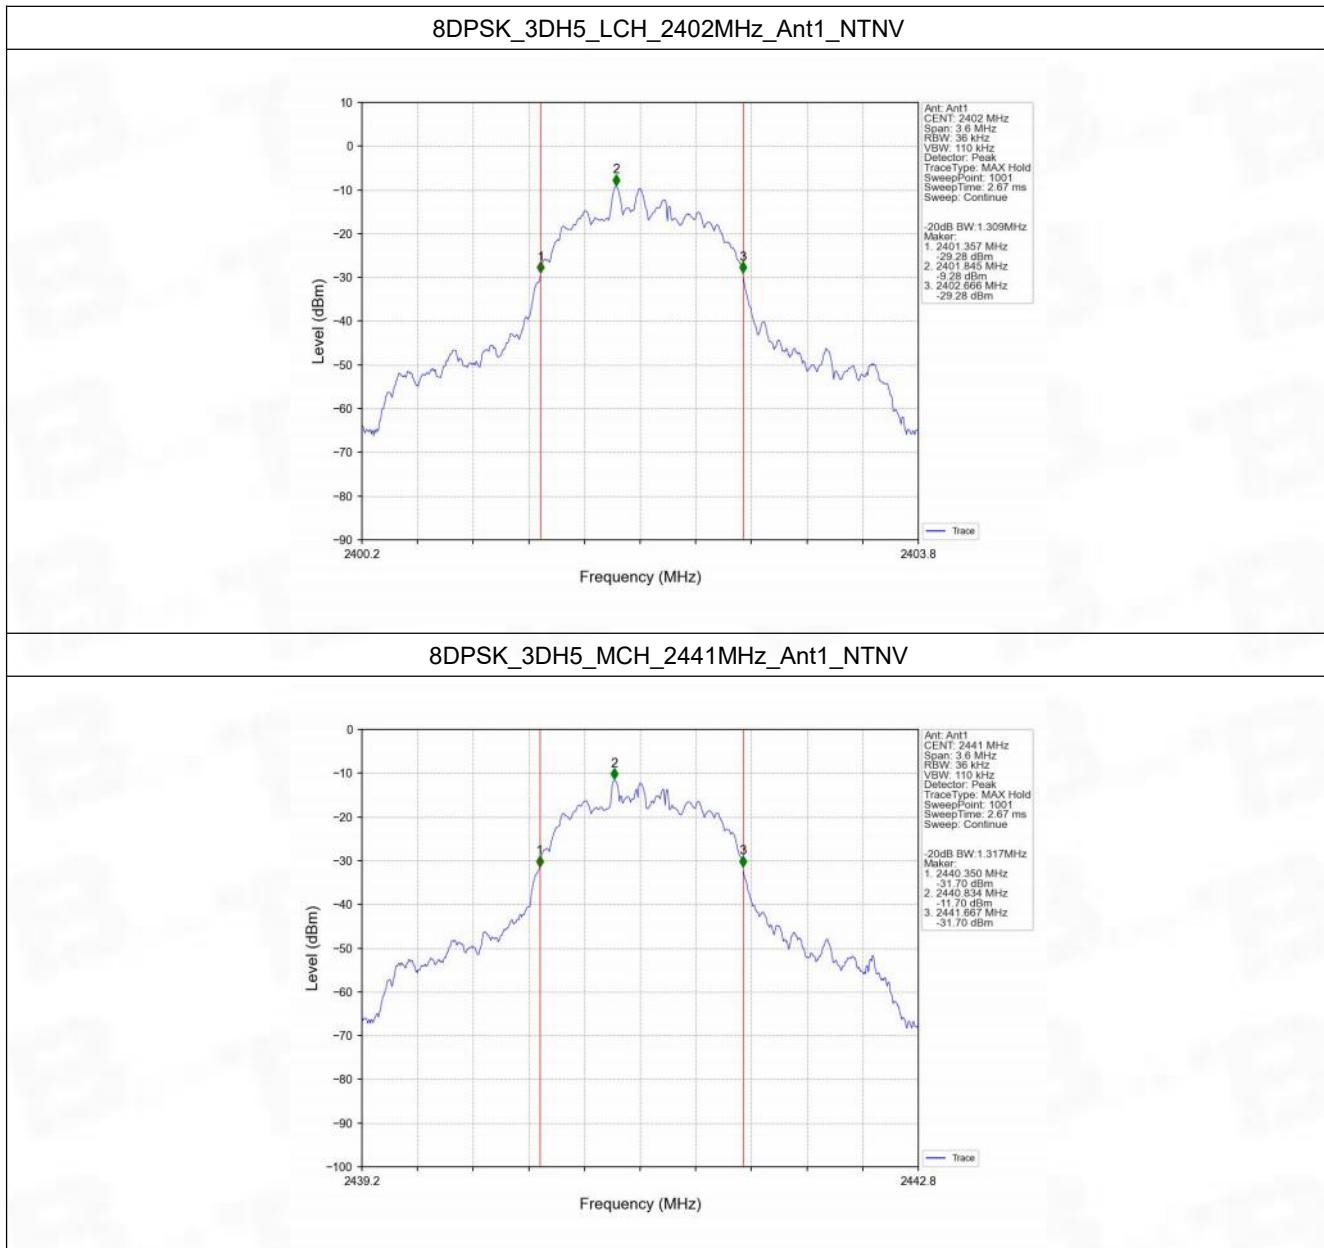

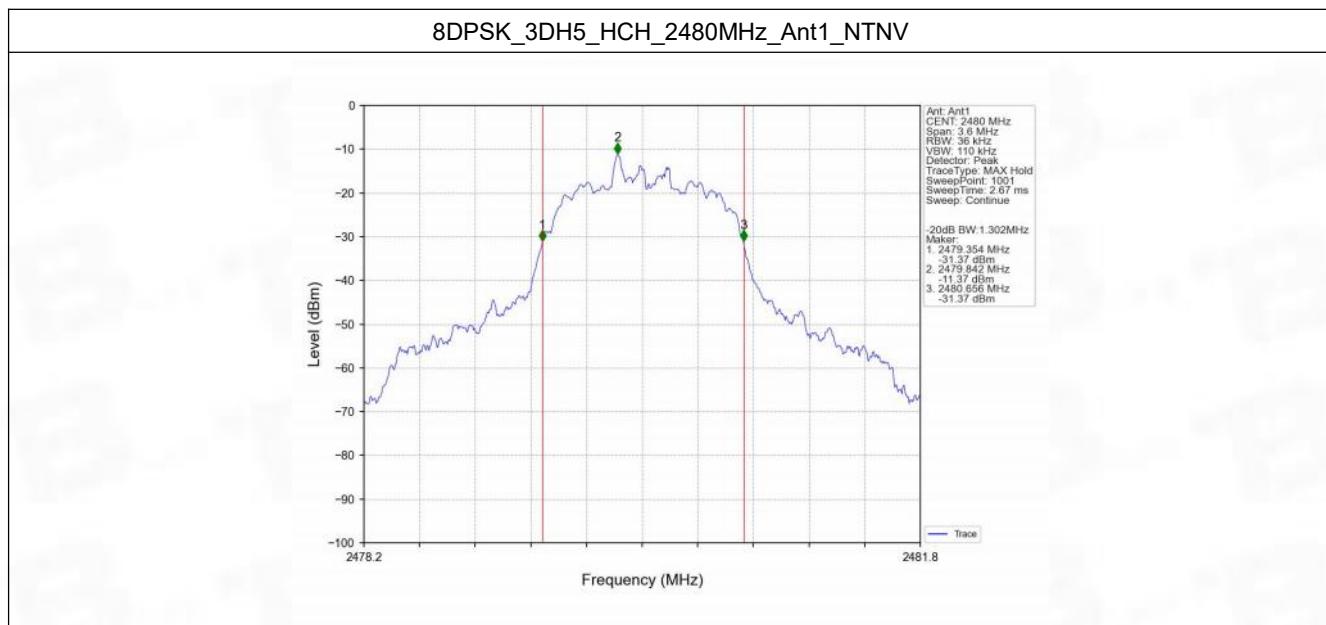

2. Maximum Conducted Output Power

2.1 Test Result


2.1.1 Power


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	-6.61	<=20.97	Pass
		2441	DH5	-8.26	<=20.97	Pass
		2480	DH5	-8.77	<=20.97	Pass
Pi/4DQPSK	SISO	2402	2DH5	-6.16	<=20.97	Pass
		2441	2DH5	-7.64	<=20.97	Pass
		2480	2DH5	-8.32	<=20.97	Pass
8DPSK	SISO	2402	3DH5	-6.09	<=20.97	Pass
		2441	3DH5	-7.58	<=20.97	Pass
		2480	3DH5	-8.36	<=20.97	Pass


Note1: Antenna Gain: Ant1: -0.58dBi;


2.2 Test Graph


2.2.1 Power

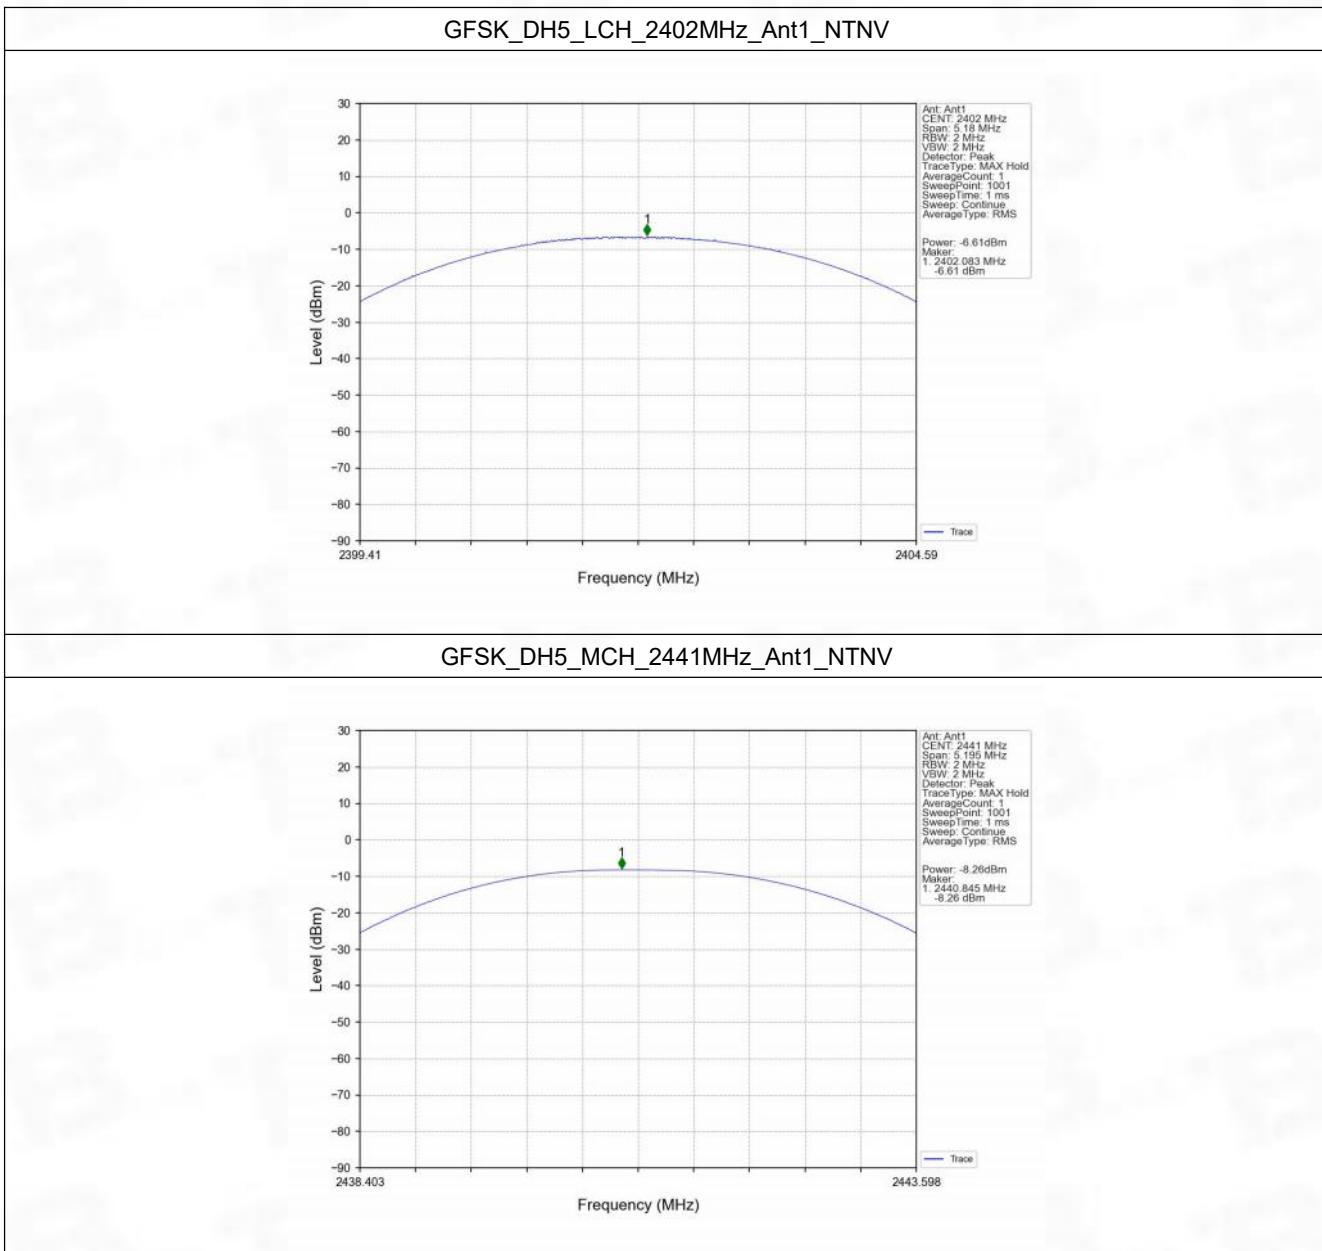

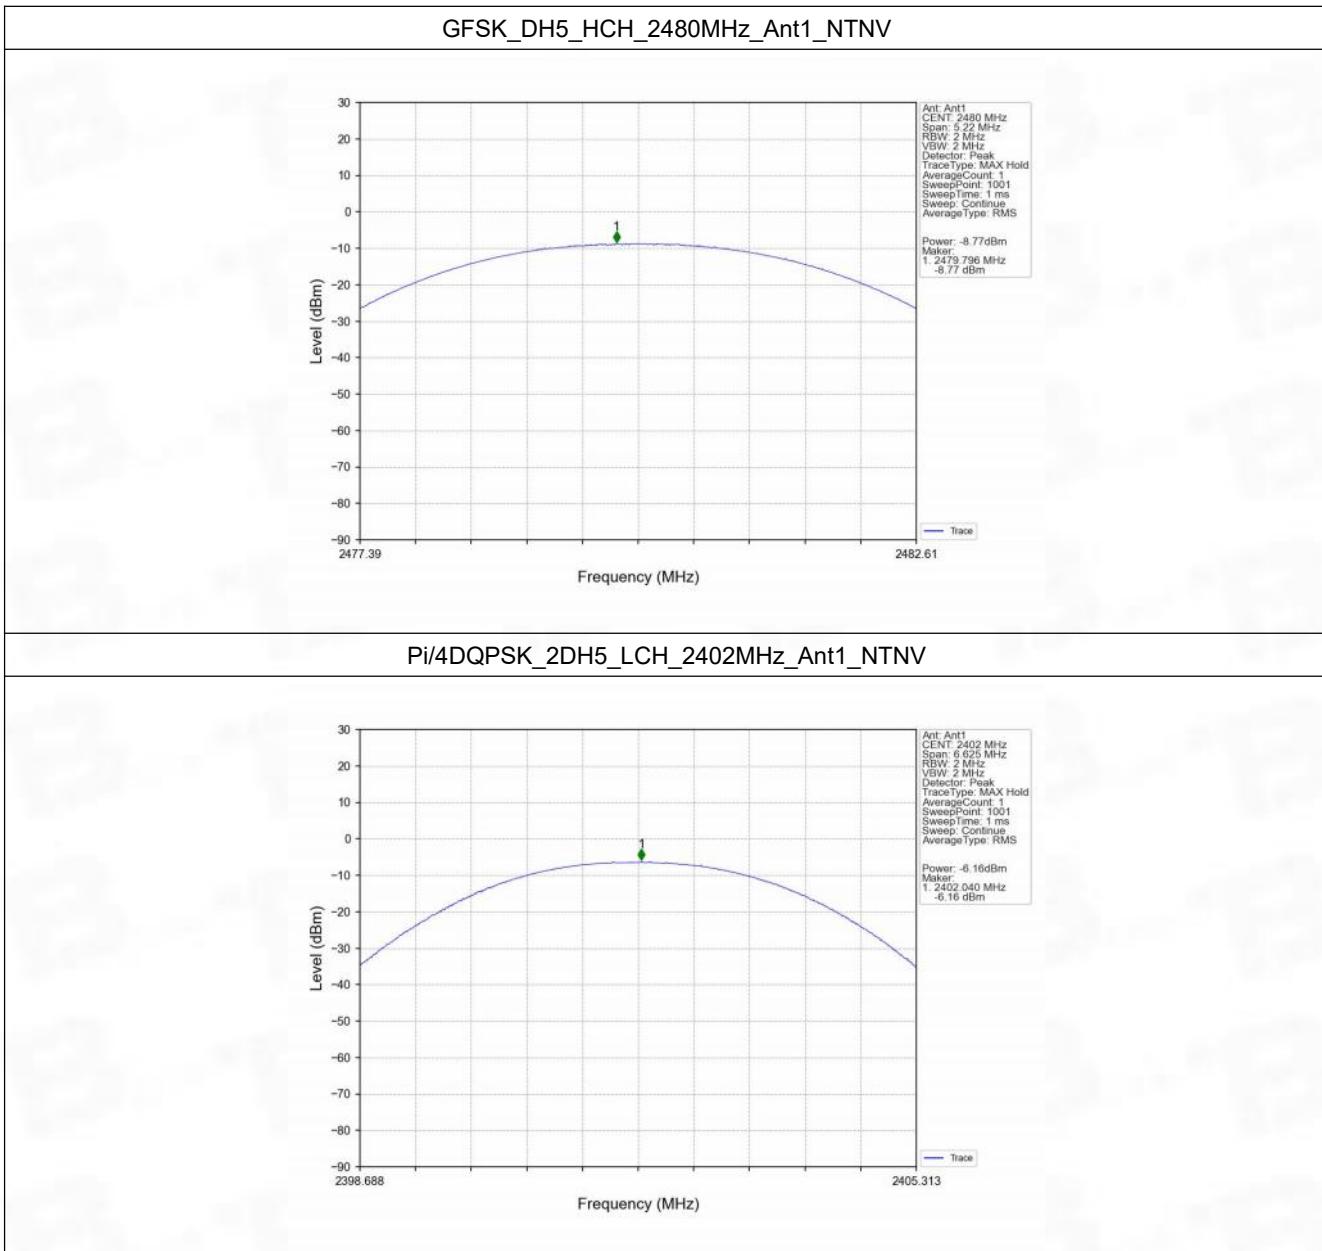

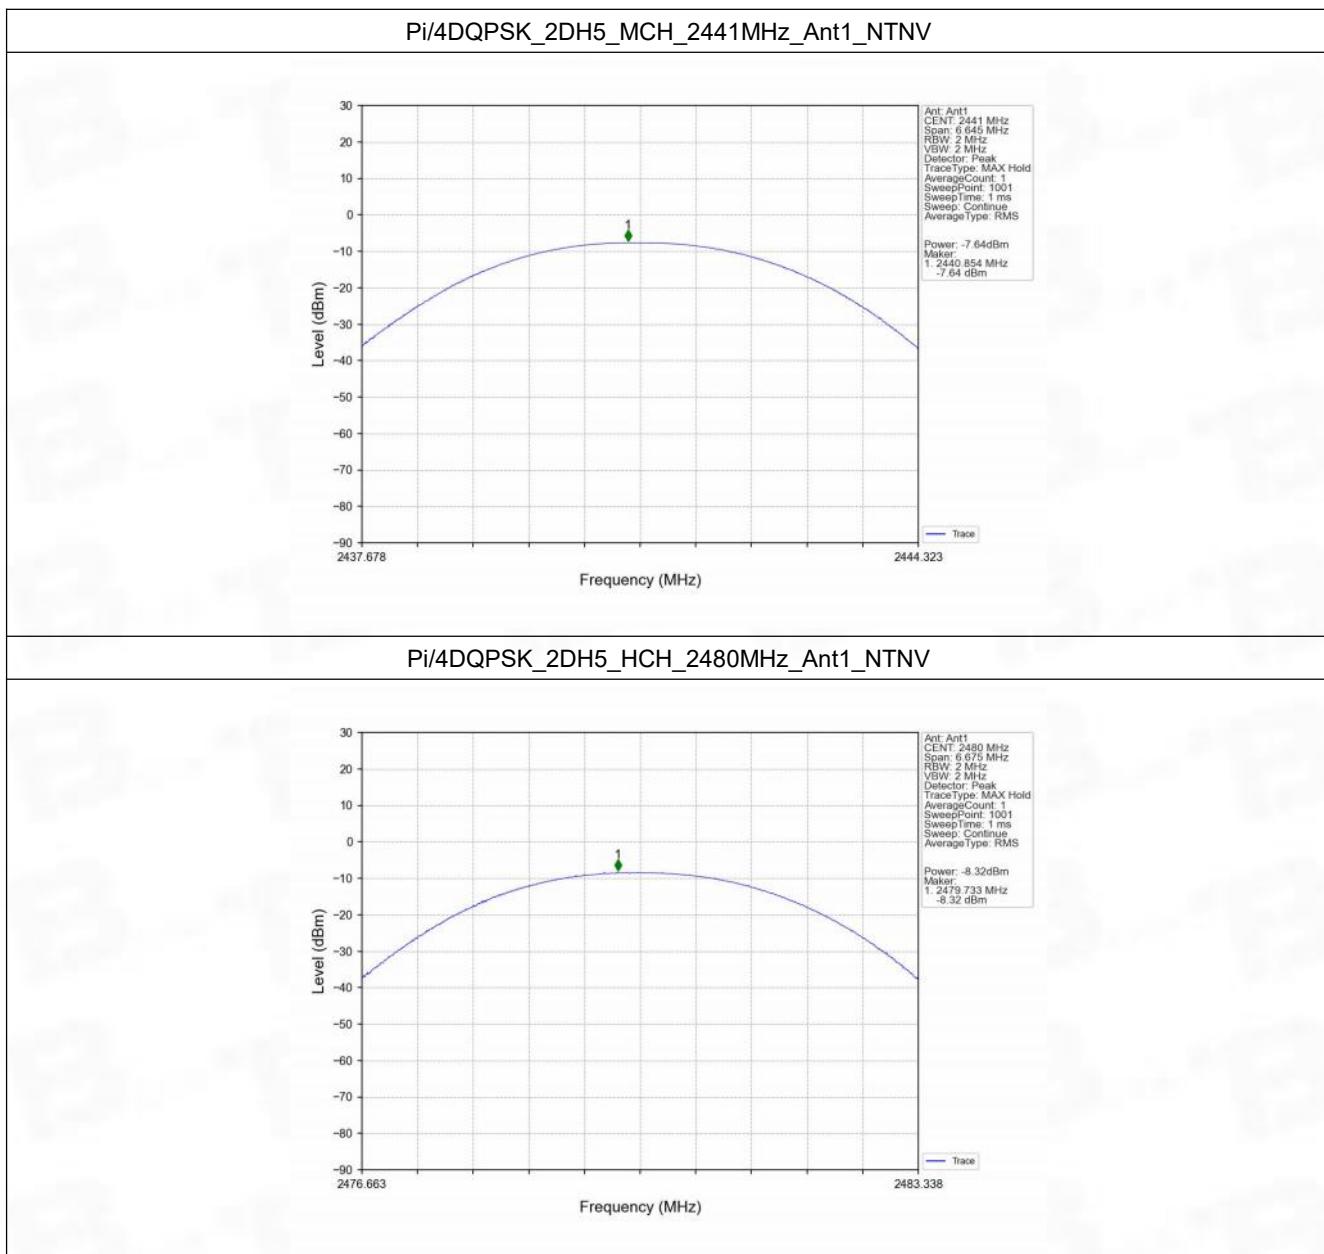

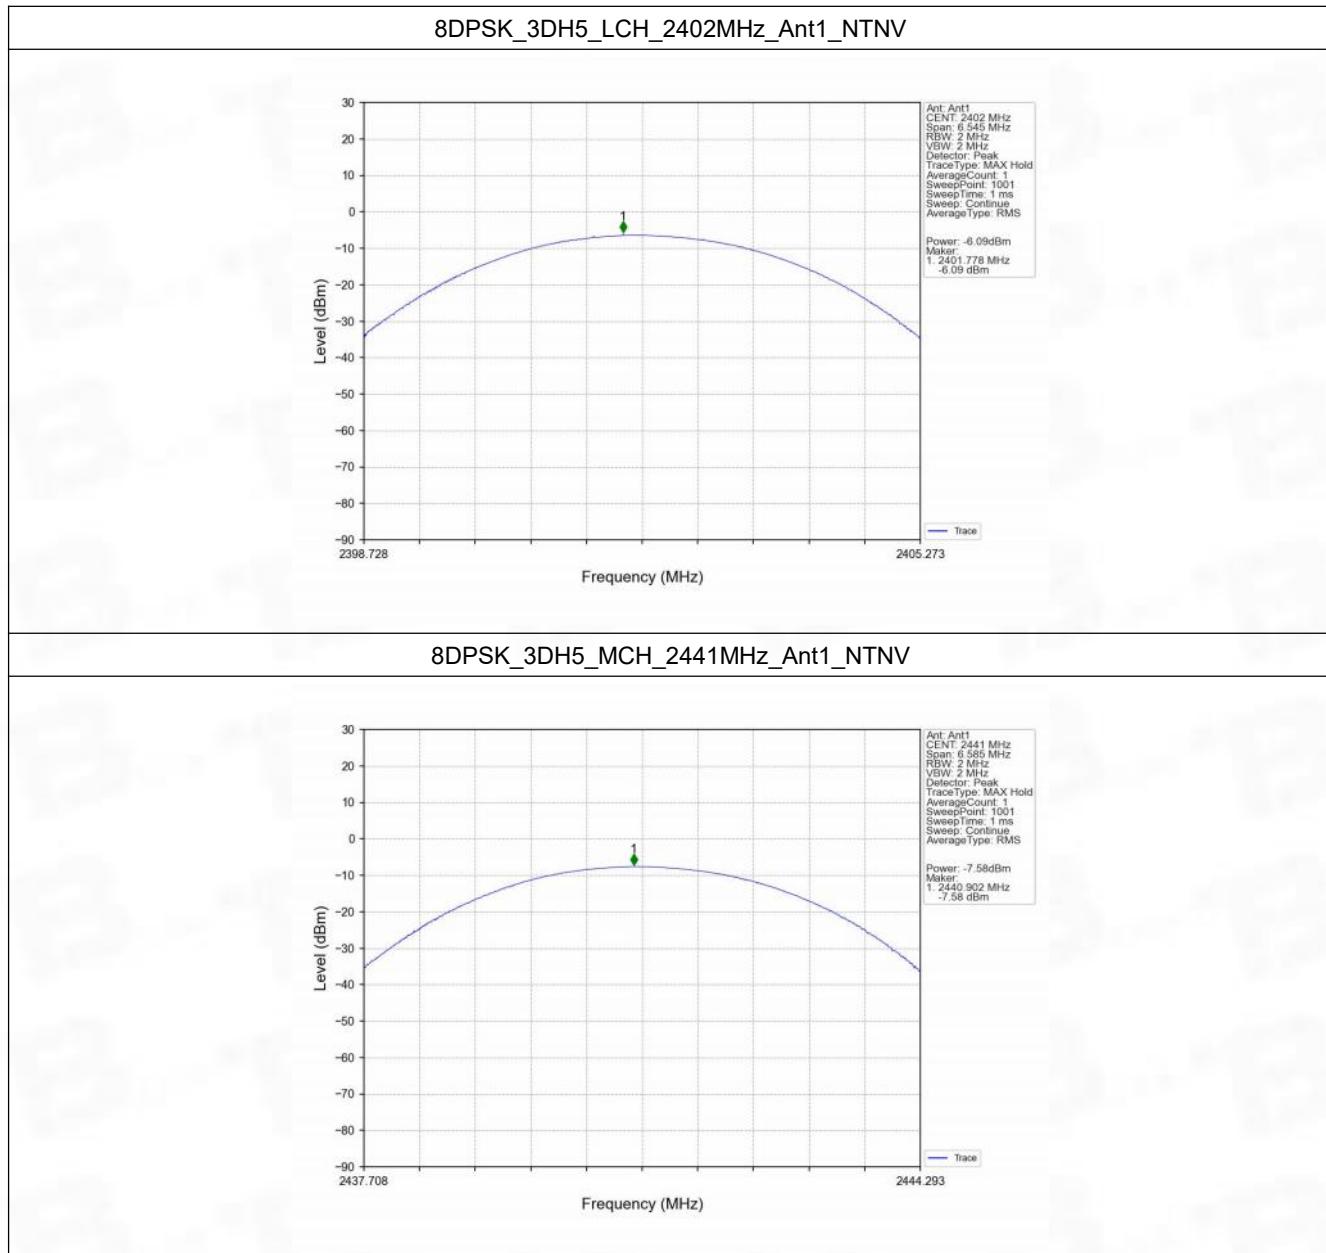

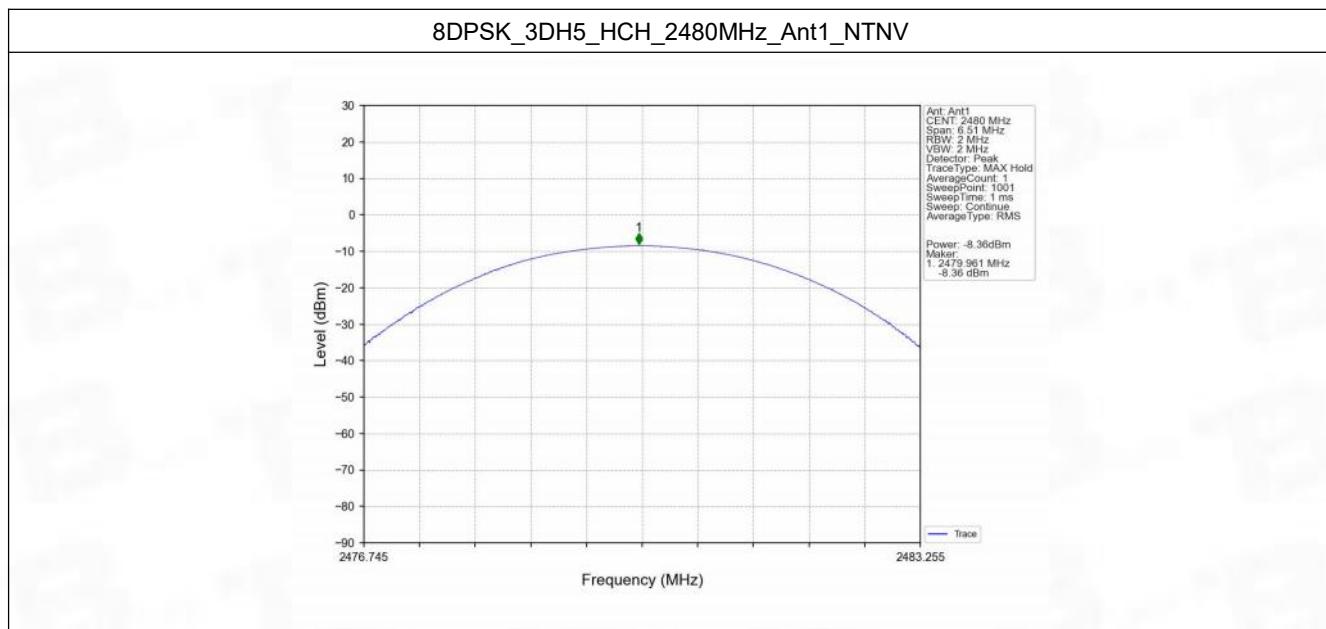

3. Carrier Frequency Separation


3.1 Test Result


3.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	0.994	1.044	>=0.696	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.335	>=0.89	Pass
8DPSK	SISO	HOPP	3DH5	1.001	1.317	>=0.878	Pass

3.2 Test Graph

3.2.1 Ant1

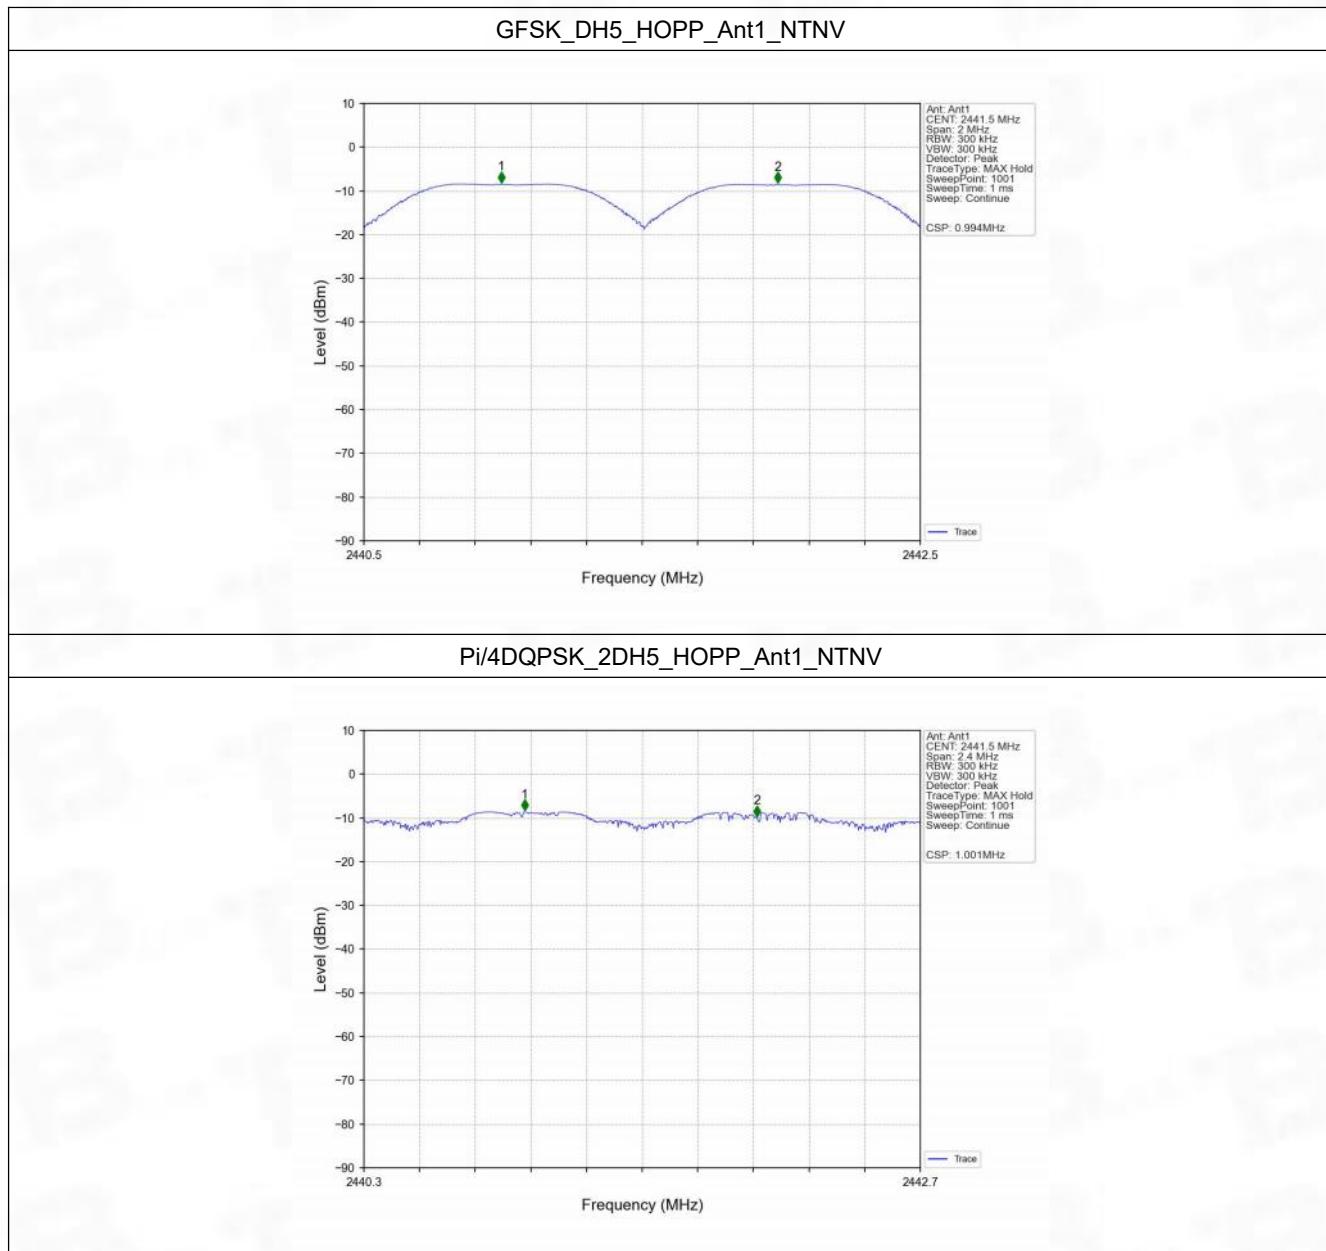

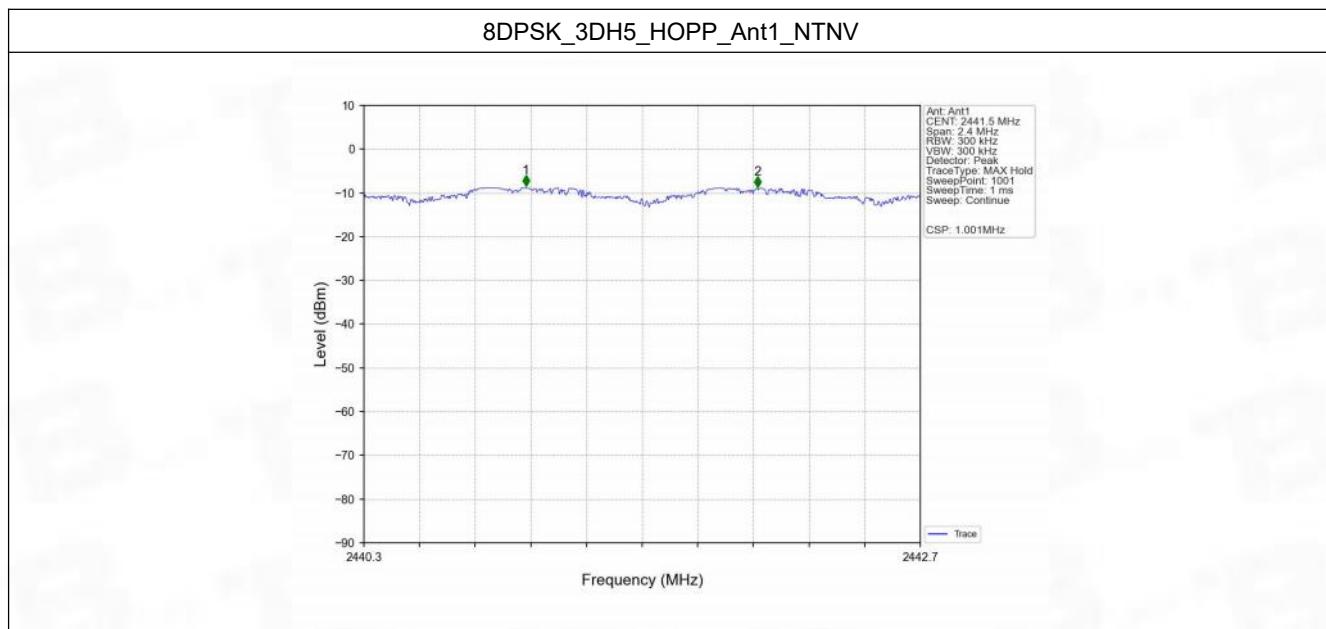

4. Number of Hopping Frequencies


4.1 Test Result


4.1.1 HoppNum

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	>=15	Pass
8DPSK	SISO	HOPP	3DH5	79	>=15	Pass

4.2 Test Graph

4.2.1 HoppNum

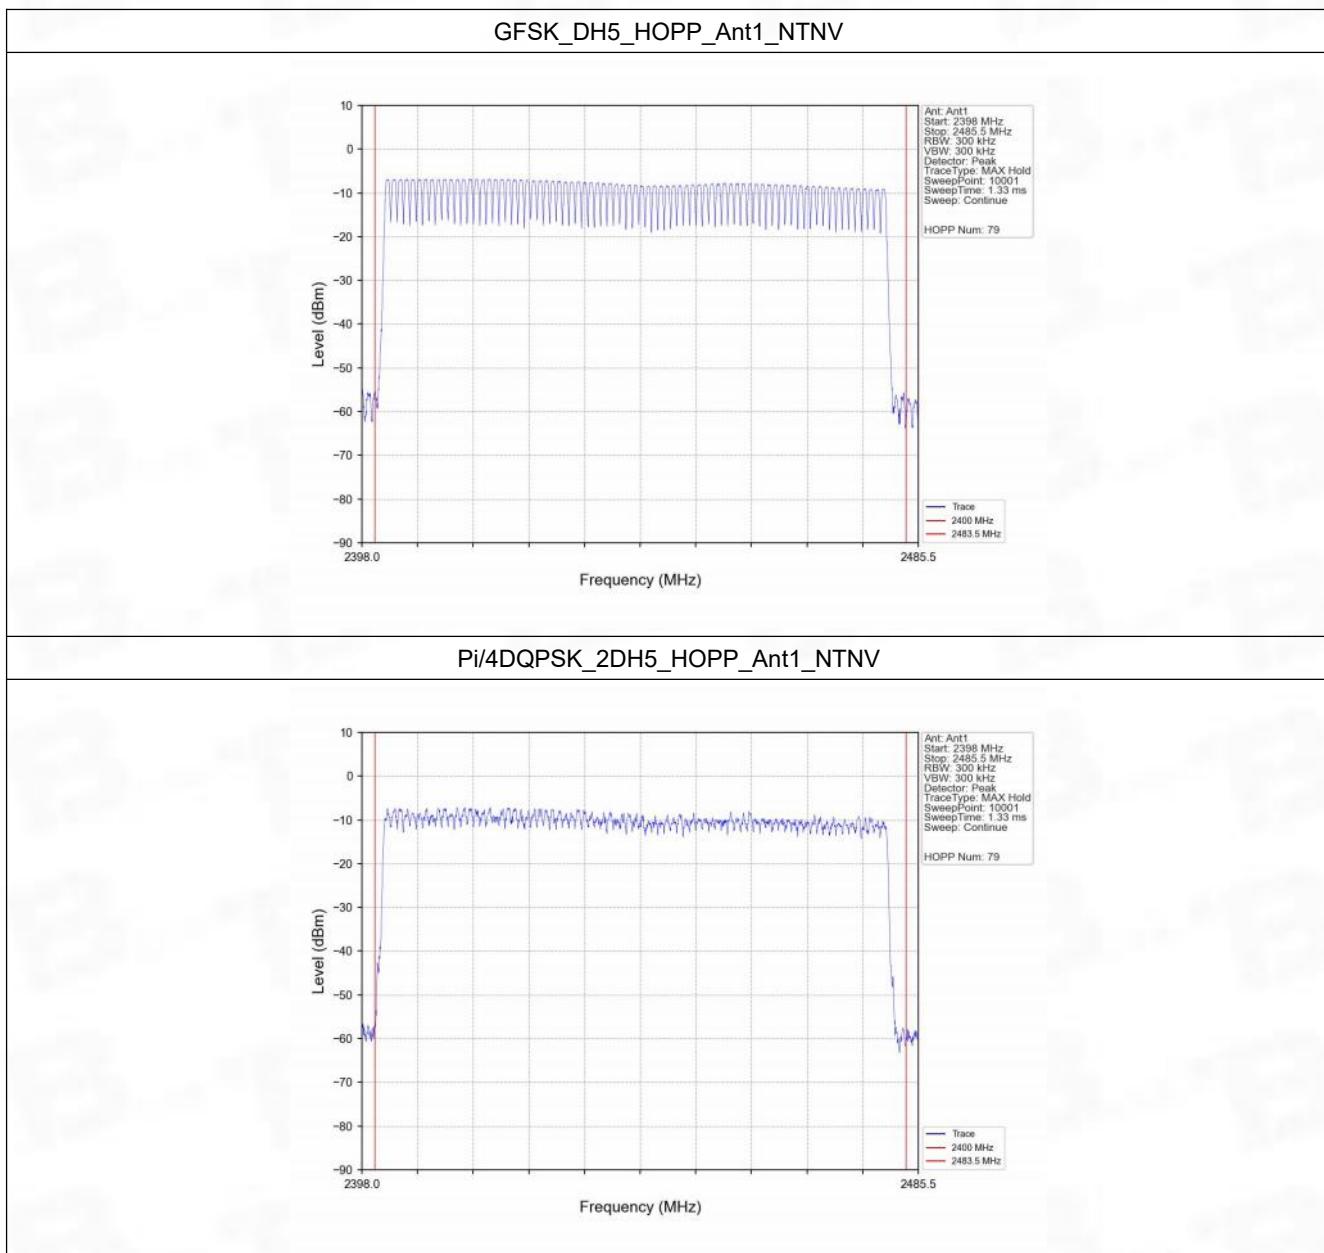

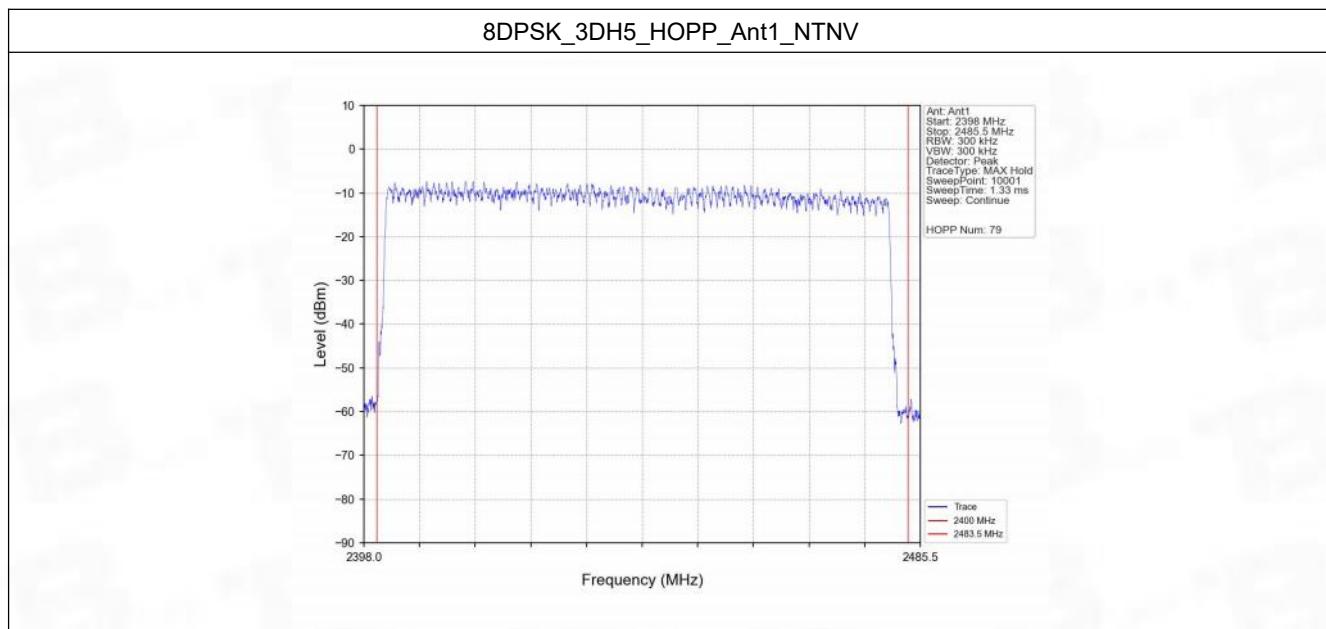

5. Time of Occupancy (Dwell Time)


5.1 Test Result


5.1.1 Ant1


Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.380	31.600	320	121.600	<=400	Pass
			DH3	1.640	31.600	157	257.480	<=400	Pass
			DH5	2.888	31.600	105	303.240	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.390	31.600	318	124.020	<=400	Pass
			2DH3	1.642	31.600	158	259.436	<=400	Pass
			2DH5	2.896	31.600	103	298.288	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.390	31.600	320	124.800	<=400	Pass
			3DH3	1.648	31.600	165	271.920	<=400	Pass
			3DH5	2.898	31.600	109	315.882	<=400	Pass


5.2 Test Graph


5.2.1 Ant1

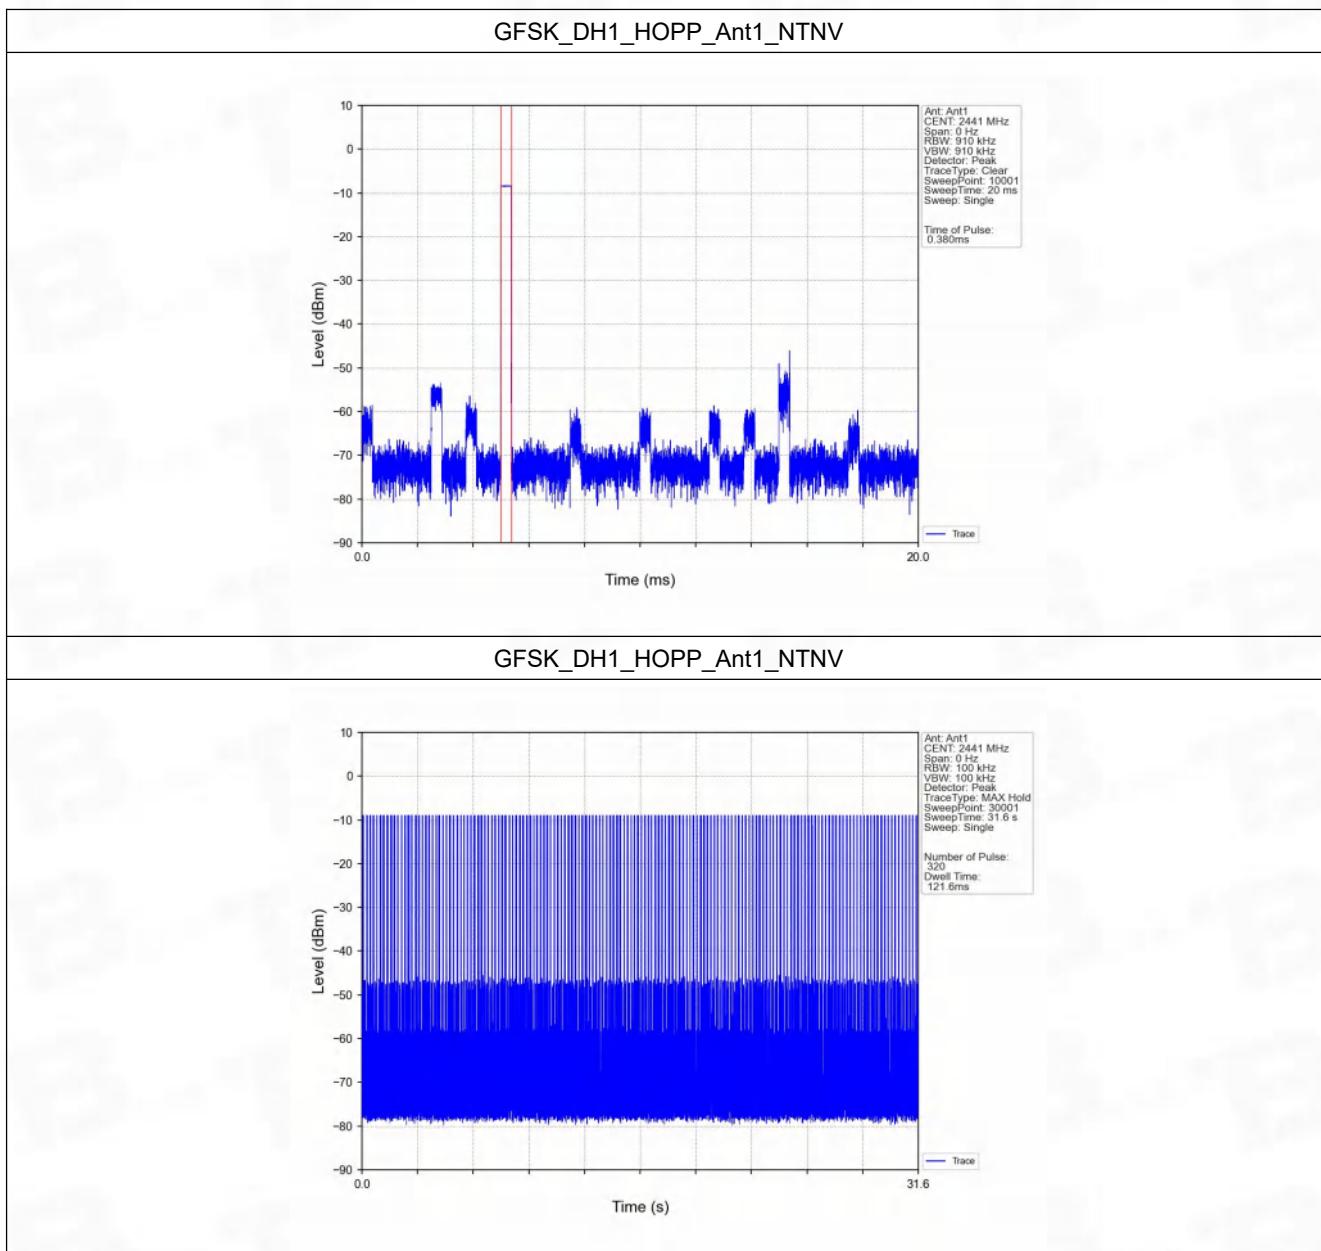


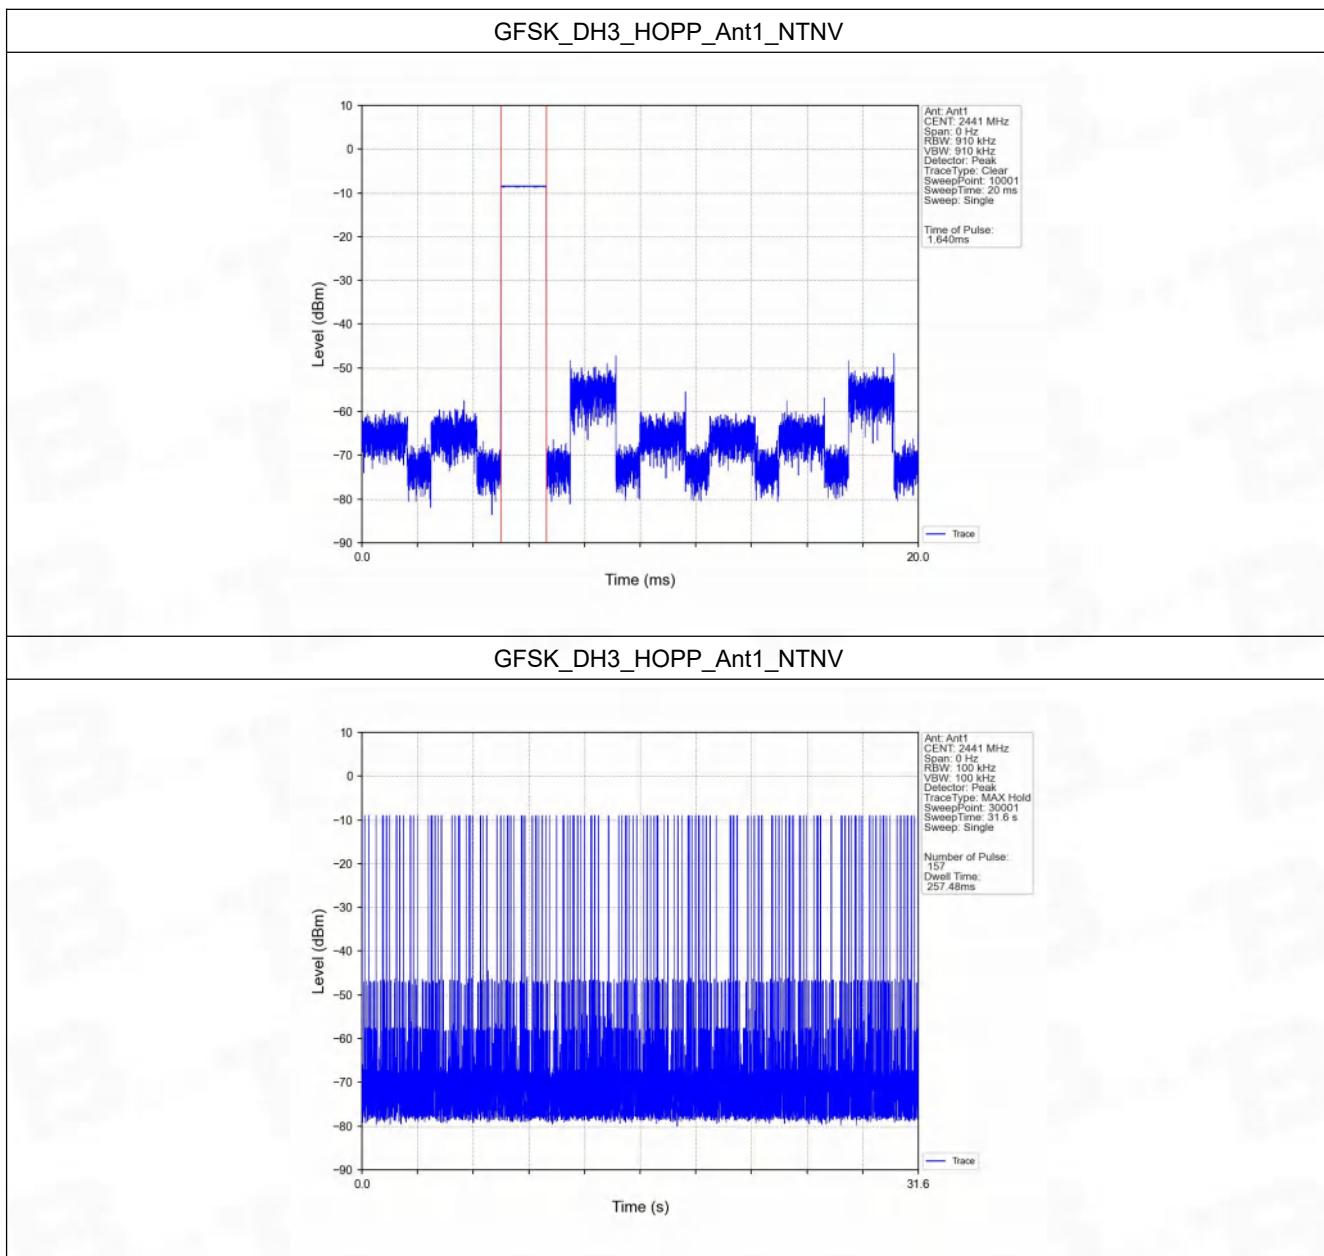


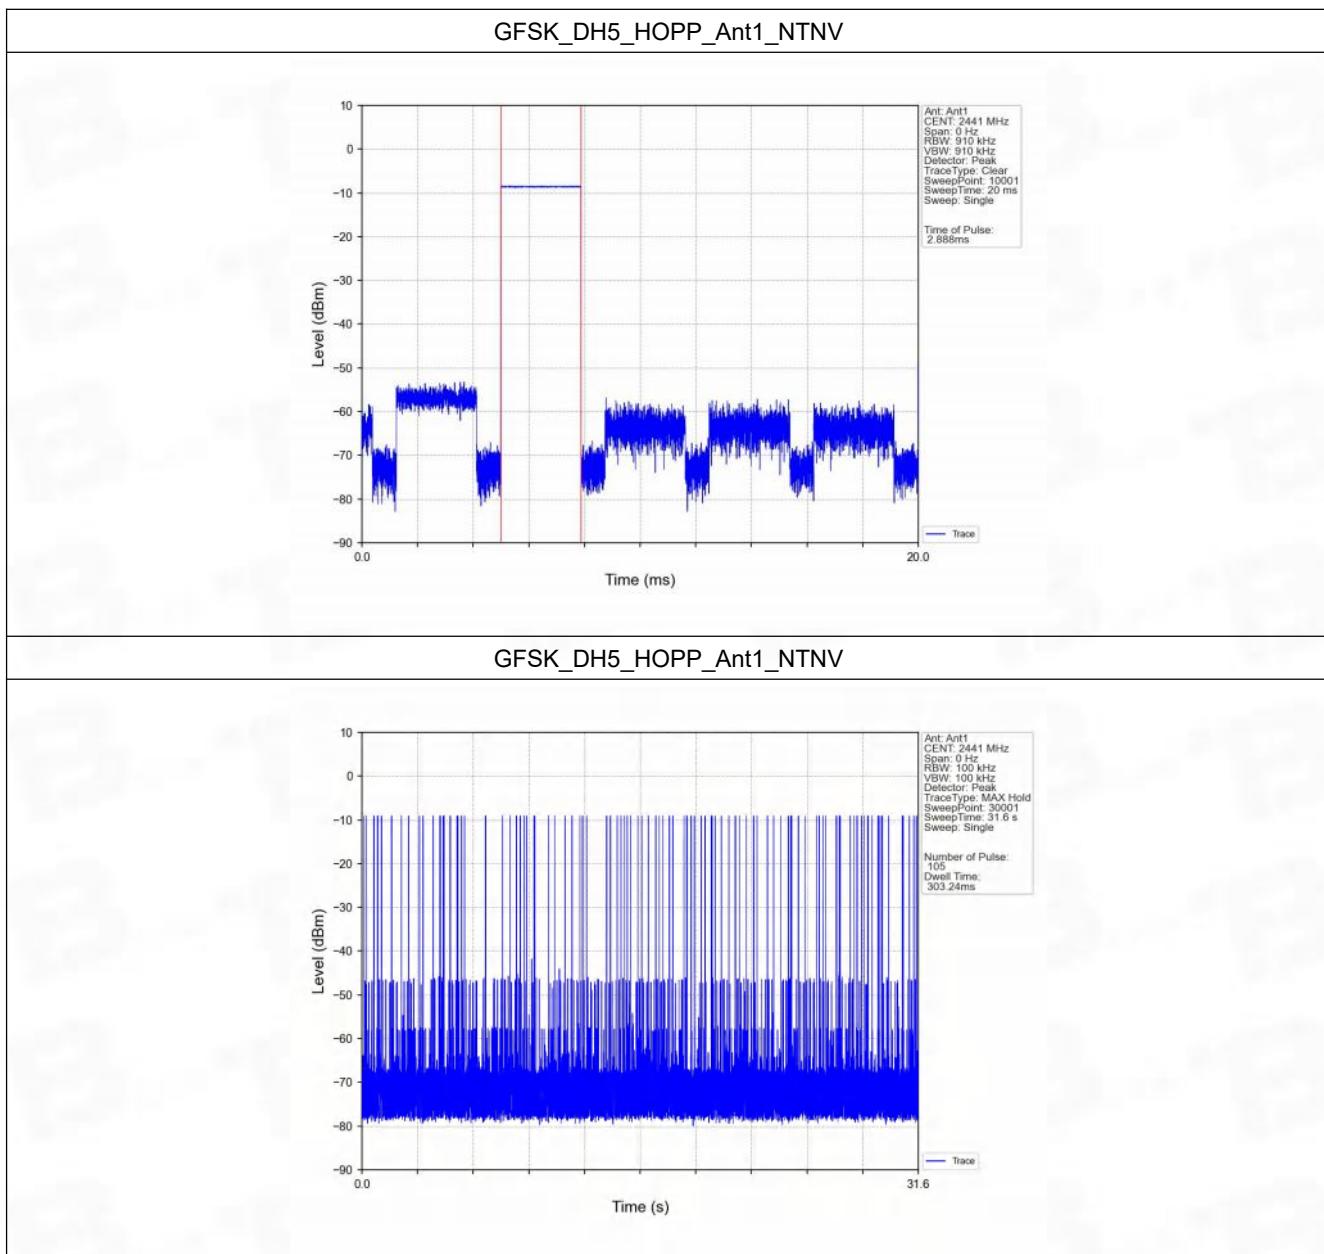


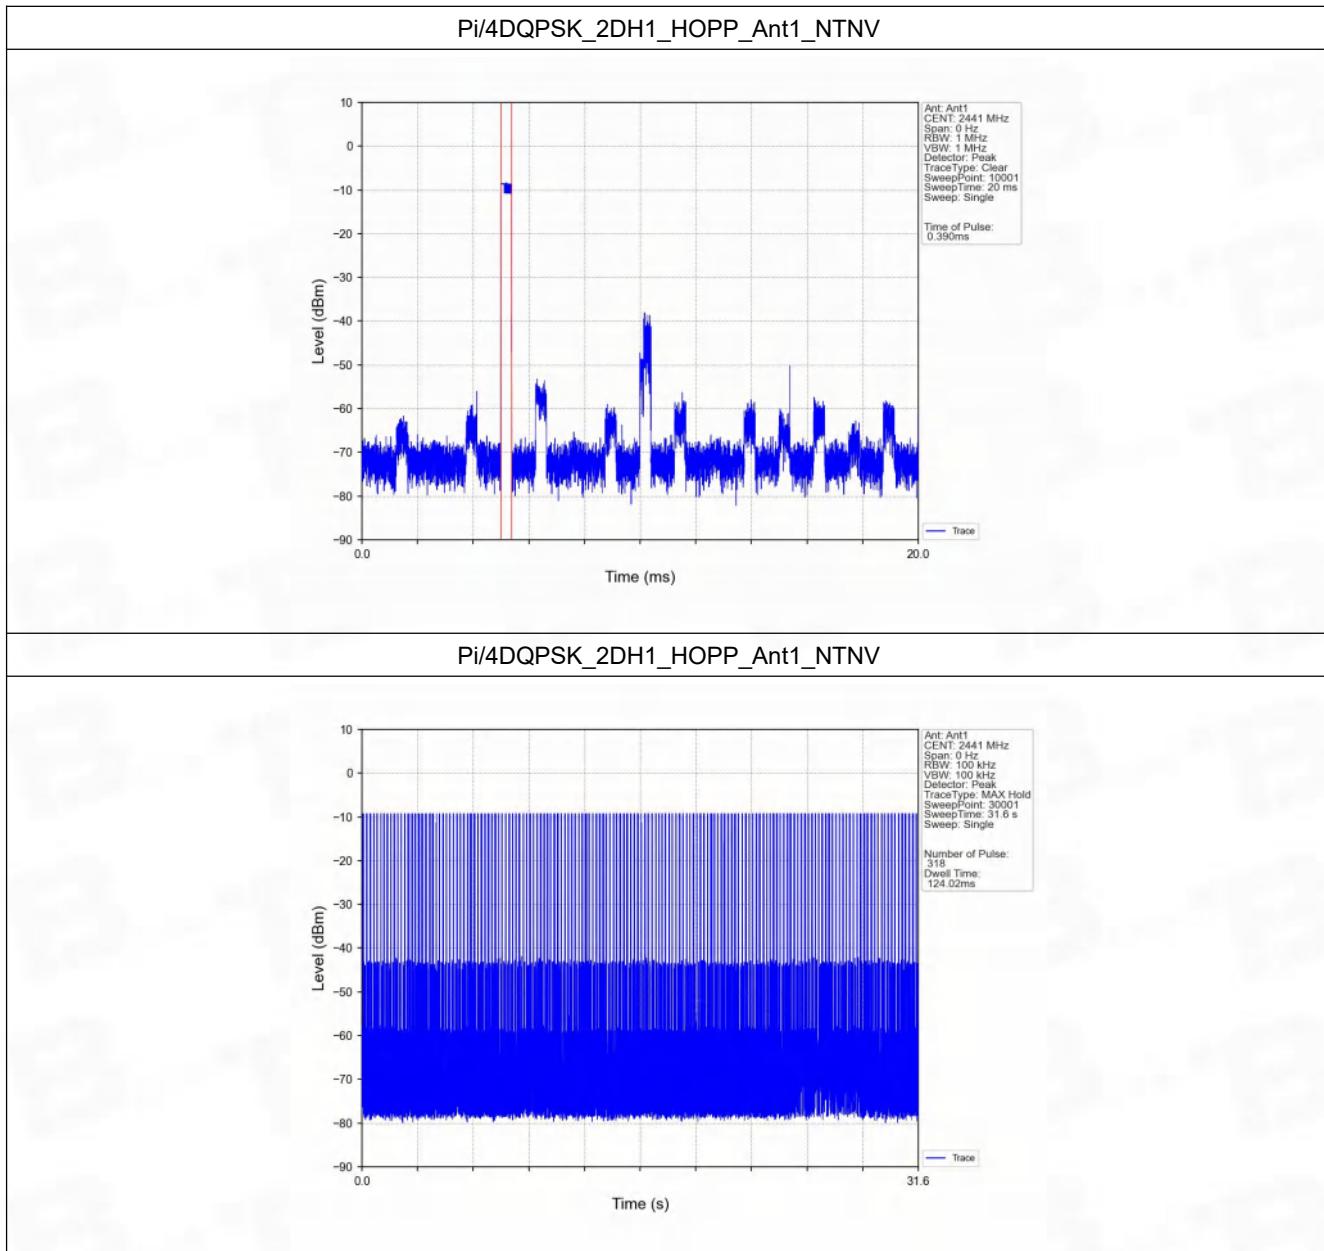


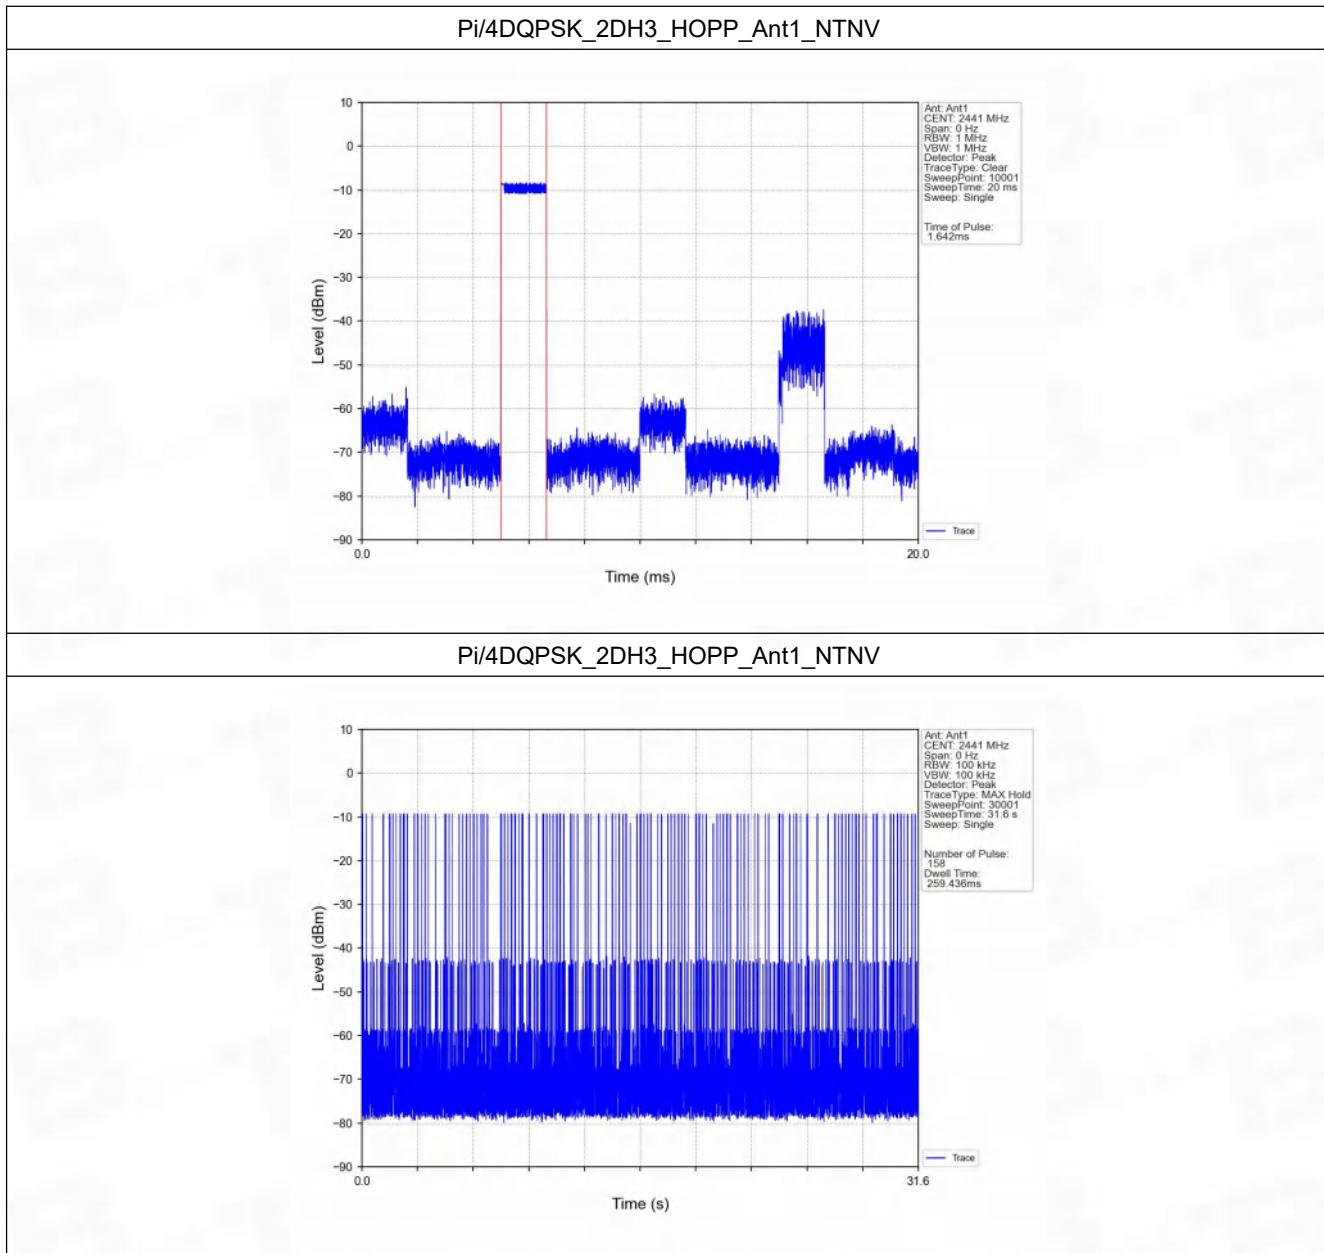

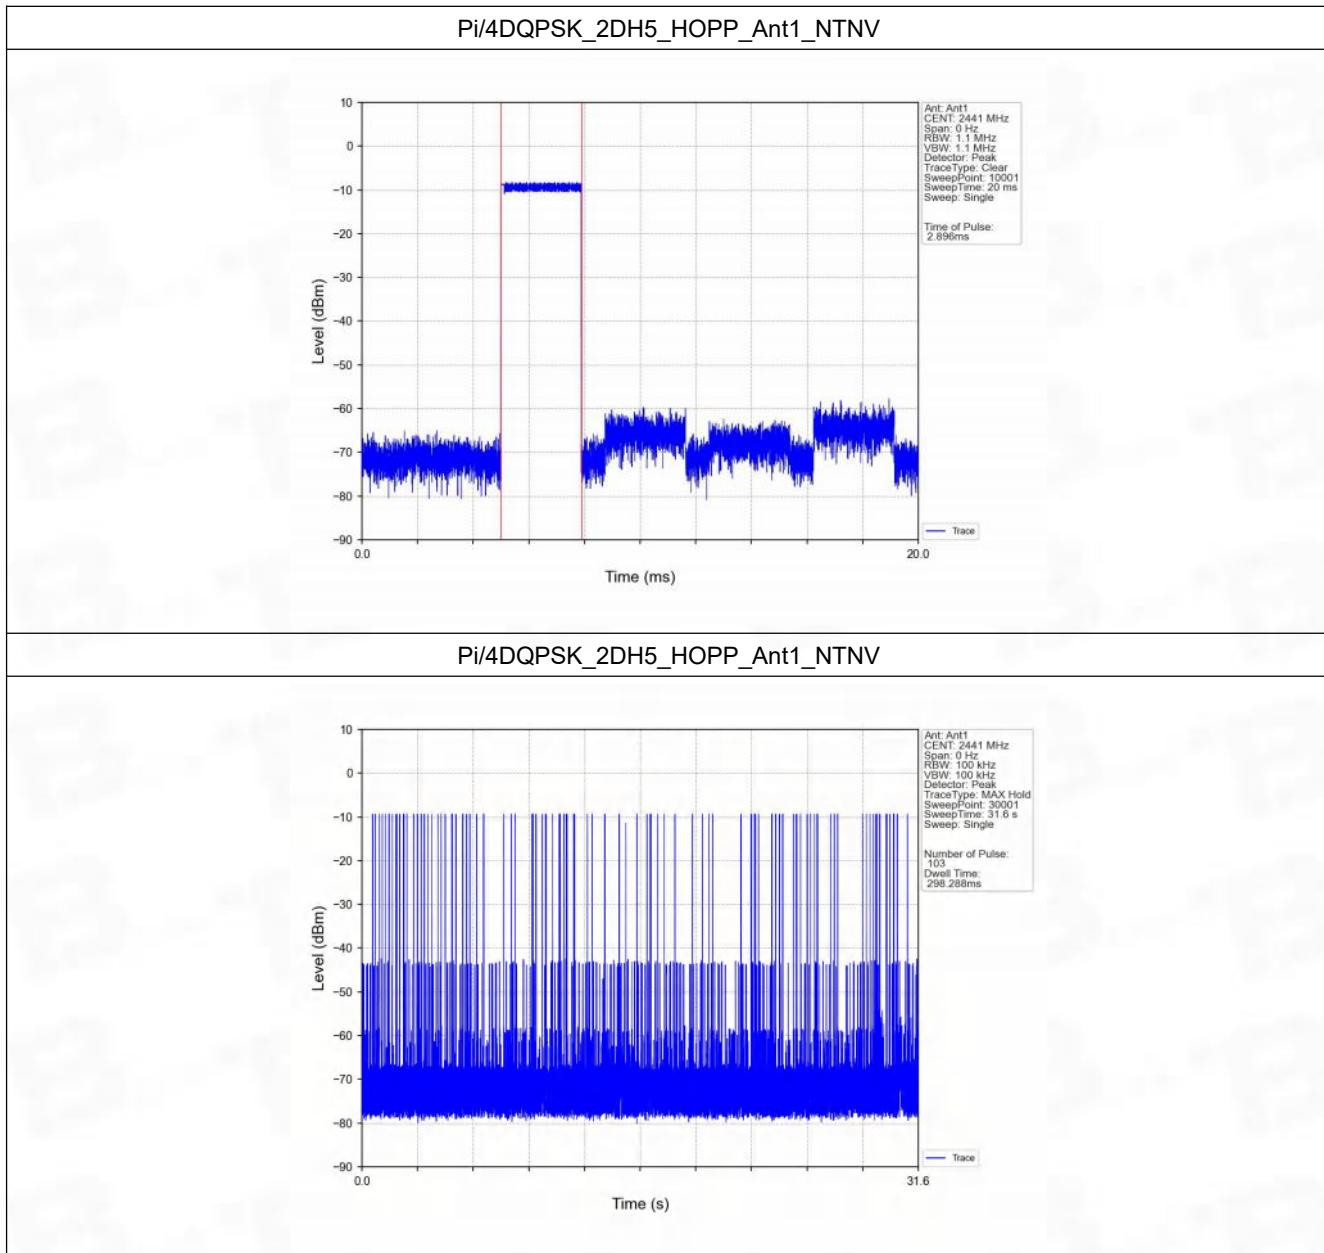

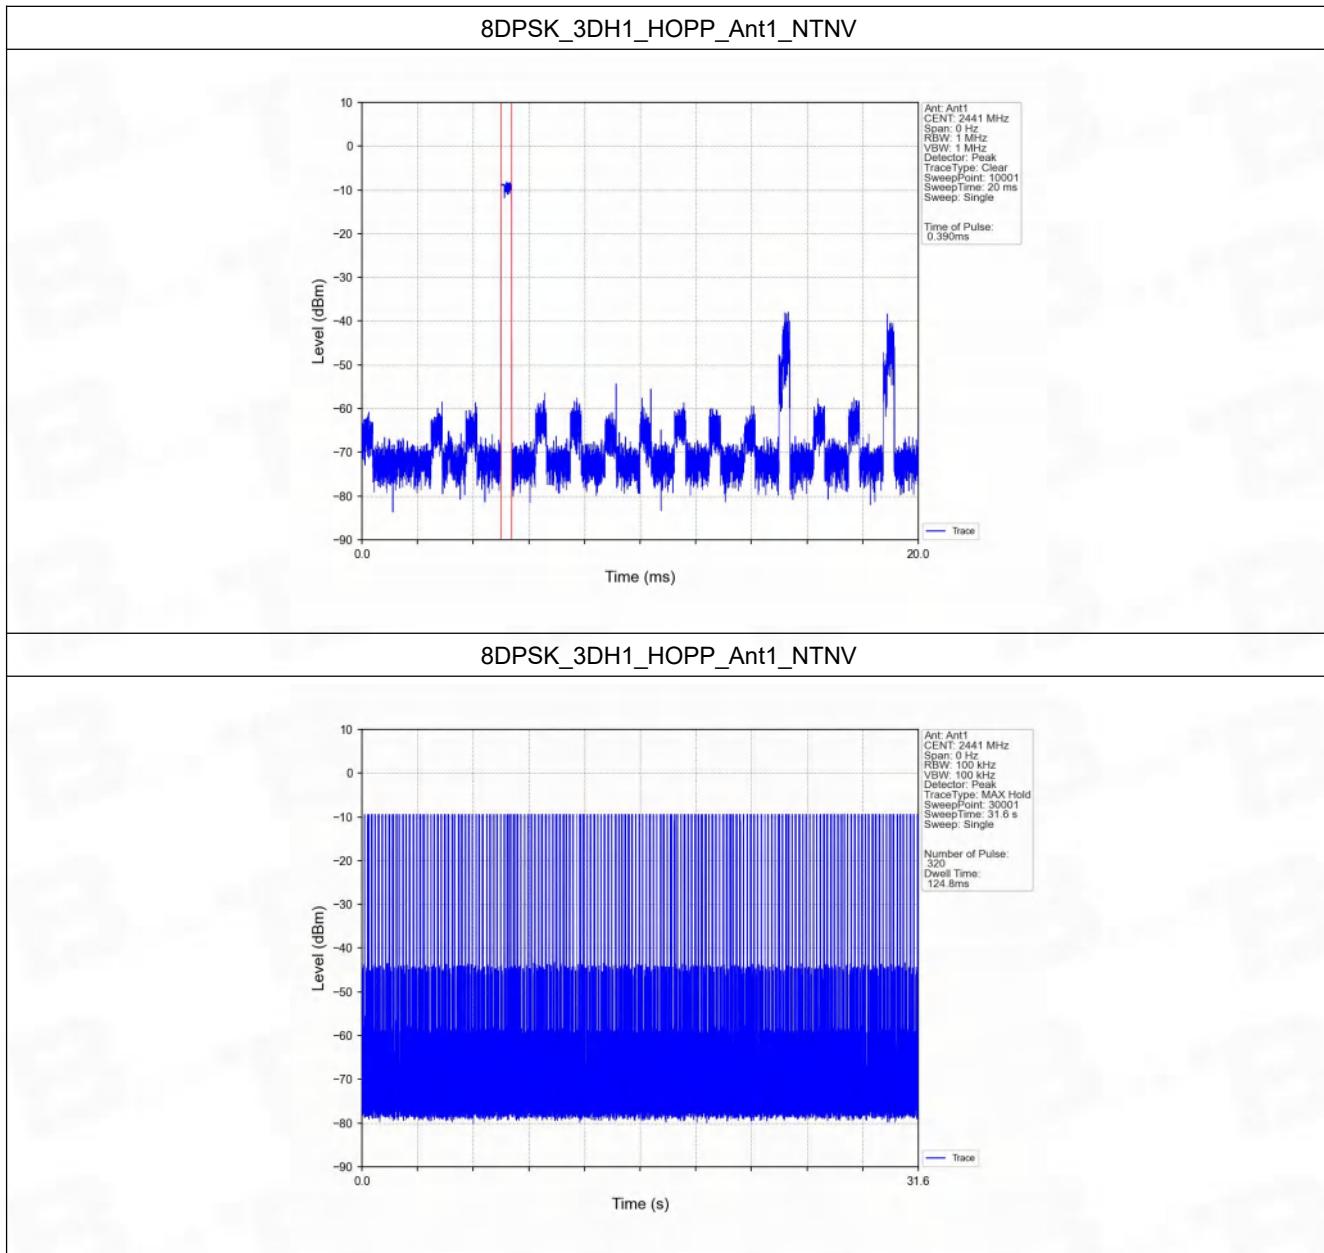

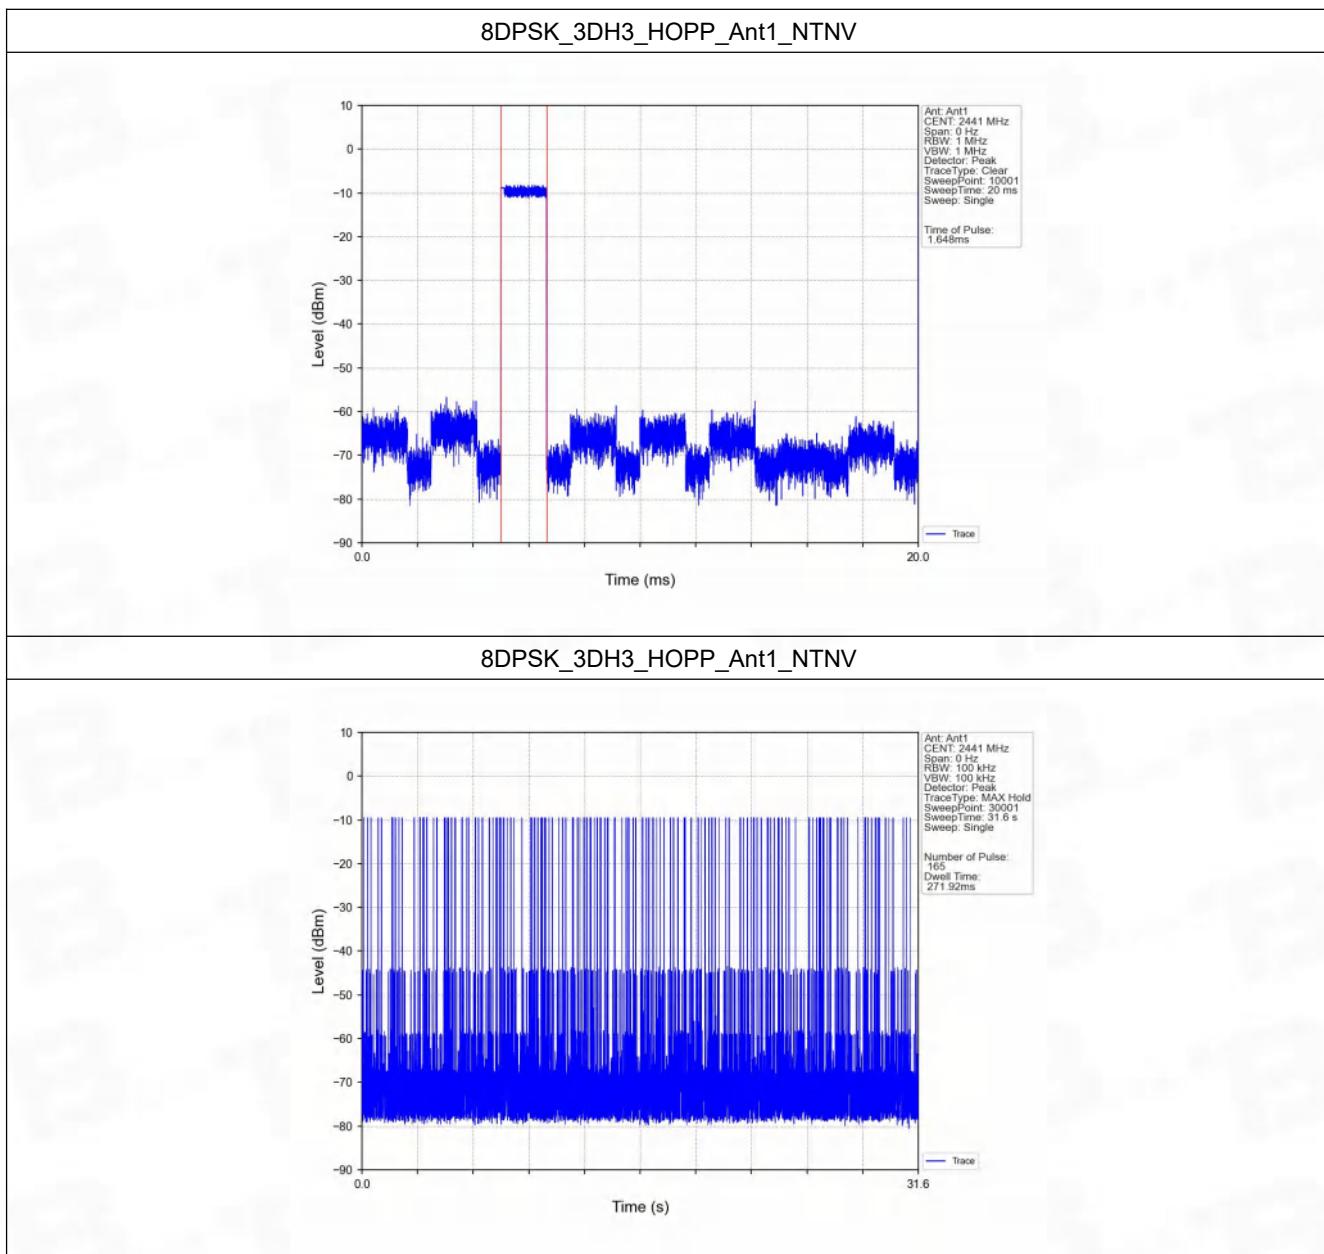

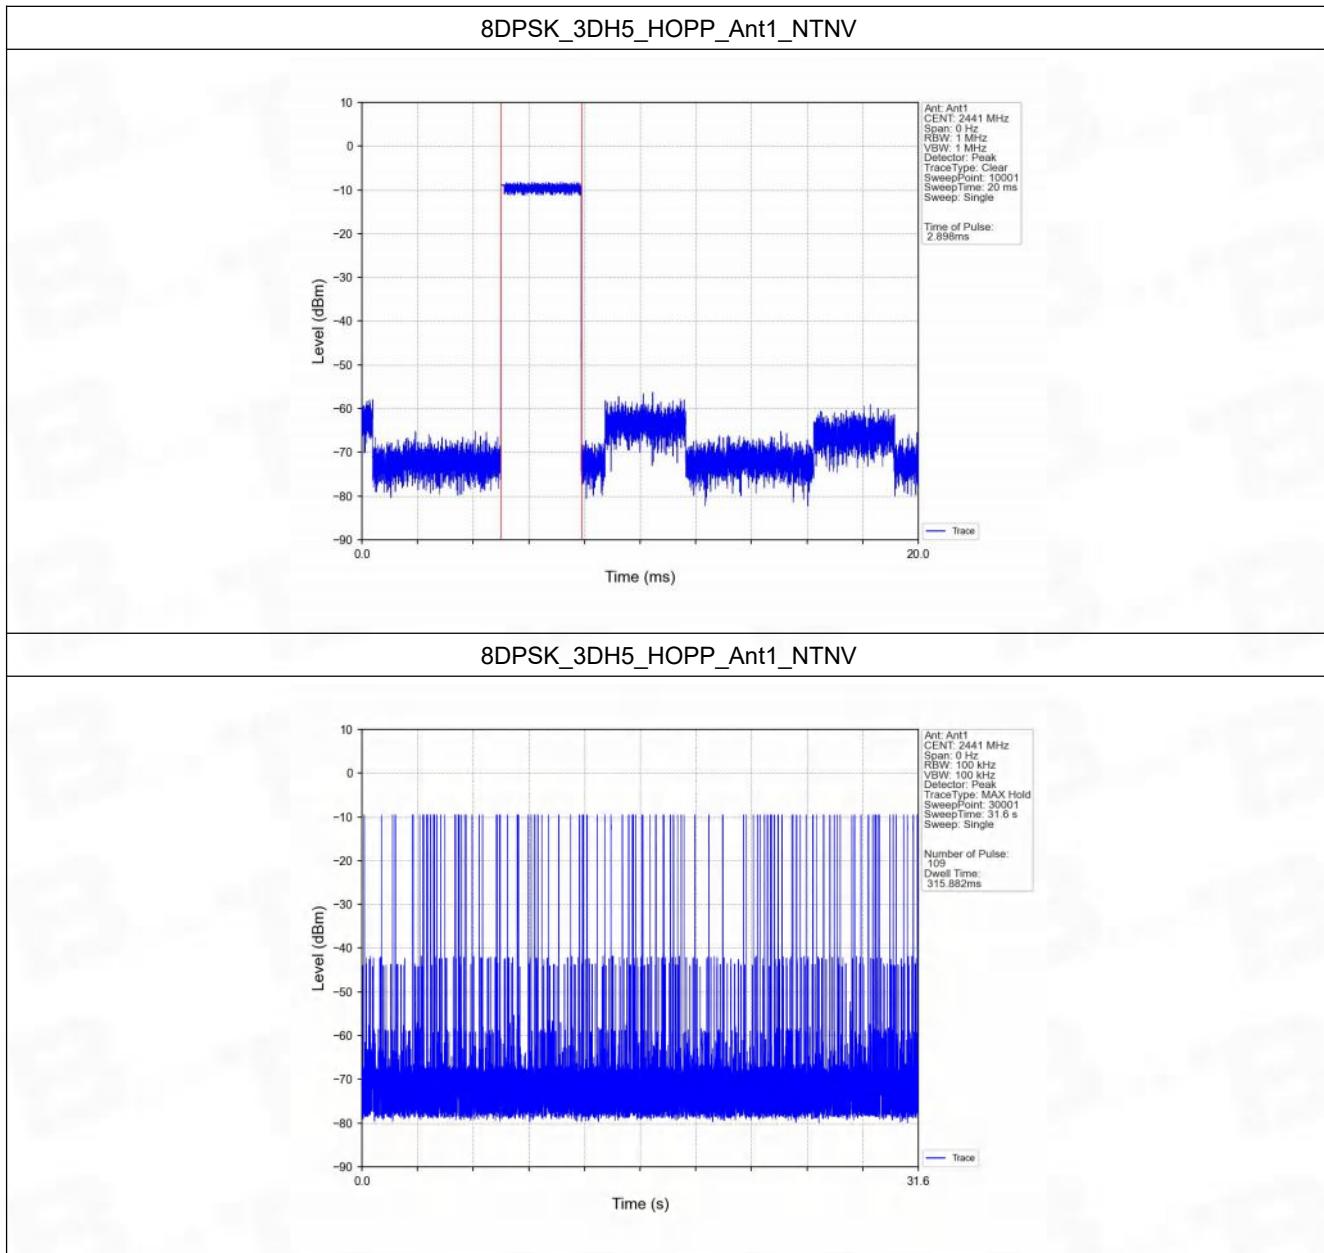

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Test Result

6.1.1 Ref

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	-7.37
		2441	DH5	1	-8.52
		2480	DH5	1	-9.40
		HOPP	DH5	1	-7.20
					-7.20
Pi/4DQPSK	SISO	2402	2DH5	1	-7.39
		2441	2DH5	1	-8.64
		2480	2DH5	1	-9.58
		HOPP	2DH5	1	-7.60
					-7.60
8DPSK	SISO	2402	3DH5	1	-7.68
		2441	3DH5	1	-8.95
		2480	3DH5	1	-9.87
		HOPP	3DH5	1	-7.73
					-7.73

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

6.1.2 CSE


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	-7.37	-27.37	Pass
		2441	DH5	1	-8.52	-28.52	Pass
		2480	DH5	1	-9.40	-29.40	Pass
		HOPP	DH5	1	-7.20	-27.20	Pass
					-7.20	-27.20	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	-7.39	-27.39	Pass
		2441	2DH5	1	-8.64	-28.64	Pass
		2480	2DH5	1	-9.58	-29.58	Pass
		HOPP	2DH5	1	-7.60	-27.60	Pass

					-7.60	-27.60	Pass				
8DPSK	SISO	2402	3DH5	1	-7.68	-27.68	Pass				
		2441	3DH5	1	-8.95	-28.95	Pass				
		2480	3DH5	1	-9.87	-29.87	Pass				
		HOPP	3DH5	1	-7.73	-27.73	Pass				
					-7.73	-27.73	Pass				
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.											


6.2 Test Graph


6.2.1 Ref


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

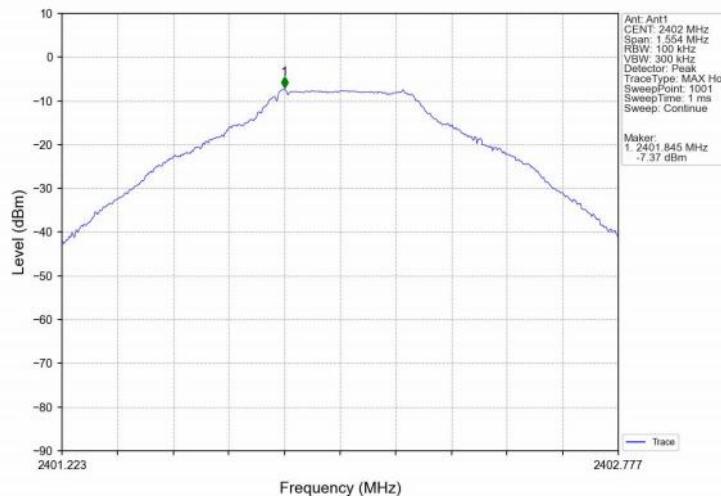



GFSK_DH5_MCH_2441MHz_Ant1_NTNV

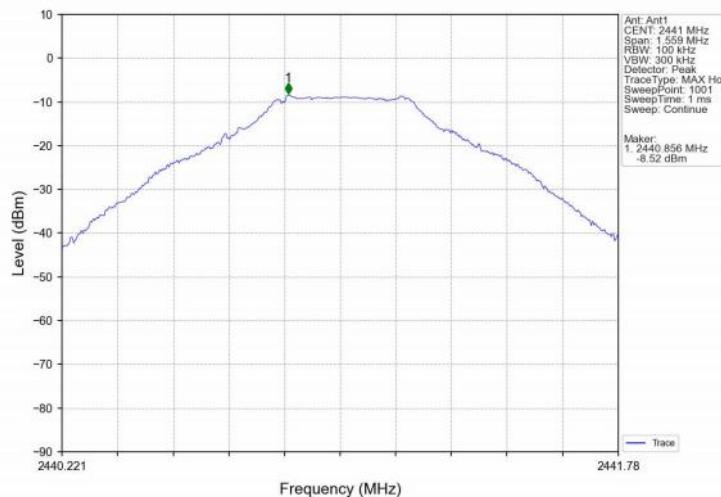


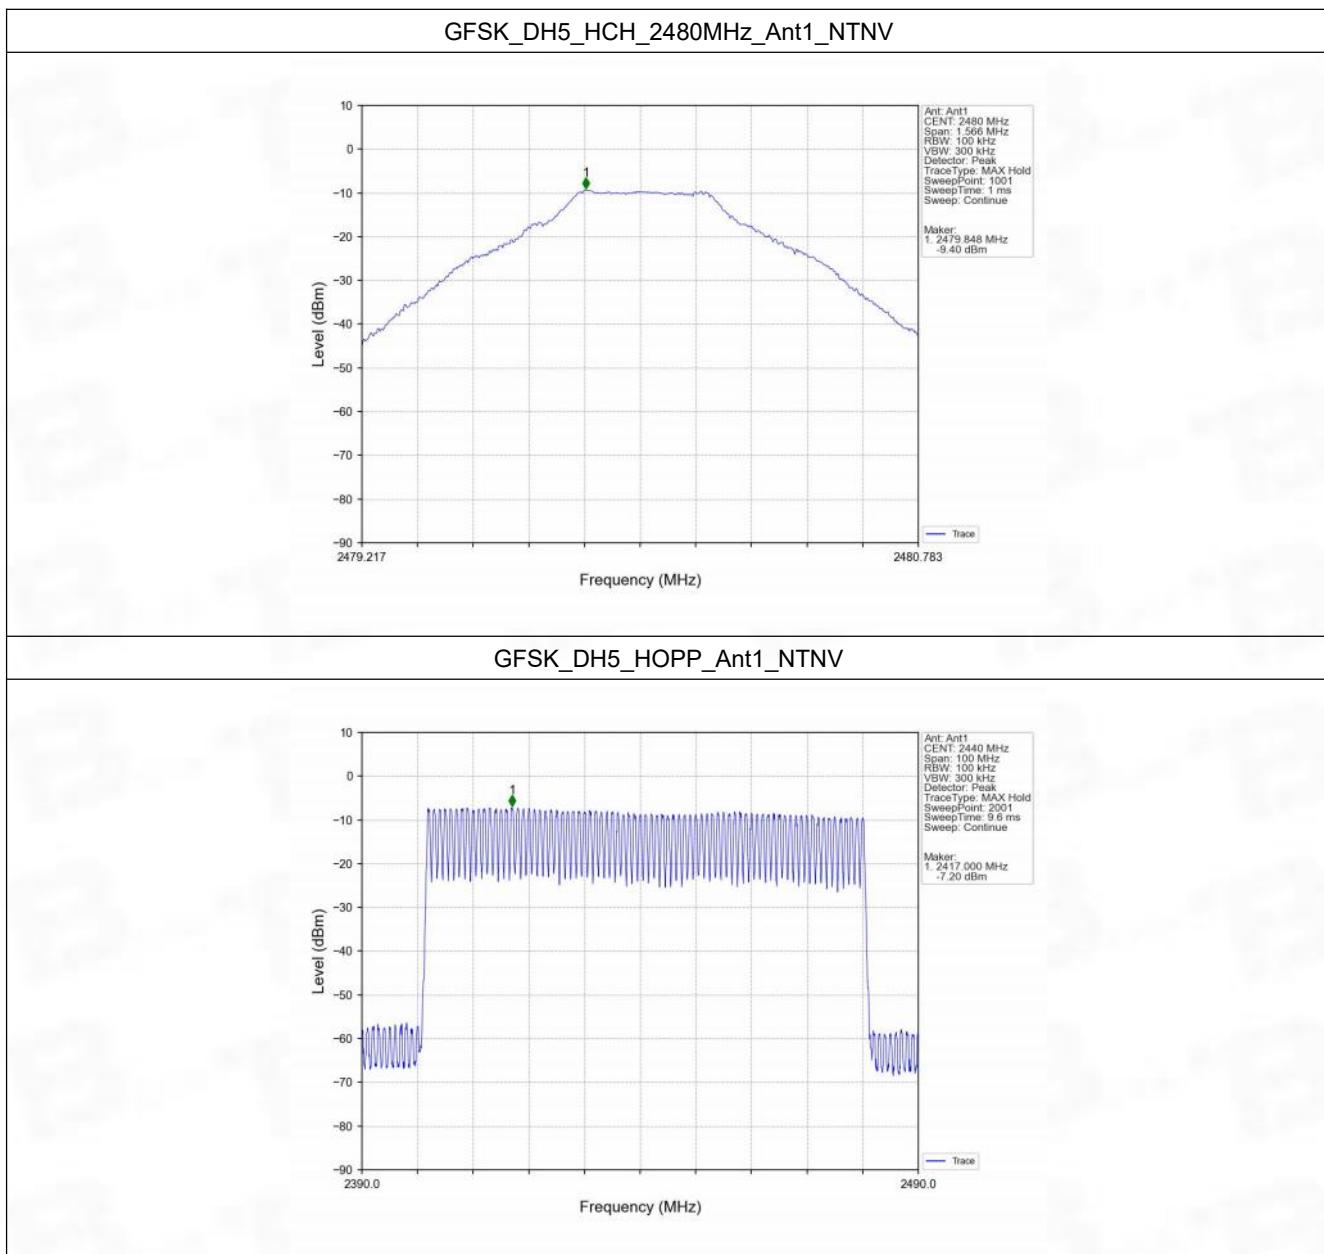


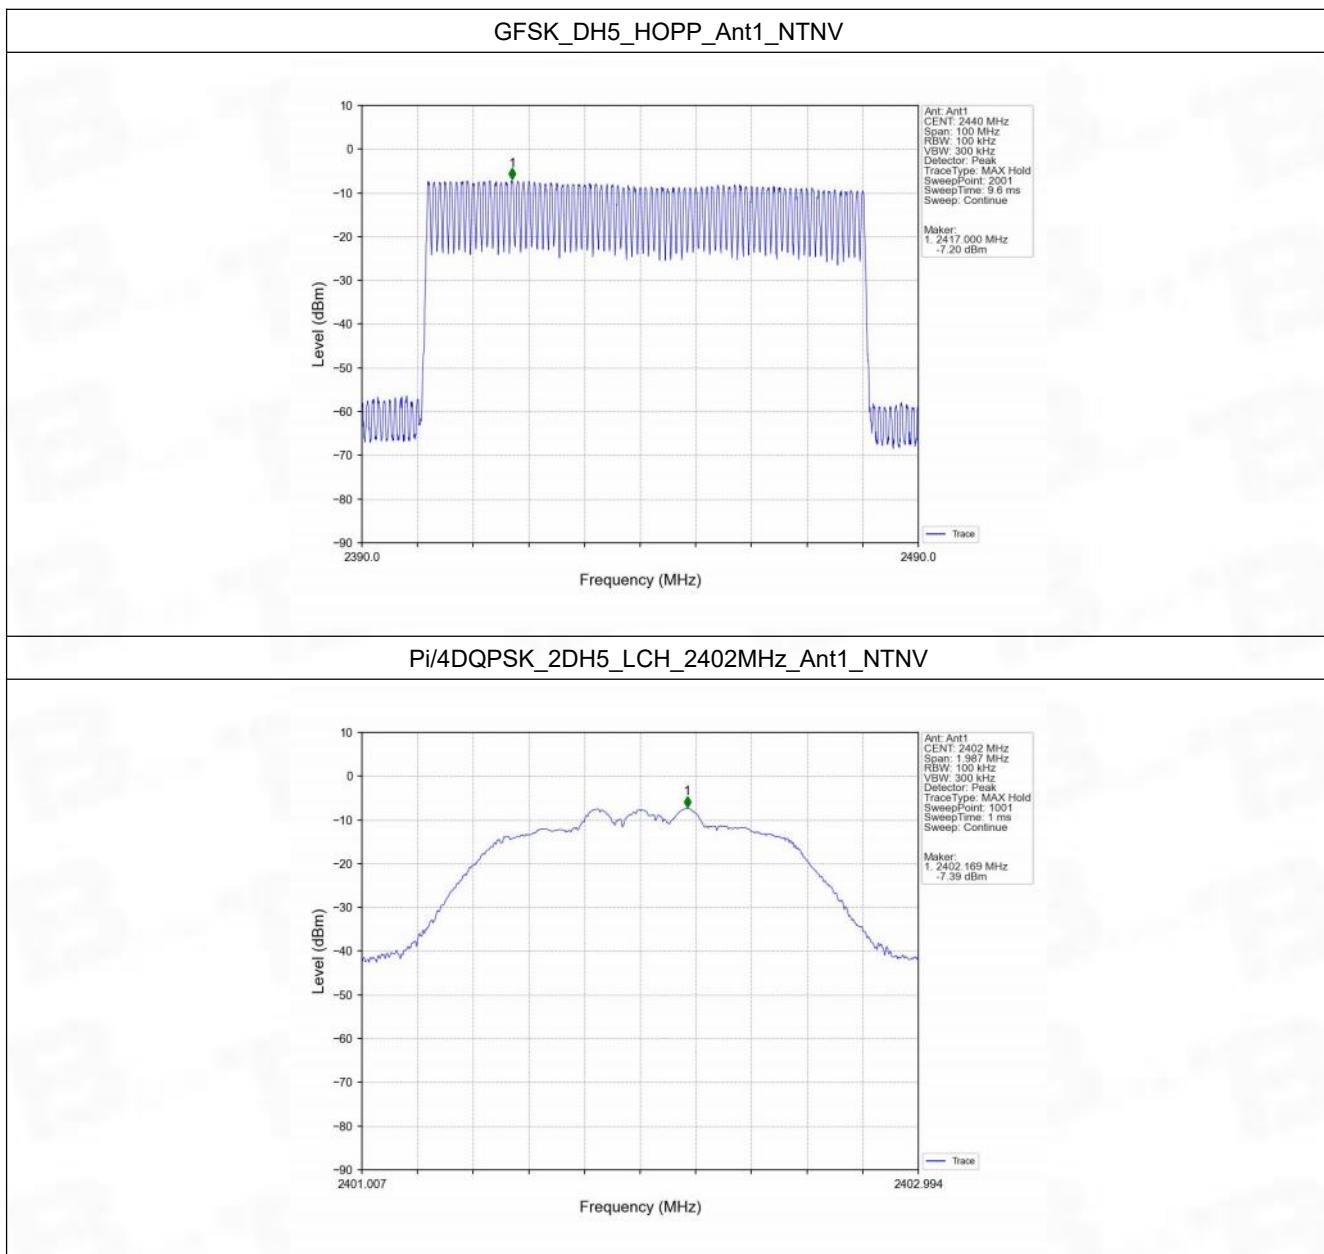


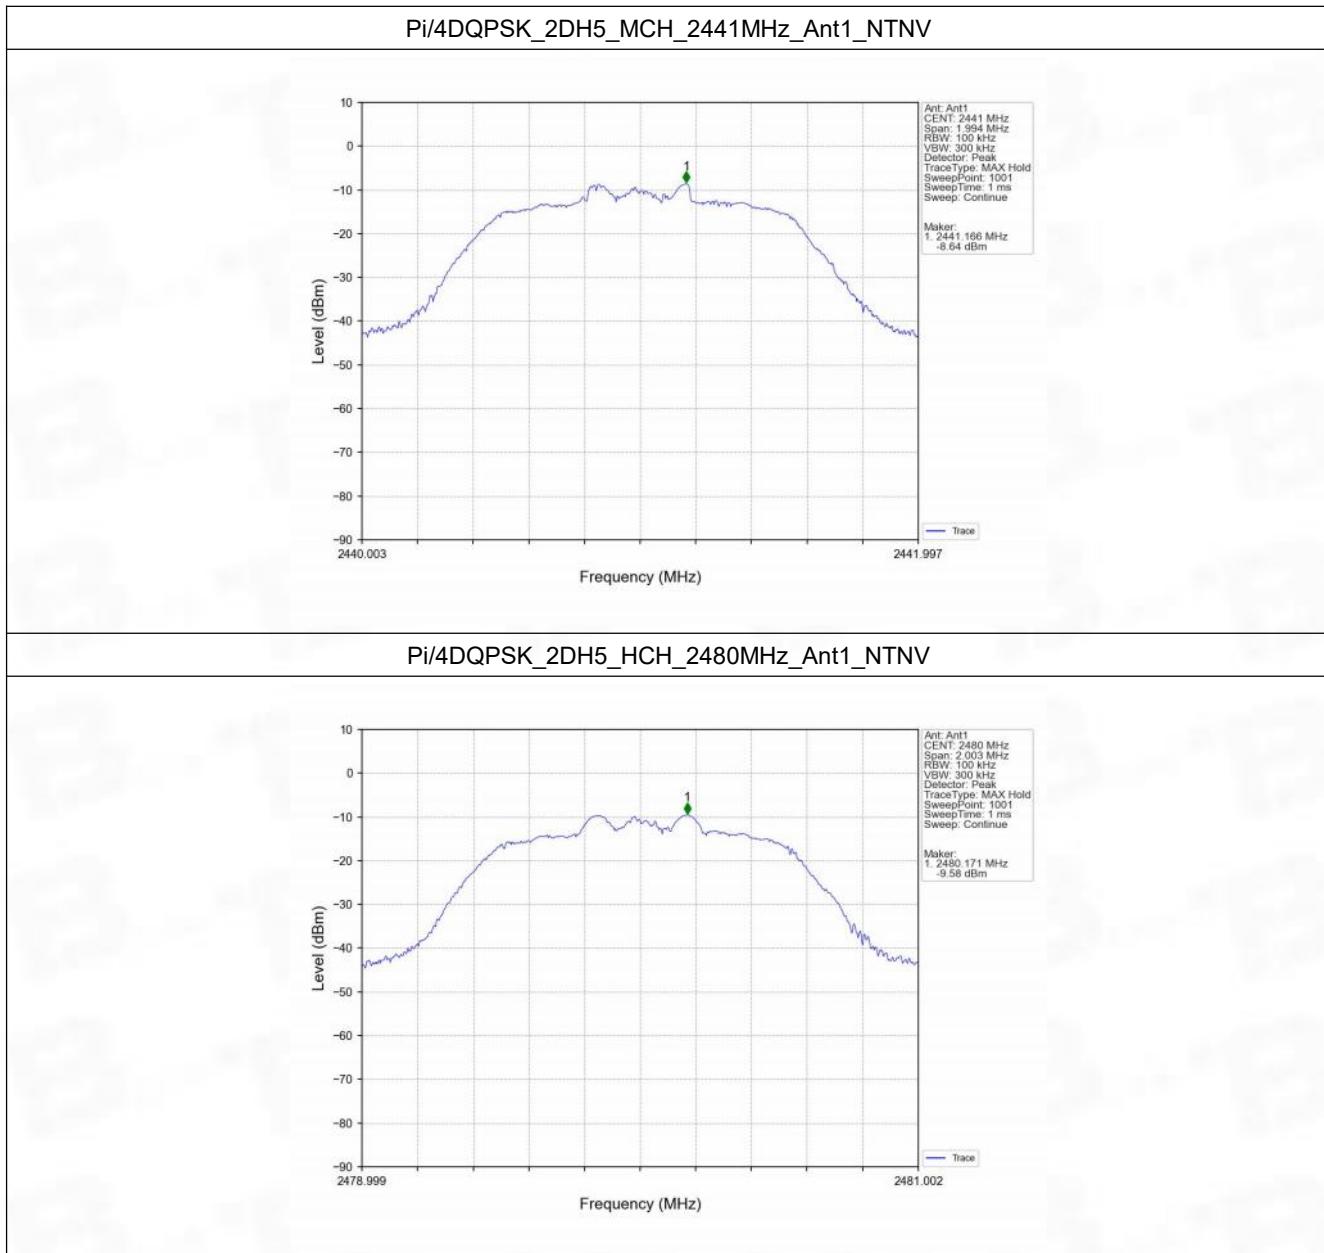


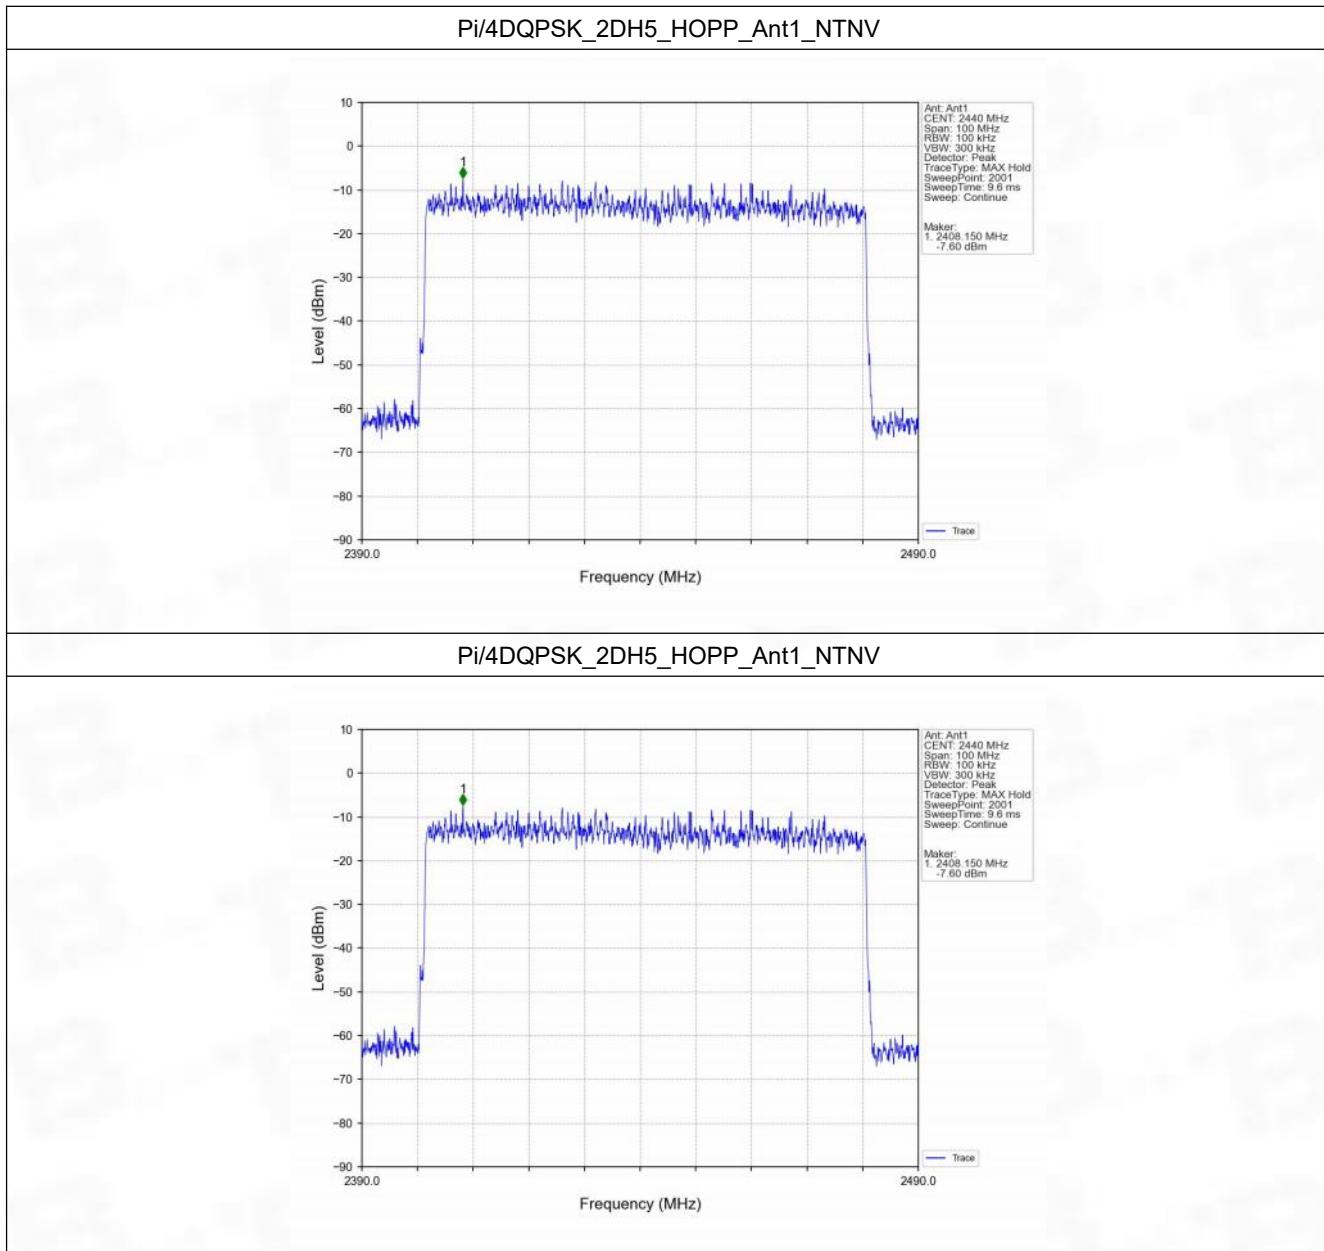


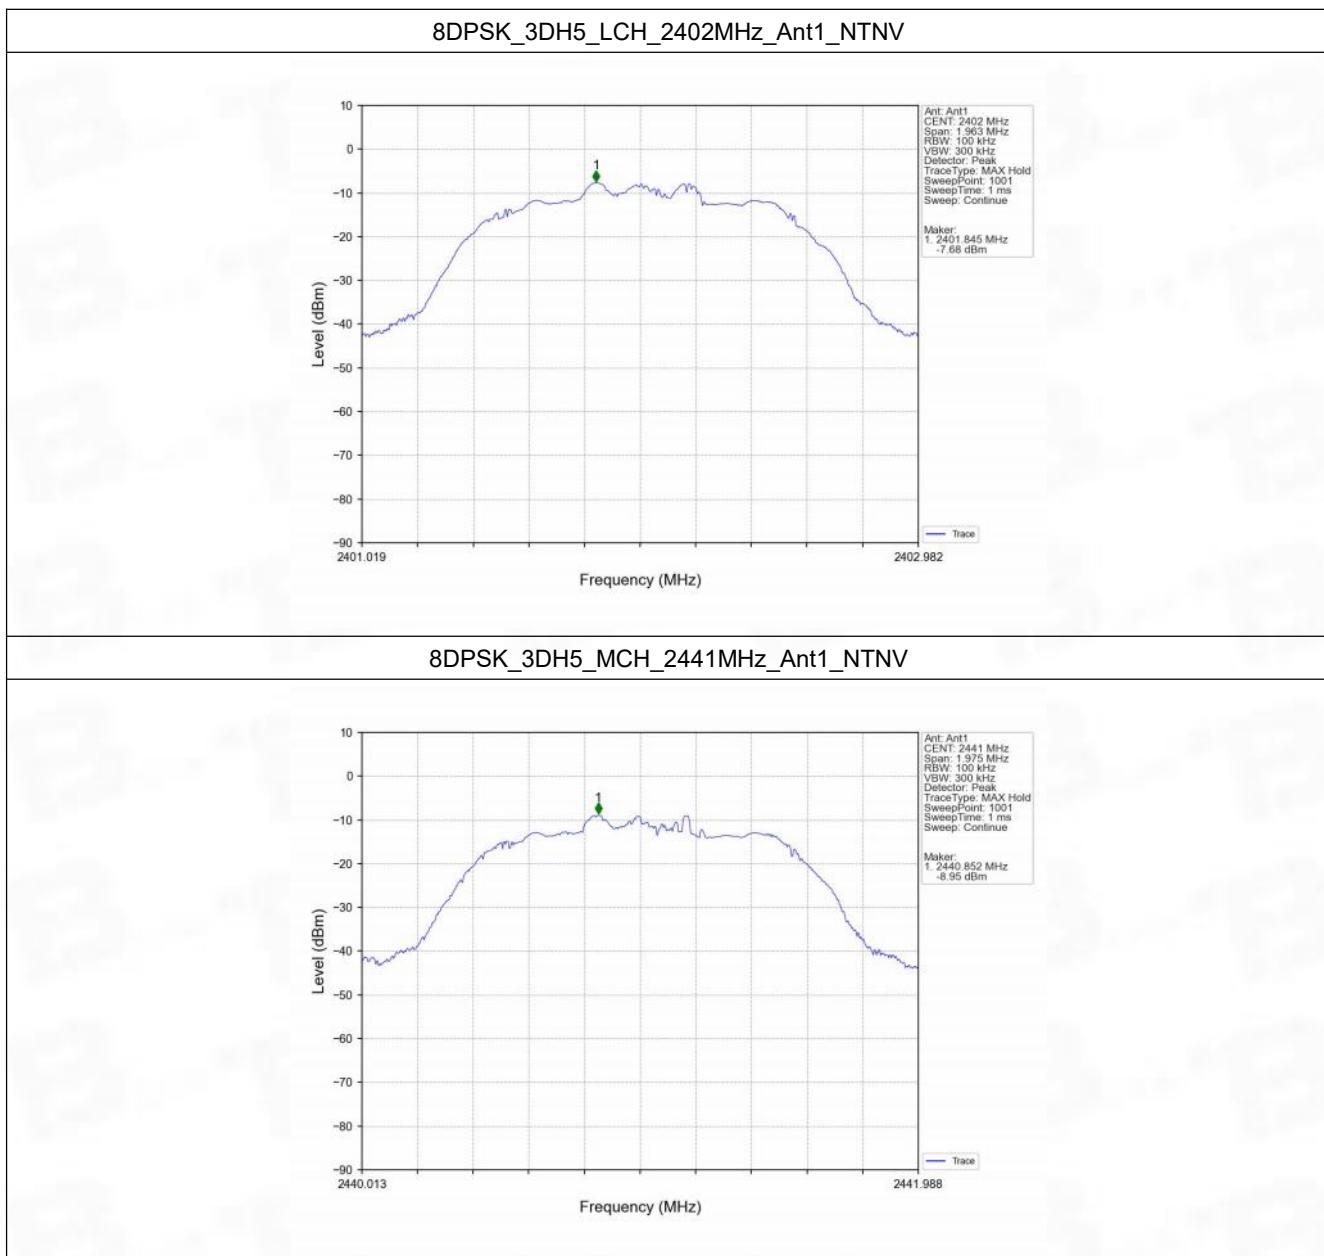


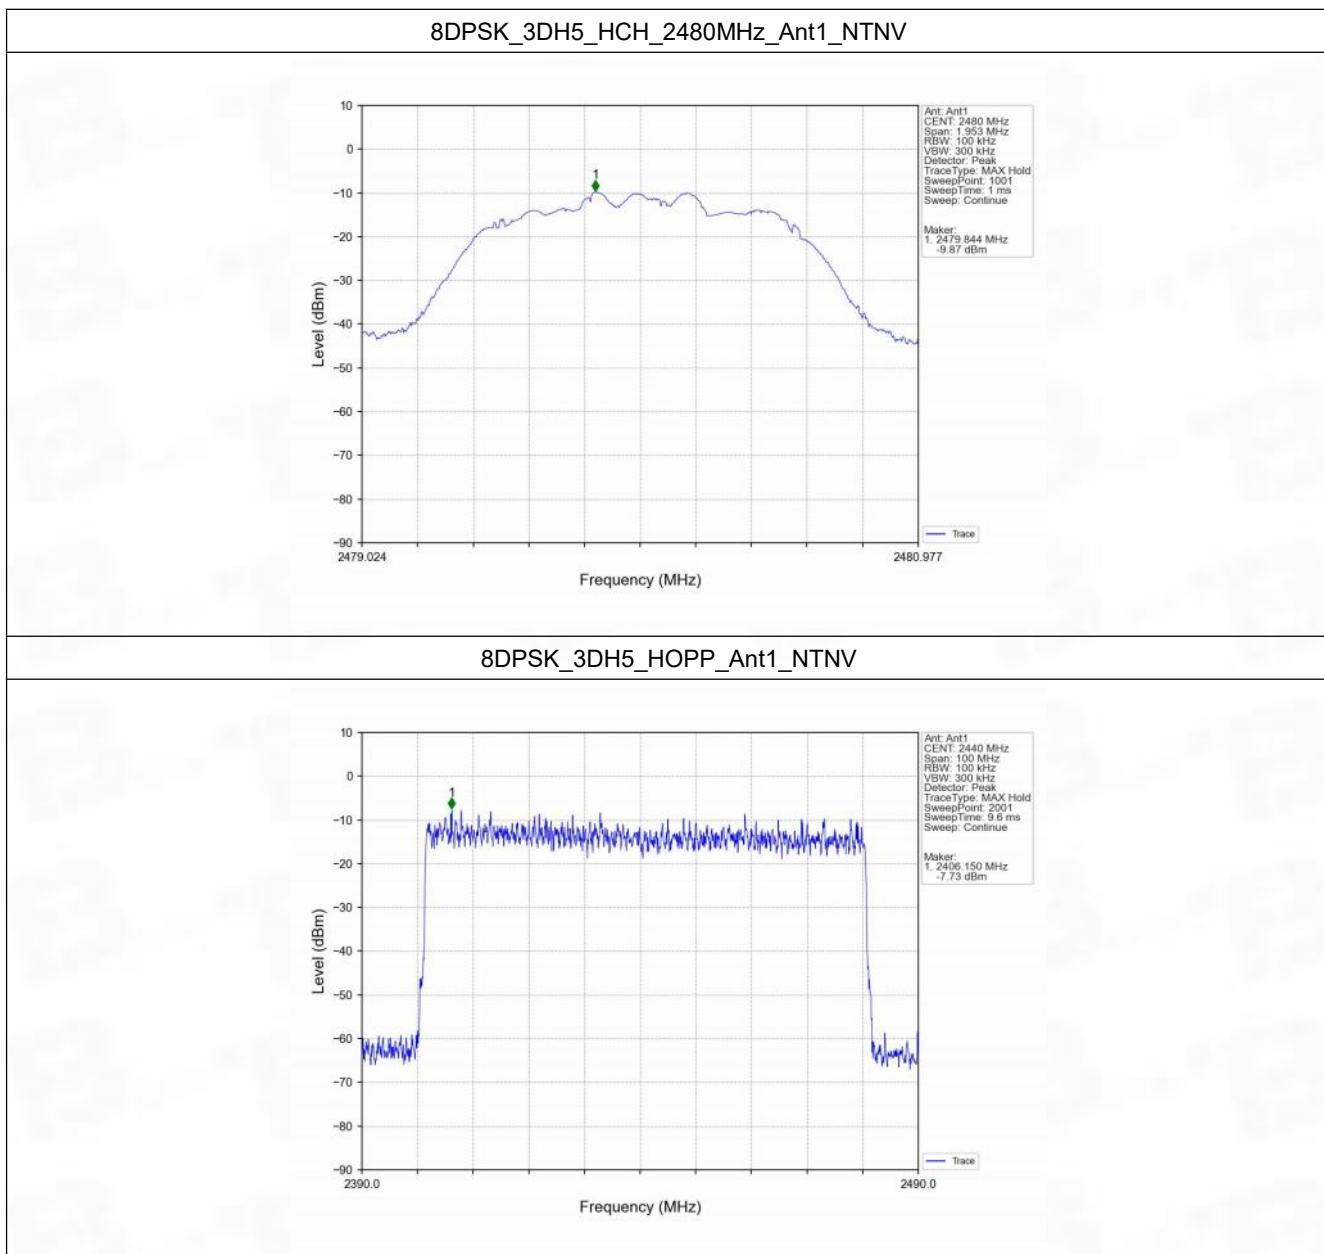


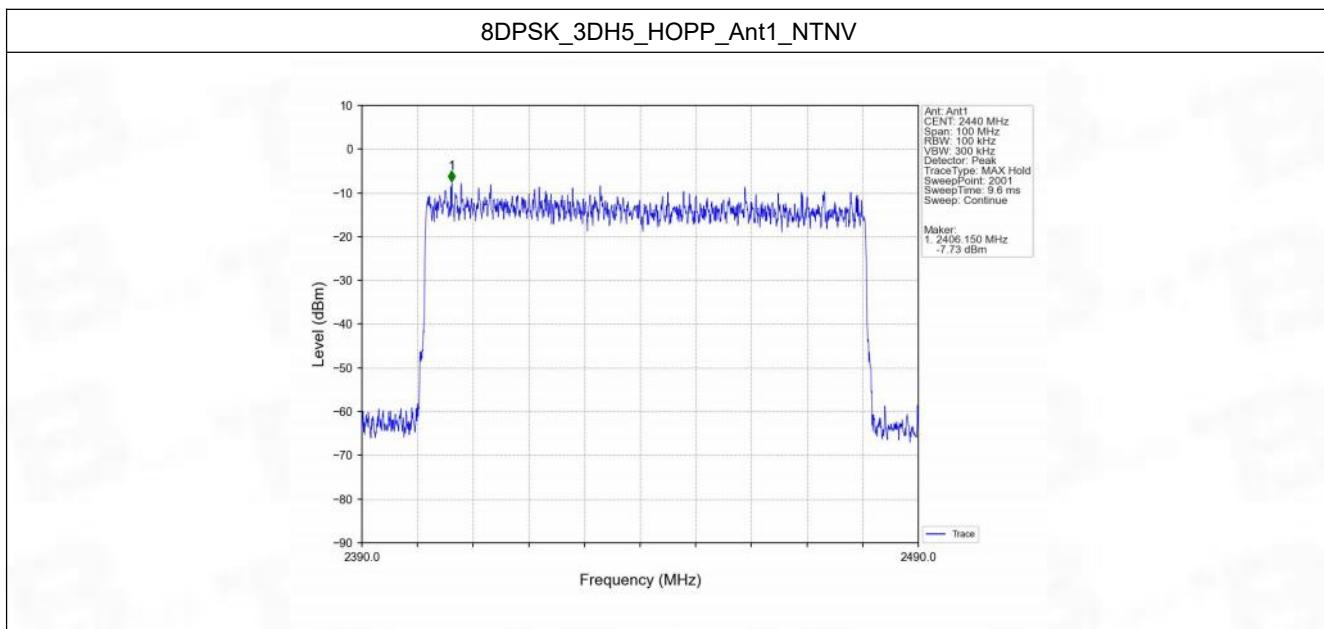



6.2.2 CSE

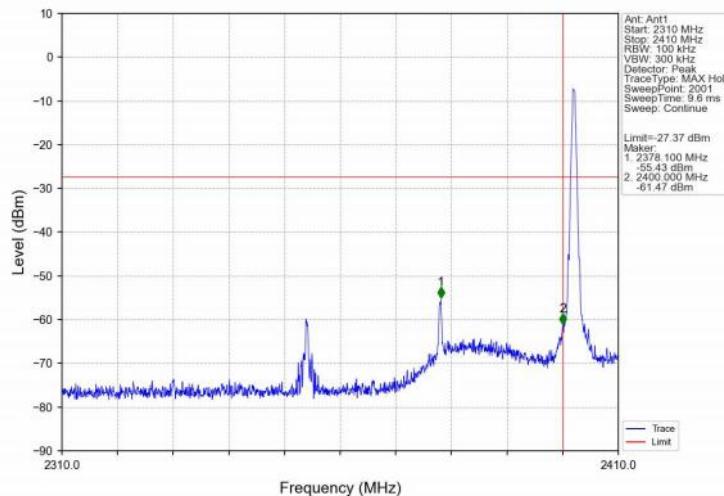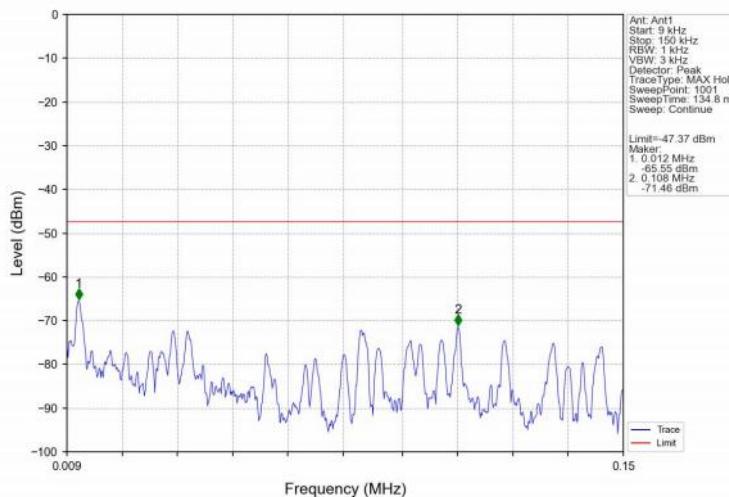
GFSK_DH5_LCH_2402MHz_Ant1_NTNV

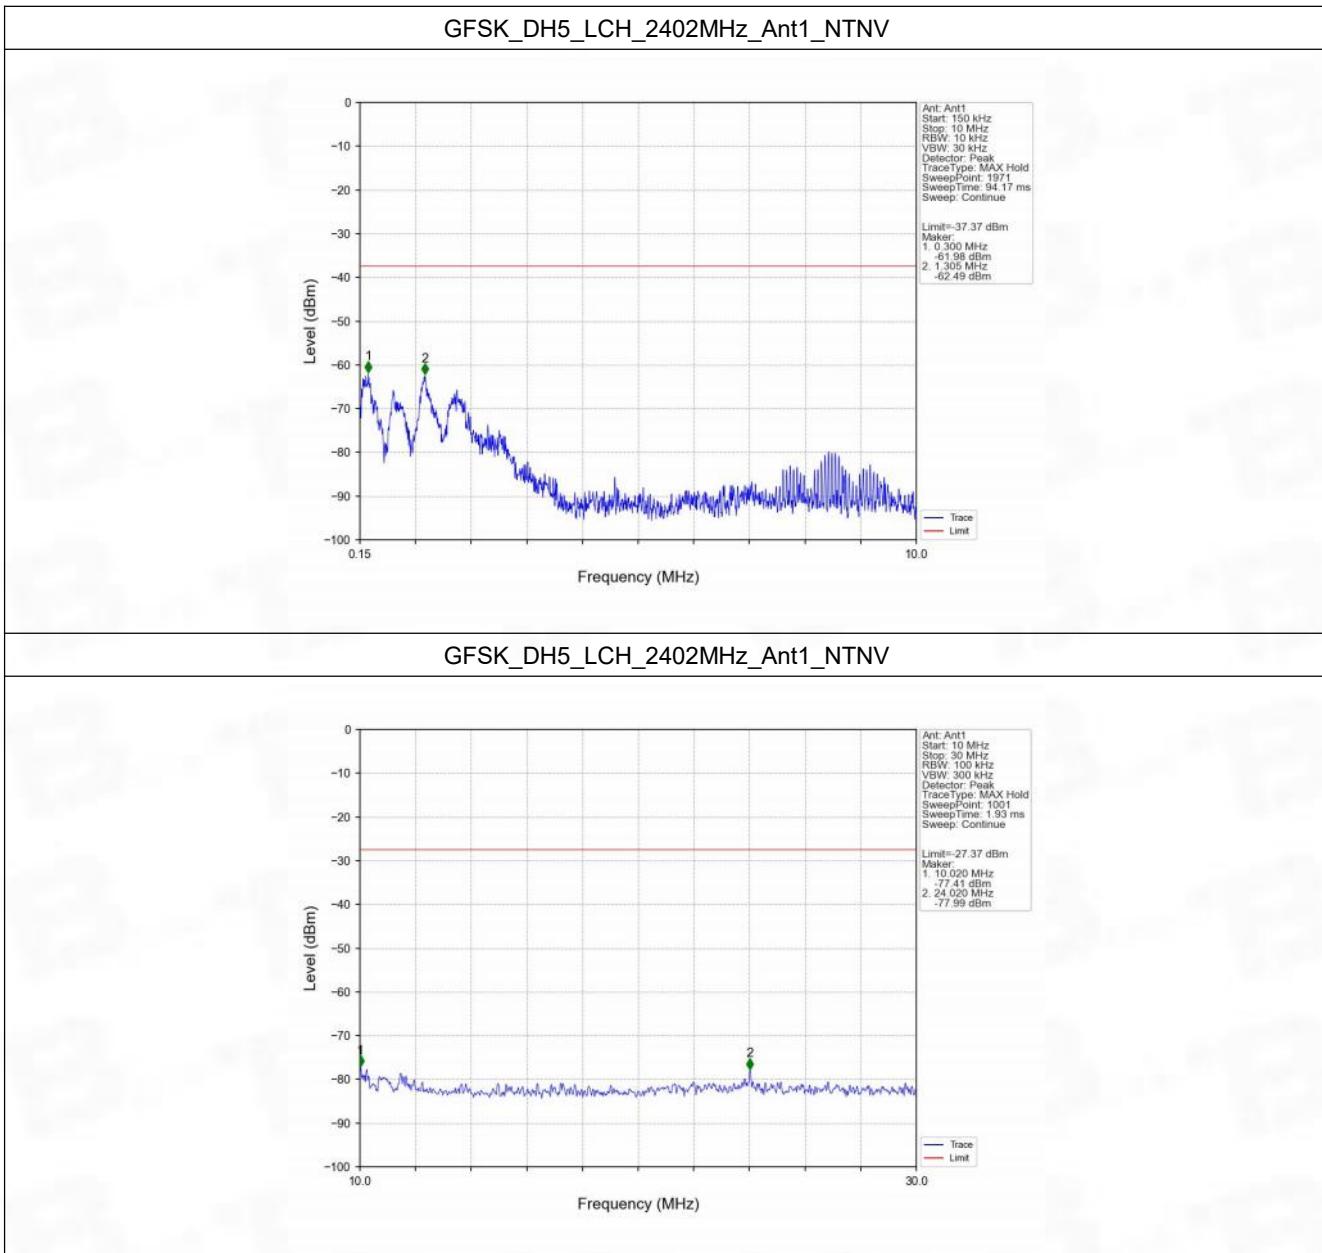GFSK_DH5_LCH_2402MHz_Ant1_NTNV

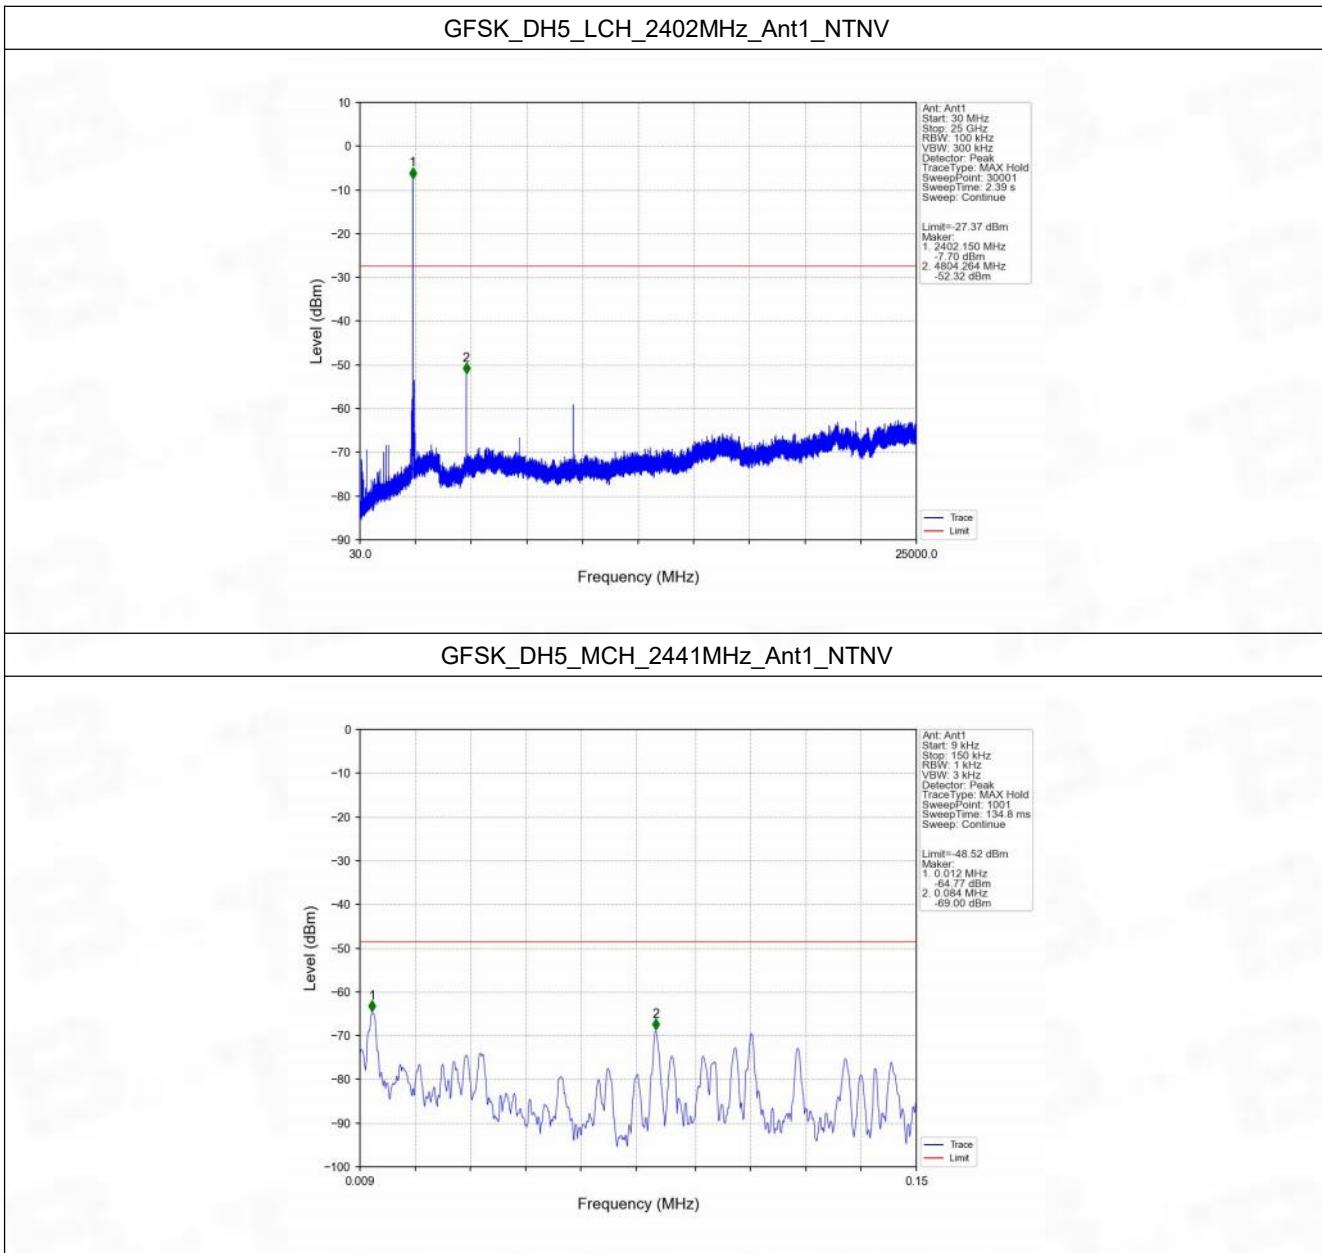
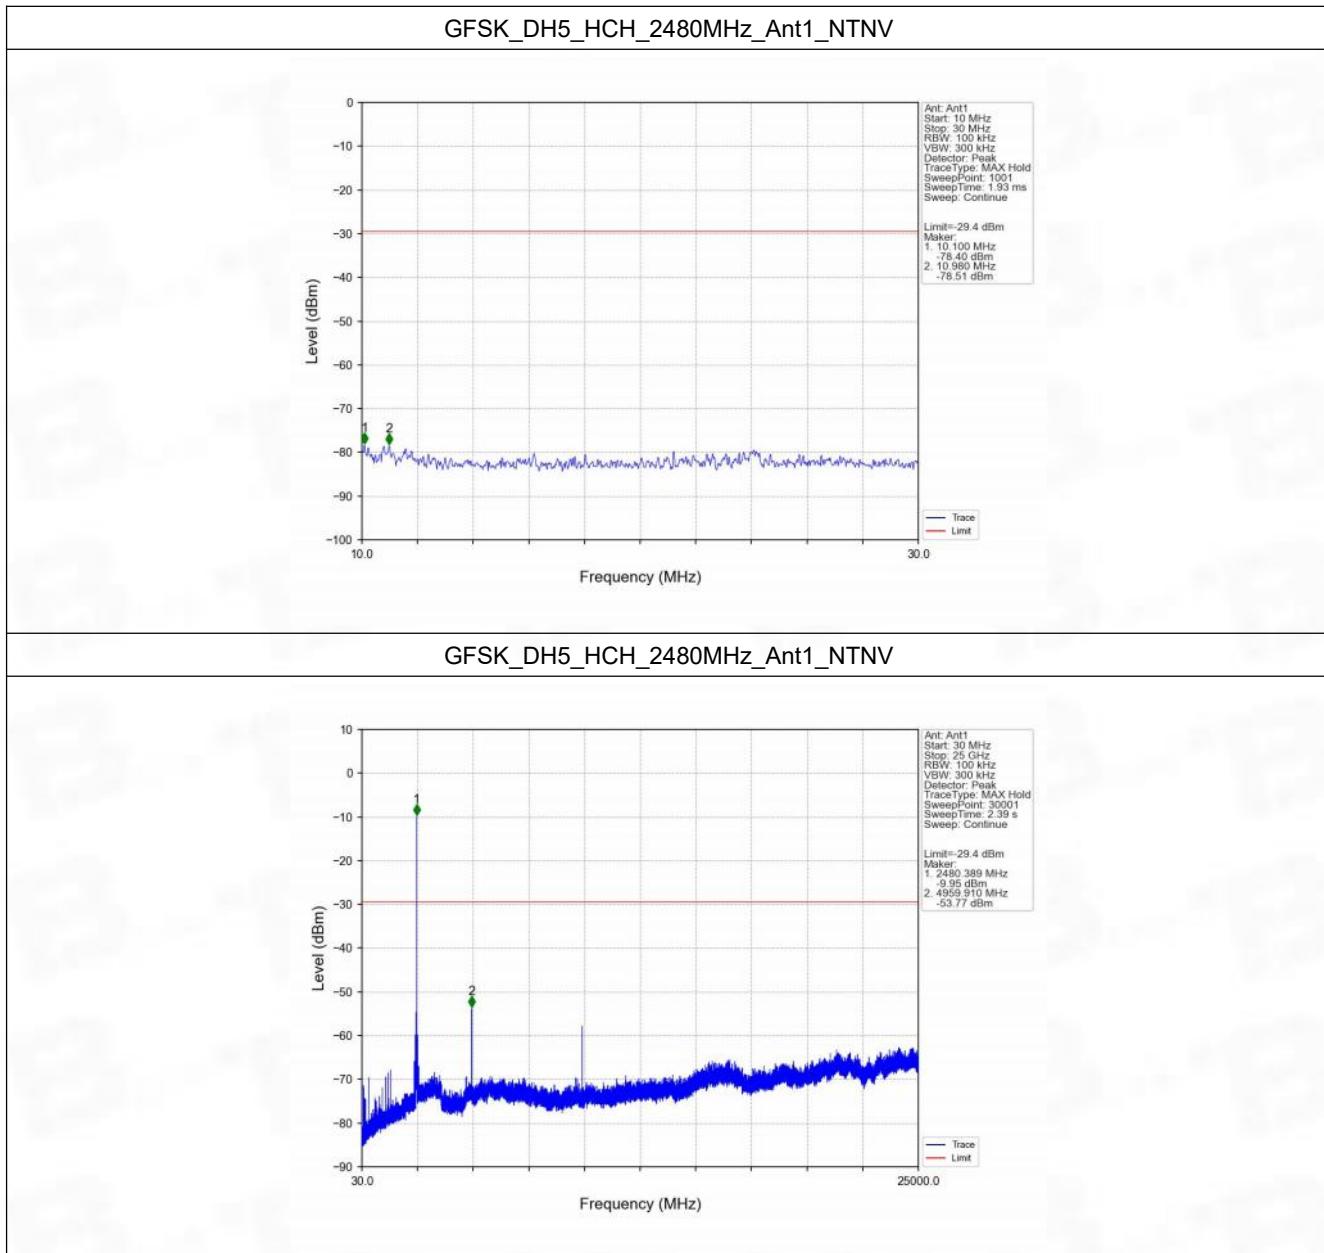


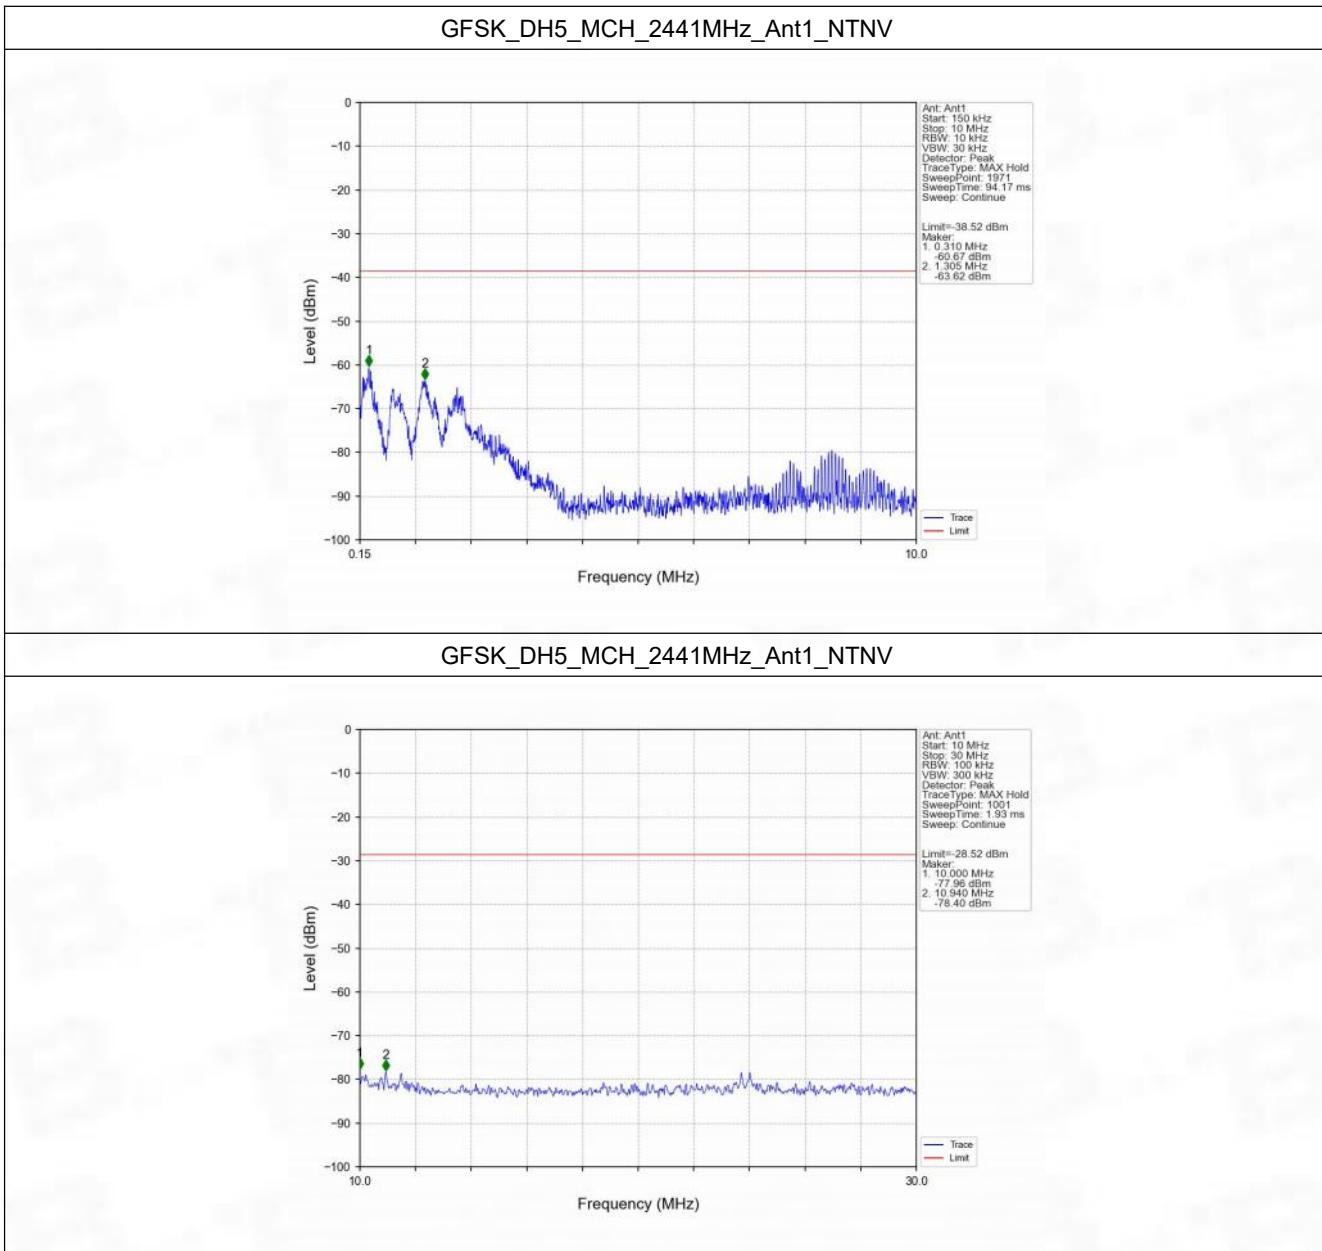


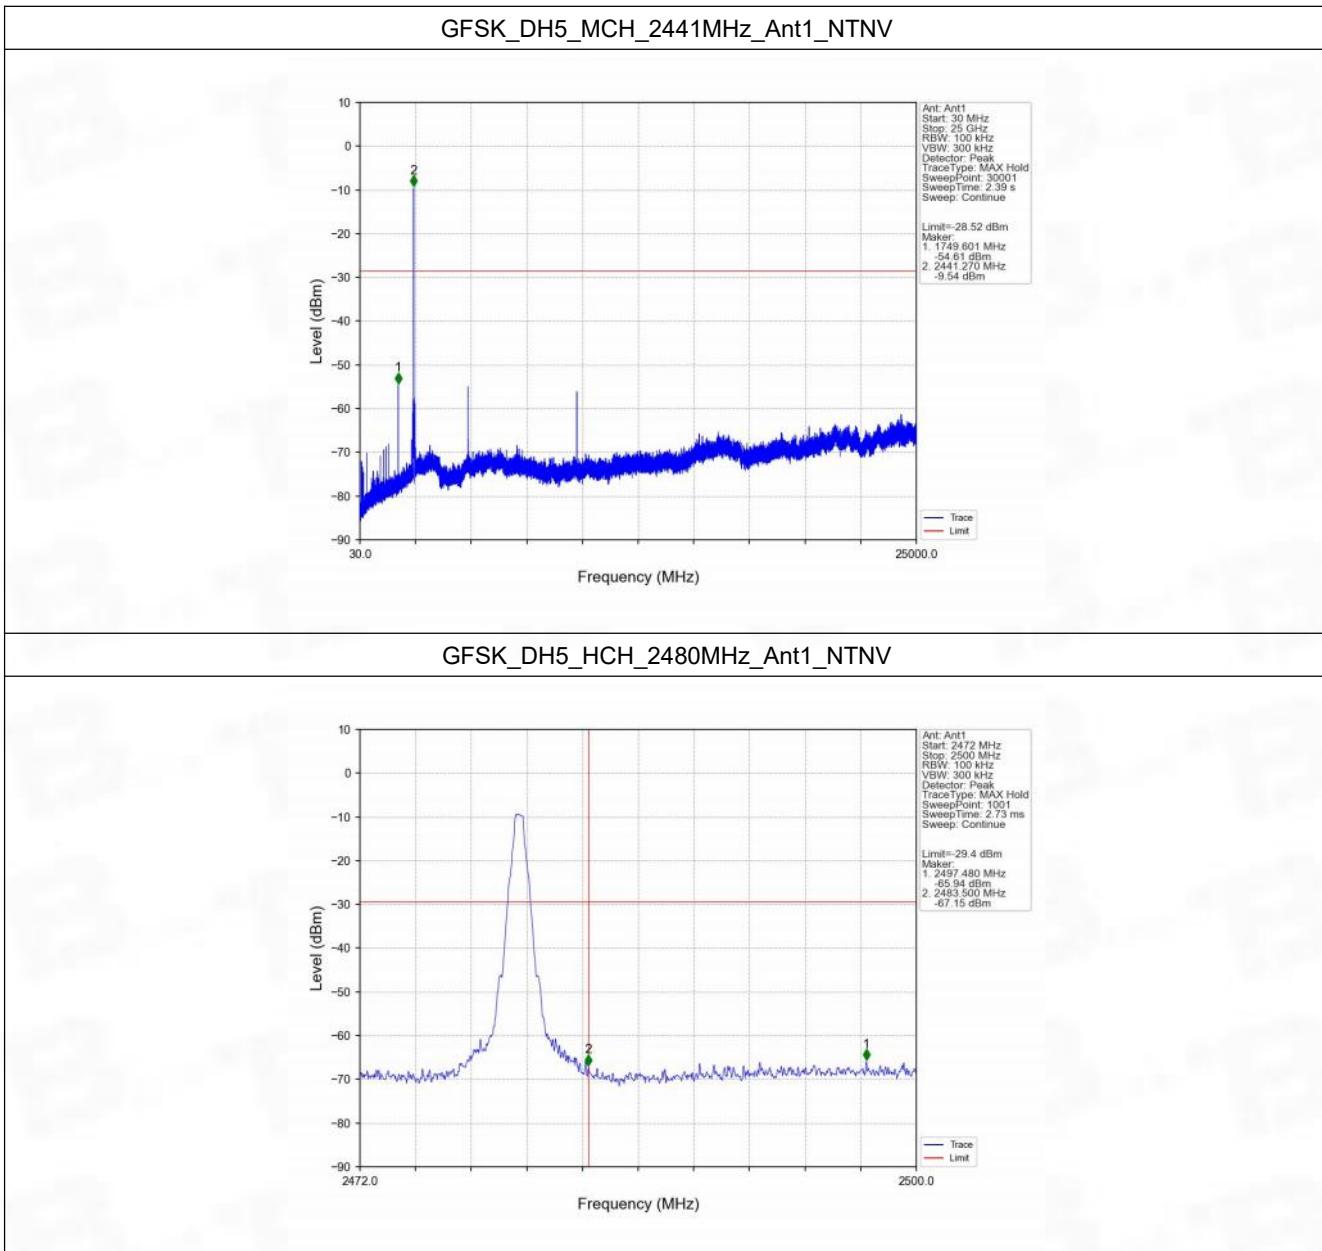


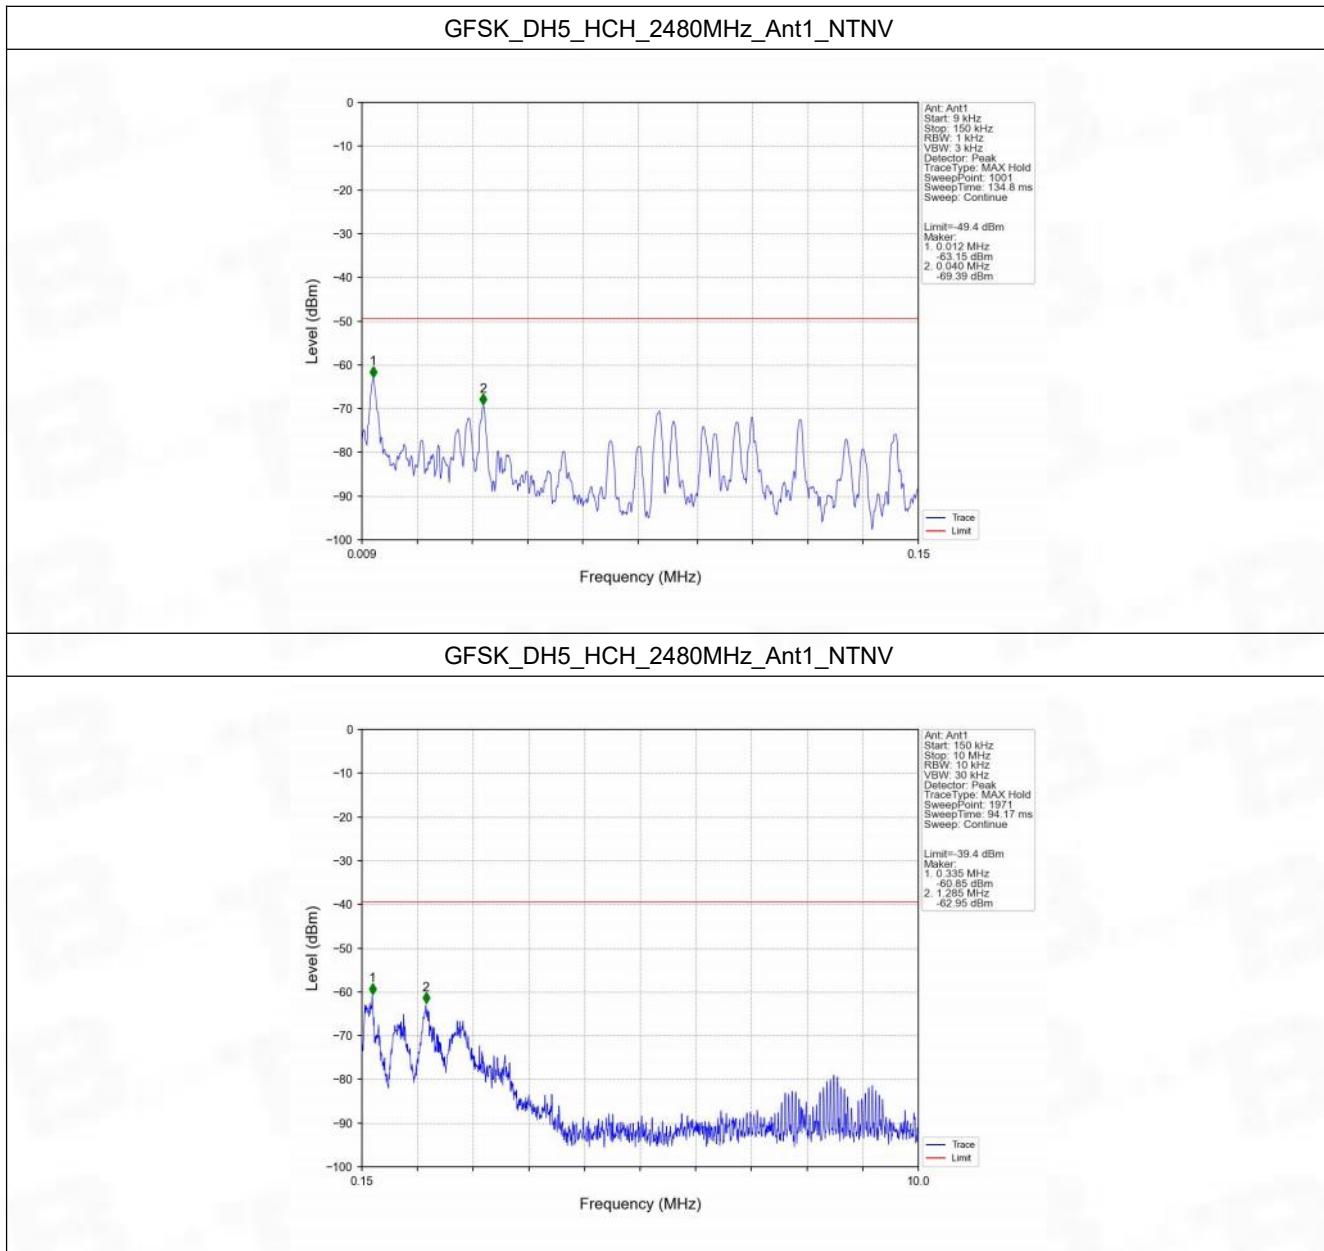








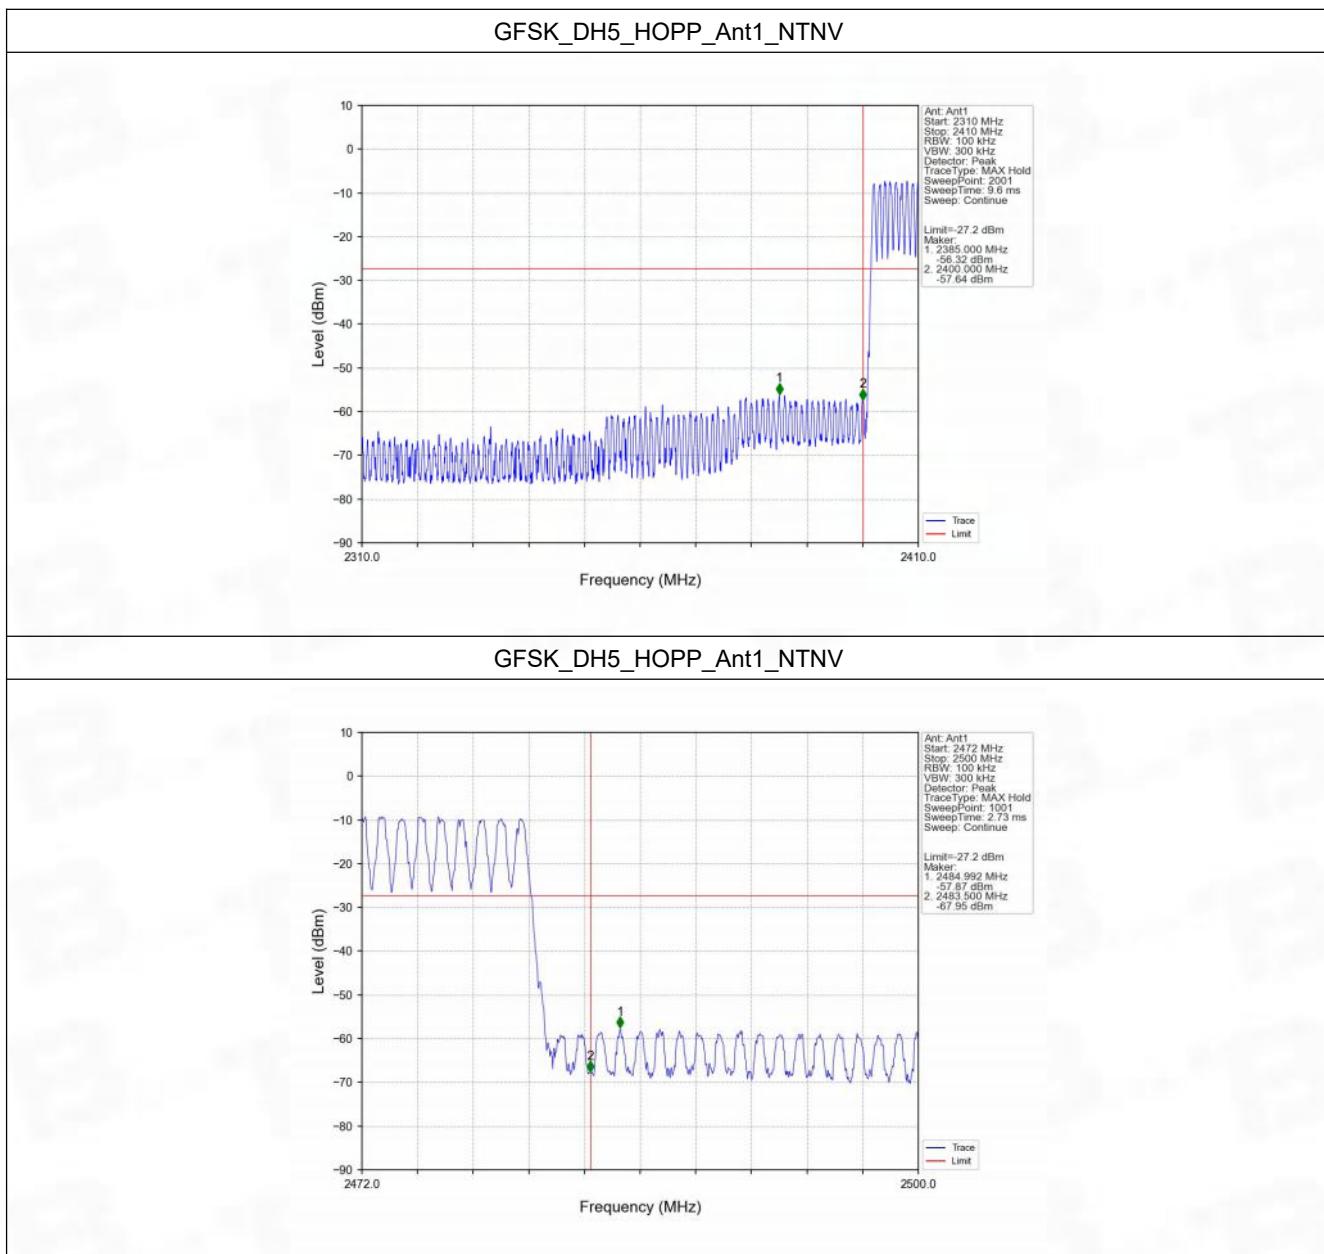


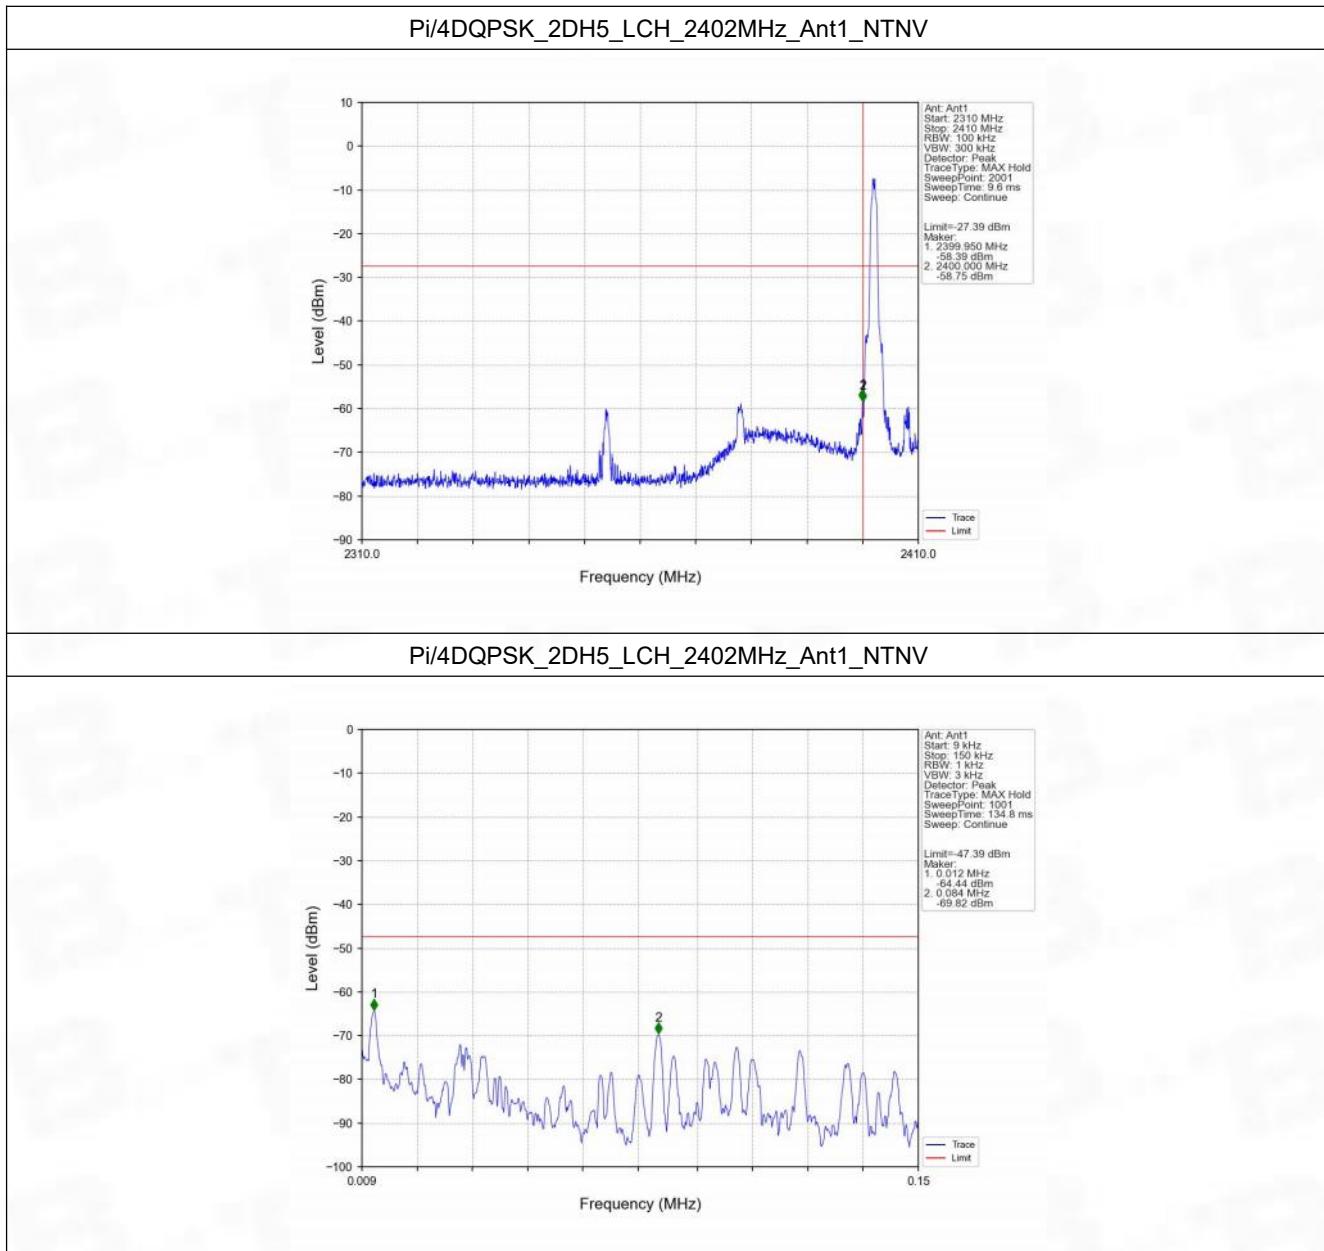


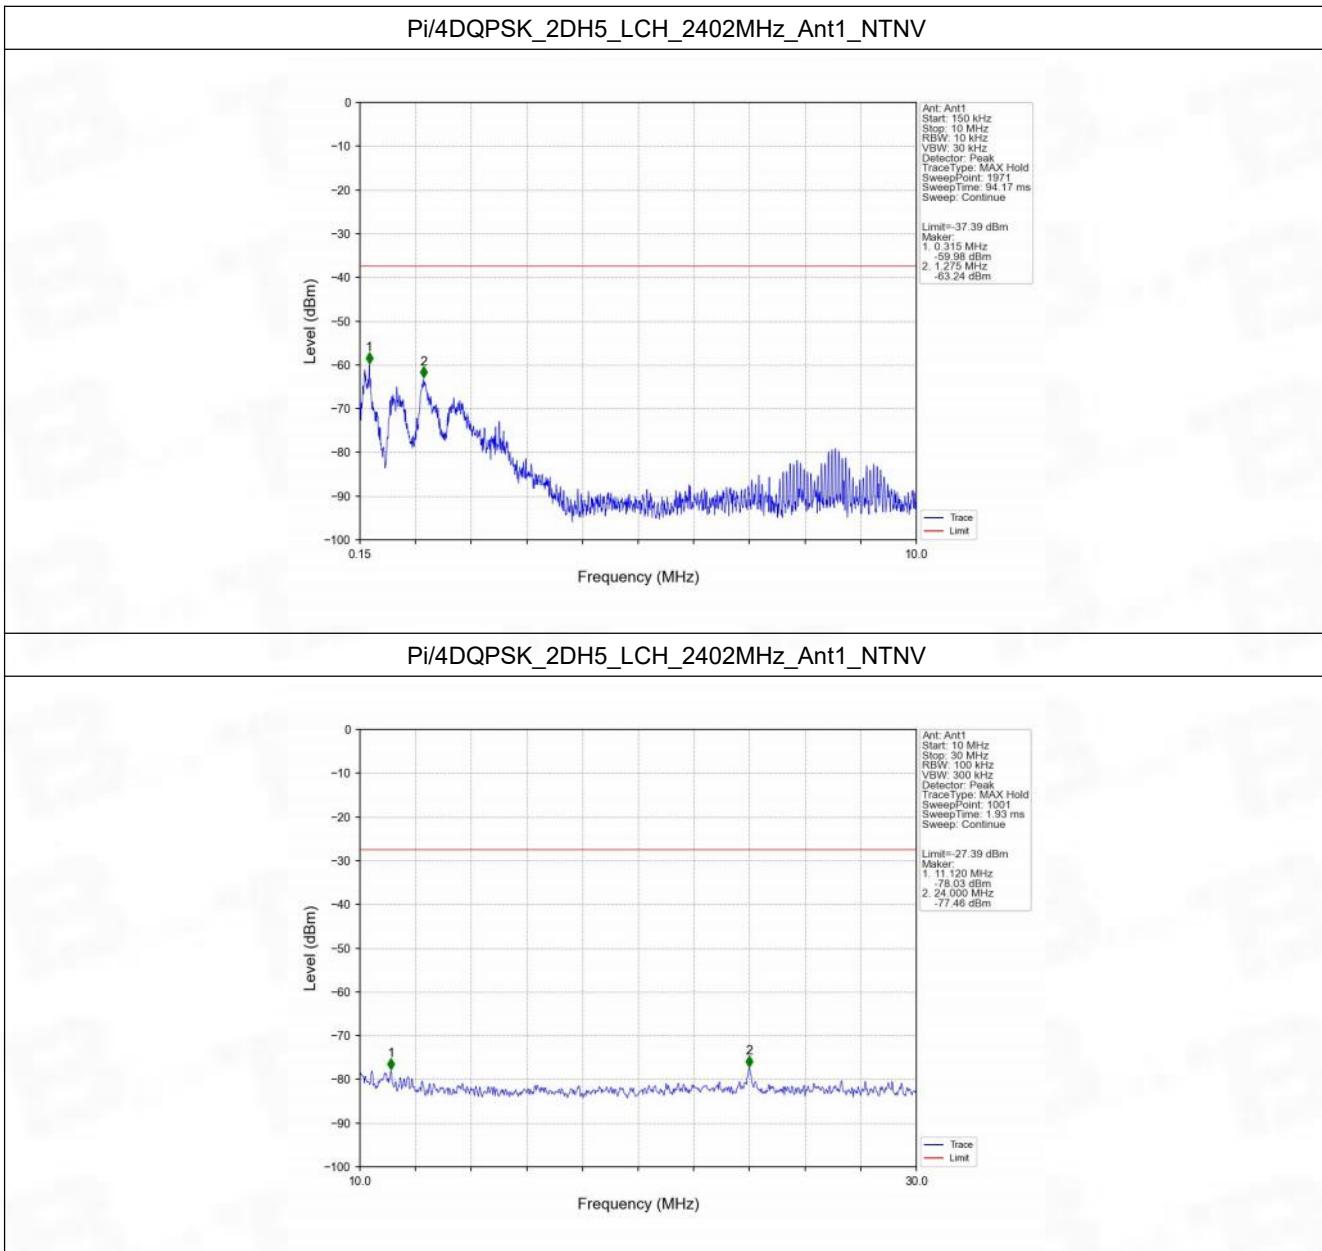


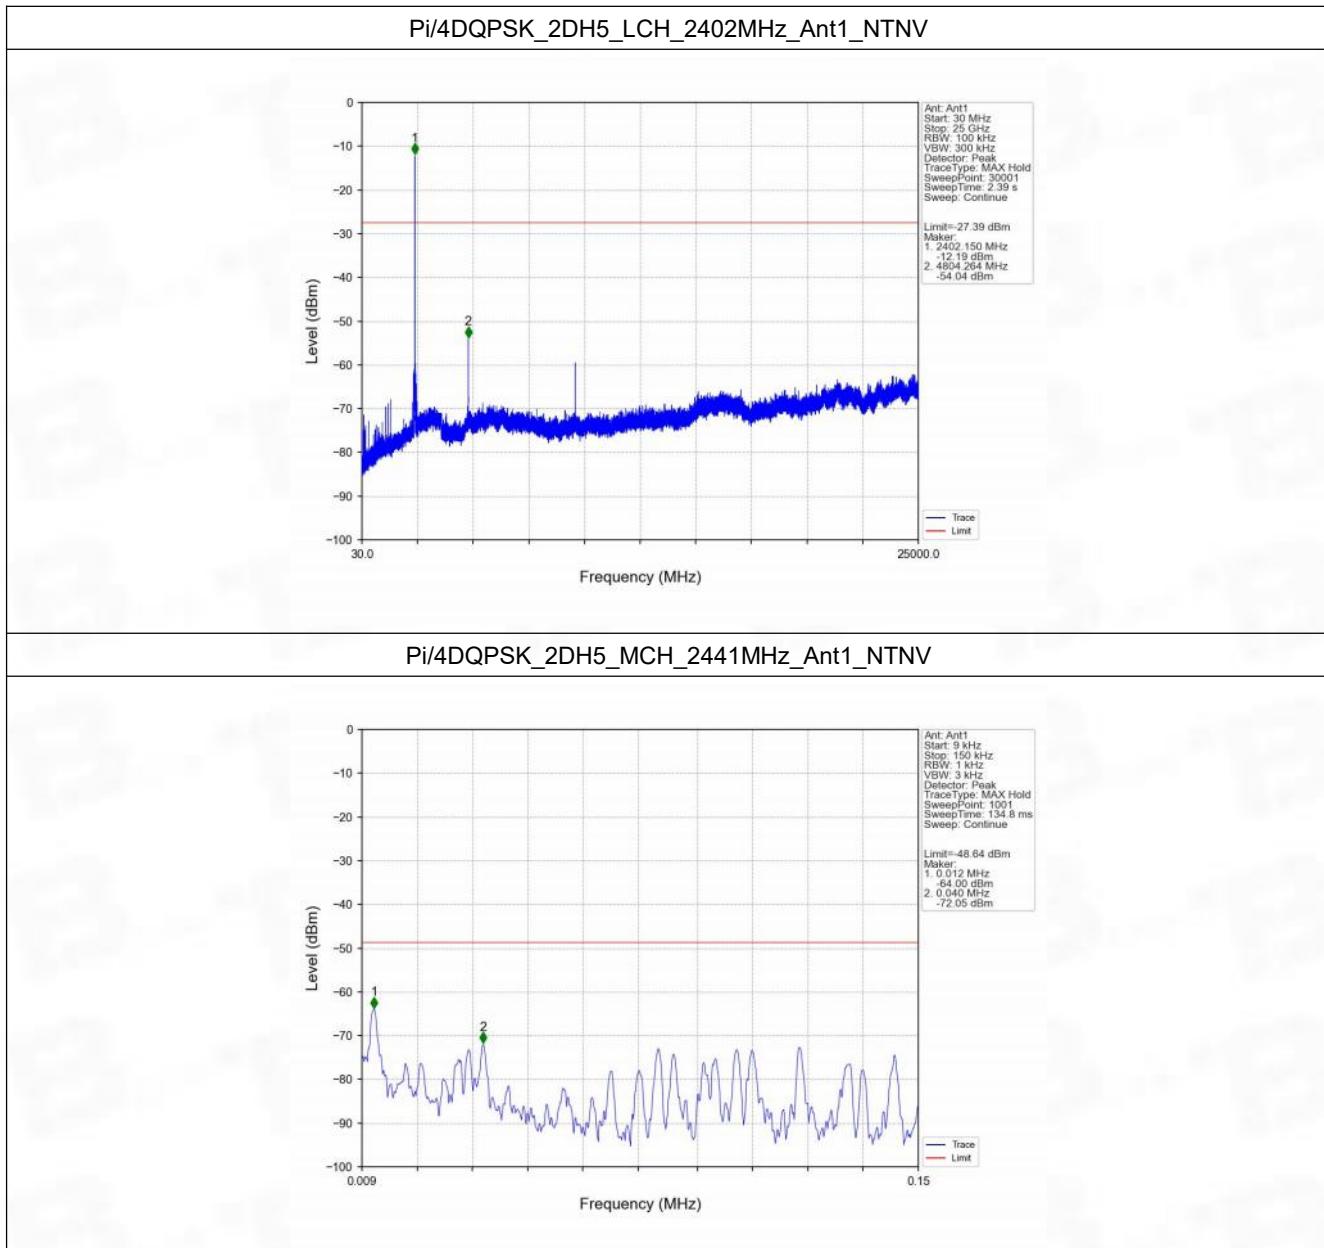


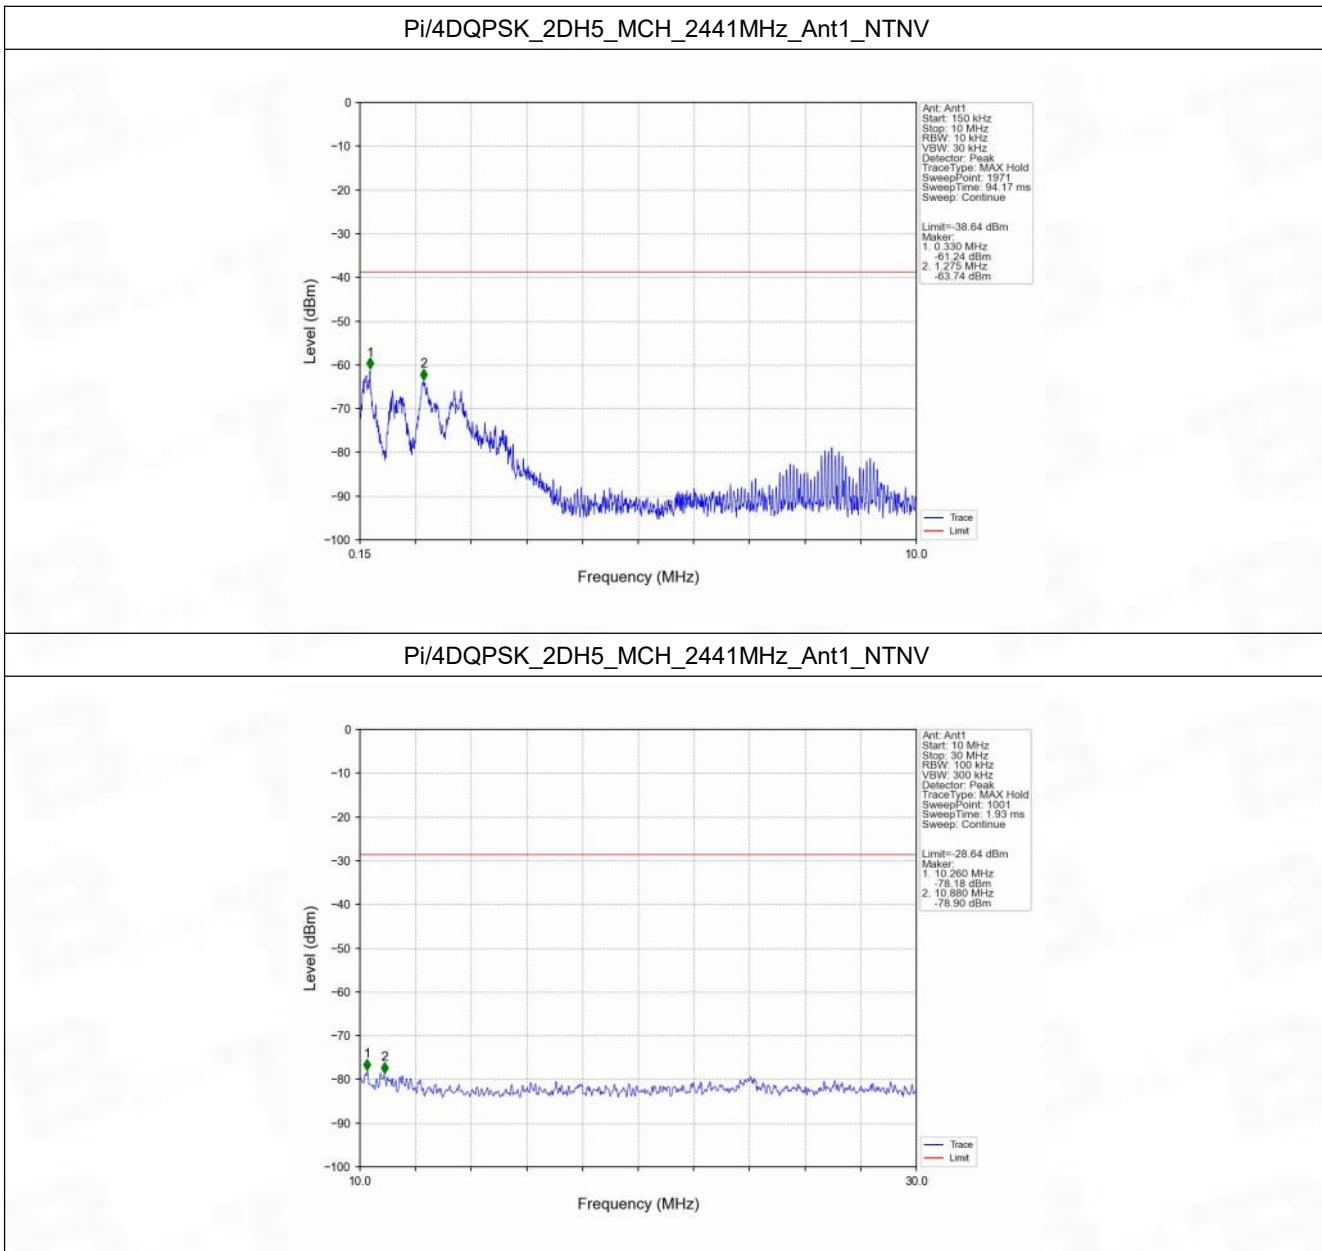


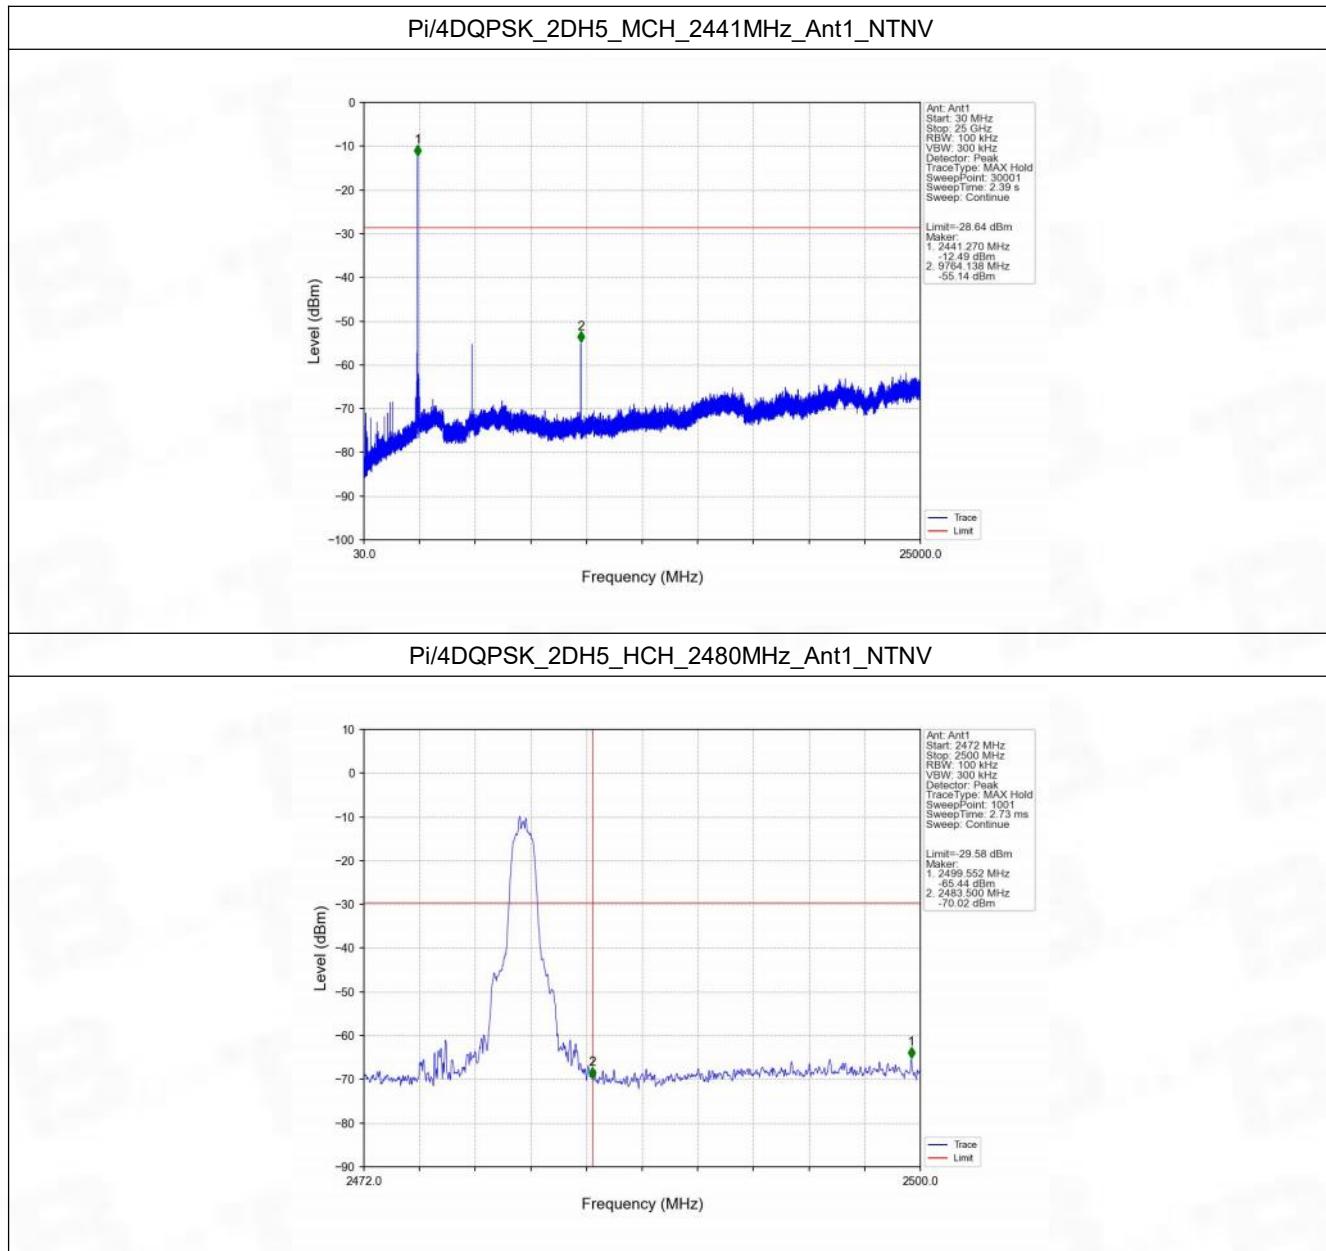


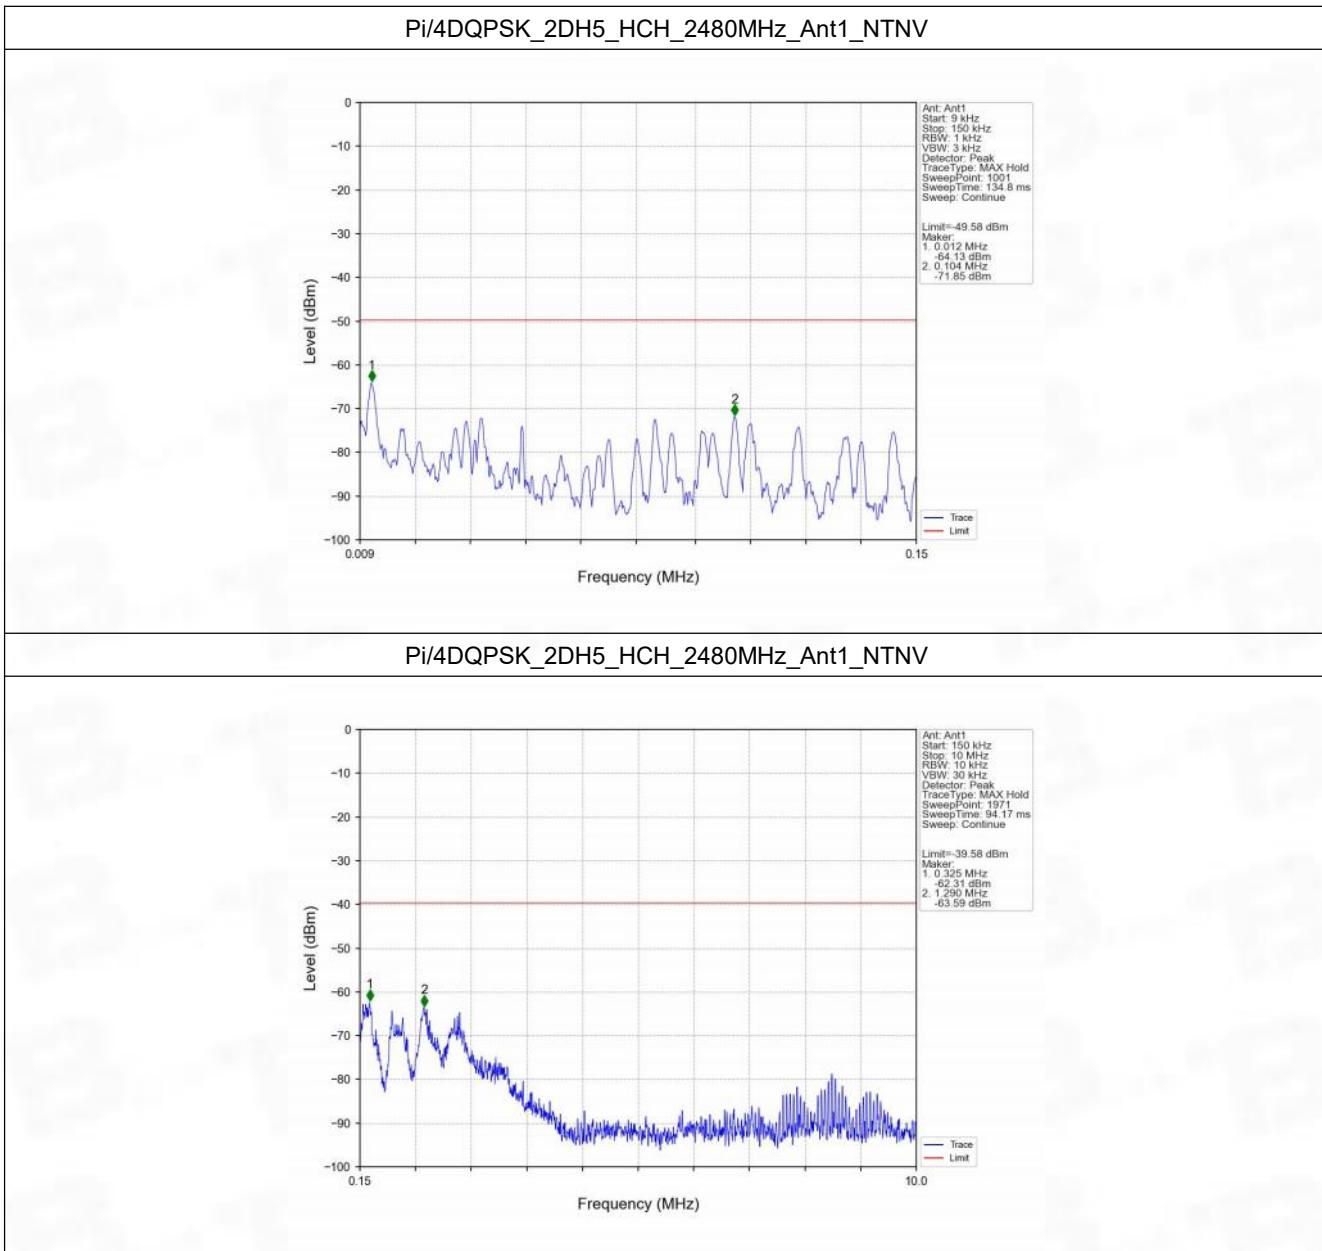


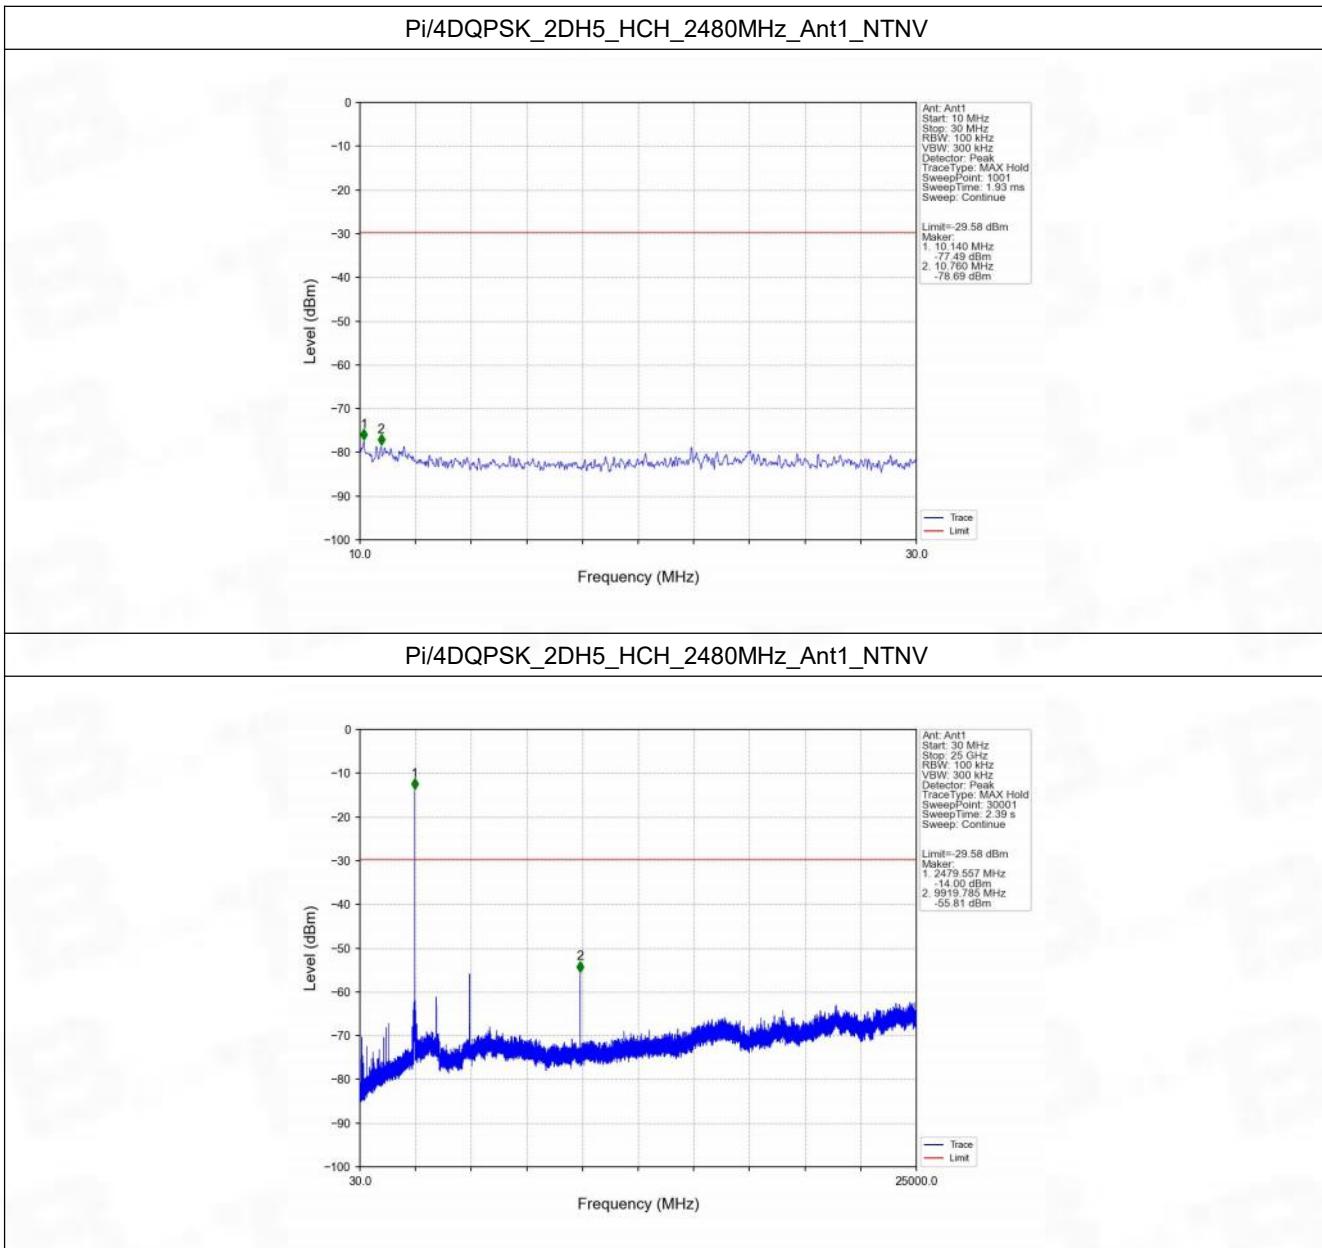


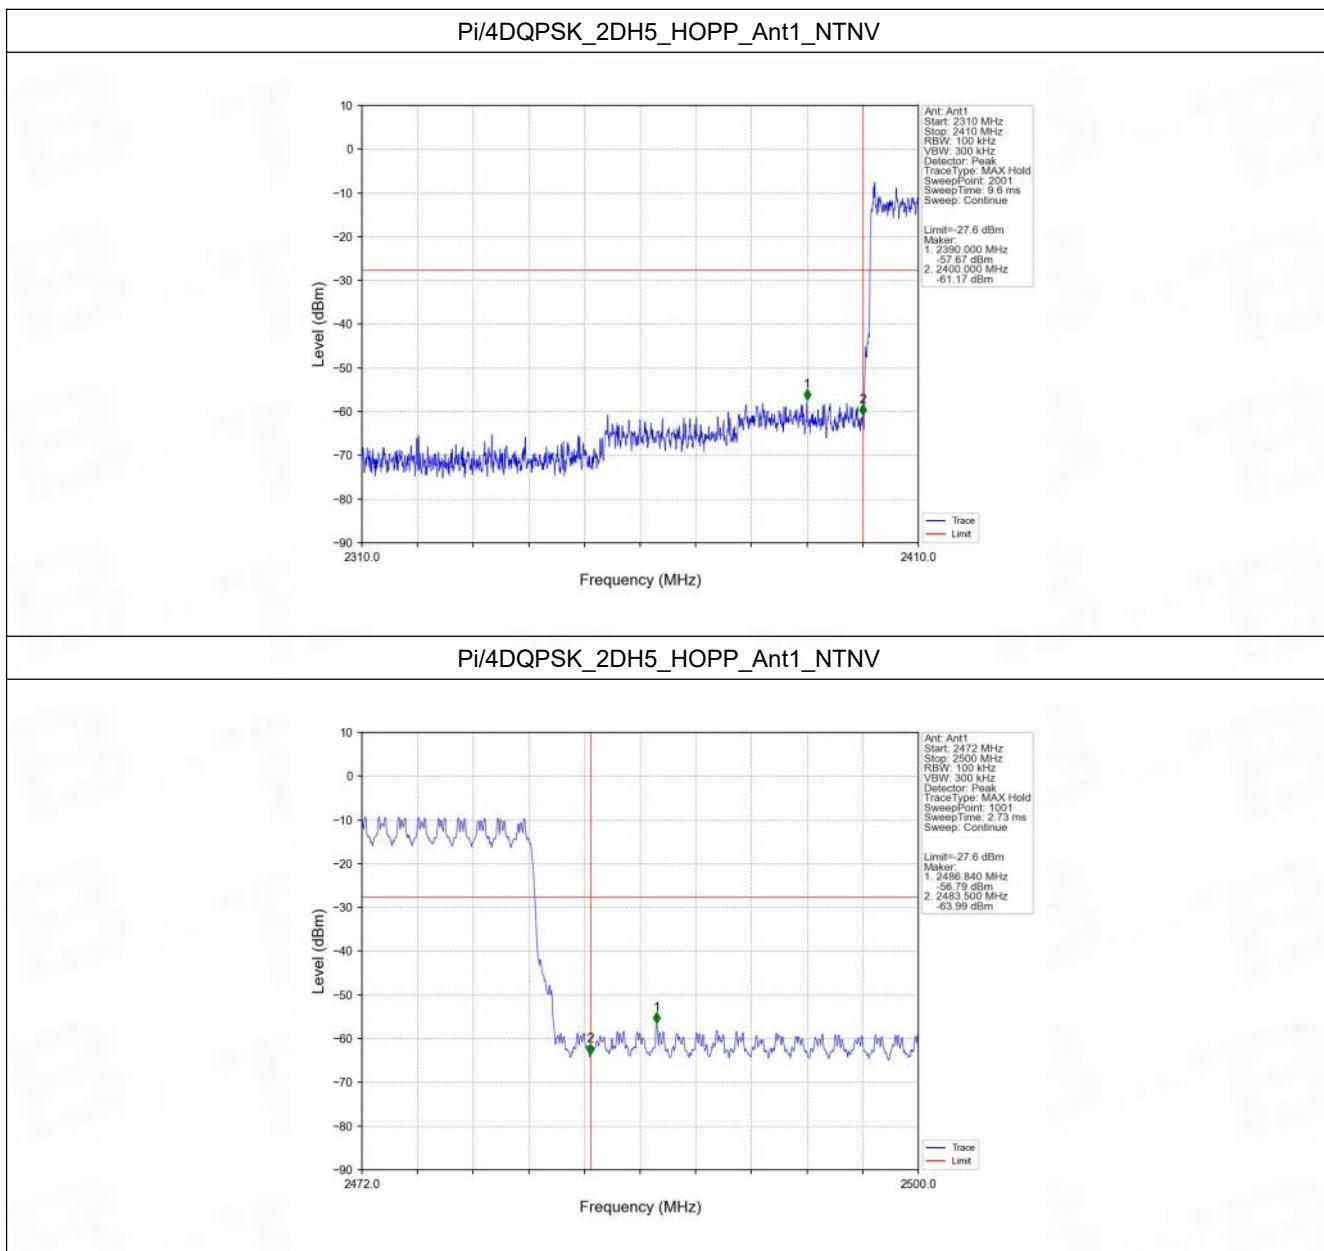


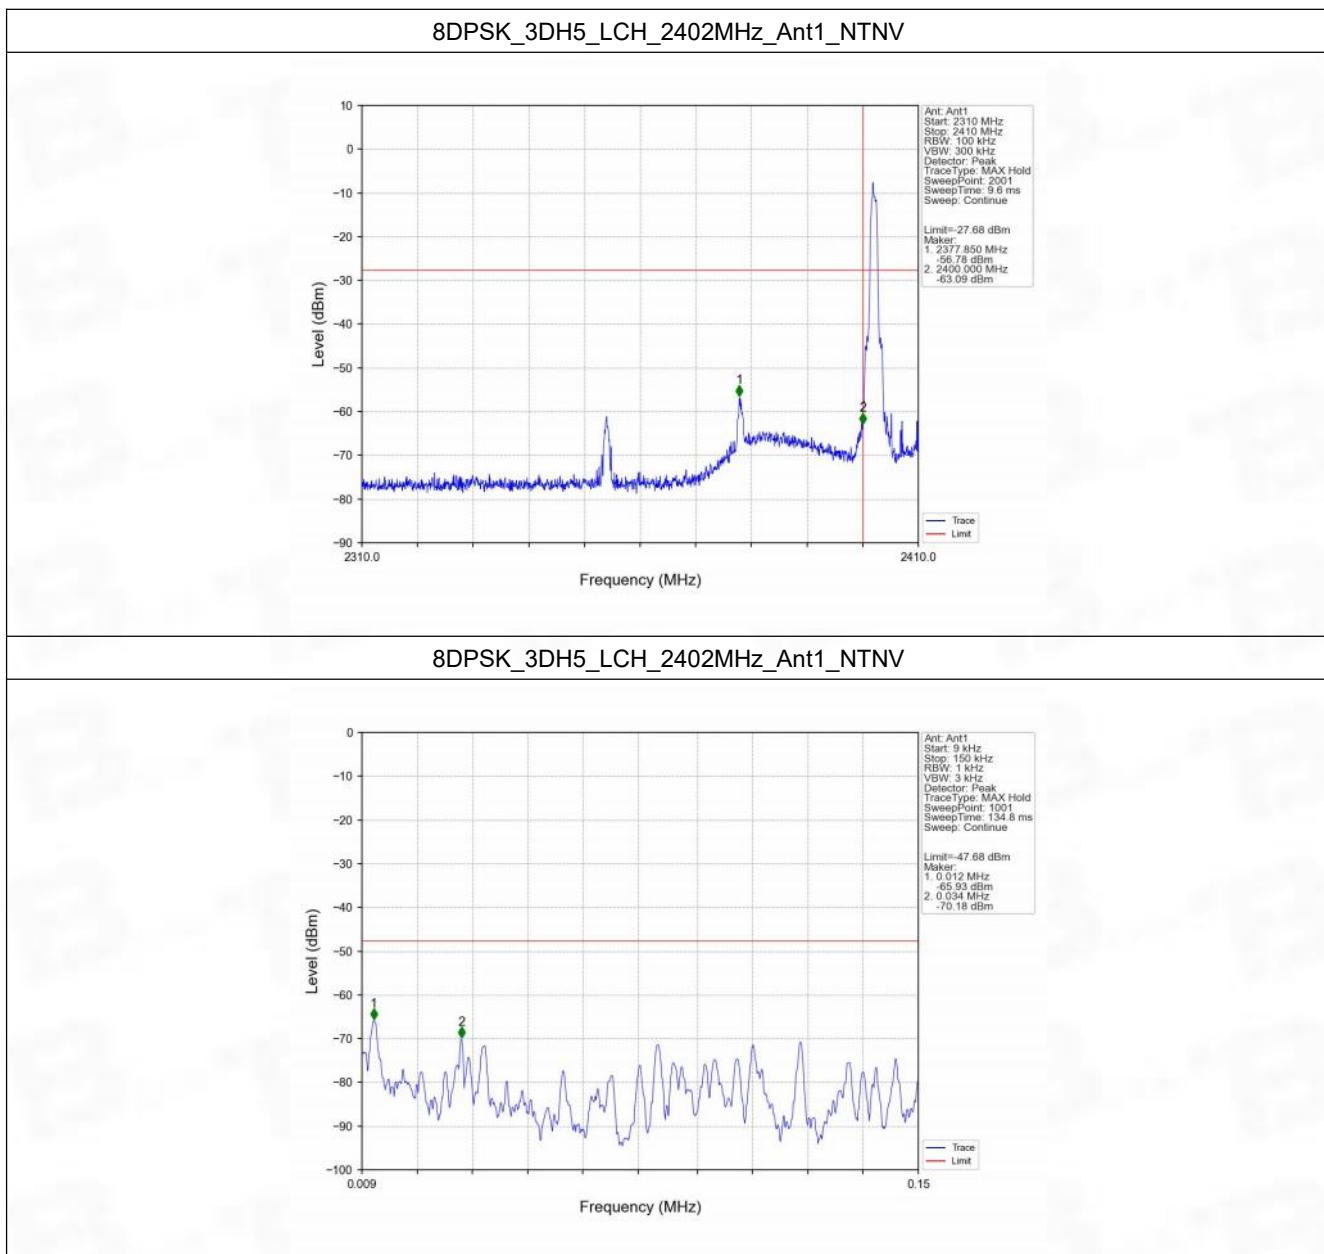


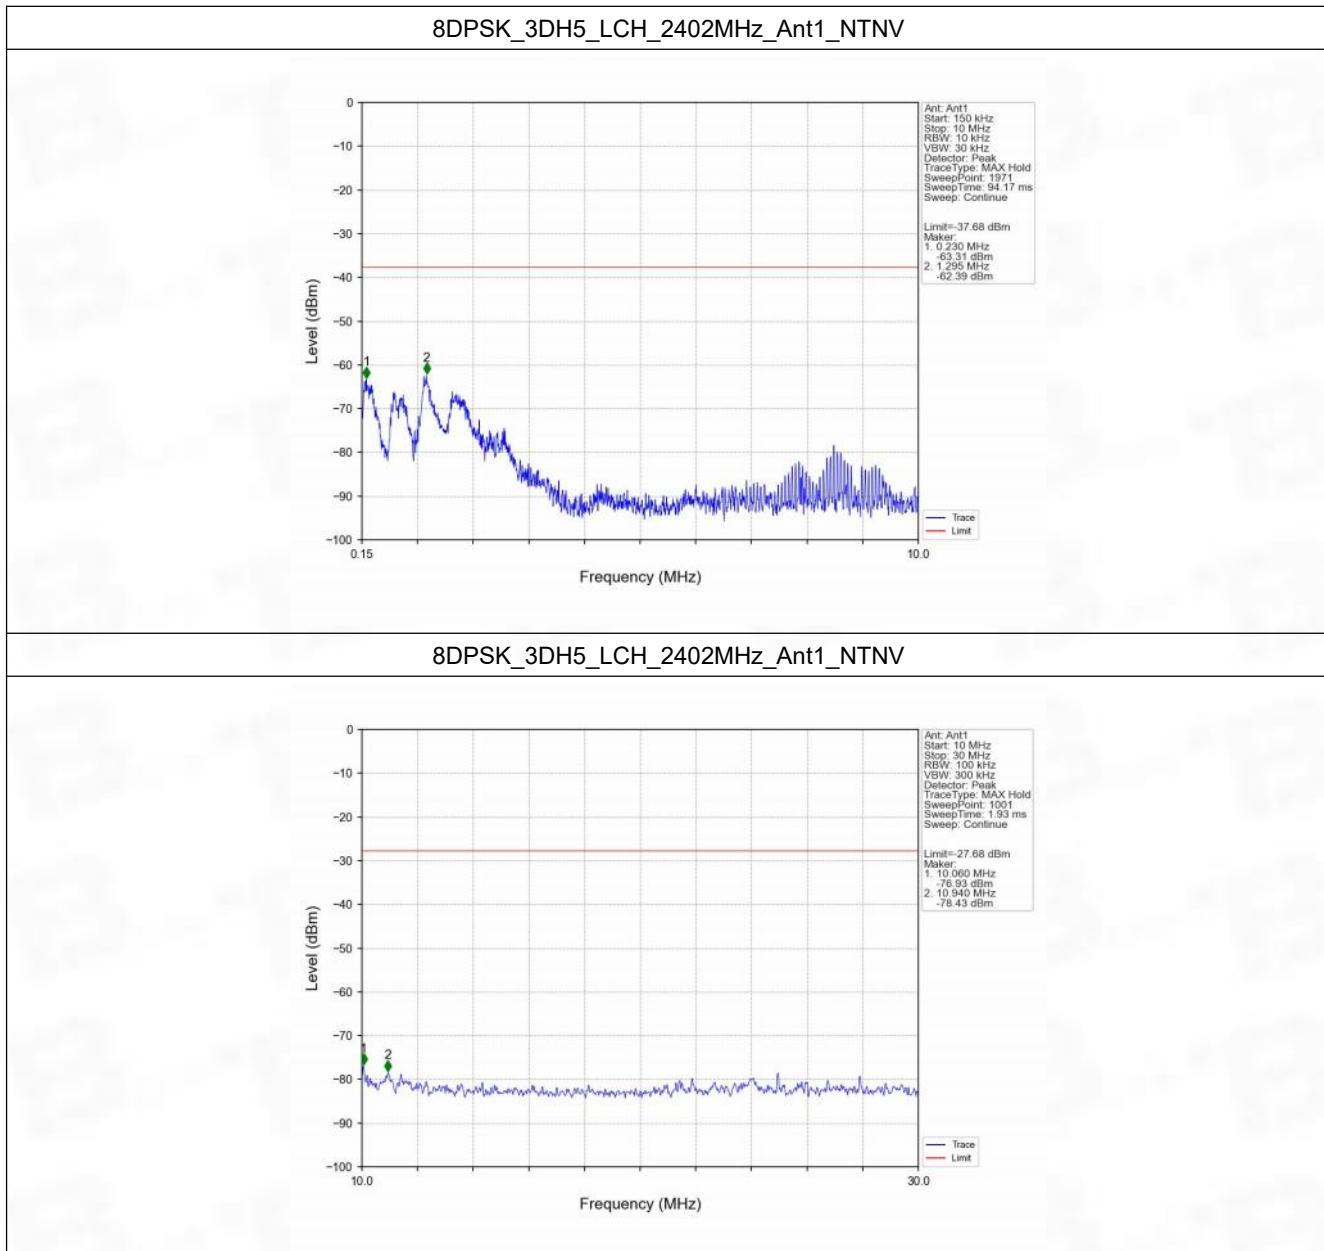


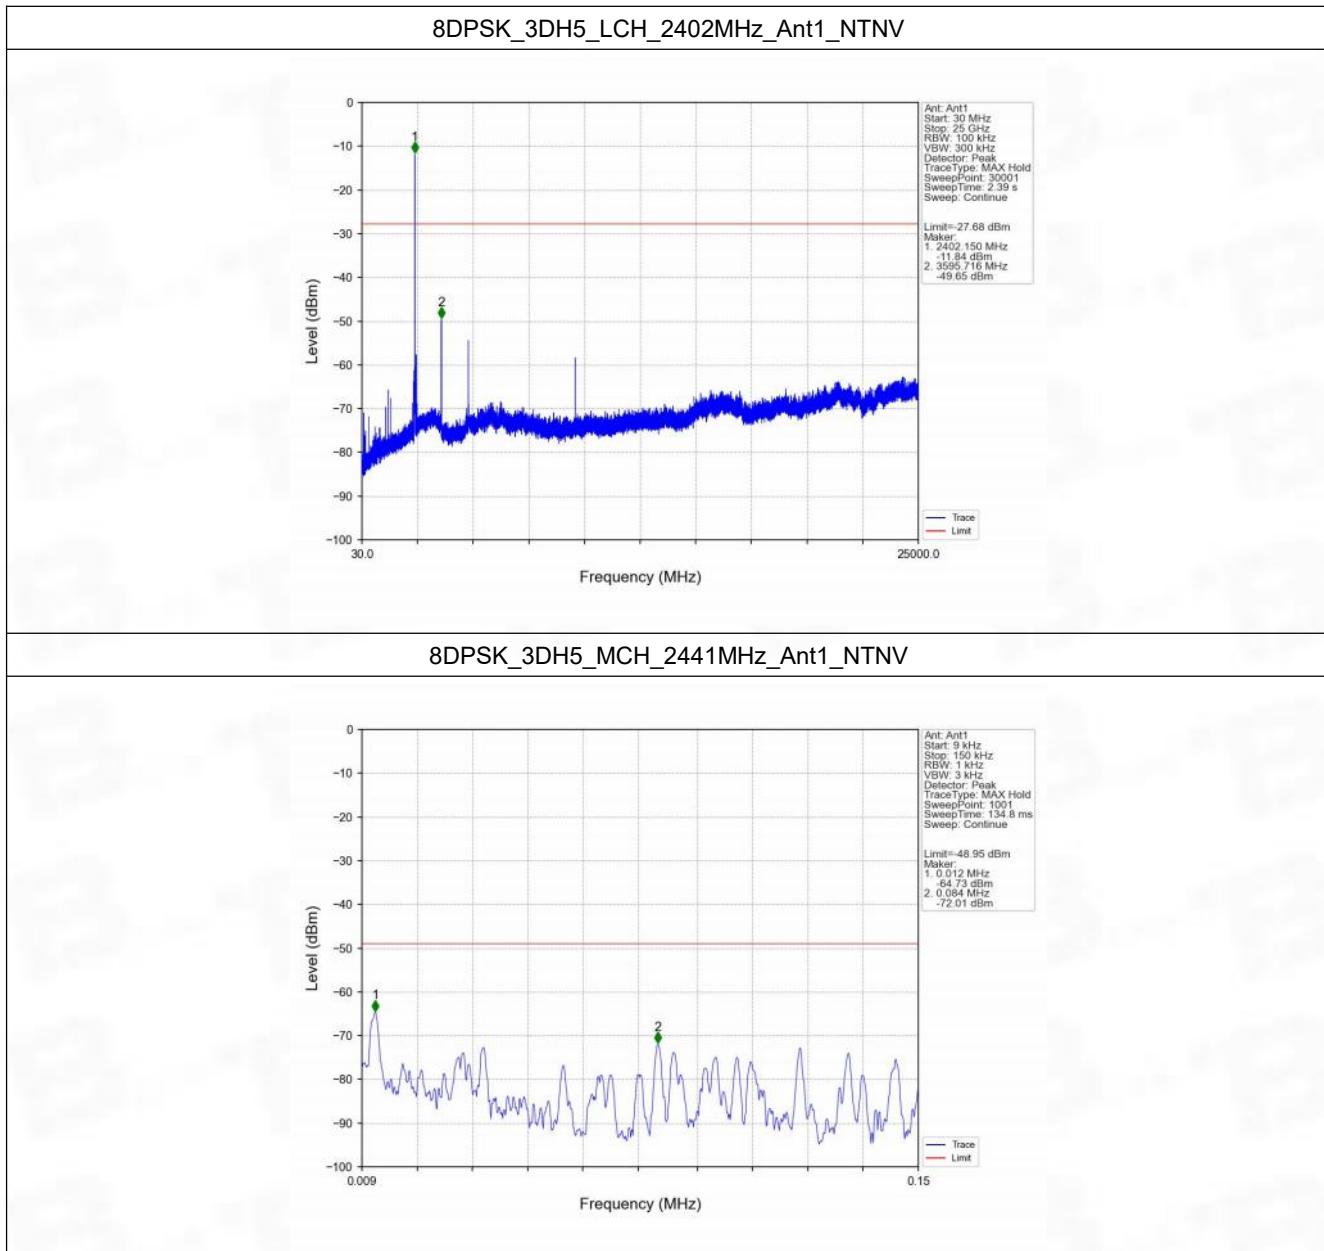


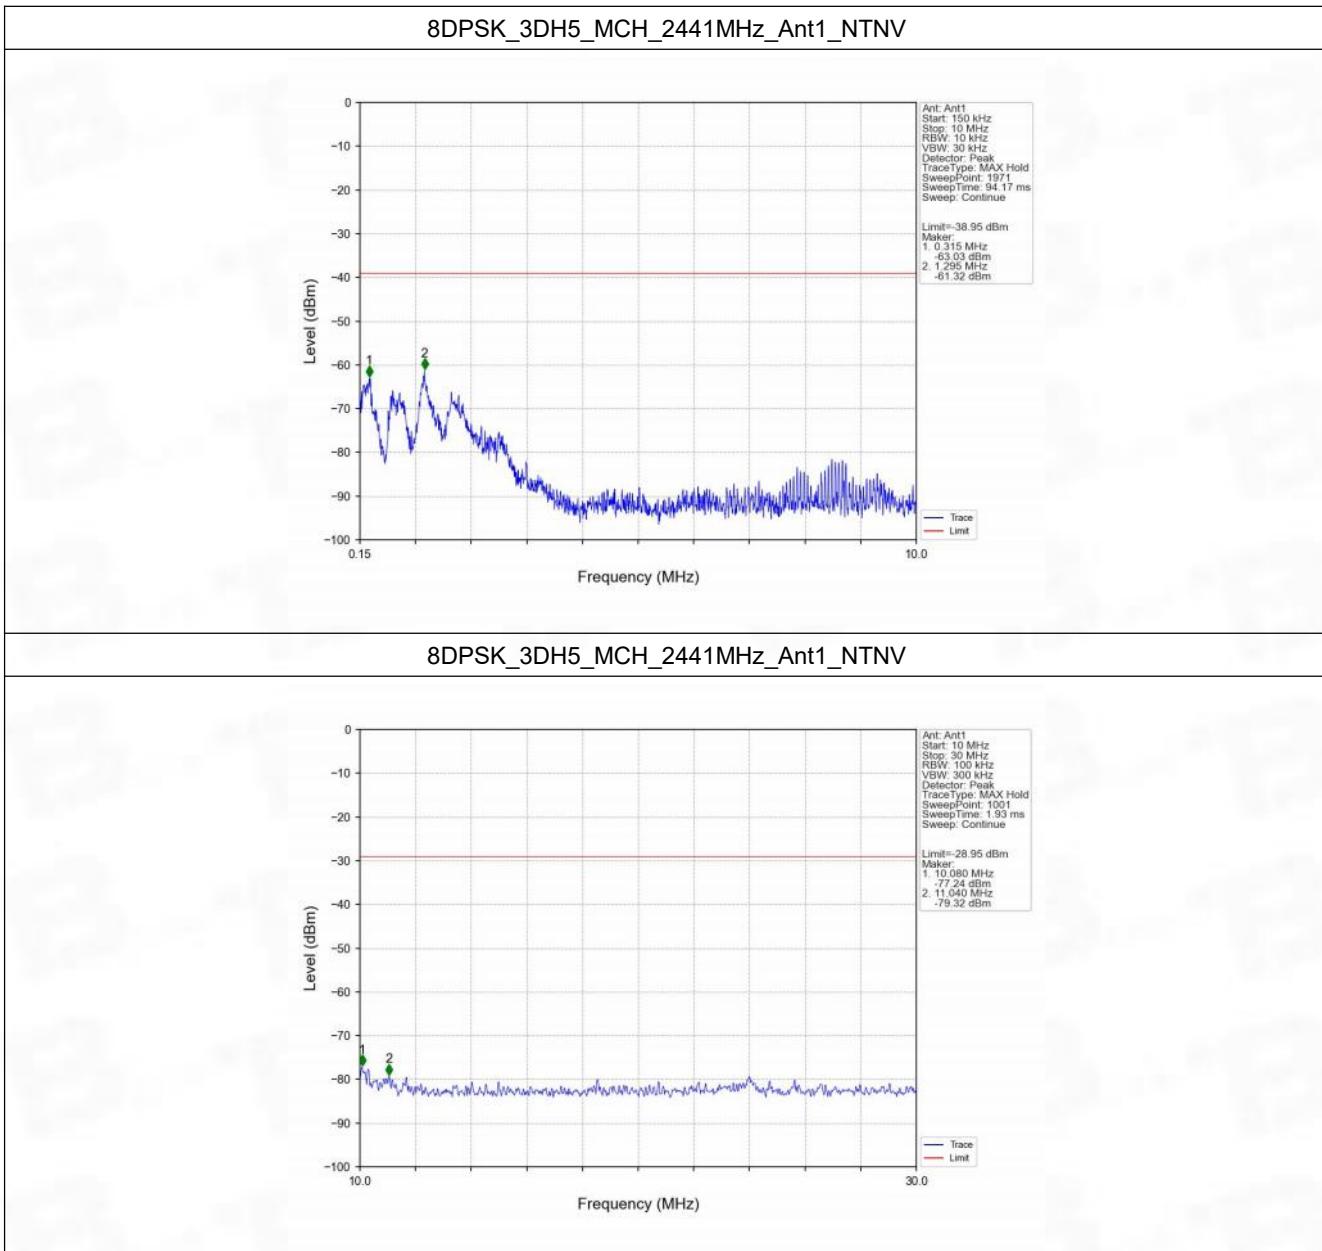

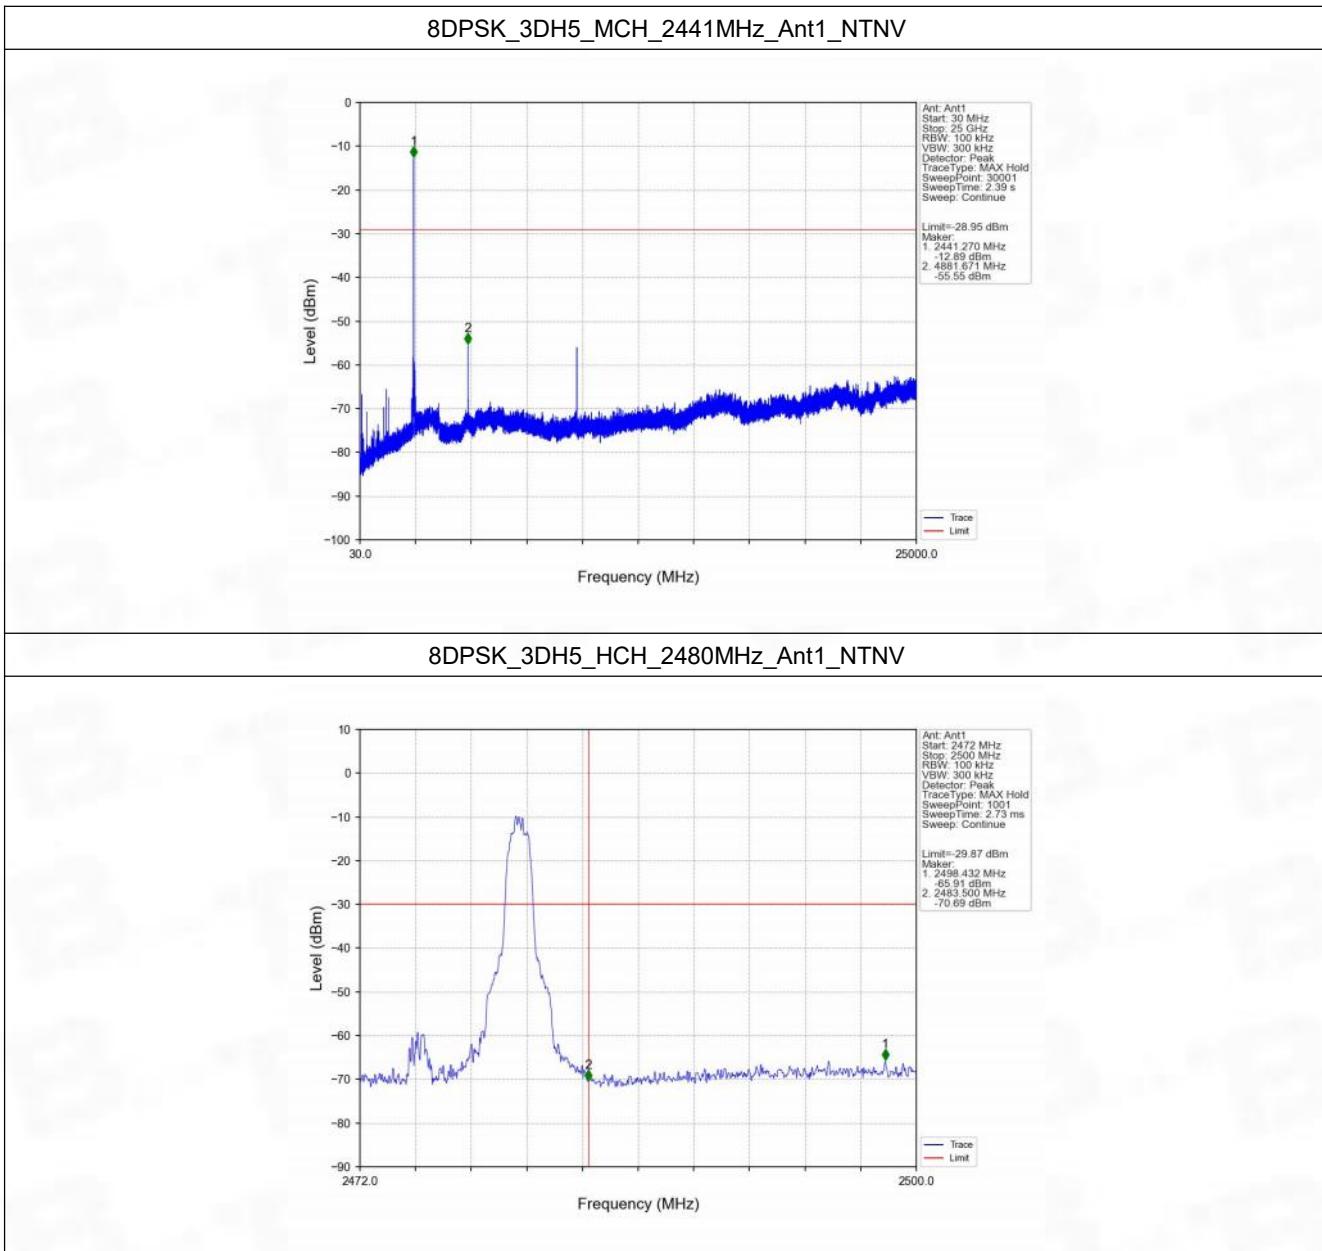

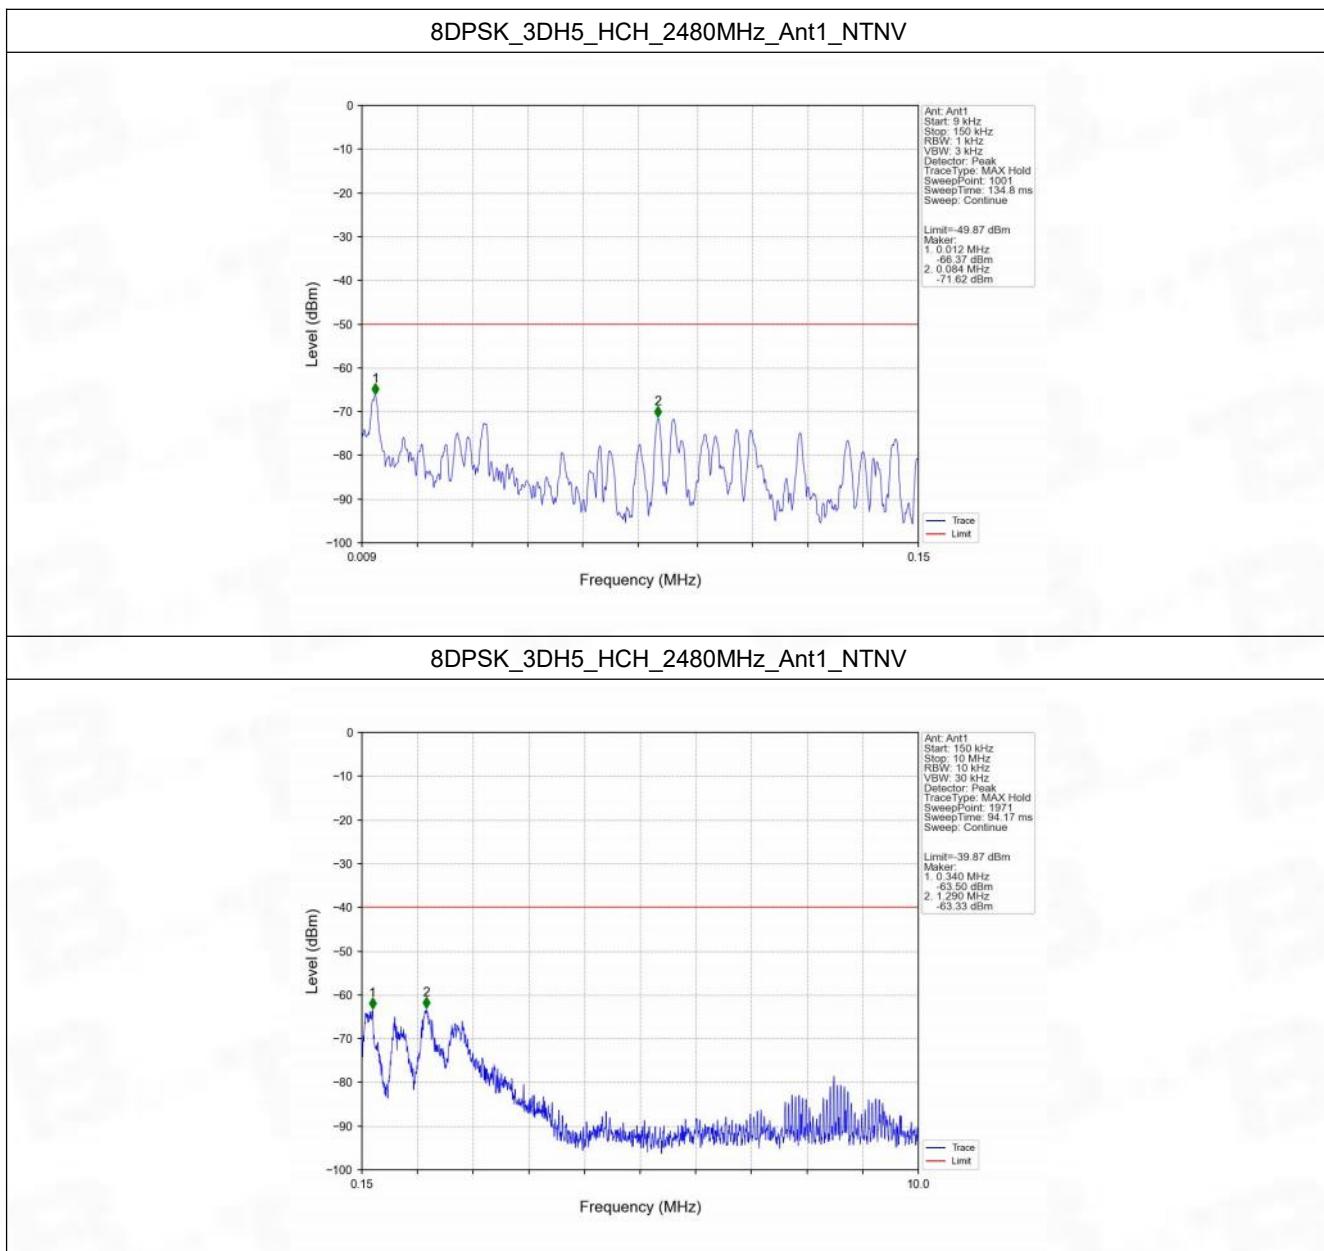

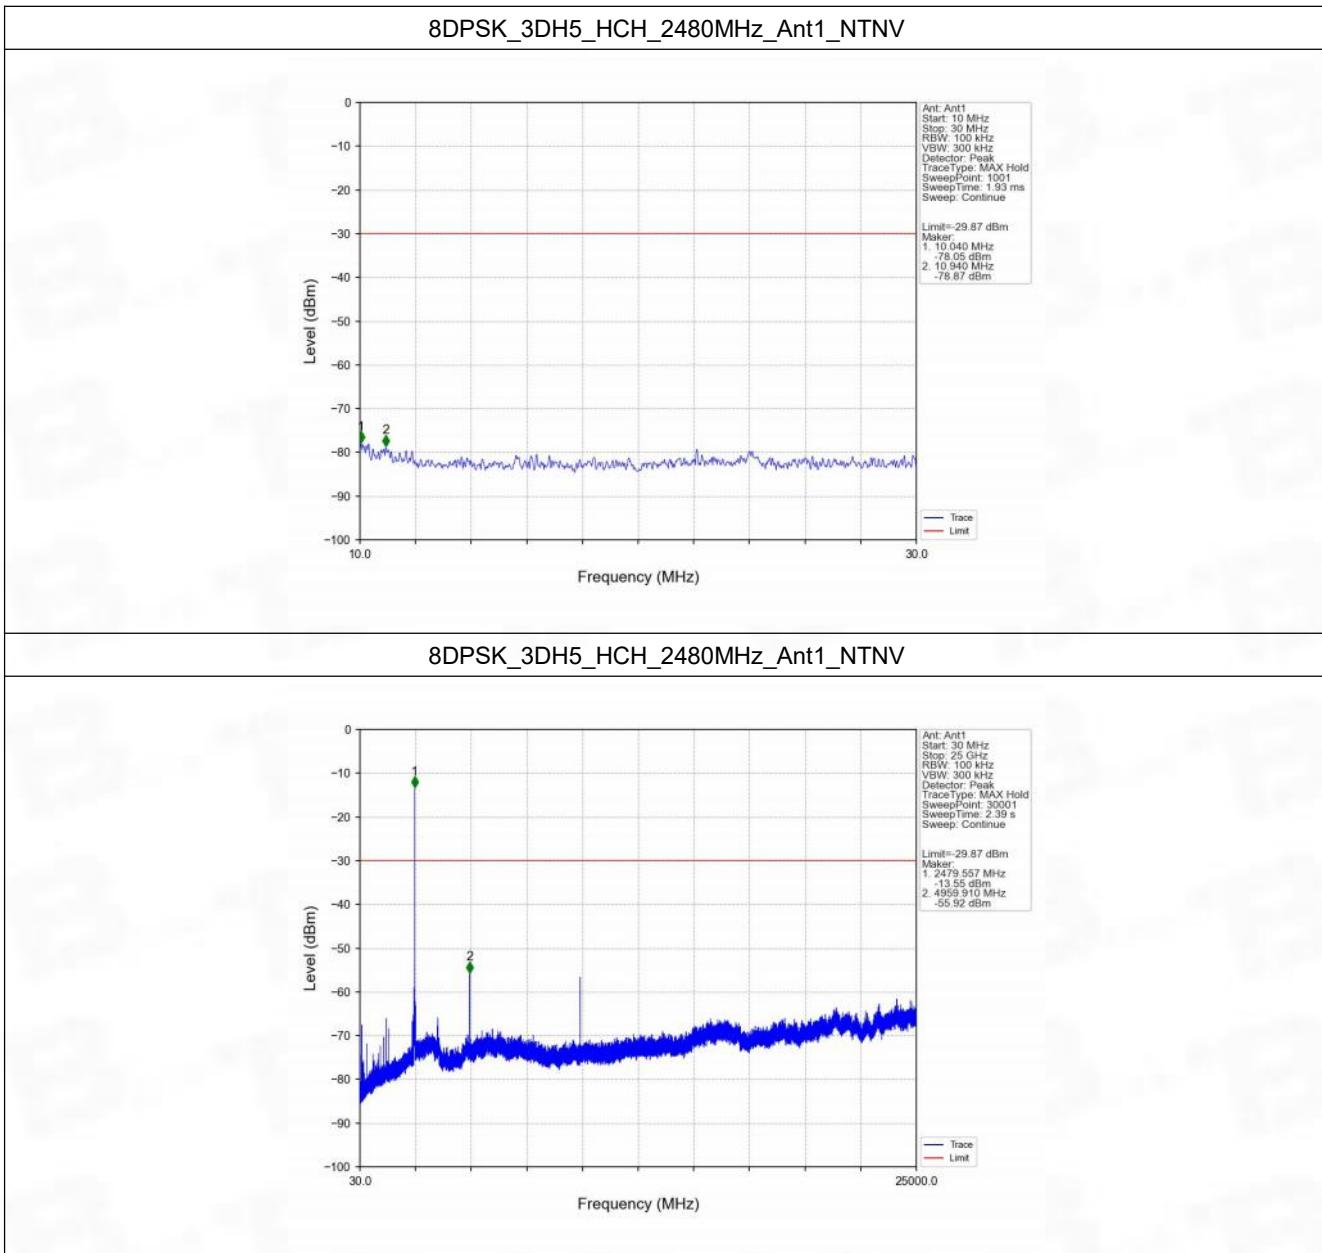

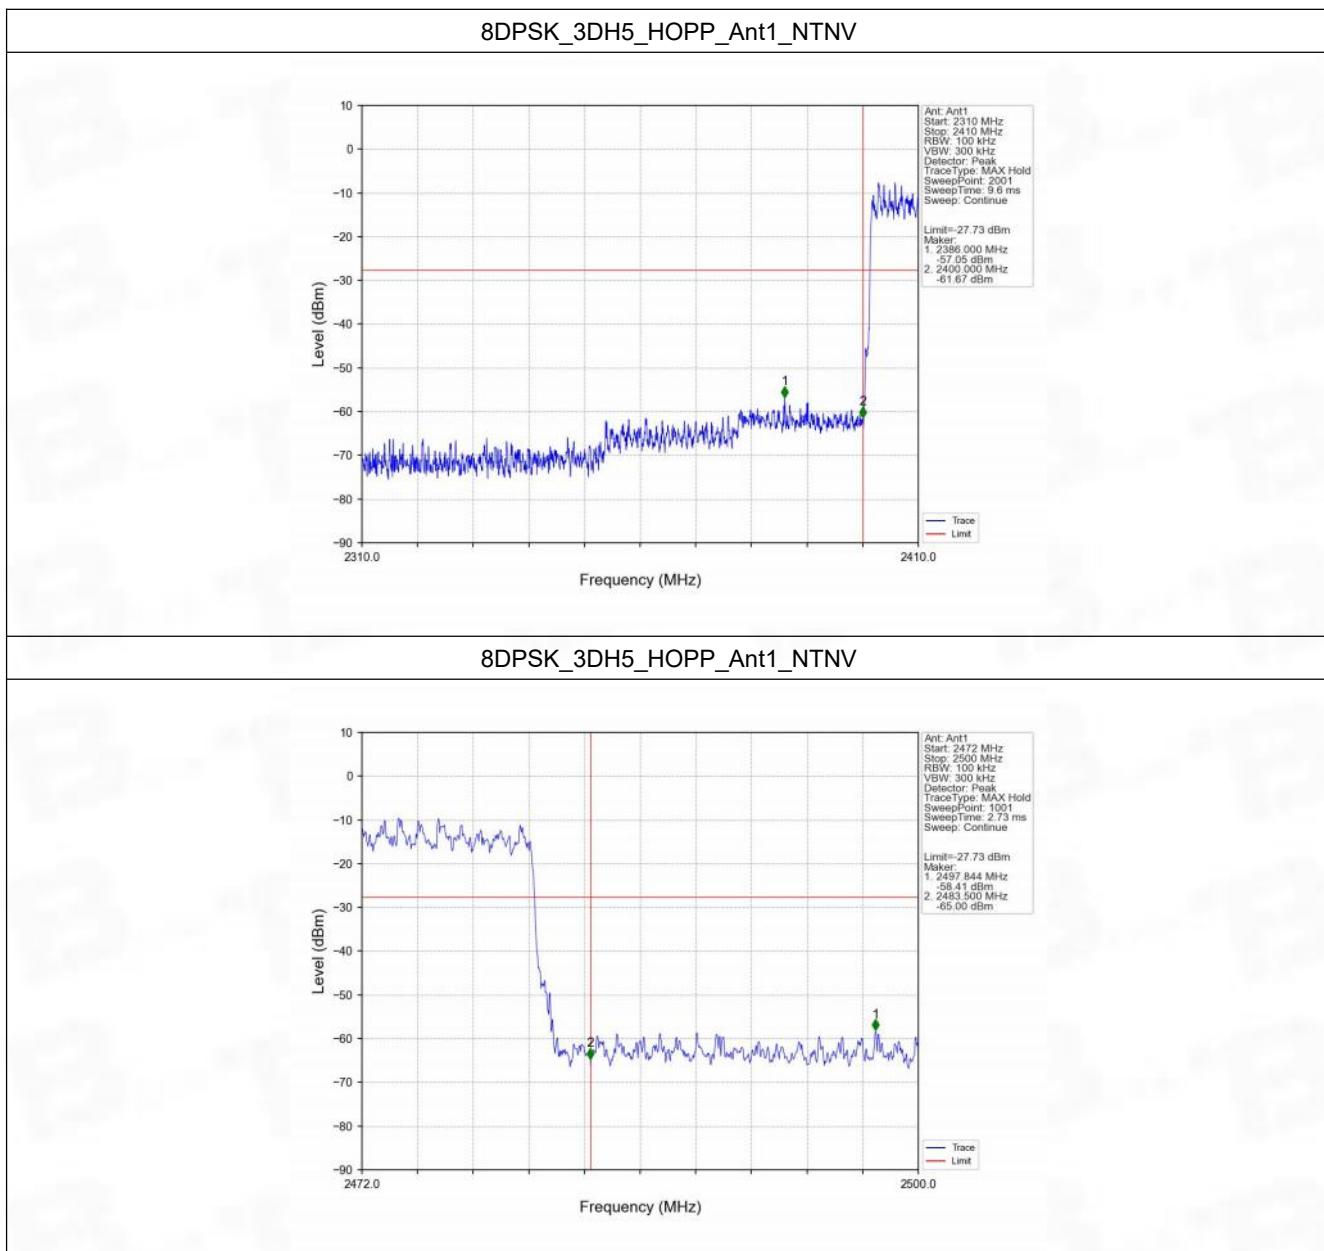

7. Form731

7.1 Test Result

7.1.1 Form731

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0002	-6.09



BTF Testing Lab (Shenzhen) Co., Ltd.

101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

www.btf-lab.com

-- END OF REPORT --