



# RF - TEST REPORT

## - Human Exposure -

**Type / Model Name** : DePLife

**Product Description** : Through-wall imaging system

**Applicant** : MaXentric Technologies LLC

Address : 7590 Fay Ave #301

92037 SAN DIEGO, U.S.A.

**Manufacturer** : MaXentric Technologies LLC

Address : 7590 Fay Ave #301

92037 SAN DIEGO, U.S.A.

<b>Test Result</b> according to the standards listed in clause 1 test standards:	<b>POSITIVE</b>
--	-----------------

<b>Test Report No. :</b> <u>80219970-03 Rev_1</u>	<u>11. April 2025</u> Date of issue
---	--



Deutsche  
Akkreditierungsstelle  
D-PL-12030-01-00

FCC ID: 2BKU8DEPLIFE-1

IC: 33302-DEPLIFE1

## Contents

<b>1 TEST STANDARDS</b>	<b>3</b>
<b>2 EQUIPMENT UNDER TEST</b>	<b>4</b>
2.1 Information provided by the Client	4
2.2 Sampling	4
2.3 Photo documentation of the EUT – See ATTACHMENT A	4
2.4 Equipment type, category	4
2.5 Short description of the equipment under test (EUT)	4
2.6 Variants of the EUT	4
2.7 Operation frequency	4
2.8 Transmit operating modes	4
2.9 Antennas	5
2.10 Power supply system utilised	5
<b>3 TEST RESULT SUMMARY</b>	<b>6</b>
3.1 Revision history of test report	6
3.2 Final assessment	6
<b>4 TEST ENVIRONMENT</b>	<b>7</b>
4.1 Address of the test laboratory	7
4.2 Environmental conditions	7
4.3 Statement of the measurement uncertainty	7
<b>5 HUMAN EXPOSURE</b>	<b>8</b>
5.1 RF output power	8
5.2 Maximum permissible exposure (MPE)	10
5.3 Co-location and Co-transmission	12
<b>6 USED TEST EQUIPMENT AND ACCESSORIES</b>	<b>13</b>

ATTACHMENT A as separate supplement

FCC ID: 2BKU8DEPLIFE-1

IC: 33302-DEPLIFE1

## 1 TEST STANDARDS

The tests were performed according to following standards:

**FCC Rules and Regulations Part 1, Subpart I - Procedures Implementing the National Environmental Policy Act of 1969**

Part 1, Subpart I, Section 1.1310	Radiofrequency radiation exposure limits
Part 1, Subpart 2, Section 2.1091	Radiofrequency radiation exposure evaluation: <b>mobile devices</b> .
Part 1, Subpart 2, Section 2.1093	Radiofrequency radiation exposure evaluation: <b>portable devices</b> .
KDB 447498 D01	RF Exposure procedures and equipment authorisation policies for mobile and portable devices, April 20, 2021.
ANSI C95.1: 2005	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
ETSI TR 100 028 V1.3.1: 2001-03,	Electromagnetic Compatibility and Radio Spectrum Matters (ERM); Uncertainties in the Measurement of Mobile Radio Equipment Characteristics—Part 1 and Part 2

FCC ID: 2BKU8DEPLIFE-1

IC: 33302-DEPLIFE1

## 2 EQUIPMENT UNDER TEST

### 2.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

### 2.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according his/her instructions.

### 2.3 Photo documentation of the EUT – See ATTACHMENT A

### 2.4 Equipment type, category

WiFi device, UWB device, mobile equipment

### 2.5 Short description of the equipment under test (EUT)

The DePLife system is an ultra-wide band (UWB) radar for detecting the presence of life through walls made of modern building materials. The data is transmitted to a smart phone via Wi-fi for remote operation.

Number of tested samples: 1  
Serial number: 054  
Firmware version: deplife\_test\_full\_em\_random\_ch.s19

### 2.6 Variants of the EUT

There are no variants.

### 2.7 Operation frequency

The operating frequencies are 2400 MHz to 2483.5 MHz and 1990 MHz to 10600 MHz.

### 2.8 Transmit operating modes

#### WiFi

Modulation: BPSK modulation with 11 Mbps data rate.

#### UWB

Modulation: variable pulse position modulation (PPM) in combination with binary phase shift keying (BPSK).

FCC ID: 2BKU8DEPLIFE-1

IC: 33302-DEPLIFE1

## 2.9 Antennas

The following antennas shall be used with the EUT:

### WiFi

Number	Characteristic	Model number	Plug	Frequency range (GHz)	Gain (dBi)
1	Omni	Antenova Mutica SR42W001	None, SMD	2.4 – 2.5	2.0

### UWB

Number	Characteristic	Model number	Plug	f-range (GHz)	Gain (dBi)	Average Gain (dBi)
1	Omni	6-8.5GHz	None, PCB	6-8.5GHz	3-5	4dBi

## 2.10 Power supply system utilised

Power supply voltage,  $V_{\text{nom}}$  : 3.7 V DC (battery driven)

FCC ID: 2BKU8DEPLIFE-1

IC: 33302-DEPLIFE1

### 3 TEST RESULT SUMMARY

FCC Rule Part	Description	Result
KDB 447498, 7.1	MPE	passed
KDB 447498, 4.3.1	SAR exclusion consideration	not applicable
KDB 447498, 7.2	Co-location, Co-transmission	not applicable

#### 3.1 Revision history of test report

Test report No	Rev.	Issue Date	Changes
80219970-03	0	22 January 2025	Initial test report
	1	11 April 2025	General: IC ID added in header Clause 5.3.2: correction of percentages Clause 6: correction of table formation

The test report with the highest revision number replaces the previous test reports.

#### 3.2 Final assessment

The equipment under test fulfills the requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 07 November 2024

Testing concluded on : 07 November 2024

Checked by:

Tested by:

---

Klaus Gegenfurtner  
Teamleader Radio

---

Franz-Xaver Schrettenbrunner  
Radio Team

FCC ID: 2BKU8DEPLIFE-1

IC: 33302-DEPLIFE1

## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

**CSA Group Bayern GmbH**  
Straubinger Straße 100  
94447 PLATTLING  
GERMANY

### 4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15 - 35 °C

Humidity: 30 - 60 %

Atmospheric pressure: 86 - 106 kPa

### 4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor  $k = 2$ . The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report on basis of the ETSI Technical Report TR 100 028 Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1 and Part 2. The results are documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

### 4.4 Conformity Decision Rule

The applied conformity decision rule is based on ILAC G8:09/2019 clause 4.2.1 Binary Statement for Simple Acceptance Rule ( $w = 0$ ).

Details can be found in the procedure CSA\_B\_V50\_29.

FCC ID: 2BKU8DEPLIFE-1

IC: 33302-DEPLIFE1

## 5 HUMAN EXPOSURE

### 5.1 RF output power

For test instruments and accessories used see section 6 Part **CPR 3**.

#### 5.1.1 Description of the test location


Test location: Fully anechoic room FAR1

#### 5.1.2 Test result

##### 5.1.2.1 UWB

According to test report 80219970-01 Rev\_0 by CSA Group Bayern GmbH, Straubinger Strasse 100, 94447 Plattling, Germany, the 99% OBW measurements provides  $f_L = 6674.5$  MHz and  $f_H = 7813.9$  MHz. Therefore, a channel power measurement is taken with channel width > 99% OBW:


Test setup:

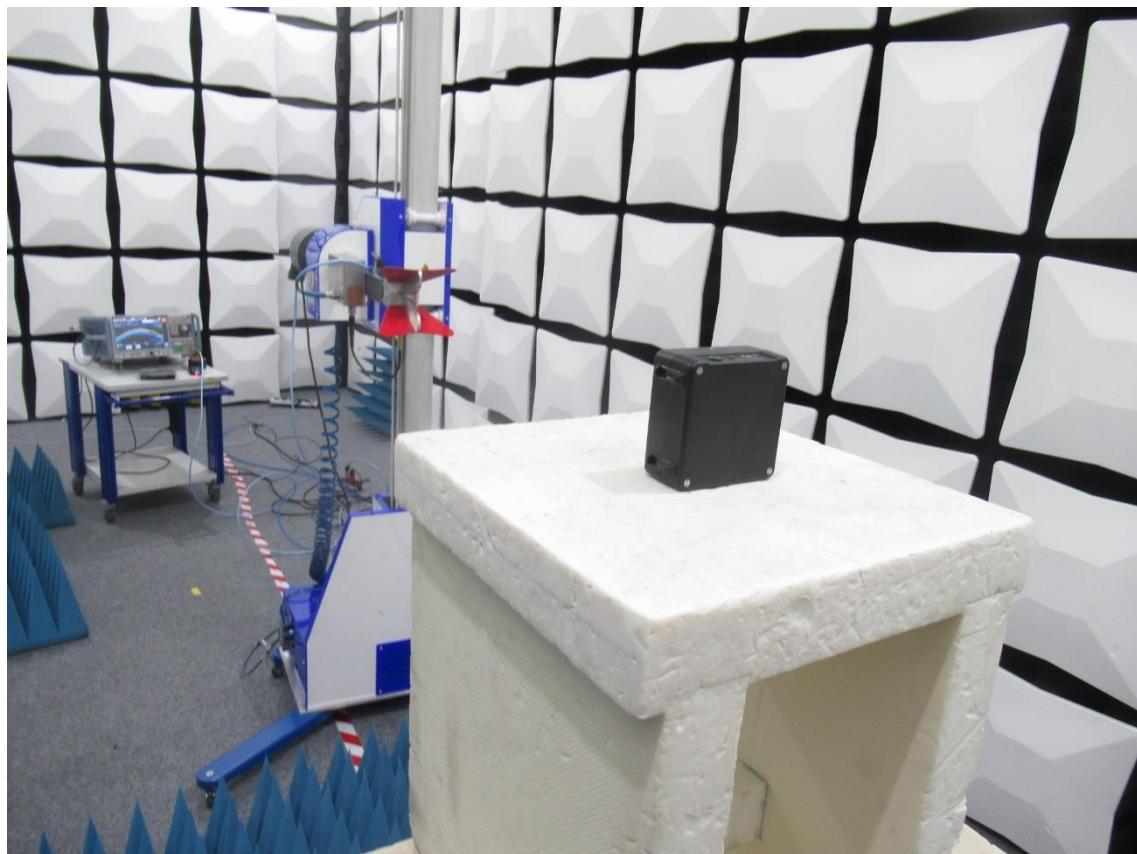

FCC ID: 2BKU8DEPLIFE-1

IC: 33302-DEPLIFE1

Test result:

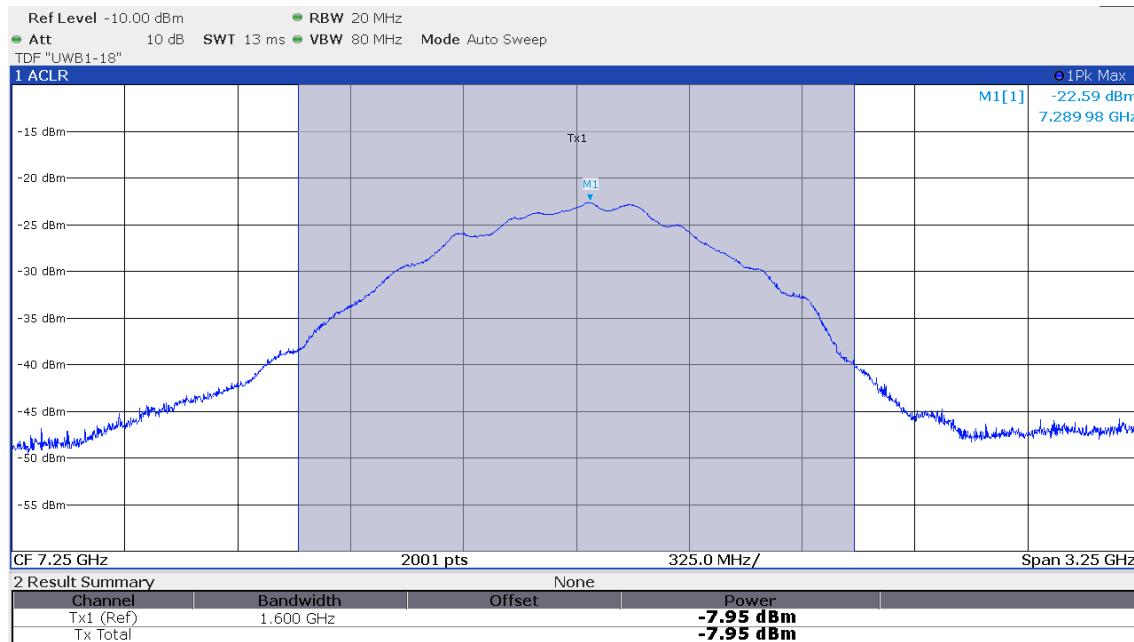

$EIRP_{UWB} = -7.95 \text{ dBm} = 0.2 \text{ mW}$

### 5.1.2.2 WiFi

The output power of the device is taken from the power measurement test report 80219970-01 Rev\_0 by CSA Group Bayern GmbH, Straubinger Strasse 100, 94447 Plattling, Germany.

$EIRP_{WiFi} = -21.0 \text{ dBm} + 2.0 \text{ dBi} = 23.0 \text{ dBm} = 199.5 \text{ mW}$

**Remarks:** As worst case the power values are not averaged over time.

FCC ID: 2BKU8DEPLIFE-1

IC: 33302-DEPLIFE1

## 5.2 Maximum permissible exposure (MPE)

### 5.2.1 Applicable standard

According to FCC Part 15, Section 15.247(i):

Systems operating under the provisions of this section shall be operated in a manner that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

The test methods used comply with ANSI/IEEE C95.1, "IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz".

This test report shows the compliance with the limits for Maximum Permissible Exposure (MPE) specified in FCC Part 1, Section 1.1310 and the criteria to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in FCC Part 1, Section 1.1307(b).

### 5.2.2 Description of Determination

The maximum rated output power conducted included the tune up tolerance is used to calculate the EIRP. Through the Friis transmission formula, the known maximum gain of the antenna and the maximum power, can be calculated the MPE in a defined distance away from the product.

Friis transmission formula:

$$P_d = \frac{P_{out} * G}{4 * \Pi * r^2}$$

Where:

$P_d$  = power density (mW/cm<sup>2</sup>)

$P_{out}$  = output power to antenna (mW)

G = gain of antenna (linear scale)

r = distance between antenna and observation point (cm)

According to FCC Rules 47CFR 2.1093(b) the EUT is not a portable device. The EUT is designed to be used that radiating structures are 20 cm outside of the body of the user. (r = 20 cm)

FCC ID: 2BKU8DEPLIFE-1

IC: 33302-DEPLIFE1

### 5.2.3 Determination of MPE according to FCC

#### UWB

$$P_d = 0.2 \text{ mW} / (4\pi \times [20\text{cm}]^2)$$

$$P_d = 0.00004 \text{ mW/cm}^2$$

#### WiFi

$$P_d = 199.5 \text{ mW} / (4\pi \times [20\text{cm}]^2)$$

$$P_d = 0.04 \text{ mW/cm}^2$$

Limits for maximum permissible exposure (MPE):

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(B) Limits for General Population / Uncontrolled Exposure</b>				
0.3 – 1.34	614	1.63	100	30
1.34 – 30	824/f	2.19/f	180/f <sup>2</sup>	30
30 - 300	27.5	0.073	0.2	30
300-1500	---	---	f/1500	30
<b>1500-100000</b>	<b>---</b>	<b>---</b>	<b>1.0</b>	<b>30</b>

f = Frequency in MHz

### 5.2.4 Determination of MPE according to ISED:

#### UWB

$$\mathbf{EIRP = 0.2 \text{ mW}}$$

Limit: 5 W

#### WiFi

$$\mathbf{EIRP = 199.5 \text{ mW}}$$

Limit: 2.7 W

Exemption limits for routine Evaluation – RF exposure evaluation according to RSS-102, 2.5.2:

At or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834} \text{ W}$  (adjusted for tune-up tolerance), where f is in MHz;

At or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance)

The requirements are **FULFILLED**.

**Remarks:**

FCC ID: 2BKU8DEPLIFE-1

IC: 33302-DEPLIFE1

### 5.3 Co-location and Co-transmission

The FCC's MPE limits vary with frequency. Therefore, in mixed or broadband RF fields where several sources and frequencies are involved, the fraction of the recommended limit (in terms of power density or square of the electric or magnetic field strength) incurred within each frequency interval should be determined, and the sum of all fractional contributions should not exceed 1.0, or 100 % in terms of percentage.

#### 5.3.1 Determination of MPE according to FCC

UWB:

 $P_d = 0.00004 \text{ mW/cm}^2$   
Limit: 1.0 mW/cm<sup>2</sup>  
Fraction: 0.0 %

WiFi

 $P_d = 0.04 \text{ mW/cm}^2$   
Limit: 1.0 mW/cm<sup>2</sup>  
Fraction: 4.0 %

Calculation of the sum of MPE ratios:

 $\text{UWB} + \text{WiFi} \leq 100 \text{ \%};$   
 $0.0 \% + 4.0 \% = \mathbf{4.0 \% \leq 100 \%};$ 

#### 5.3.2 Determination of MPE according to ISED:

UWB:

 $\text{EIRP} = 0.2 \text{ mW}$   
Limit: 5 W  
Fraction: 0.0 %

WiFi

 $\text{EIRP} = 199.5 \text{ mW}$   
Limit: 2.7 W  
Fraction: 7.4 %

Calculation of the sum of MPE ratios:

 $\text{UWB} + \text{WiFi} \leq 100 \text{ \%};$   
 $0.0 \% + 7.4 \% = \mathbf{7.4 \% \leq 100 \%};$ The requirements are **FULFILLED**.Remarks: None.

FCC ID: 2BKU8DEPLIFE-1

IC: 33302-DEPLIFE1

## 6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
CPR 3	FSW43	02-02/11-15-001	19/08/2025	19/08/2024		
	AMF-6D-01002000-22-10P	02-02/17-15-004				
	3117	02-02/24-05-009	23/07/2025	23/07/2024		
	BAM 4.5-P	02-02/50-17-024				
	NCD	02-02/50-17-025				
	KK-SF106-2X11N-6,5M	02-02/50-18-016				
	BAT-EMC 2023.0.8.0	02-02/68-13-001				