



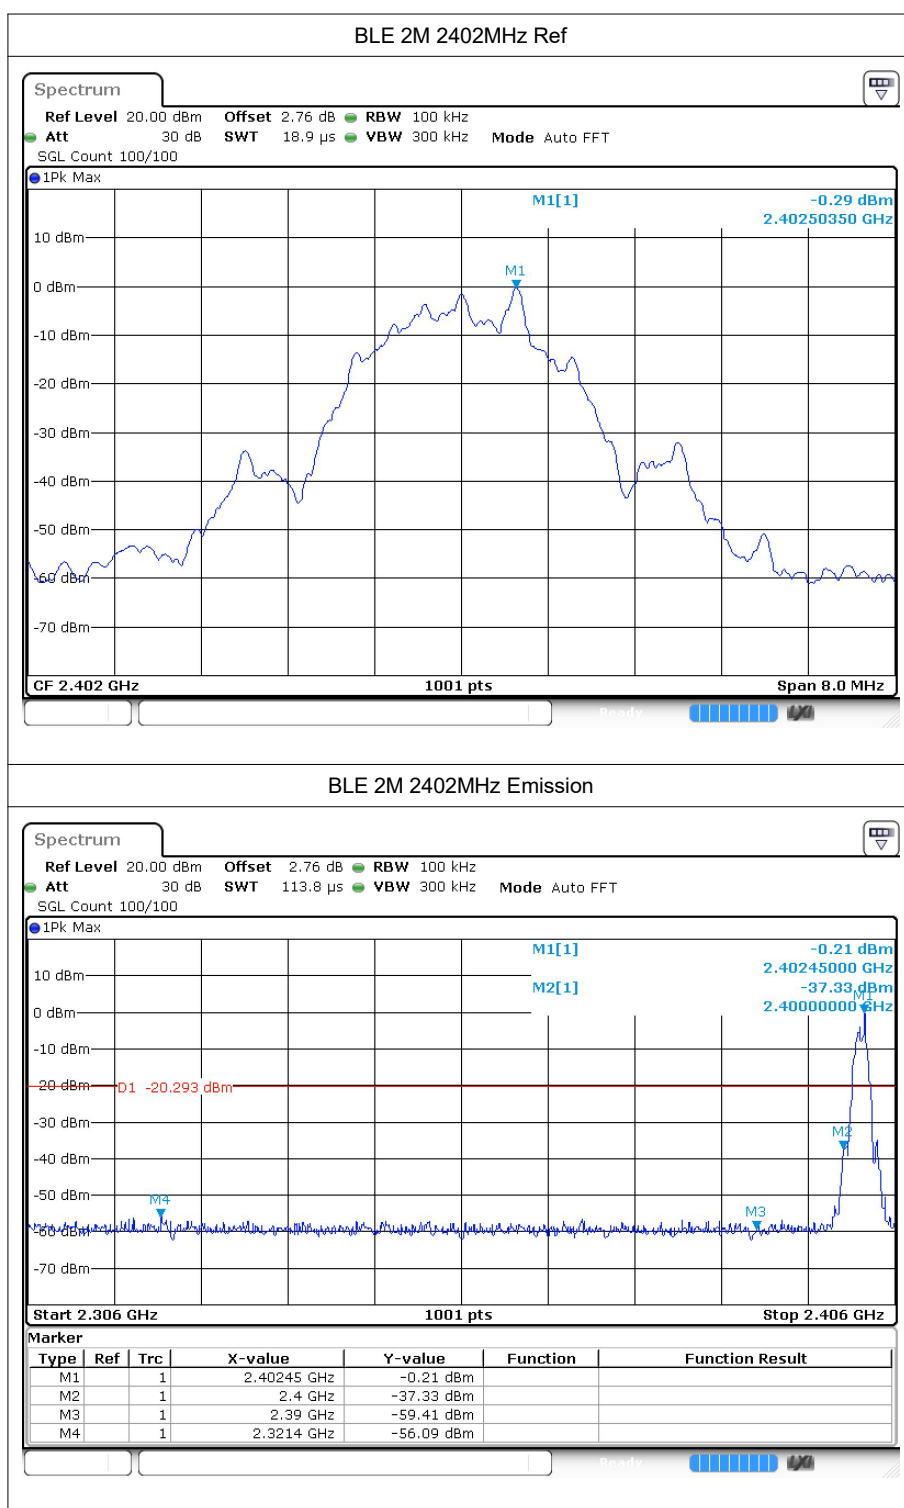

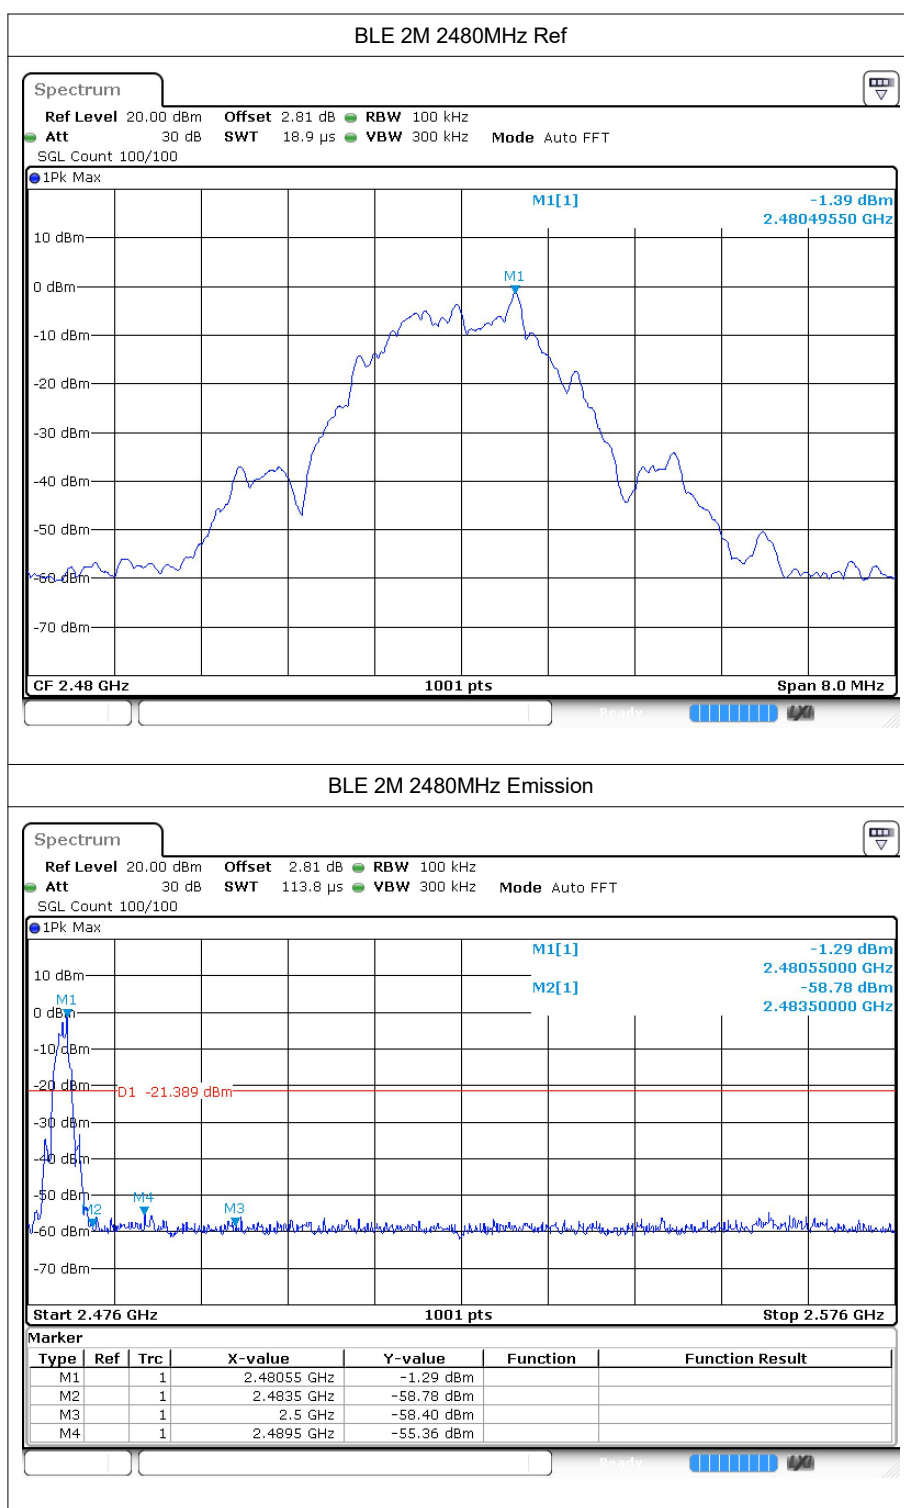



6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-42.91	-20	Pass
BLE 1M	2440	-43.01	-20	Pass
BLE 1M	2480	-42.01	-20	Pass
BLE 2M	2402	-43.33	-20	Pass
BLE 2M	2440	-42.51	-20	Pass
BLE 2M	2480	-42.3	-20	Pass


6.2 Test Graphs

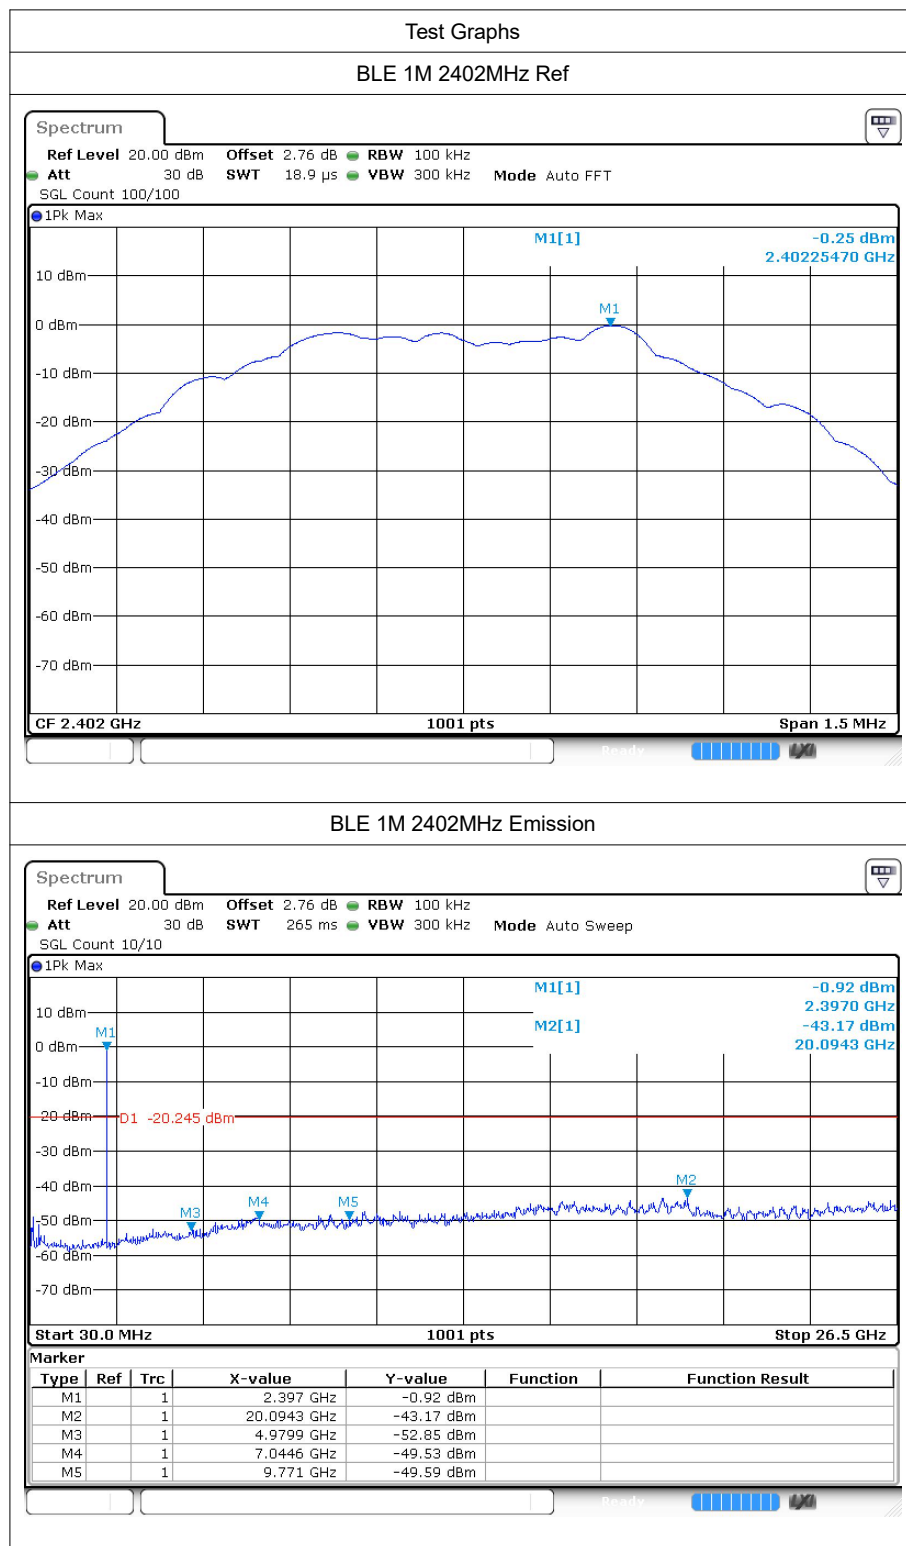


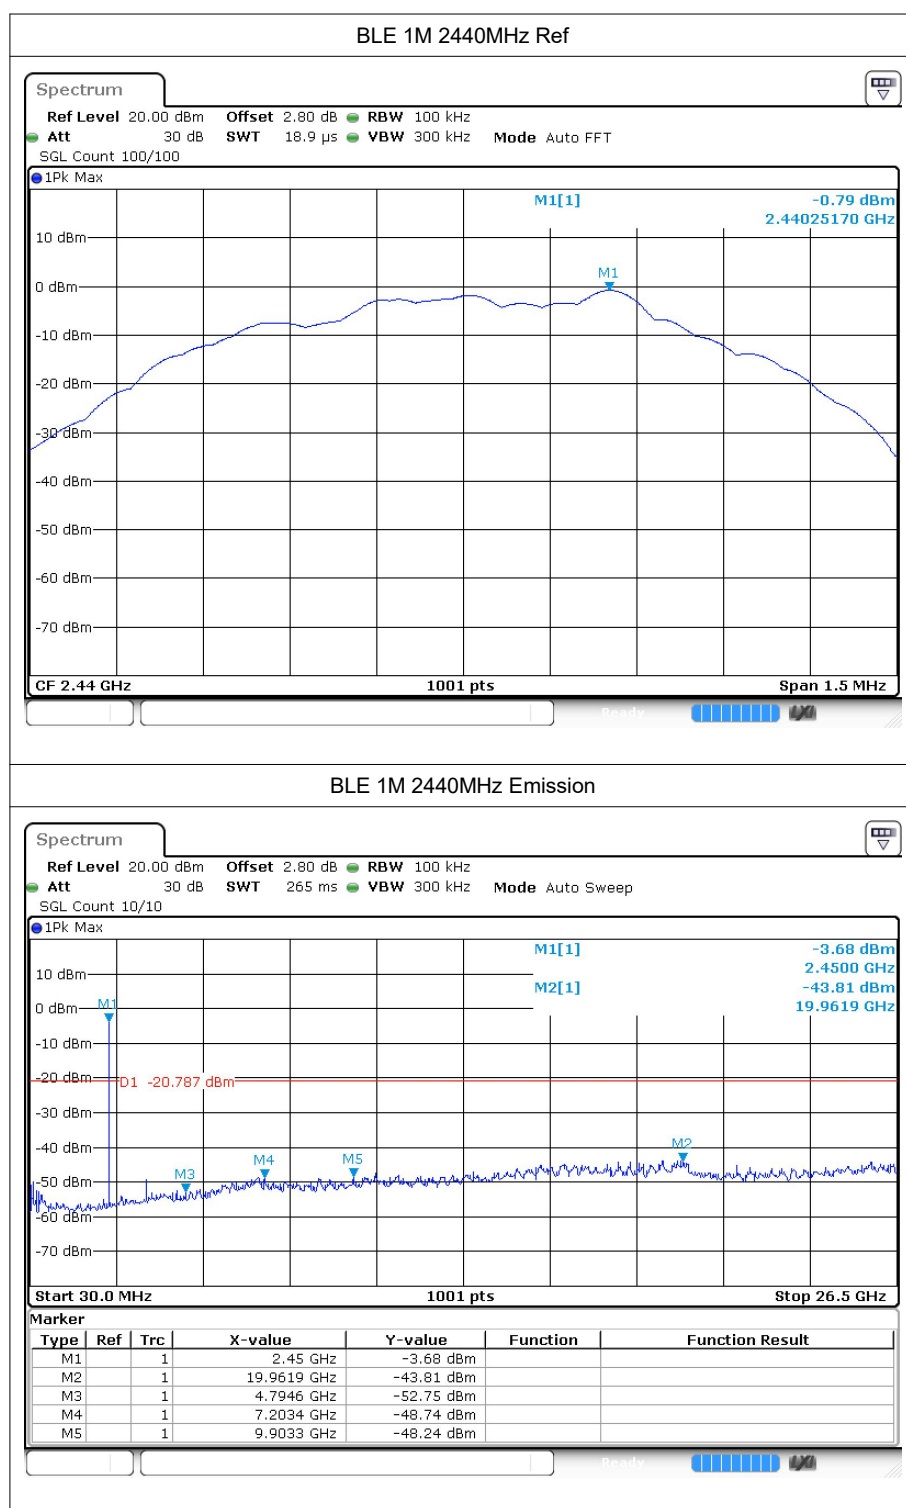

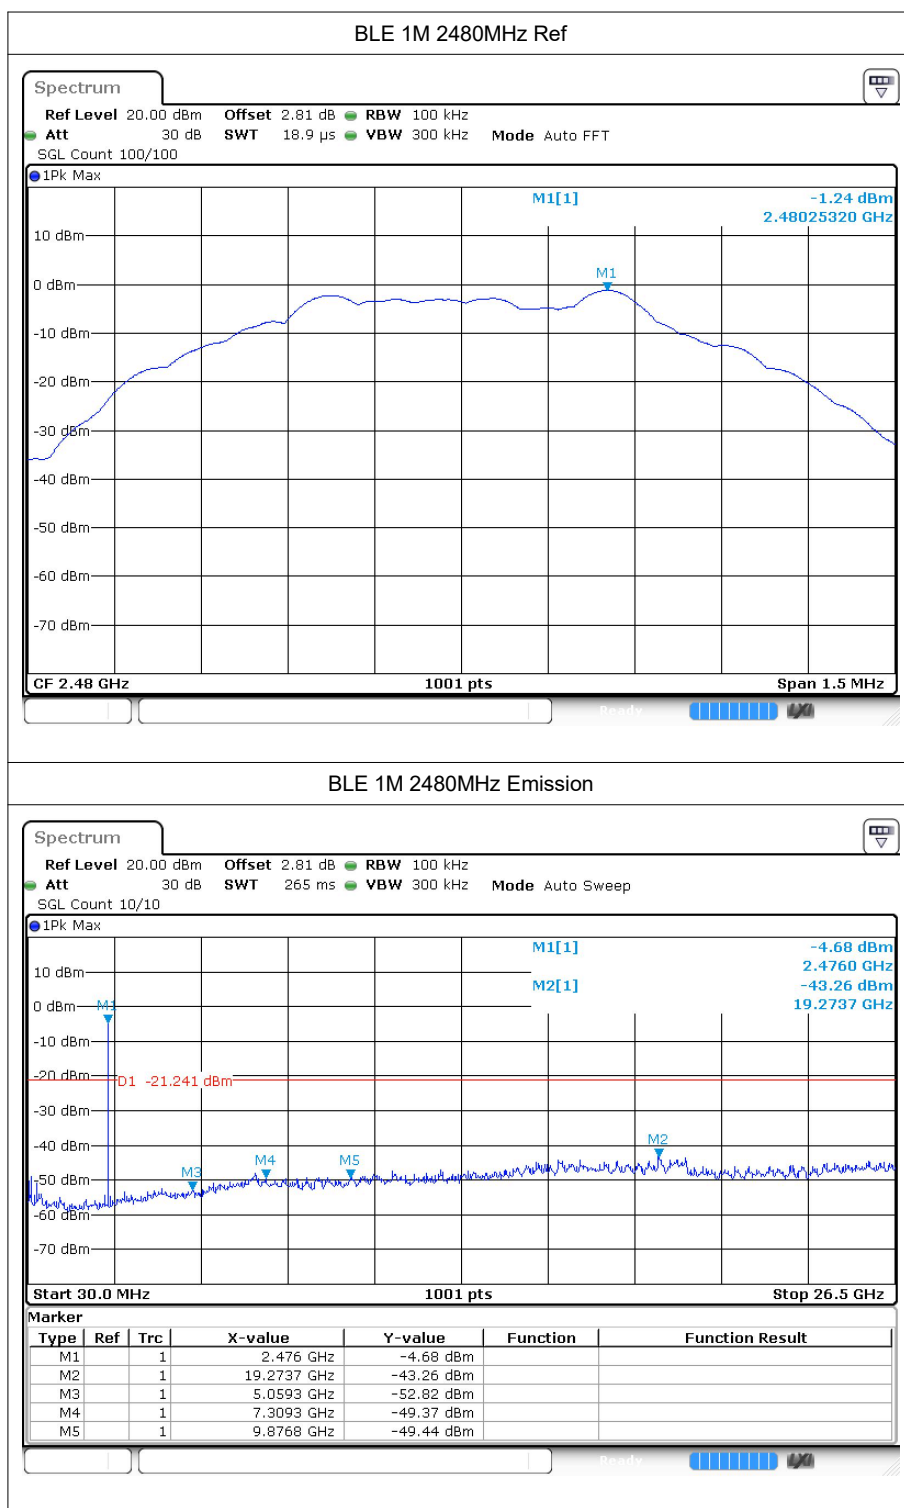

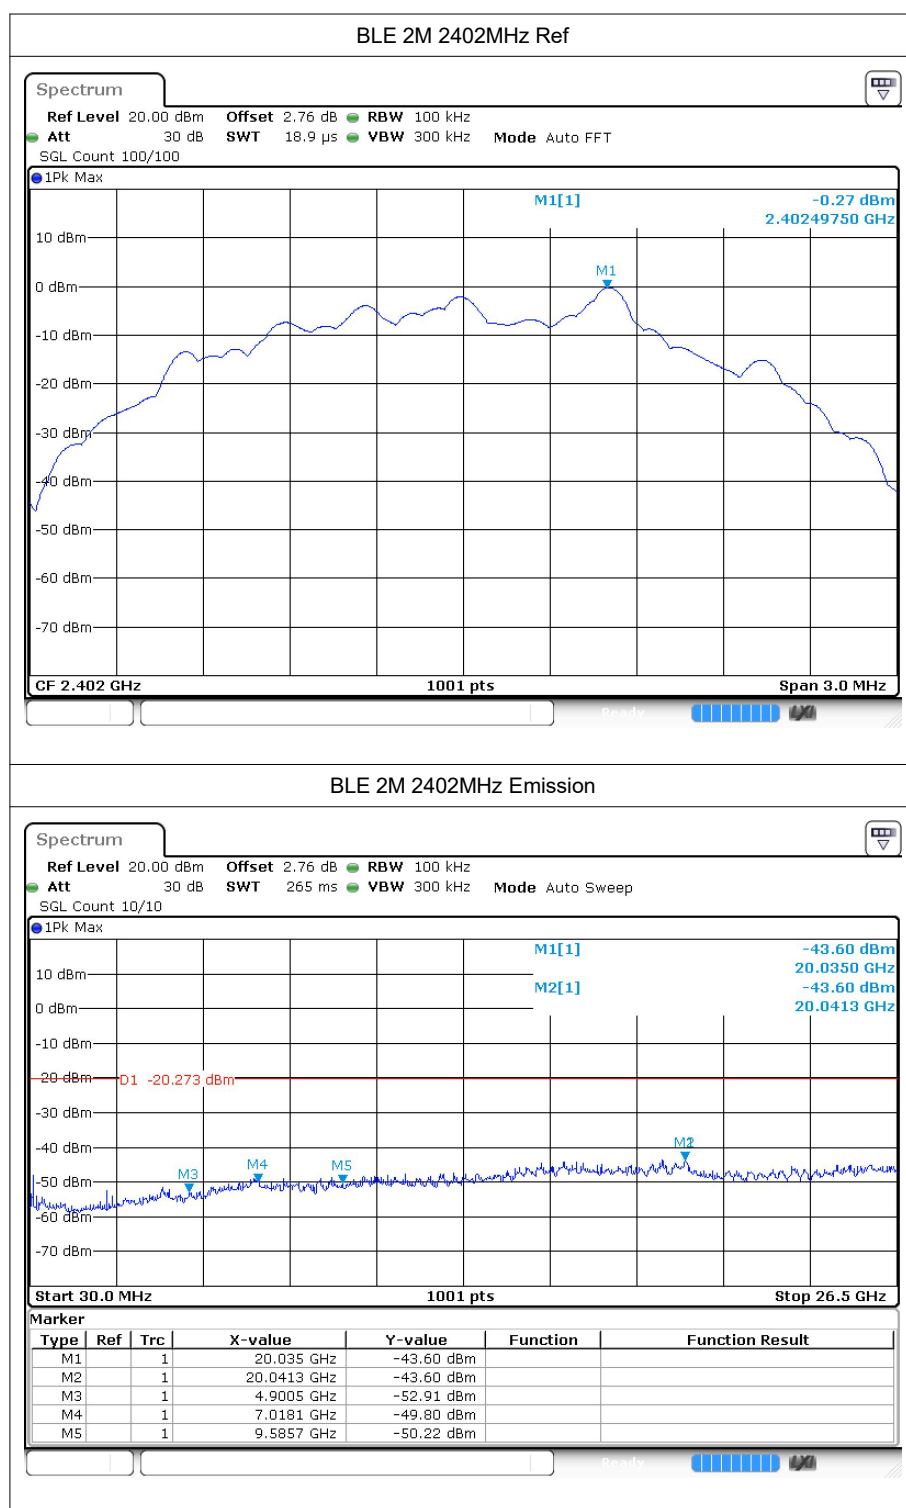

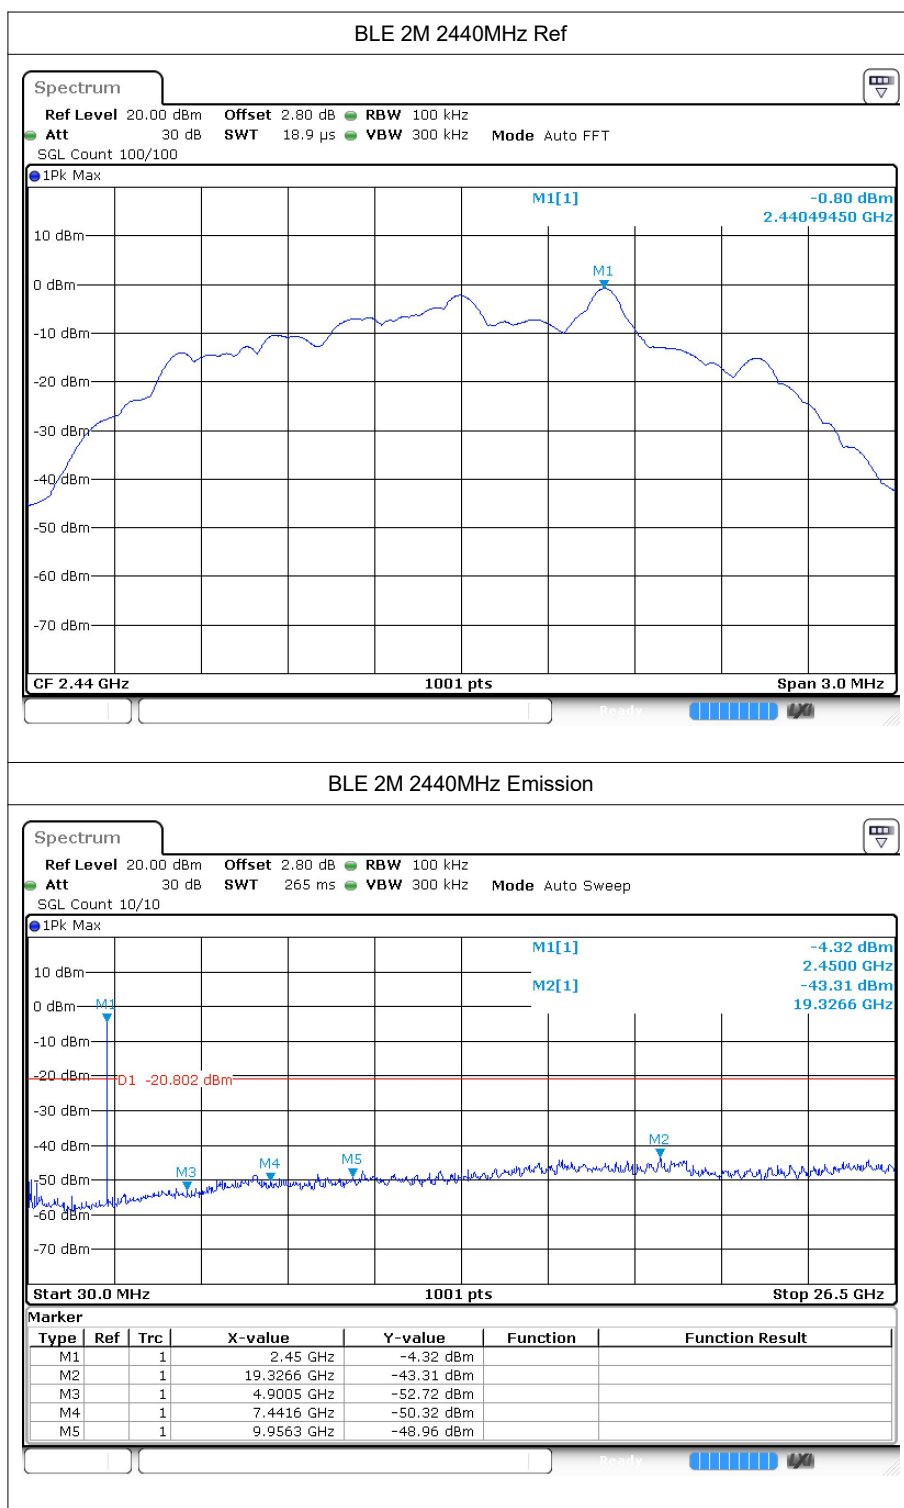

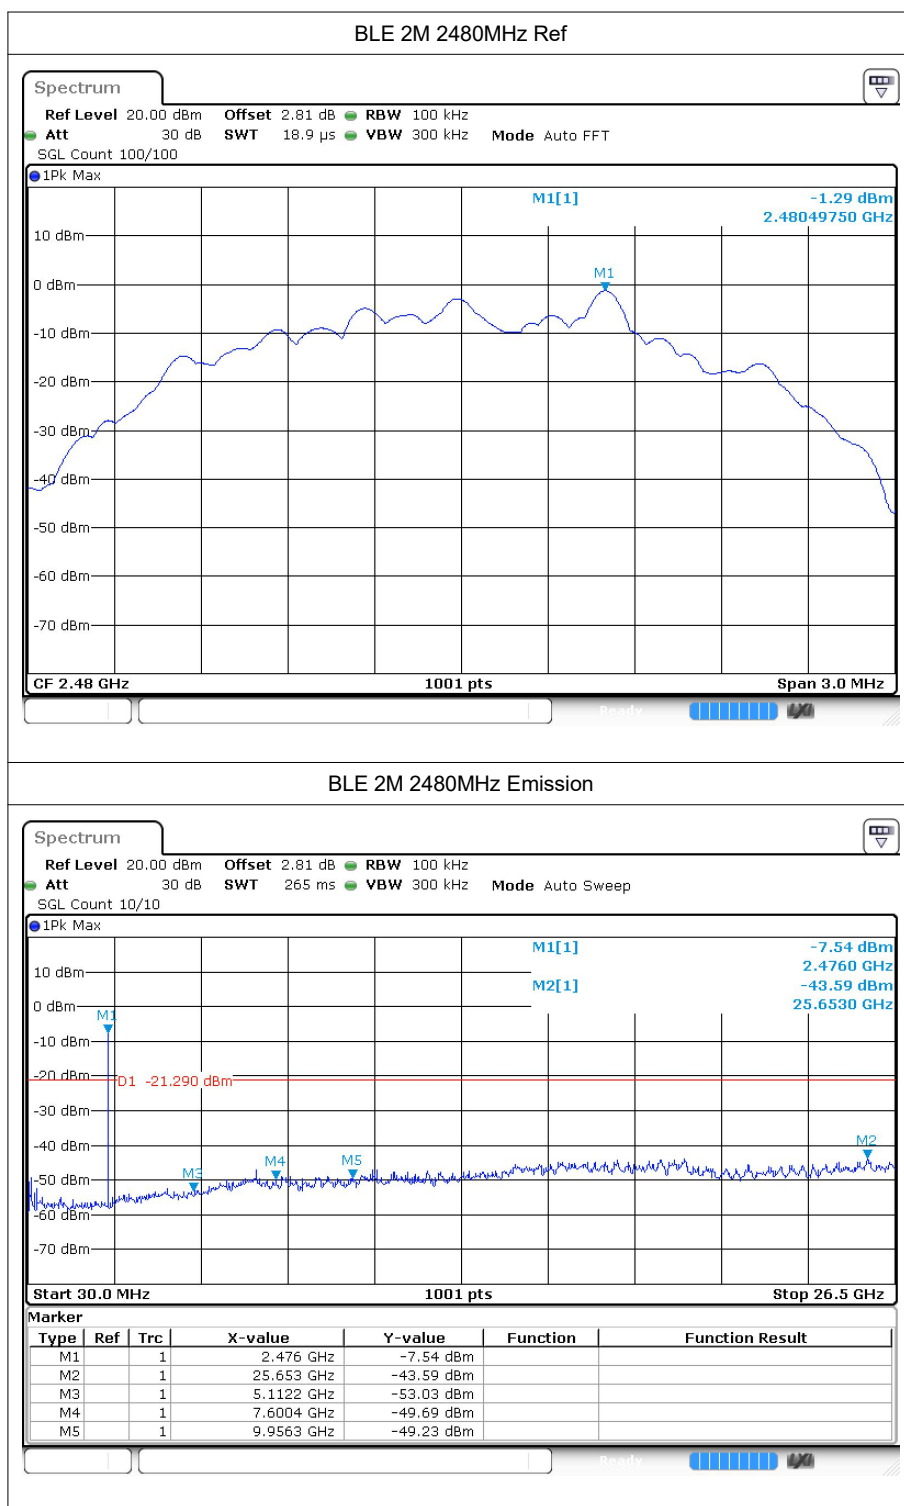





7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-49.39	2	-	47.87	Peak	74	Pass
BLE 1M	2402	2310	-57.54	2	3.49	43.21	Average	54	Pass
BLE 1M	2402	2316.432	-46.05	2	-	51.21	Peak	74	Pass
BLE 1M	2402	2339.664	-55.05	2	3.49	45.7	Average	54	Pass
BLE 1M	2402	2390	-50.77	2	-	46.49	Peak	74	Pass
BLE 1M	2402	2390	-56.93	2	3.49	43.82	Average	54	Pass
BLE 1M	2480	2483.5	-49.47	2	-	47.79	Peak	74	Pass
BLE 1M	2480	2483.5	-55.73	2	3.57	45.1	Average	54	Pass
BLE 1M	2480	2494.36	-46.27	2	-	50.99	Peak	74	Pass
BLE 1M	2480	2483.512	-55.75	2	3.57	45.08	Average	54	Pass
BLE 1M	2480	2500	-49.6	2	-	47.66	Peak	74	Pass
BLE 1M	2480	2500	-56.97	2	3.57	43.86	Average	54	Pass
BLE 2M	2402	2310	-49.11	2	-	48.15	Peak	74	Pass
BLE 2M	2402	2310	-56.77	2	5.78	46.27	Average	54	Pass
BLE 2M	2402	2339.088	-45.4	2	-	51.86	Peak	74	Pass
BLE 2M	2402	2338.128	-54.53	2	5.78	48.51	Average	54	Pass
BLE 2M	2402	2390	-50.36	2	-	46.9	Peak	74	Pass
BLE 2M	2402	2390	-57.4	2	5.78	45.64	Average	54	Pass
BLE 2M	2480	2483.5	-46.69	2	-	50.57	Peak	74	Pass
BLE 2M	2480	2483.5	-55.81	2	5.65	47.1	Average	54	Pass
BLE 2M	2480	2483.68	-46.44	2	-	50.82	Peak	74	Pass
BLE 2M	2480	2483.512	-55.82	2	5.65	47.09	Average	54	Pass
BLE 2M	2480	2500	-50.8	2	-	46.46	Peak	74	Pass
BLE 2M	2480	2500	-56.83	2	5.65	46.08	Average	54	Pass

7.2 Test Graphs

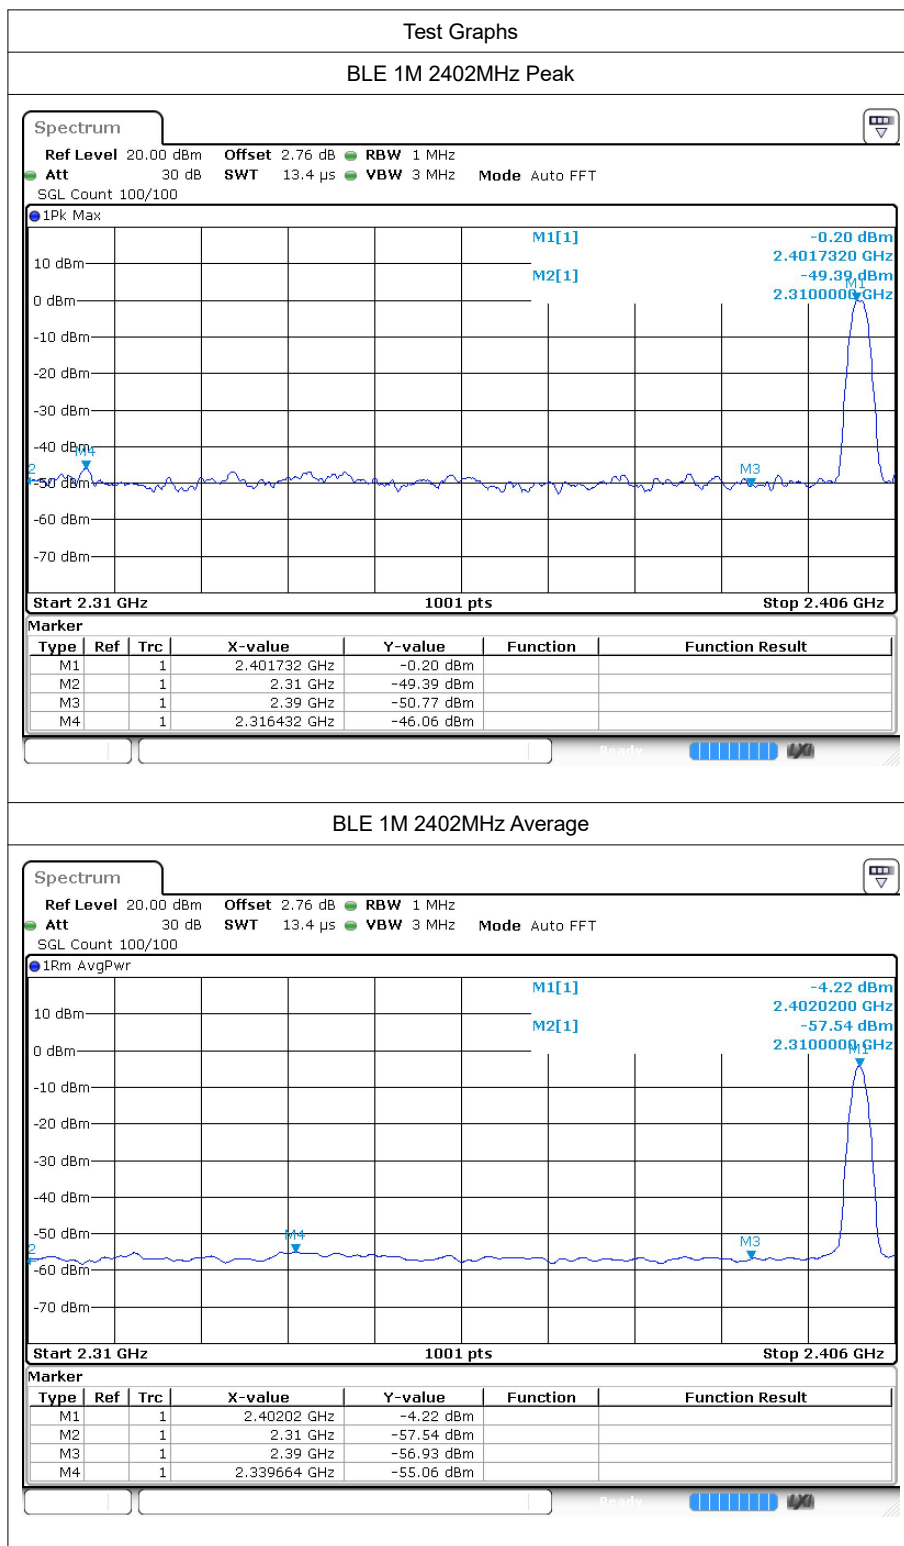

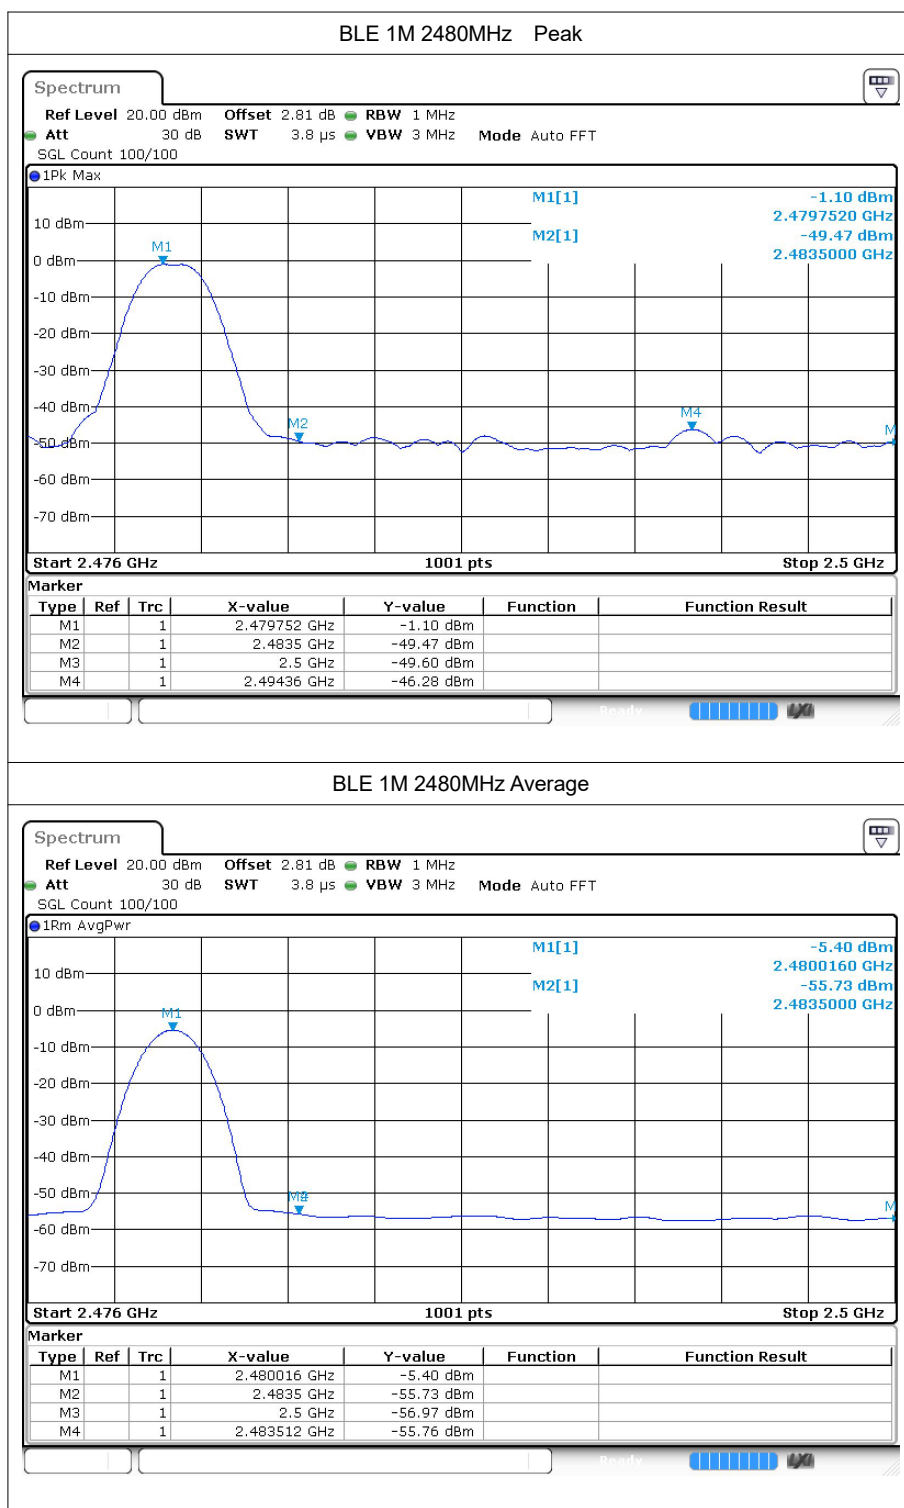

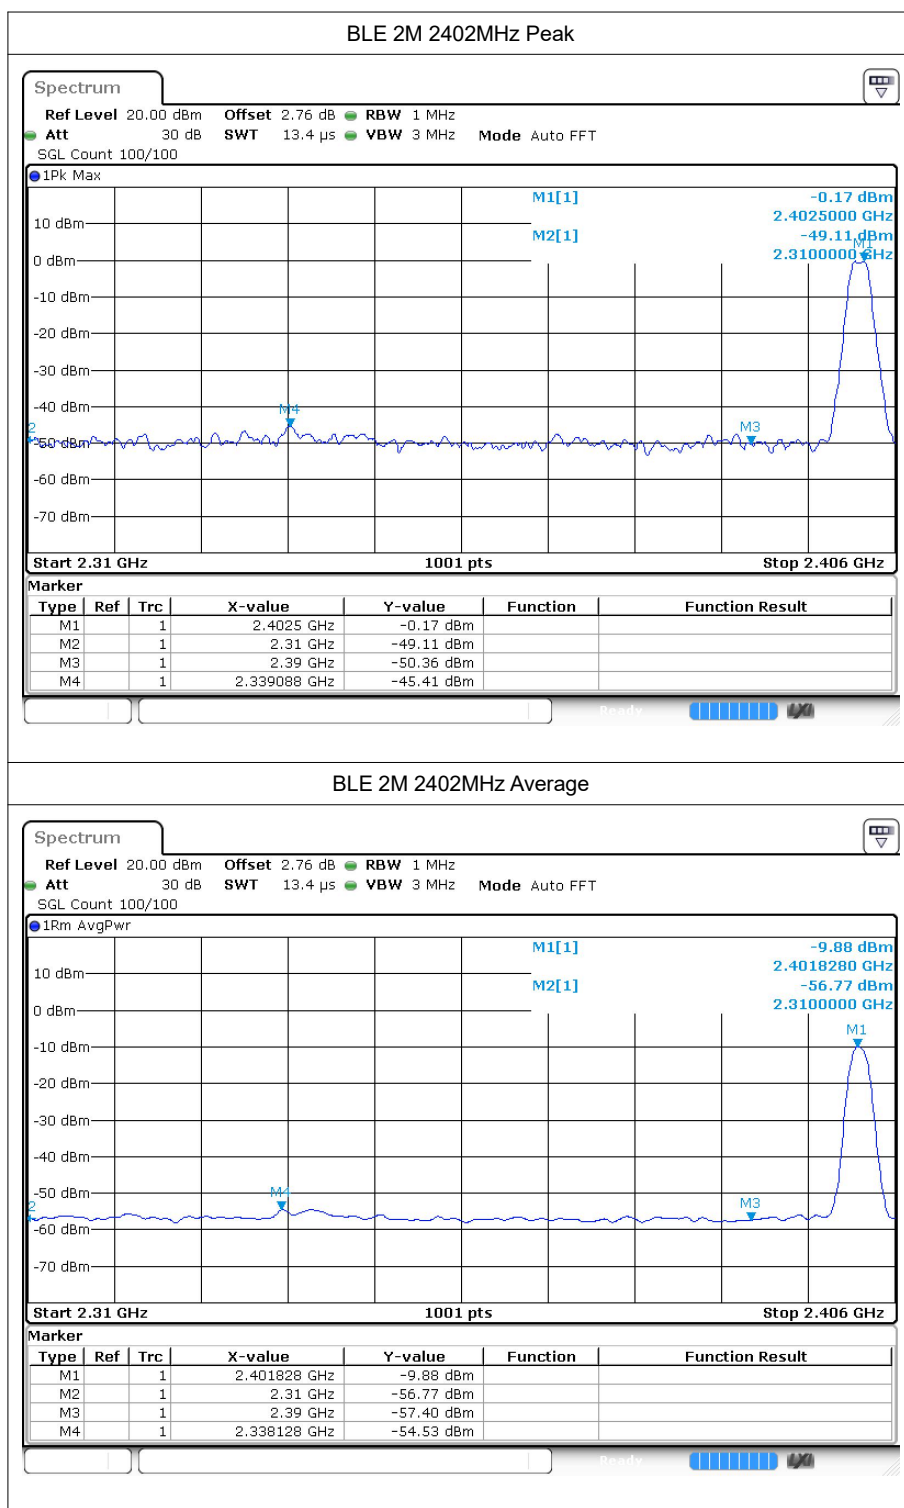

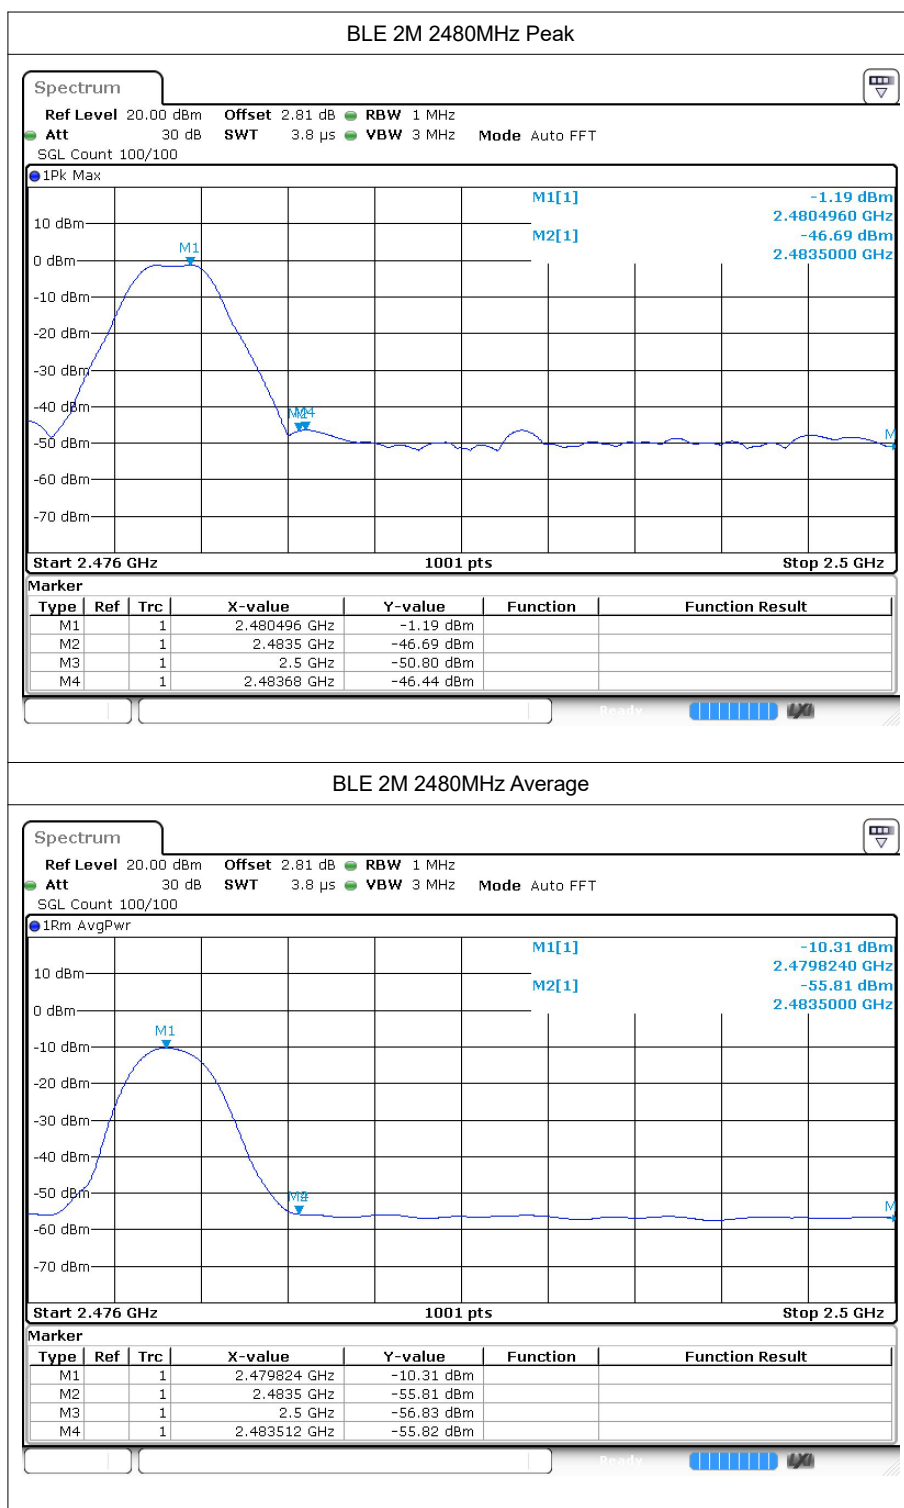

---The End---