



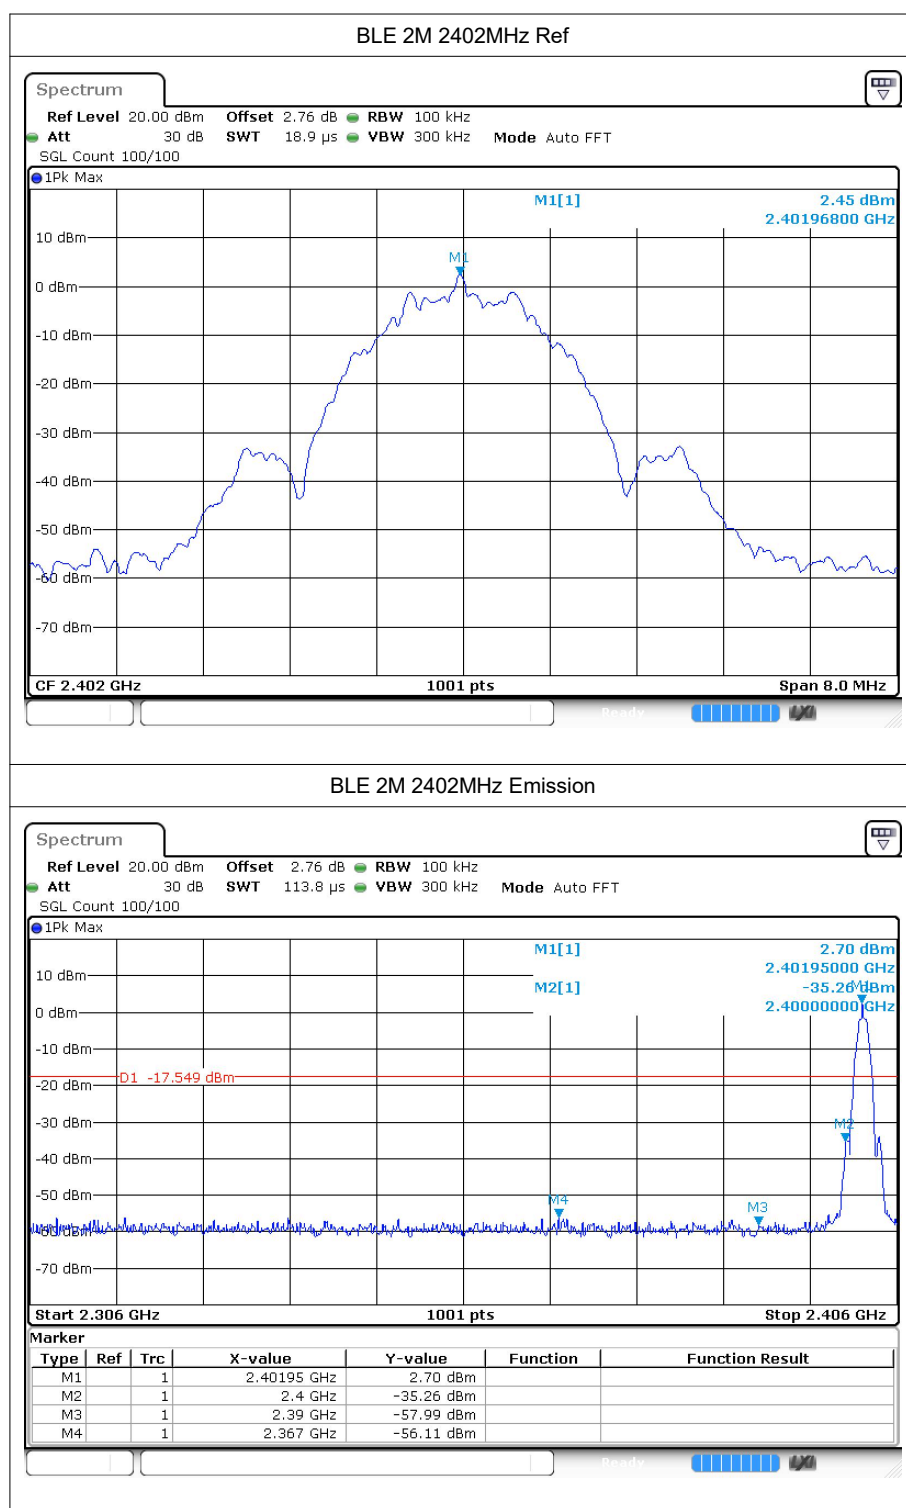

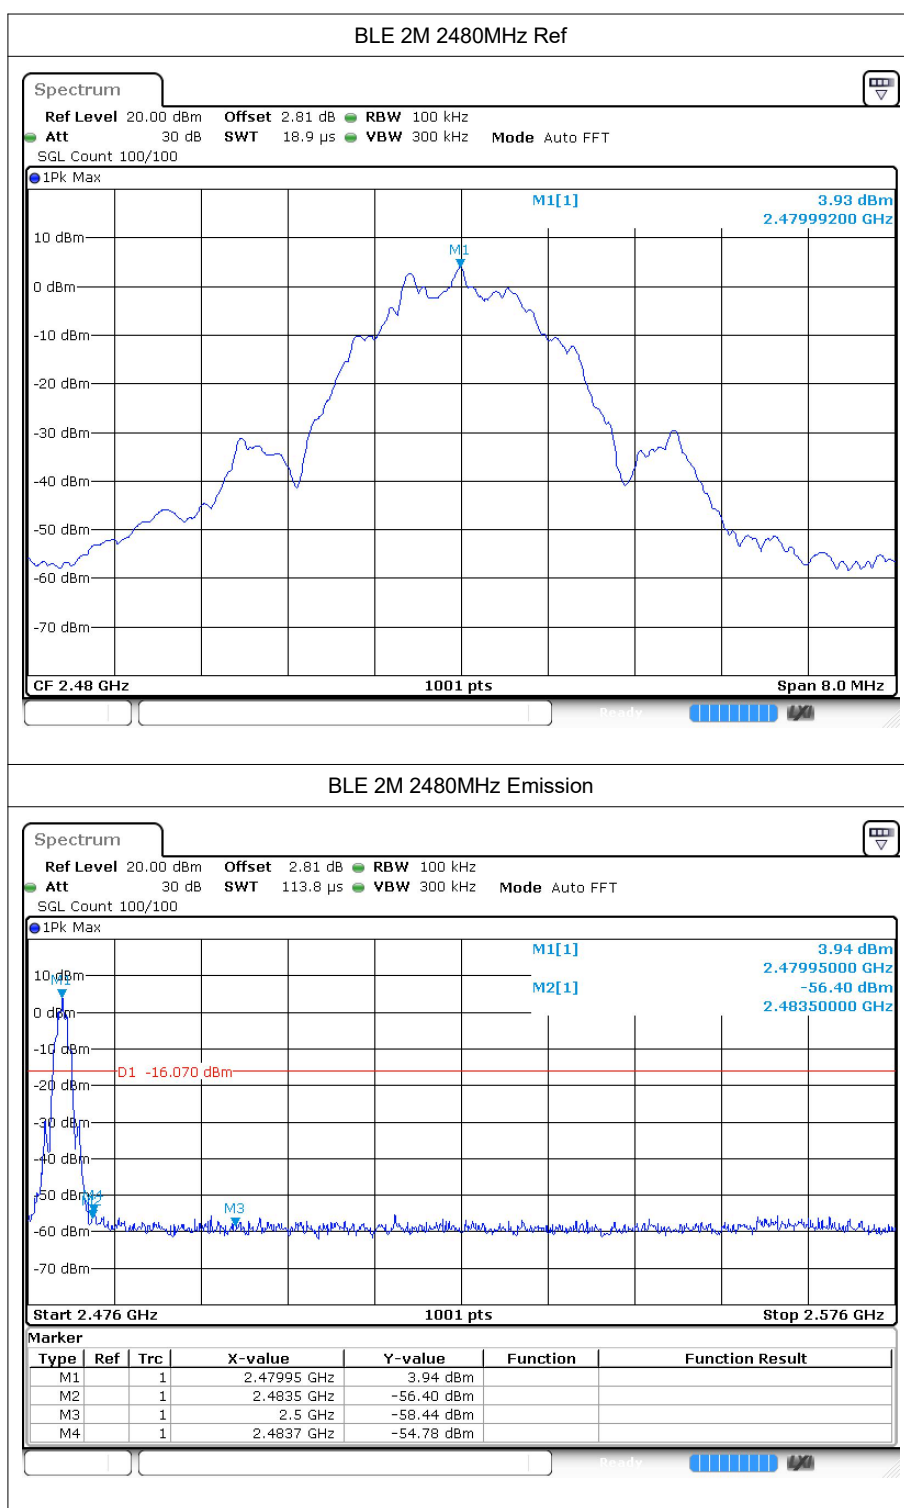



6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-38.71	-20	Pass
BLE 1M	2440	-45.26	-20	Pass
BLE 1M	2480	-45.92	-20	Pass
BLE 2M	2402	-45.63	-20	Pass
BLE 2M	2440	-46.6	-20	Pass
BLE 2M	2480	-46.98	-20	Pass


6.2 Test Graphs

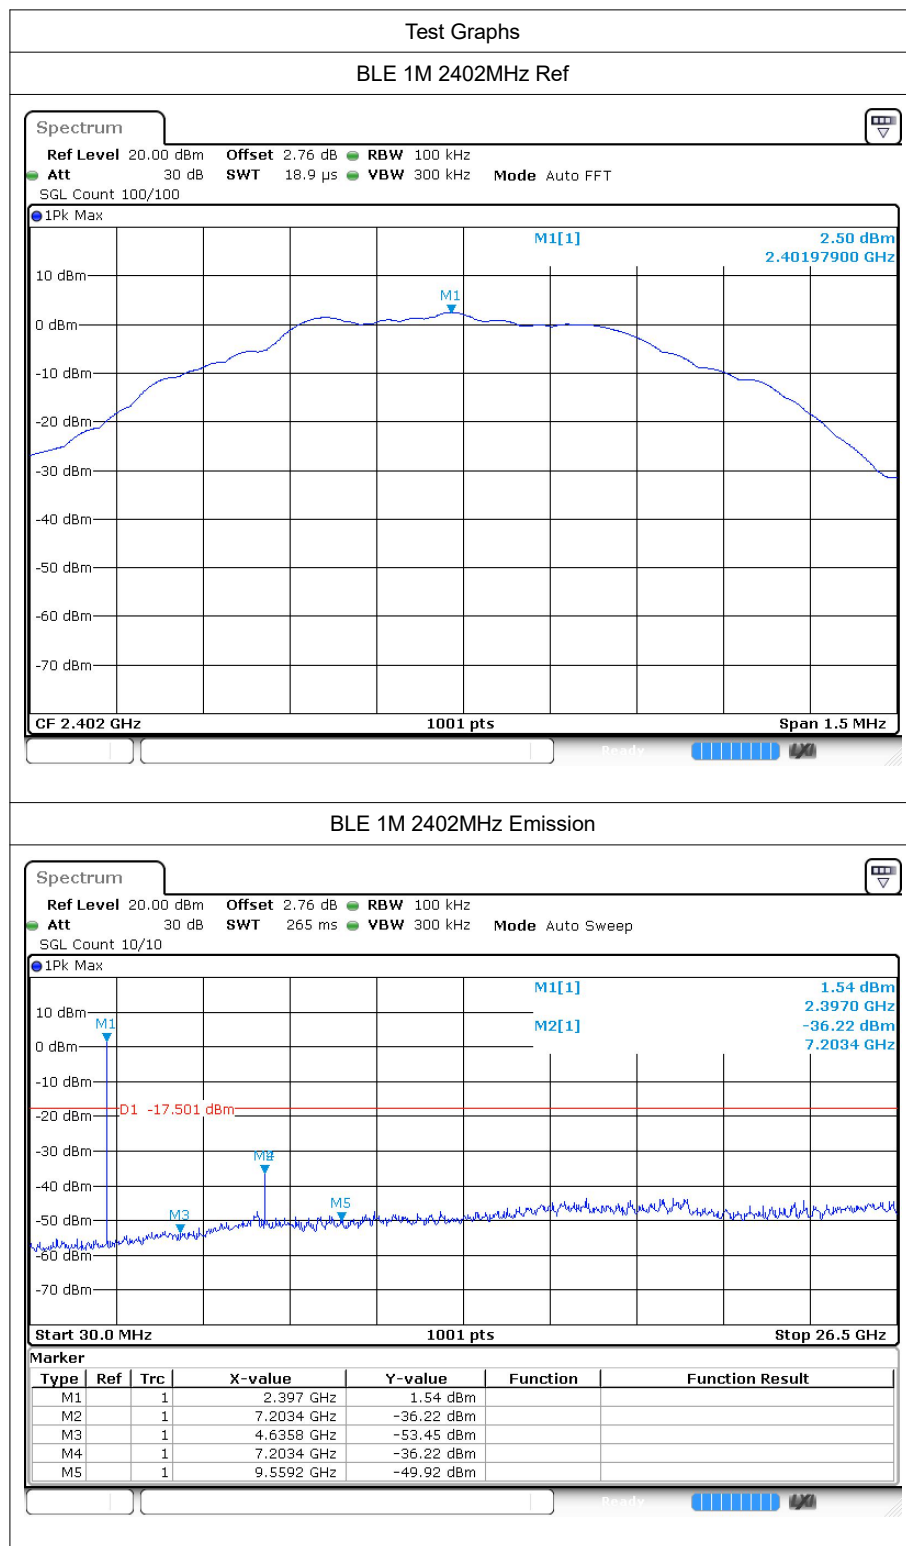


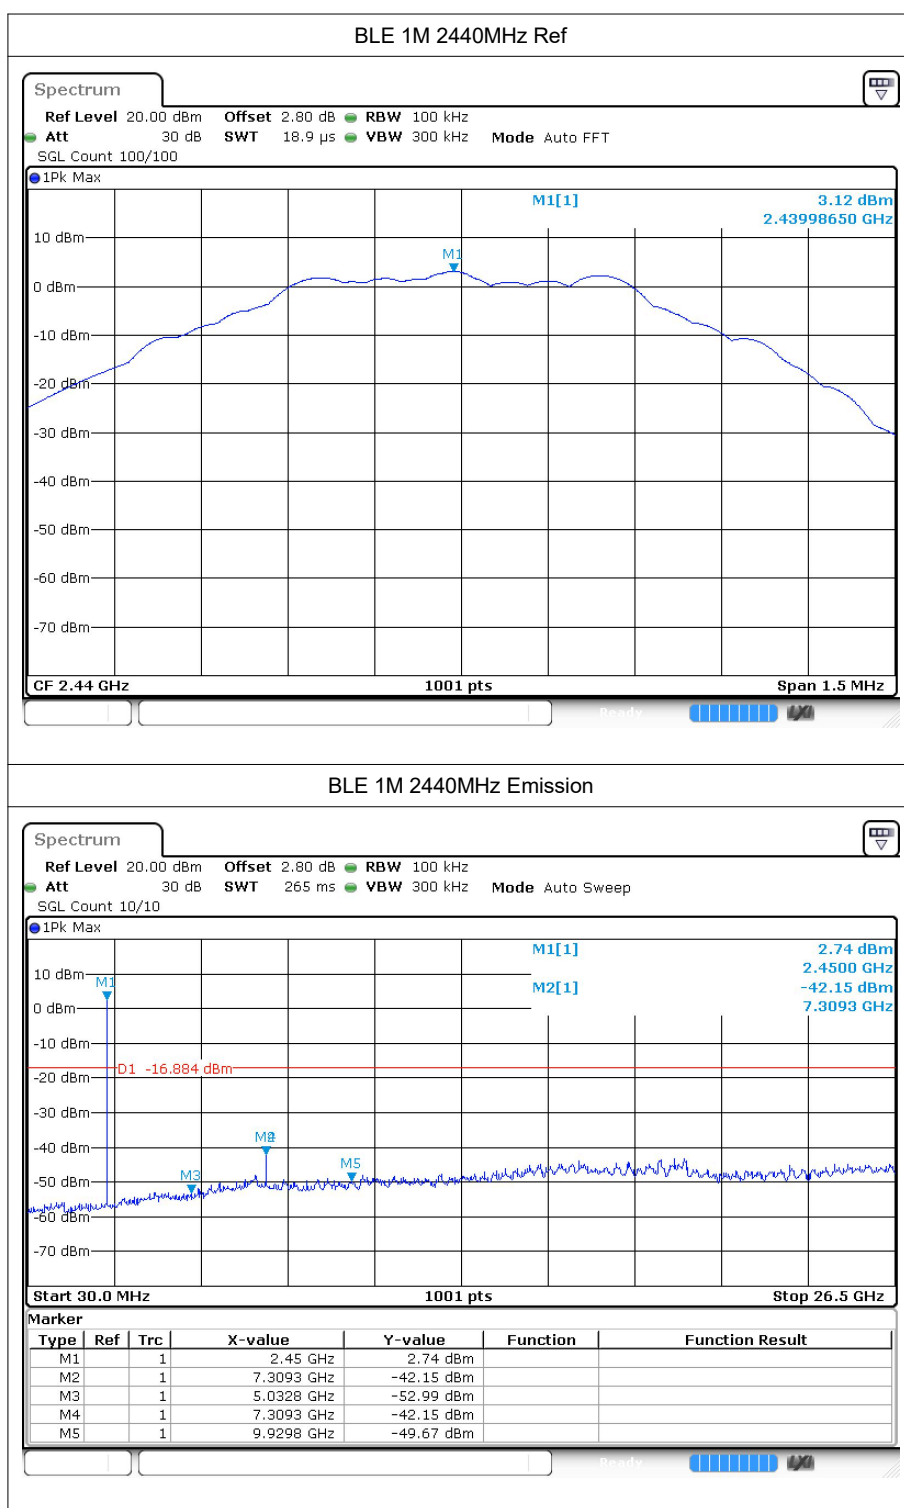

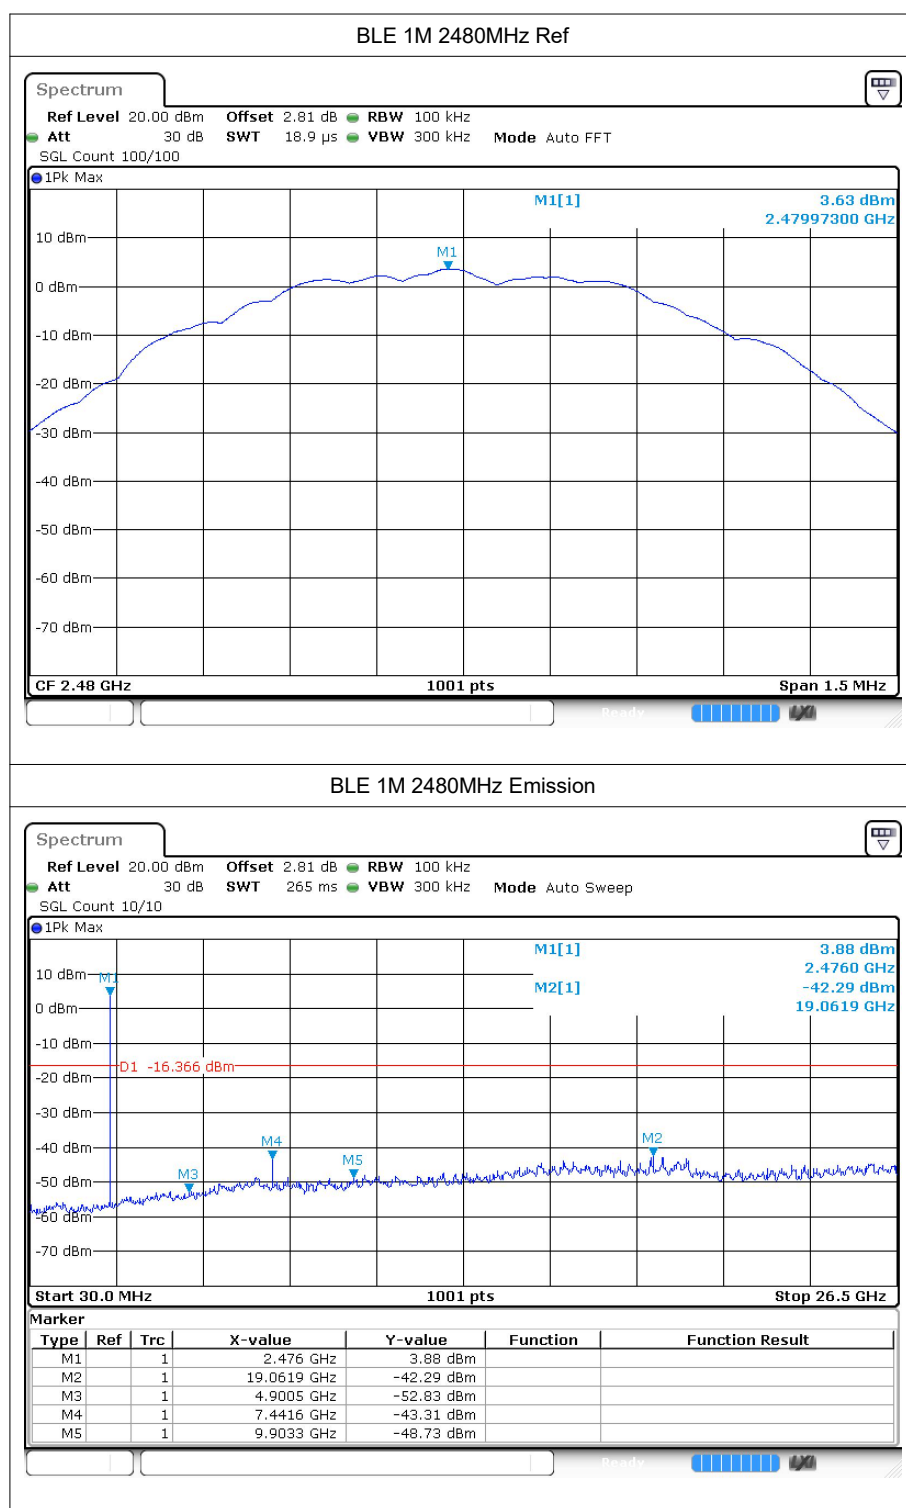

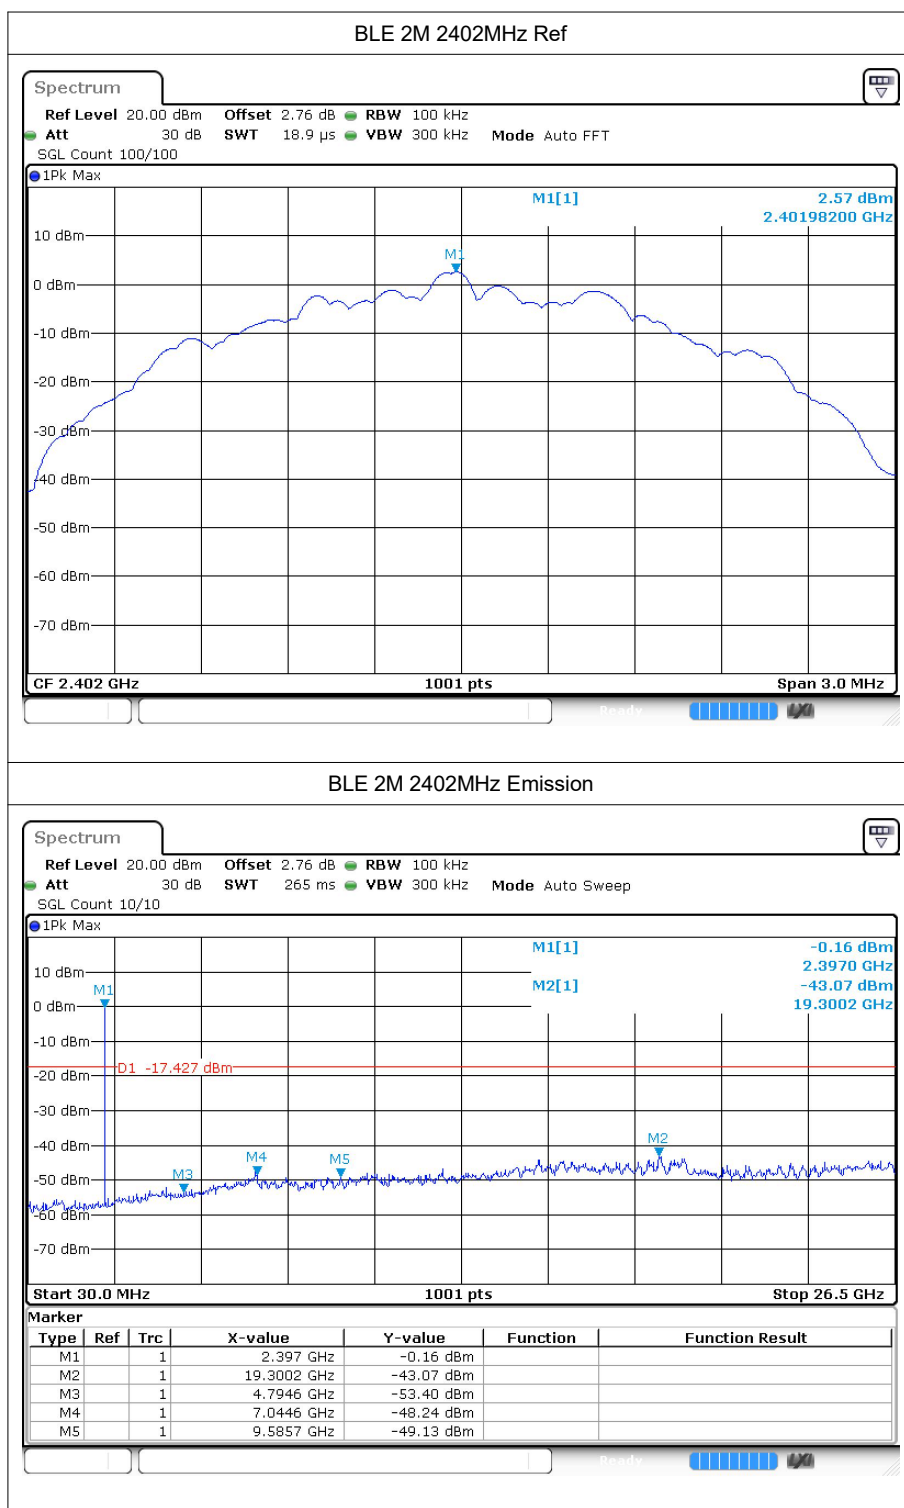

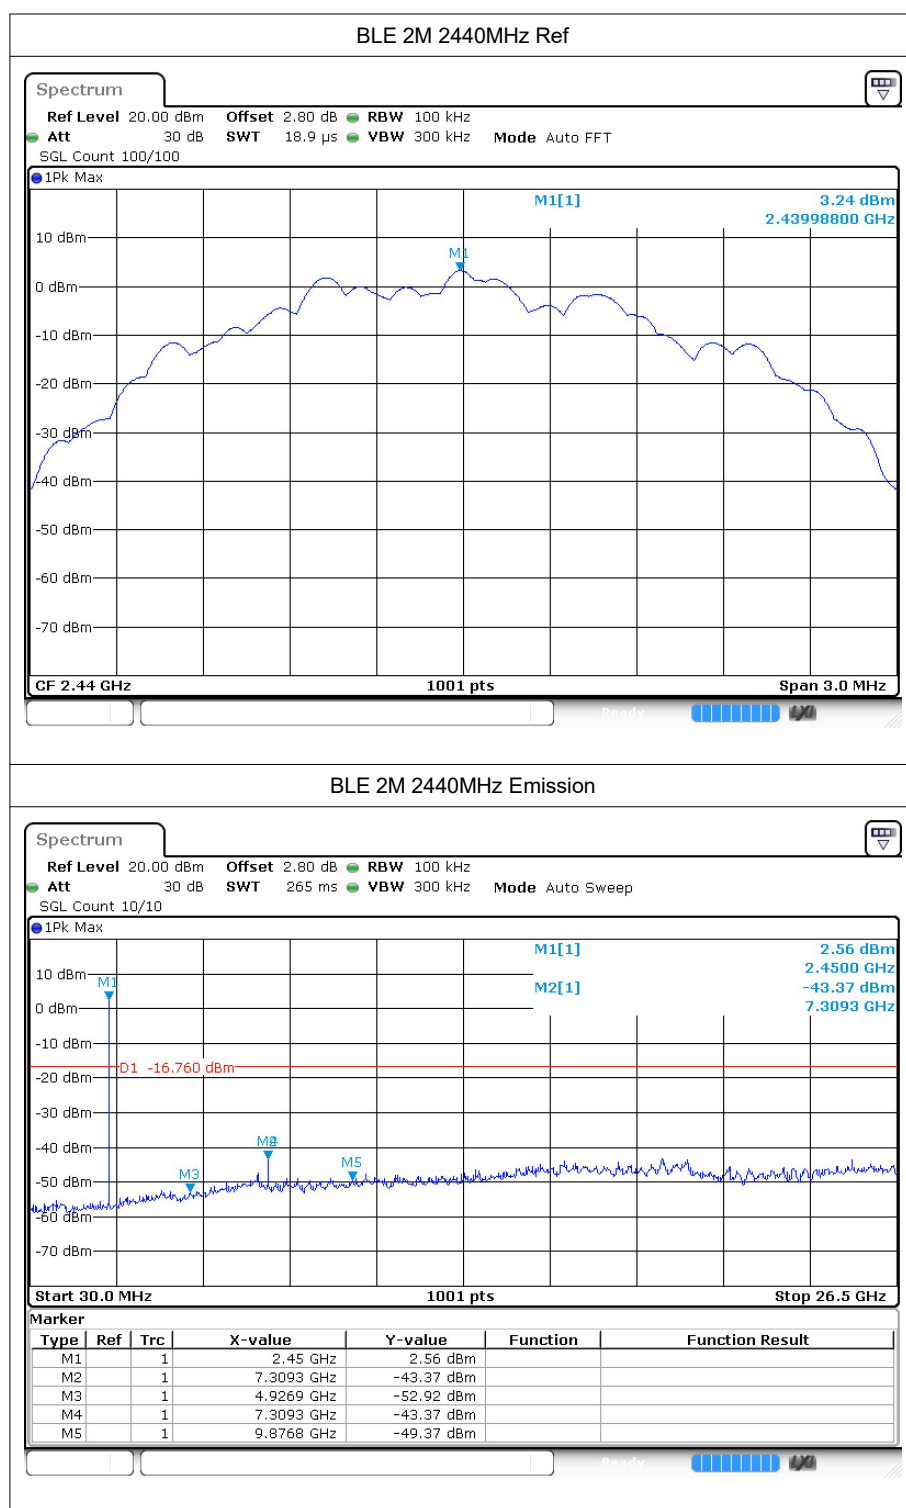

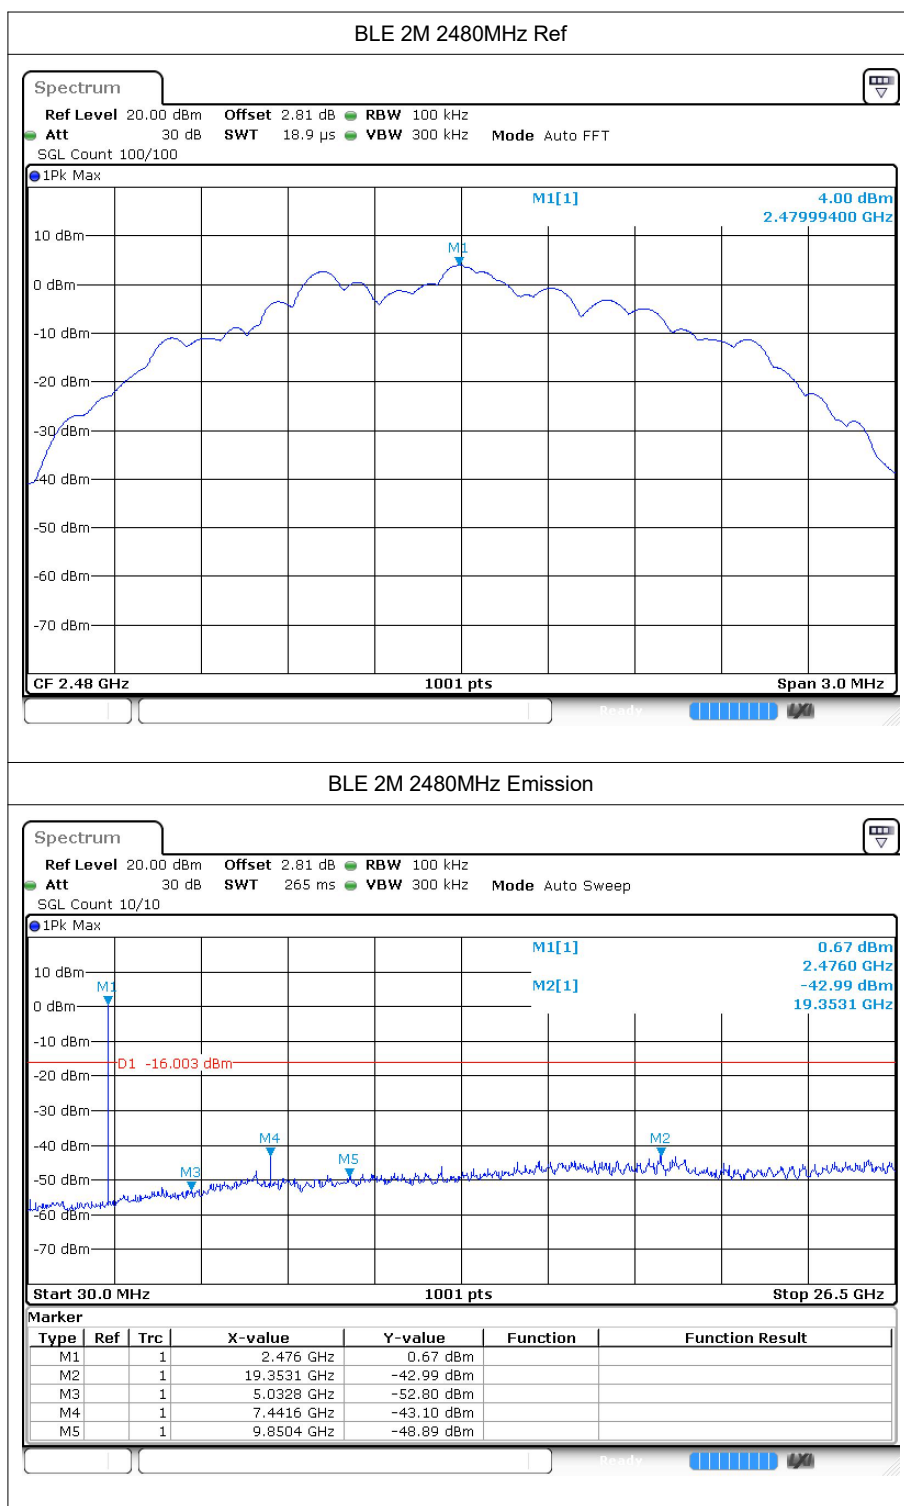





7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-49.52	2	-	47.74	Peak	74	Pass
BLE 1M	2402	2310	-56.68	2	1.67	42.25	Average	54	Pass
BLE 1M	2402	2386.128	-46.17	2	-	51.09	Peak	74	Pass
BLE 1M	2402	2338.896	-54.86	2	1.67	44.07	Average	54	Pass
BLE 1M	2402	2390	-51	2	-	46.26	Peak	74	Pass
BLE 1M	2402	2390	-57.55	2	1.67	41.38	Average	54	Pass
BLE 1M	2480	2483.5	-47.82	2	-	49.44	Peak	74	Pass
BLE 1M	2480	2483.5	-53.74	2	1.67	45.19	Average	54	Pass
BLE 1M	2480	2484.112	-45.32	2	-	51.94	Peak	74	Pass
BLE 1M	2480	2483.512	-53.77	2	1.67	45.16	Average	54	Pass
BLE 1M	2480	2500	-50.75	2	-	46.51	Peak	74	Pass
BLE 1M	2480	2500	-57.45	2	1.67	41.48	Average	54	Pass
BLE 2M	2402	2310	-49.6	2	-	47.66	Peak	74	Pass
BLE 2M	2402	2310	-57.47	2	4.07	43.86	Average	54	Pass
BLE 2M	2402	2338.128	-45.75	2	-	51.51	Peak	74	Pass
BLE 2M	2402	2338.608	-54.35	2	4.07	46.98	Average	54	Pass
BLE 2M	2402	2390	-51.1	2	-	46.16	Peak	74	Pass
BLE 2M	2402	2390	-55.82	2	4.07	45.51	Average	54	Pass
BLE 2M	2480	2483.5	-46.37	2	-	50.89	Peak	74	Pass
BLE 2M	2480	2483.5	-54.89	2	4.16	46.53	Average	54	Pass
BLE 2M	2480	2483.512	-46.49	2	-	50.77	Peak	74	Pass
BLE 2M	2480	2483.512	-54.97	2	4.16	46.45	Average	54	Pass
BLE 2M	2480	2500	-48.4	2	-	48.86	Peak	74	Pass
BLE 2M	2480	2500	-57.06	2	4.16	44.36	Average	54	Pass

7.2 Test Graphs

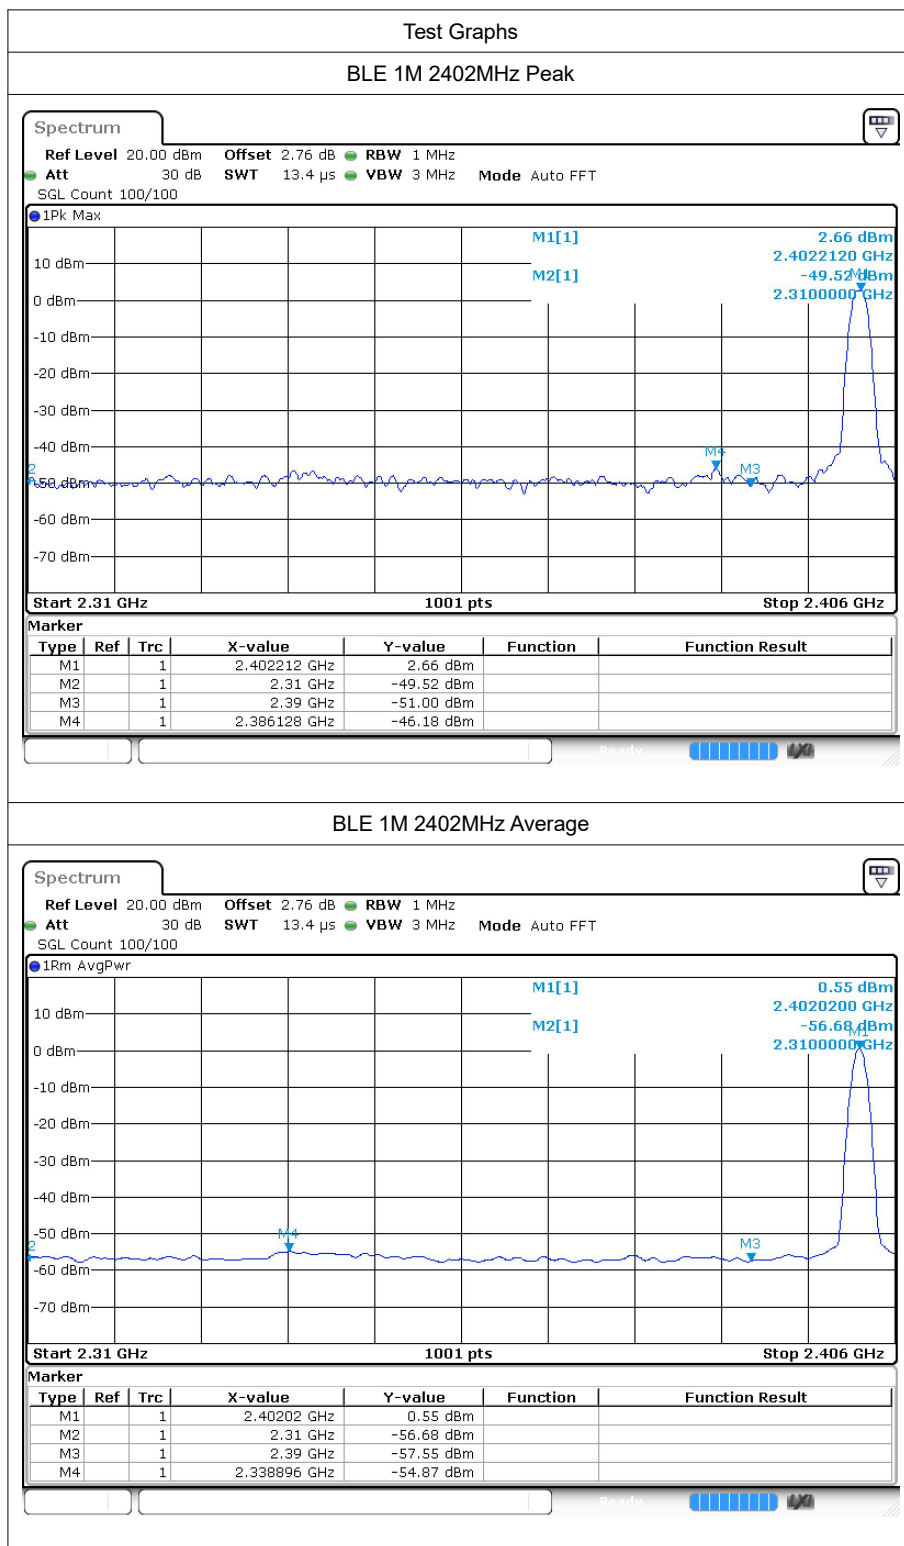

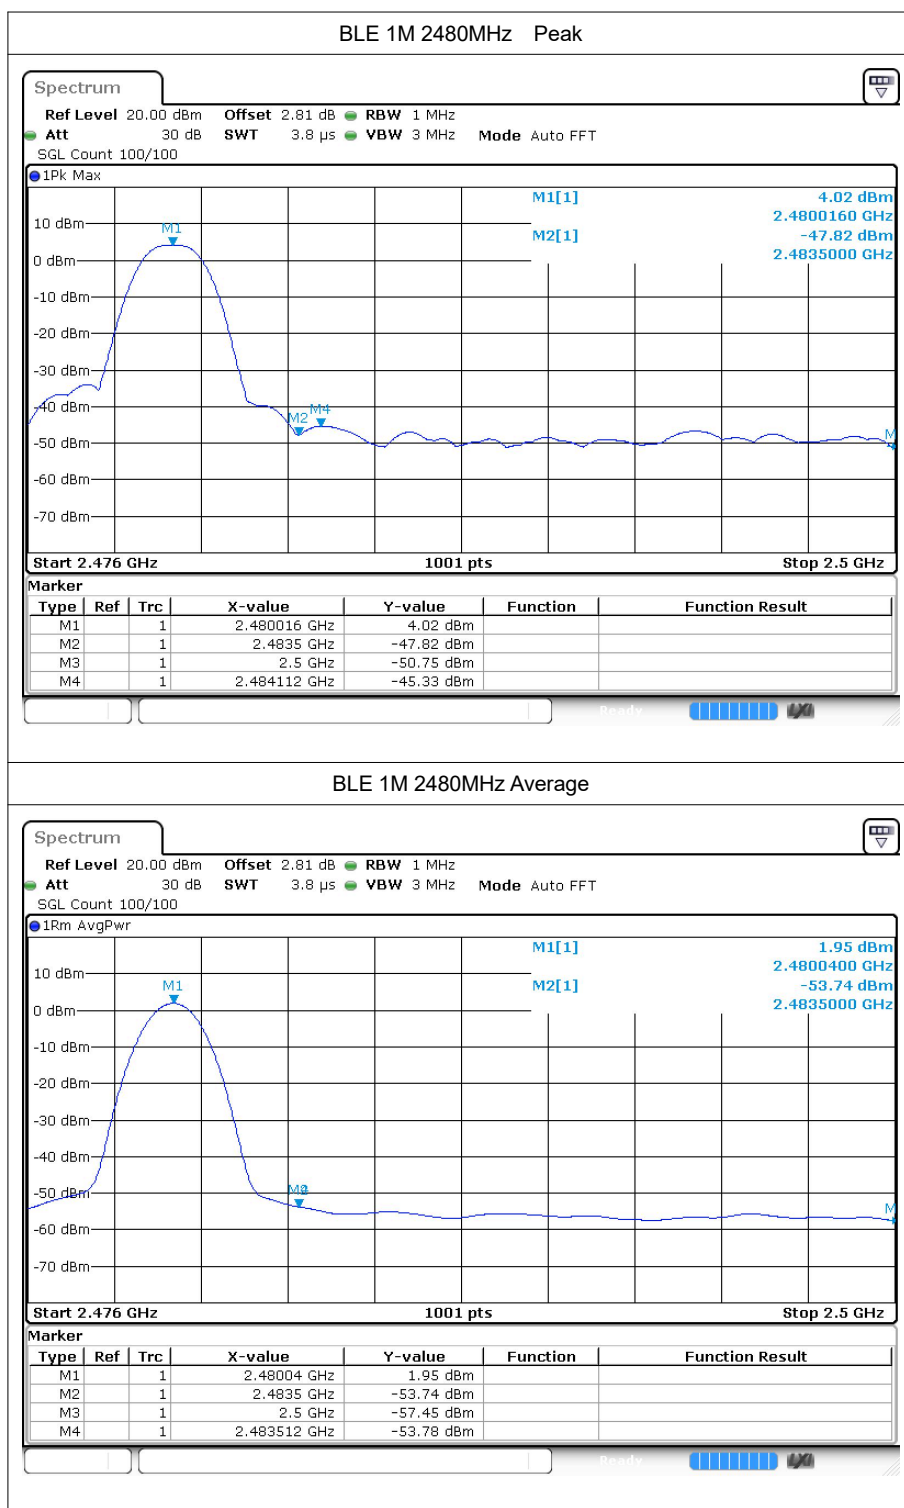

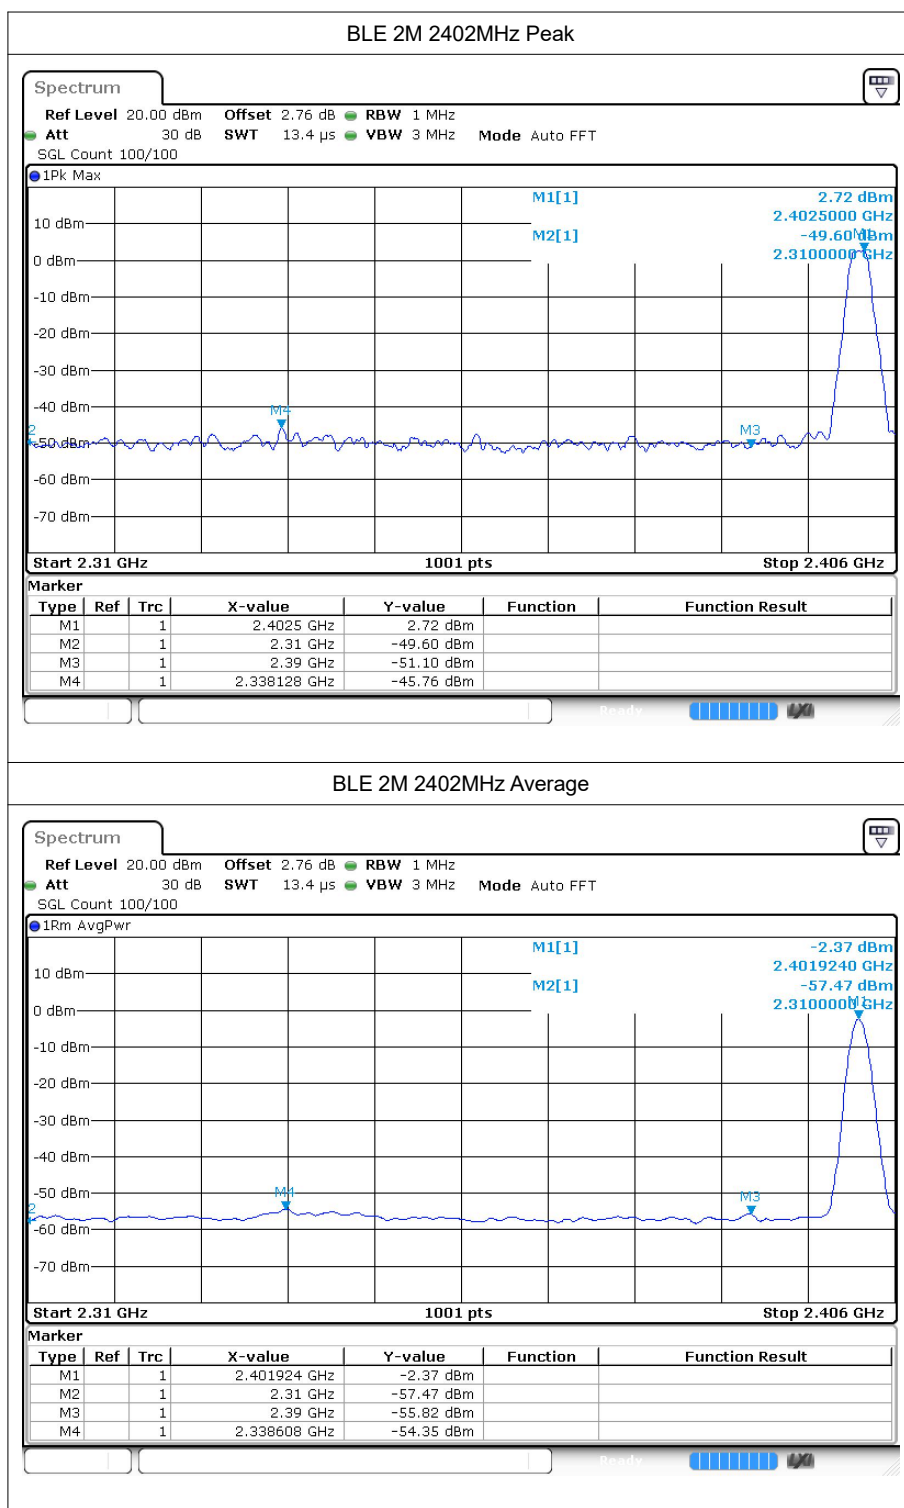

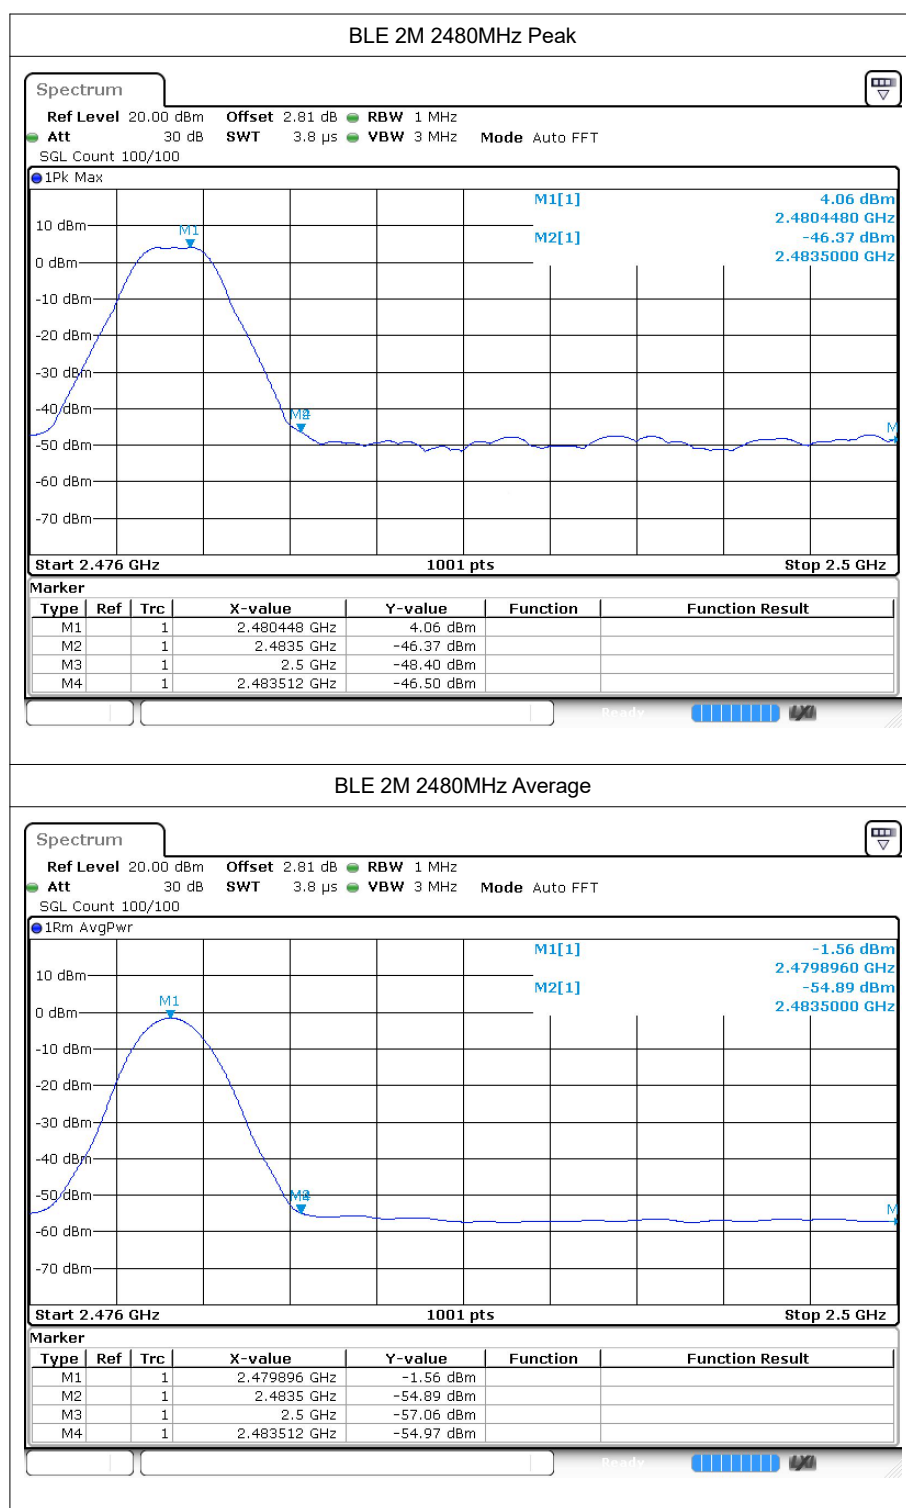

---The End---