


产品规格书

制造商名称	SHENZHEN JIUYI ELECTRONICS CO.,LTD	客户料号	J.CJ.Q2507M02		
		规格编号	202401002800	版本	01

◆、外形尺寸

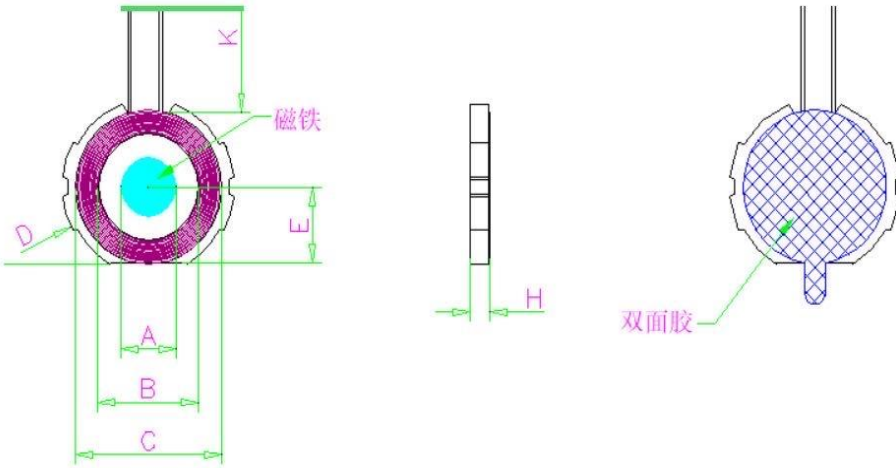

(单位: mm)

A	7.6 ±1.0
B	13.6 ±1.0
C	19.0 ±1.0
D	25.0 ±1.0
E	10.0 ±1.0
K	7.0 ±2.0
H	2.6 ±0.3(含膜厚)

备注

- (1)线径: 0.08*24P绞线, 单线双层绕法
Wire diameter :0.08*24P twisted wire , single wire double winding
- (2)线圈绕10圈Coil around 10 times
- (3)底部背双面背胶Coil around 10 times
- (4)起尾线是否交叉: 是Whether the start and end lines cross: Yes
- (5)线圈中间放置 7.5*2.2的强磁3400GS±200GS
A 7.5*2.2 strong magnetic 3400GS±200GS is placed in the middle of the coil

◆、电气特性:

参数	规格	测试条件	测试仪器
L(W1)	4.1 ±10% μH	100KHz/1V	■TH2816B
DCR(W1)	<200 mΩ	@ 25℃	■CH-502BC
Q	>20 min	100KHz/1V	■TH1816B

◆、温度等级:

操作温度	-40℃~ 125℃
------	------------

◆、材料清单:

序号	品名/ name	材料规格Material specification	供应商	备注
1	磁片 Magnetic sheet	25*2.6硬磁 25*2.6 Hard magnetic		
2	绞线 Stranded wire	0.08*24P		绞线Stranded wire
3	胶glue	双面背胶Double-sided adhesive		环保胶纸Eco-friendly adhesive paper
4	强磁 Strong magnetic	7.5*2.2		磁铁magnet
5	锡tin	107H		千岛环保锡Thousand island environmental tin
6	胶水glue	黄胶Yellow gum		环保胶水Eco-friendly glue