

Acknowledgment Form

Customer Name: Shenzhen Mingdiantian Technology

Customer Part Number: _____

Our model: G25 Apple Watch Soft Magnetic Coil

Sample delivery date: March 29, 2022

Supplier: Dongguan Jieruisi Technology Co., Ltd.

draw	Review nuclear	Patch allow
land Lynn	Deng Xiang Gui	land like Sent

The Client acknowledges that:

combine grid	No combine grid	Cheng recognize
Preparation Note		

Dongguan Jieruisi Technology Co., Ltd.


Tel: _____

Fax: 86+13632701380

Address: Guanchang Road, Taigongling Village, Dalingshan Town, Dongguan City 152 Number

Customer Name	Customer Part Number	Our model	version Book	day Expect
Ming Ding Tian		G25	A0	2022.3.29

1. Plane structure diagram: Unit : MM

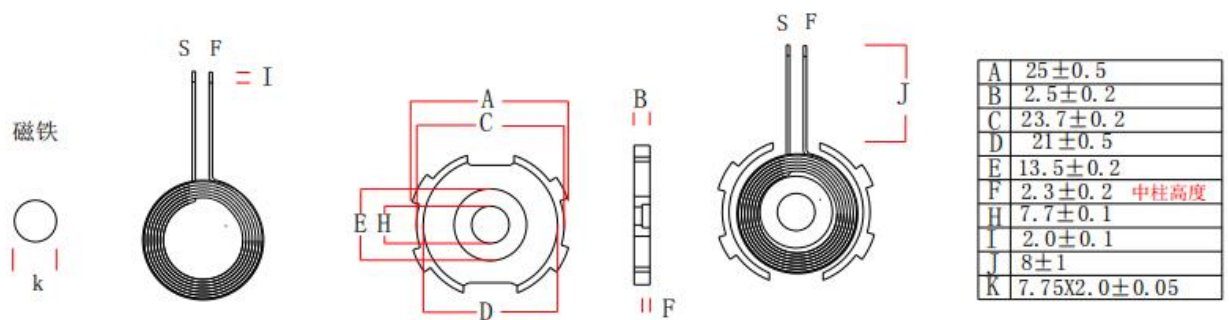

2. Product parameters:

foot Bit	Wire path	lock up number	Preparation Note
S -- F	0.08*24	14	Hot air stranded wire

3. Technical requirements:

1. Fix the thread ends to prevent the thread from loosening or breaking.
2. According to customer requirements, cut off the excessive wire ends and tin them. The tinning depth is unified to $1 \pm 0.5\text{MM}$
3. Apply appropriate amount of white glue on the soft magnetic sheet and attach the coil. During the process, make sure the surface of the product is clean and tidy.
4. Additional process (according to customer requirements) install in the middle round hole of the finished product 7.65x2.0mm The magnets are in the finished product

Add sticker on the back 14mm Round double-sided tape, then packed

4. Electrical

parameters: 1.

Inductance value, Q

value:

$$\text{PIN } S \text{ --- } F = 8.1\mu\text{H} \pm 0.2\mu\text{H}$$

$$Q \text{ Value} \geq 35$$

The above inductance values are based on Quanhua 1062A Instruments , 10KHZ/0.3Vrms
Standard or equivalent instrument. Q Worth Quanhua 1062A Instruments,
100KHZ/0.3Vrms Standard or equivalent instrument

5. Materials List:

Serial number	name	Material	supplier	Preparation Note	
1	Hot air stranded wire	0.08X24	Uyghur-Chinese or equivalent		
2	magnetic piece	G25 Soft substrate	Tiantong or equivalent		
3	tin	High temperature environmental protection	Thousand Islands or equivalent		
4	white glue	BY882	Baoyue or equivalent		
5	powerful magnetic	7.65*2(powerful Spend big At 3000GS)	Liansheng or equivalent	Additional process , according to customer requirements	
6	pair noodle glue	diameter 14mm	Honghui or equivalent		