



FCC TEST REPORT

FCC ID:2BKZD-ES1

Applicant: Shenzhen Tangrong Chuanwen Trading Co., Ltd

Address: Room B111, North Block 1205, International Commercial Building, Nanhu Street, Luohu District, Shenzhen city,Guangdong,CN

Manufacturer: Shenzhen Tangrong Chuanwen Trading Co., Ltd

Address: Room B111, North Block 1205, International Commercial Building, Nanhu Street, Luohu District, Shenzhen city,Guangdong,CN

EUT: Open Ear Headphones

Trade Mark: Bakeey

Model Number: ES1

Date of Receipt: Jan. 17, 2025

Test Date: Jan. 17, 2025 to Feb. 10, 2025

Date of Report: Jul. 31, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250729007R

Prepared (Test Engineer): Dimon Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1.VERSION	4
2. SUMMARY OF TEST RESULTS	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
5.RADIATED BAND EMISSION MEASUREMENT	28
5.1 TEST REQUIREMENT:	28
5.2 TEST PROCEDURE	28
5.3 DEVIATION FROM TEST STANDARD	29
5.4 TEST SETUP	29
5.5 EUT OPERATING CONDITIONS	29
5.6 TEST RESULT	30
6.POWER SPECTRAL DENSITY TEST	32
6.1 APPLIED PROCEDURES / LIMIT	32



Table of Contents	Page
6.2 TEST PROCEDURE	32
6.3 DEVIATION FROM STANDARD	32
6.4 TEST SETUP	32
6.5 EUT OPERATION CONDITIONS	32
6.6 TEST RESULT	34
7. CHANNEL BANDWIDTH	36
7.1 APPLIED PROCEDURES / LIMIT	36
7.2 TEST PROCEDURE	36
7.3 DEVIATION FROM STANDARD	36
7.4 TEST SETUP	36
7.5 EUT OPERATION CONDITIONS	37
7.6 TEST RESULT	38
8. PEAK OUTPUT POWER TEST	40
8.1 APPLIED PROCEDURES / LIMIT	40
8.2 TEST PROCEDURE	40
8.3 DEVIATION FROM STANDARD	40
8.4 TEST SETUP	40
8.5 EUT OPERATION CONDITIONS	40
8.6 TEST RESULT	41
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	42
9.1 APPLICABLE STANDARD	42
9.2 TEST PROCEDURE	42
9.3 DEVIATION FROM STANDARD	42
9.4 TEST SETUP	42
9.5 EUT OPERATION CONDITIONS	42
10. DUTY CYCLE	46
10.1 APPLIED PROCEDURES / LIMIT	46
10.2 DEVIATION FROM STANDARD	46
10.3 TEST SETUP	46
11. ANTENNA REQUIREMENT	49
12. TEST SETUP PHOTO	50
13. EUT CONSTRUCTIONAL DETAILS	50



1.VERSION

Report No.	Version	Description	Approved
DLE-250729007R	Rev.01	Initial issue of report	Jul. 31, 2025



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	-6dB OCB	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)“N/A” denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB identifier: CN0118

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Open Ear Headphones
Model No.:	ES1
Model Different.:	N/A
Serial No.:	N/A
Hardware Version:	H1.0
Software Version:	S1.0
Sample(s) Status:	Engineer sample
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	Chip ANT
Antenna gain:	2.7dBi
Power supply:	Input: DC 5V/0.5A Battery: 3.7V, 60mAh, 0.222Wh



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402 MHz	11	2422 MHz	21	2442 MHz	31	2462 MHz
2	2404 MHz	12	2424 MHz	22	2444 MHz	32	2464 MHz
3	2406 MHz	13	2426 MHz	23	2446 MHz	33	2466 MHz
4	2408 MHz	14	2428 MHz	24	2448 MHz	34	2468 MHz
5	2410 MHz	15	2430 MHz	25	2450 MHz	35	2470 MHz
6	2412 MHz	16	2432 MHz	26	2452 MHz	36	2472 MHz
7	2414 MHz	17	2434 MHz	27	2454 MHz	37	2474 MHz
8	2416 MHz	18	2436 MHz	28	2456 MHz	38	2476 MHz
9	2418 MHz	19	2438 MHz	29	2458 MHz	39	2478 MHz
10	2420 MHz	20	2440 MHz	30	2460 MHz	40	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

3.2 DESCRIPTION OF TEST MODES


Transmitting mode	Keep the EUT in continuously transmitting mode
Charging mode	Keep the EUT in Charging mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	FCC_assist Test Tool
Power level setup	Default



3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Open Ear Headphones	Bakeey	ES1	N/A	EUT
A-1	Adapter	N/A	BI18L-090200-AdU	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 30, 2024	Sep. 29, 2025
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	C-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Sep. 29, 2024	Sep. 28, 2025
5	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Sep. 29, 2024	Sep. 28, 2025
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 30, 2024	Sep. 29, 2025
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2024	Sep. 29, 2025
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Oct. 11, 2024	Oct. 10, 2025
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 29, 2024	Sep. 28, 2025
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Sep. 30, 2024	Sep. 29, 2025
11	Test Cable	N/A	R-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
12	Test Cable	N/A	R-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
13	Test Cable	N/A	R-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
14	D.C. Power Supply	LongWei	TPR-6405D	GQ7516	N/A	Sep. 29, 2024	Sep. 28, 2025
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	RF-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	Test Cable	N/A	RF-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Test Cable	N/A	RF-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
6	ESG Signal Generator	Agilent	E4421B	GB40051203	B.03.84	Sep. 29, 2024	Sep. 28, 2025
7	Signal Generator	Agilent	N5182A	MY47420215	A.01.87	Sep. 29, 2024	Sep. 28, 2025
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344/M-1752	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Van der Hoofden measuring head	Schwarzbeck Mess-elektronik	VDHH 9502	9502-039	N/A	Sep. 30, 2024	Sep. 29, 2025
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 30, 2024	Sep. 29, 2025
11	MWRF Power Meter Test system	MW	MW100-RF CB	10371	N/A	Sep. 29, 2024	Sep. 28, 2025
12	Power Meter	KEYSIGHT	N1912AP	926431	A.05.00	Sep. 29, 2024	Sep. 28, 2025
13	D.C. Power Supply	LongWei	TPR-6405 D	GQ7516	N/A	Sep. 29, 2024	Sep. 28, 2025
14	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

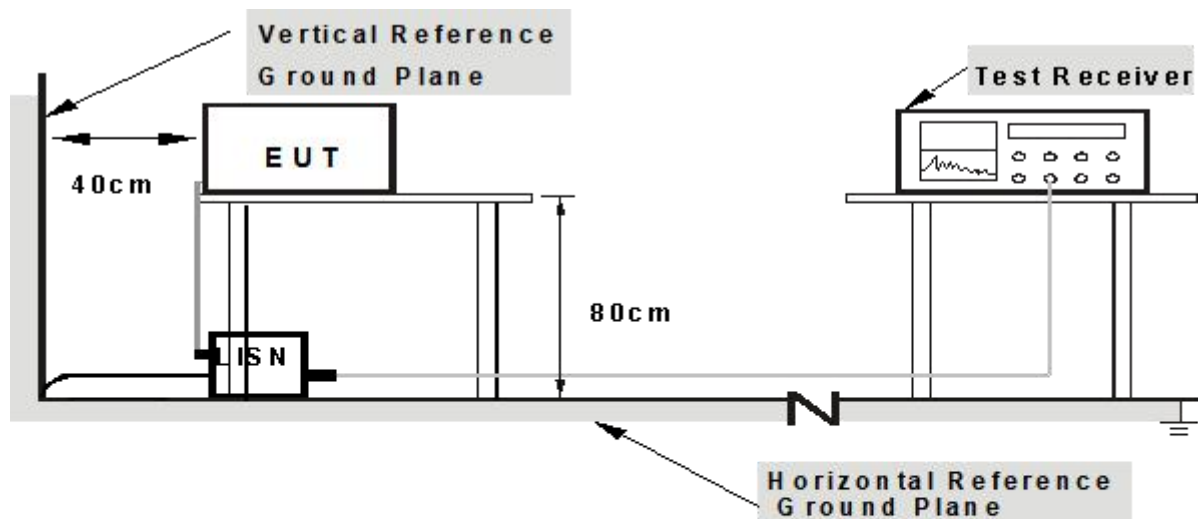

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to Charging during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

4.1.6 Test Result



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	BT TX

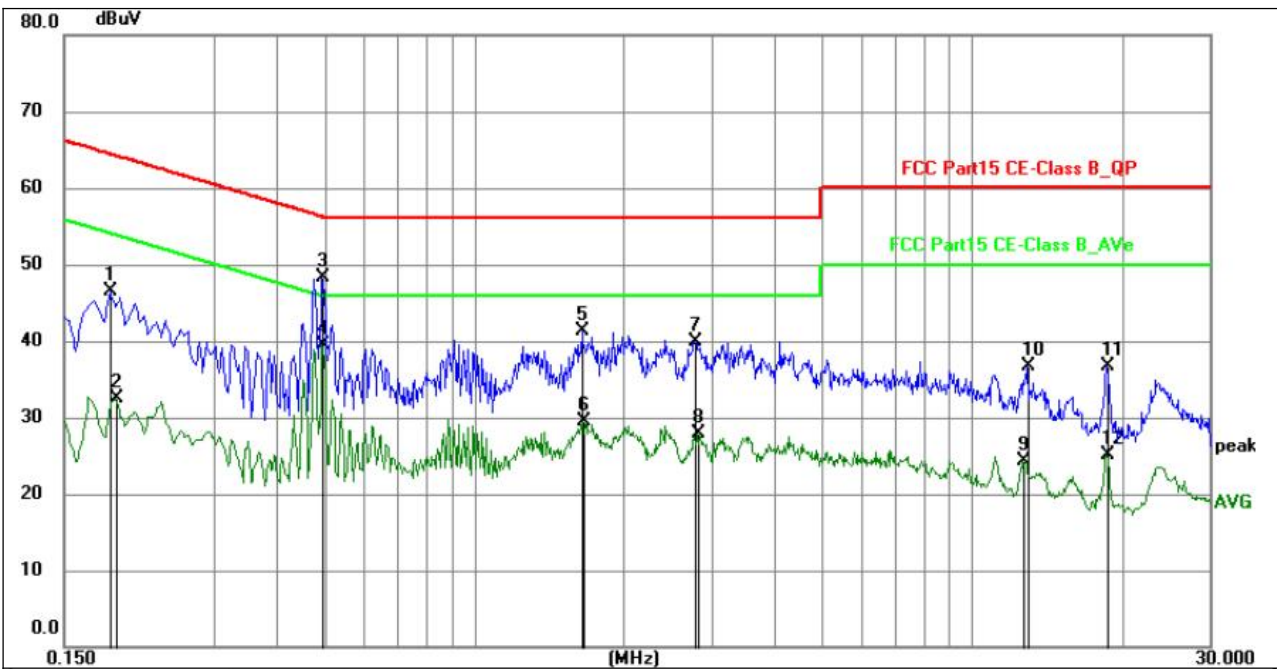


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1859	26.10	20.33	46.43	64.22	-17.79	QP	P	
2	0.1905	12.24	20.34	32.58	54.01	-21.43	AVG	P	
3	0.4964	27.91	20.30	48.21	56.06	-7.85	QP	P	
4	0.4964	19.11	20.30	39.41	46.06	-6.65	AVG	P	
5	1.6484	20.92	20.30	41.22	56.00	-14.78	QP	P	
6	1.6572	9.17	20.30	29.47	46.00	-16.53	AVG	P	
7	2.7780	19.63	20.33	39.96	56.00	-16.04	QP	P	
8	2.8229	7.66	20.33	27.99	46.00	-18.01	AVG	P	
9	12.7140	3.77	20.47	24.24	50.00	-25.76	AVG	P	
10	12.9253	16.15	20.47	36.62	60.00	-23.38	QP	P	
11	18.6493	16.29	20.50	36.79	60.00	-23.21	QP	P	
12	18.6493	4.66	20.50	25.16	50.00	-24.84	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case GFSK 2480MHz mode



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	BT TX

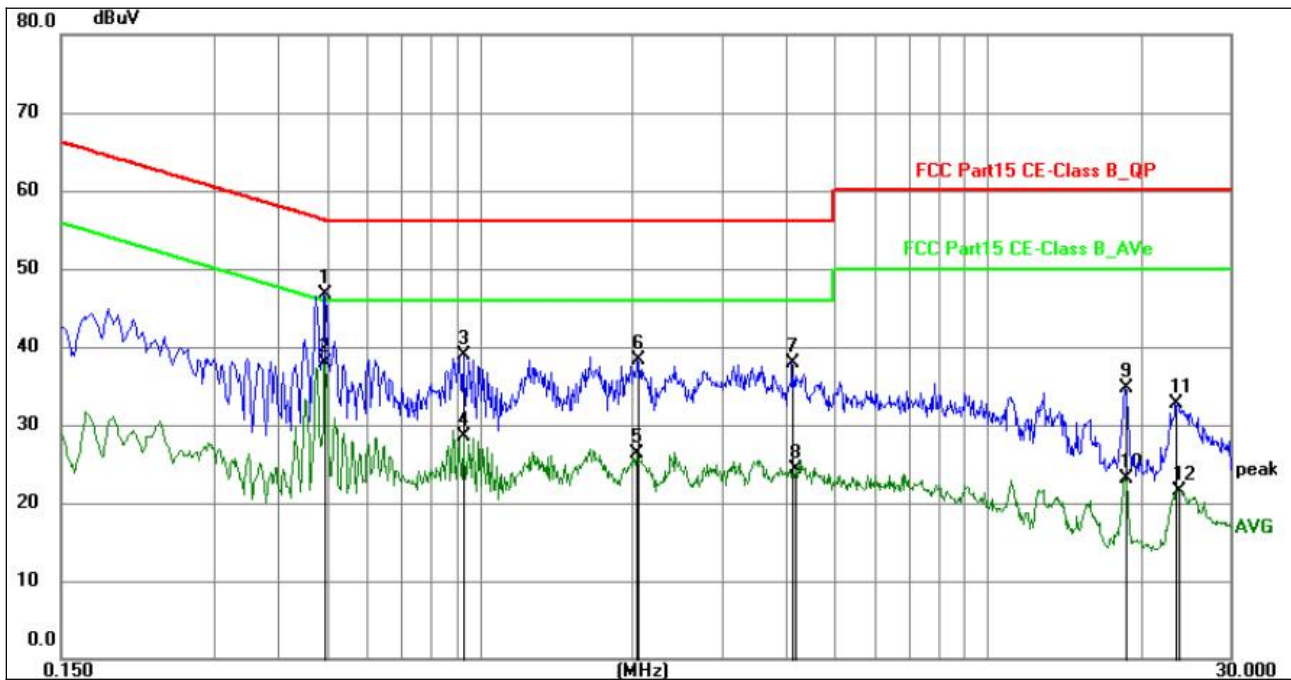

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4964	26.41	20.30	46.71	56.06	-9.35	QP	P	
2	0.4964	17.61	20.30	37.91	46.06	-8.15	AVG	P	
3	0.9325	18.70	20.30	39.00	56.00	-17.00	QP	P	
4	0.9325	8.24	20.30	28.54	46.00	-17.46	AVG	P	
5	2.0400	6.05	20.31	26.36	46.00	-19.64	AVG	P	
6	2.0533	17.92	20.31	38.23	56.00	-17.77	QP	P	
7	4.1280	17.47	20.35	37.82	56.00	-18.18	QP	P	
8	4.1863	3.94	20.35	24.29	46.00	-21.71	AVG	P	
9	18.6493	14.29	20.50	34.79	60.00	-25.21	QP	P	
10	18.6493	2.66	20.50	23.16	50.00	-26.84	AVG	P	
11	23.4146	12.21	20.59	32.80	60.00	-27.20	QP	P	
12	23.8601	0.94	20.60	21.54	50.00	-28.46	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case GFSK 2480MHz mode



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



4.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
Note:
Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


4.2.3 DEVIATION FROM TEST STANDARD

No deviation




4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

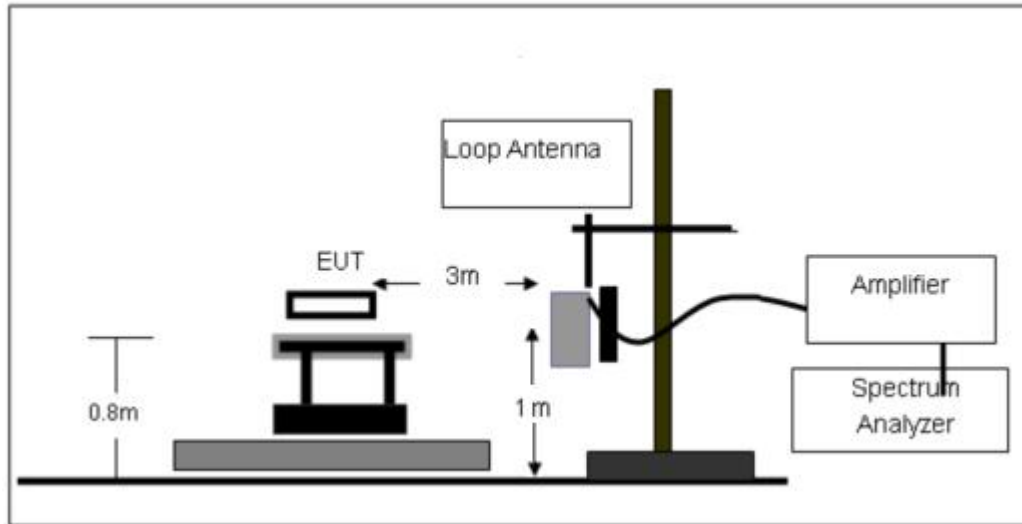


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

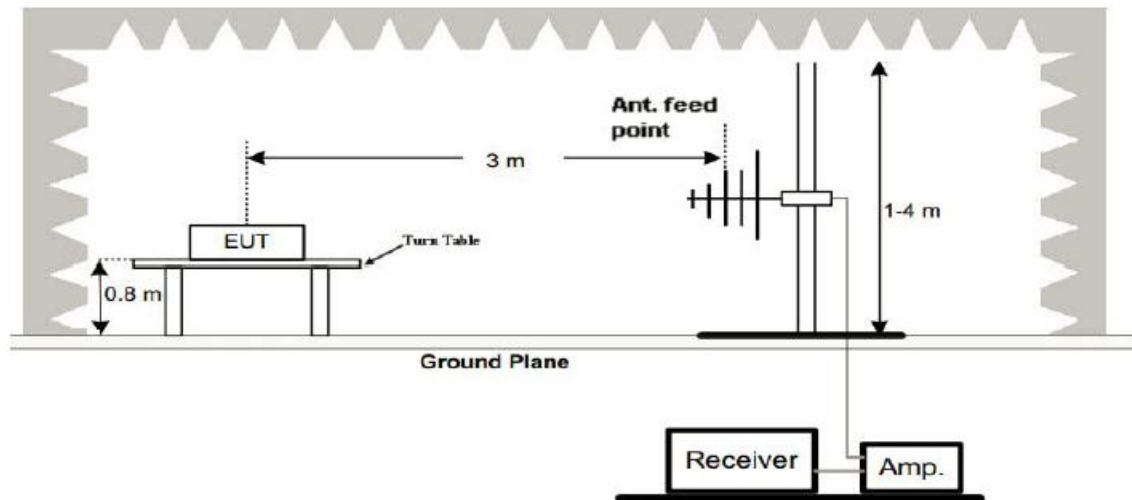



(C) Radiated Emission Test-Up Frequency Above 1GHz

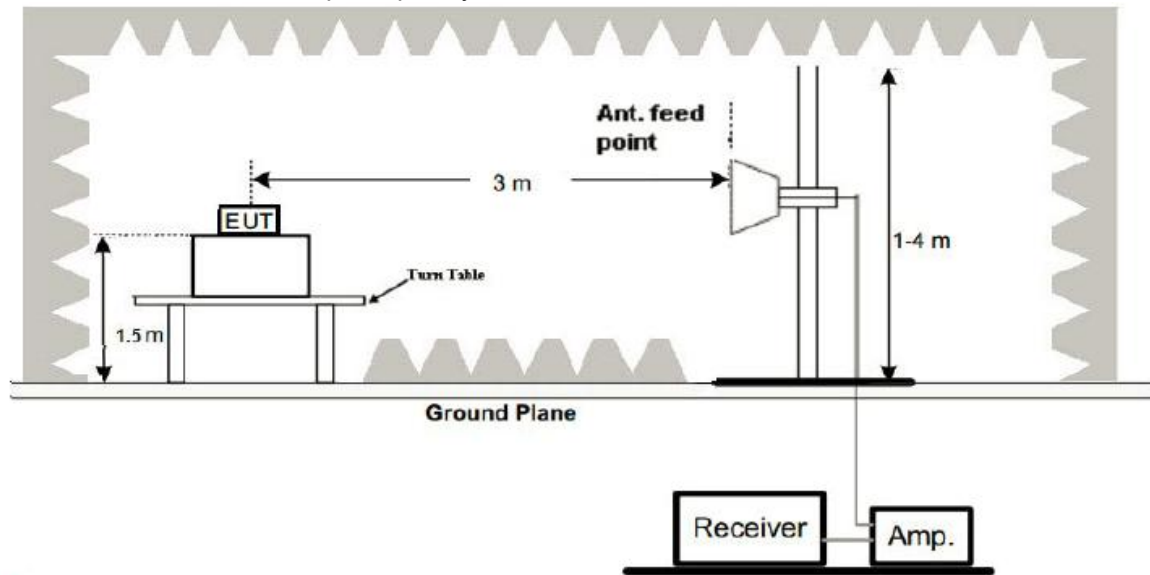

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.6 TEST RESULTS (Between 9KHz – 30 MHz)

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz(Left ear headphones)


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test Mode:	BT TX

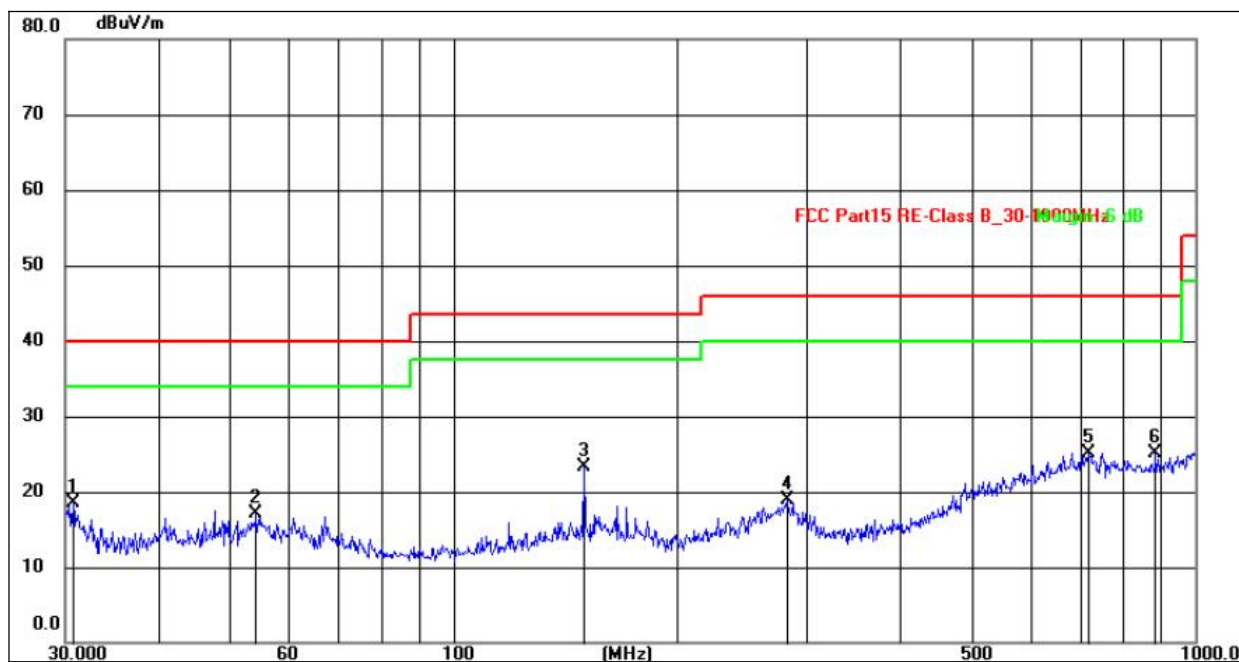

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.7454	32.68	-14.23	18.45	40.00	-21.55	QP
2	54.2608	31.18	-14.02	17.16	40.00	-22.84	QP
3	150.0107	39.58	-16.35	23.23	43.50	-20.27	QP
4	281.9945	33.12	-14.20	18.92	46.00	-27.08	QP
5	719.1992	31.51	-6.48	25.03	46.00	-20.97	QP
6	884.5027	31.80	-6.69	25.11	46.00	-20.89	QP



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test Mode:	BT TX

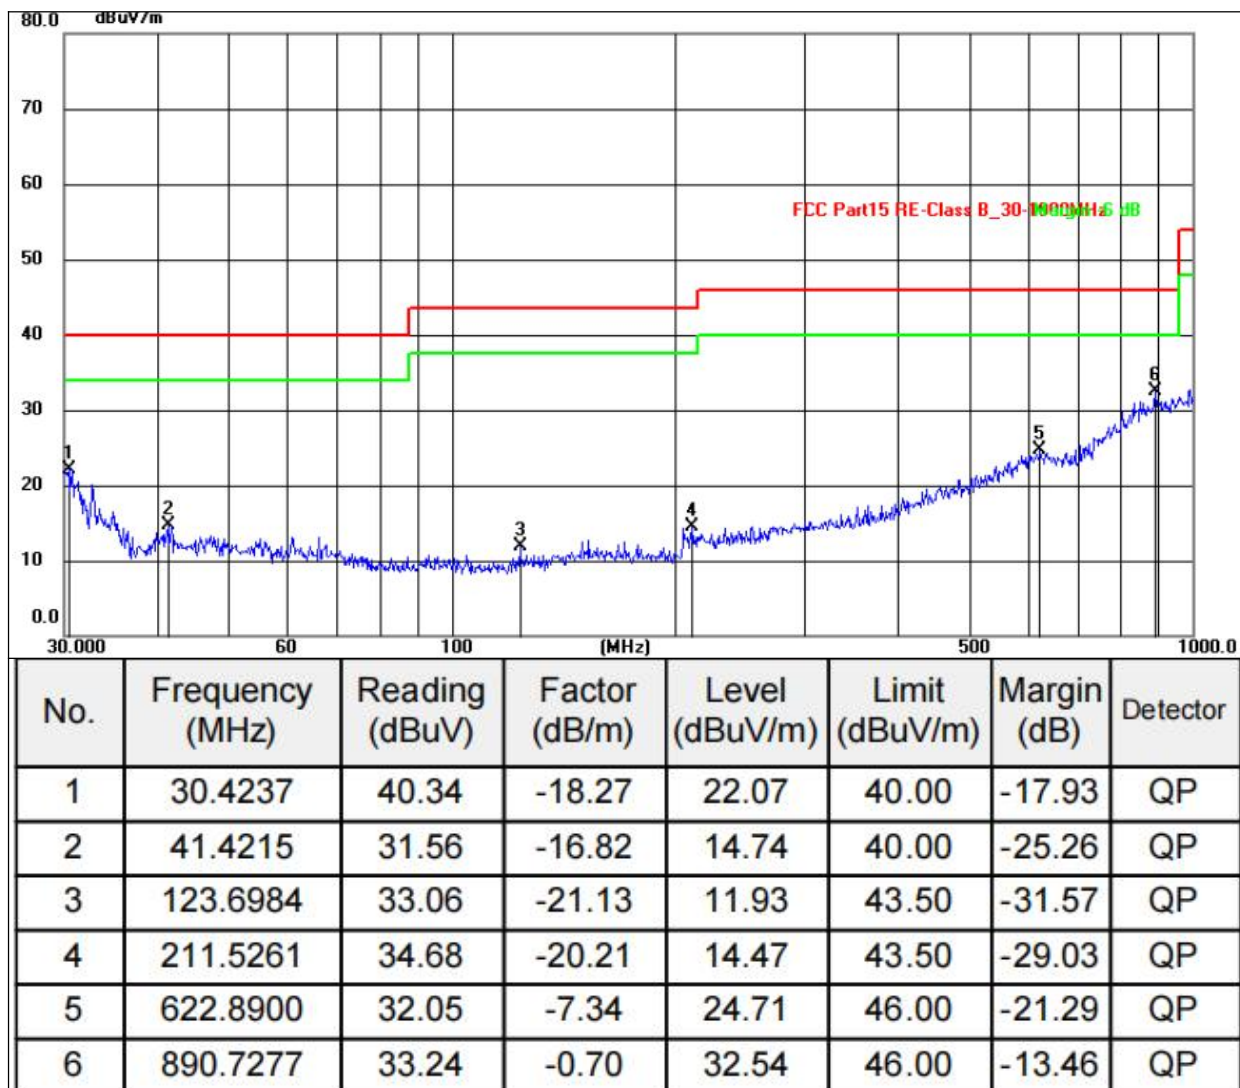


Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case GFSK 2480MHz mode



Between 30MHz – 1GHz(Right ear headphones)


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test Mode:	BT TX

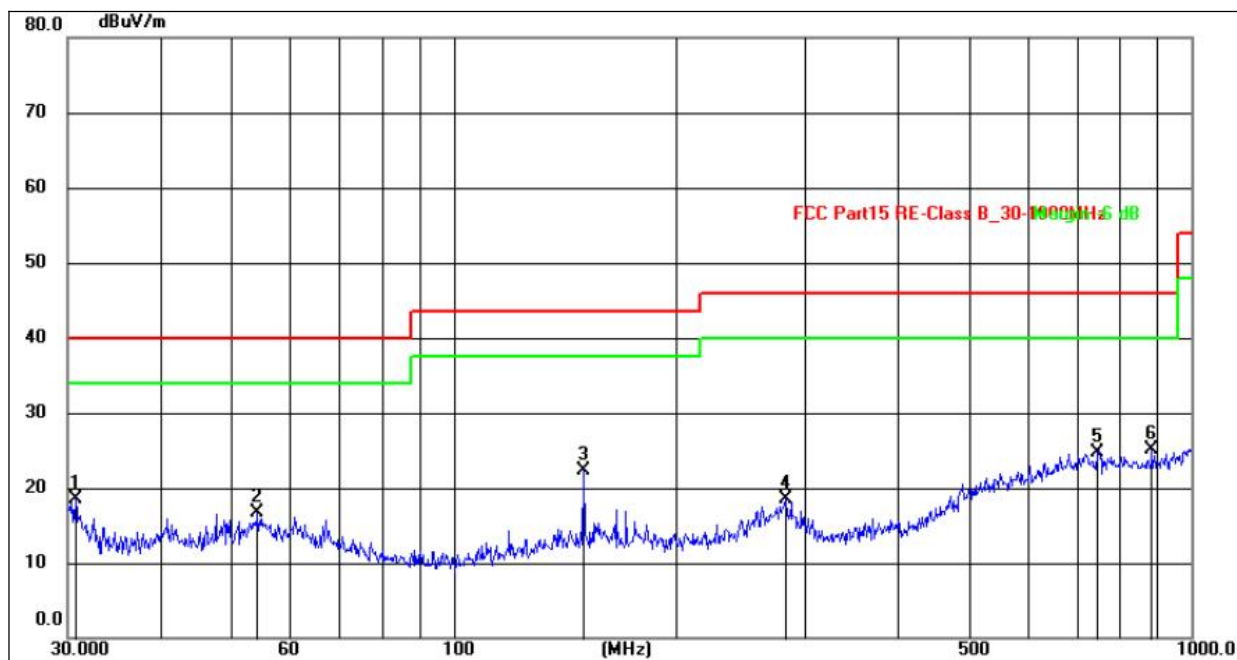

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.7454	32.68	-14.23	18.45	40.00	-21.55	QP
2	54.2608	30.68	-14.02	16.66	40.00	-23.34	QP
3	150.0107	38.58	-16.35	22.23	43.50	-21.27	QP
4	281.9945	32.62	-14.20	18.42	46.00	-27.58	QP
5	744.8659	31.22	-6.53	24.69	46.00	-21.31	QP
6	884.5027	31.80	-6.69	25.11	46.00	-20.89	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test Mode:	BT TX

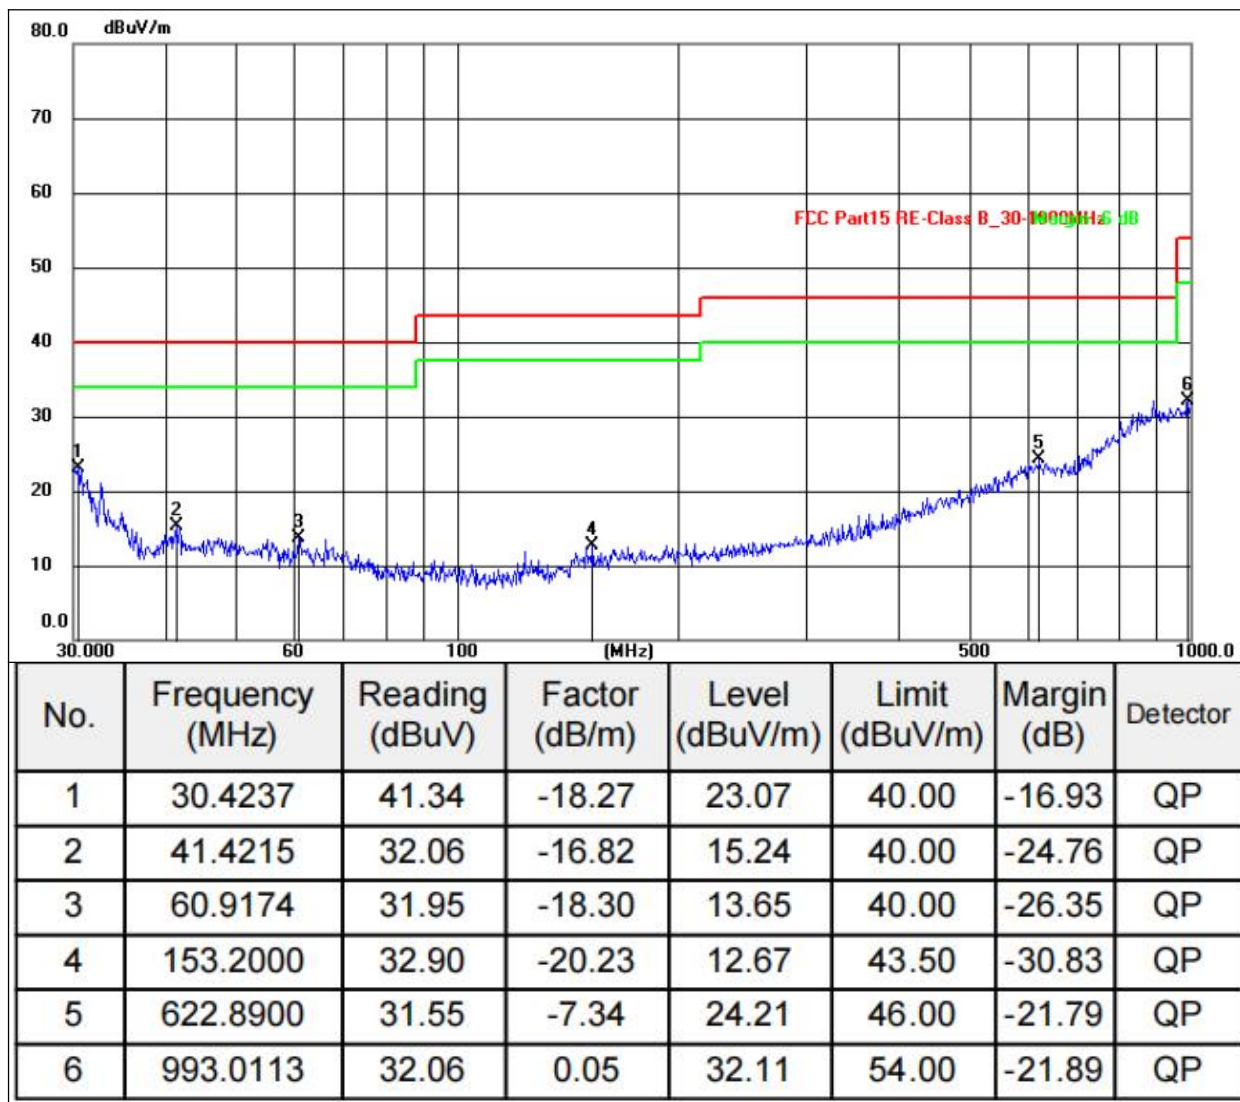

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case GFSK 2480MHz mode



1GHz~25GHz(Left ear headphones)

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	52.46	30.55	5.77	24.66	52.34	74.00	-21.66	Pk
V	4804.00	43.64	30.55	5.77	24.66	43.52	54.00	-10.48	AV
V	7206.00	52.55	30.33	6.32	24.55	53.09	74.00	-20.91	Pk
V	7206.00	43.02	30.33	6.32	24.55	43.56	54.00	-10.44	AV
V	9608.00	53.41	30.85	7.45	24.69	54.70	74.00	-19.30	Pk
V	9608.00	43.91	30.85	7.45	24.69	45.20	54.00	-8.80	AV
V	12010.00	50.54	31.02	8.99	25.57	54.08	74.00	-19.92	Pk
V	12010.00	43.37	31.02	8.99	25.57	46.91	54.00	-7.09	AV
H	4804.00	53.89	30.55	5.77	24.66	53.77	74.00	-20.23	Pk
H	4804.00	43.90	30.55	5.77	24.66	43.78	54.00	-10.22	AV
H	7206.00	52.75	30.33	6.32	24.55	53.29	74.00	-20.71	Pk
H	7206.00	43.84	30.33	6.32	24.55	44.38	54.00	-9.62	AV
H	9608.00	54.02	30.85	7.45	24.69	55.31	74.00	-18.69	Pk
H	9608.00	43.33	30.85	7.45	24.69	44.62	54.00	-9.38	AV
H	12010.00	54.45	31.02	8.99	25.57	57.99	74.00	-16.01	Pk
H	12010.00	43.65	31.02	8.99	25.57	47.19	54.00	-6.81	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2440MHz									
V	4880.00	50.25	30.55	5.77	24.66	50.13	74.00	-23.87	Pk
V	4880.00	43.91	30.55	5.77	24.66	43.79	54.00	-10.21	AV
V	7320.00	54.78	30.33	6.32	24.55	55.32	74.00	-18.68	Pk
V	7320.00	43.06	30.33	6.32	24.55	43.60	54.00	-10.40	AV
V	9760.00	51.75	30.85	7.45	24.69	53.04	74.00	-20.96	Pk
V	9760.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
V	12200.00	51.47	31.02	8.99	25.57	55.01	74.00	-18.99	Pk
V	12200.00	43.16	31.02	8.99	25.57	46.70	54.00	-7.30	AV
H	4880.00	53.27	30.55	5.77	24.66	53.15	74.00	-20.85	Pk
H	4880.00	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
H	7320.00	52.22	30.33	6.32	24.55	52.76	74.00	-21.24	Pk
H	7320.00	43.63	30.33	6.32	24.55	44.17	54.00	-9.83	AV
H	9760.00	54.97	30.85	7.45	24.69	56.26	74.00	-17.74	Pk
H	9760.00	43.10	30.85	7.45	24.69	44.39	54.00	-9.61	AV
H	12200.00	52.30	31.02	8.99	25.57	55.84	74.00	-18.16	Pk
H	12200.00	43.01	31.02	8.99	25.57	46.55	54.00	-7.45	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	51.31	30.55	5.77	24.66	51.19	74.00	-22.81	Pk
V	4960.00	43.29	30.55	5.77	24.66	43.17	54.00	-10.83	AV
V	7440.00	51.51	30.33	6.32	24.55	52.05	74.00	-21.95	Pk
V	7440.00	43.66	30.33	6.32	24.55	44.20	54.00	-9.80	AV
V	9920.00	53.87	30.85	7.45	24.69	55.16	74.00	-18.84	Pk
V	9920.00	43.90	30.85	7.45	24.69	45.19	54.00	-8.81	AV
V	12400.00	54.77	31.02	8.99	25.57	58.31	74.00	-15.69	Pk
V	12400.00	43.85	31.02	8.99	25.57	47.39	54.00	-6.61	AV
H	4960.00	51.63	30.55	5.77	24.66	51.51	74.00	-22.49	Pk
H	4960.00	43.47	30.55	5.77	24.66	43.35	54.00	-10.65	AV
H	7440.00	54.17	30.33	6.32	24.55	54.71	74.00	-19.29	Pk
H	7440.00	43.27	30.33	6.32	24.55	43.81	54.00	-10.19	AV
H	9920.00	50.87	30.85	7.45	24.69	52.16	74.00	-21.84	Pk
H	9920.00	43.98	30.85	7.45	24.69	45.27	54.00	-8.73	AV
H	12400.00	54.16	31.02	8.99	25.57	57.70	74.00	-16.30	Pk
H	12400.00	43.82	31.02	8.99	25.57	47.36	54.00	-6.64	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



1GHz~25GHz(Right ear headphones)

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	50.30	30.55	5.77	24.66	50.18	74.00	-23.82	Pk
V	4804.00	43.09	30.55	5.77	24.66	42.97	54.00	-11.03	AV
V	7206.00	50.11	30.33	6.32	24.55	50.65	74.00	-23.35	Pk
V	7206.00	43.62	30.33	6.32	24.55	44.16	54.00	-9.84	AV
V	9608.00	53.57	30.85	7.45	24.69	54.86	74.00	-19.14	Pk
V	9608.00	43.85	30.85	7.45	24.69	45.14	54.00	-8.86	AV
V	12010.00	52.83	31.02	8.99	25.57	56.37	74.00	-17.63	Pk
V	12010.00	43.37	31.02	8.99	25.57	46.91	54.00	-7.09	AV
H	4804.00	52.93	30.55	5.77	24.66	52.81	74.00	-21.19	Pk
H	4804.00	43.70	30.55	5.77	24.66	43.58	54.00	-10.42	AV
H	7206.00	52.47	30.33	6.32	24.55	53.01	74.00	-20.99	Pk
H	7206.00	43.79	30.33	6.32	24.55	44.33	54.00	-9.67	AV
H	9608.00	51.03	30.85	7.45	24.69	52.32	74.00	-21.68	Pk
H	9608.00	43.52	30.85	7.45	24.69	44.81	54.00	-9.19	AV
H	12010.00	53.13	31.02	8.99	25.57	56.67	74.00	-17.33	Pk
H	12010.00	43.45	31.02	8.99	25.57	46.99	54.00	-7.01	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2440MHz									
V	4880.00	53.01	30.55	5.77	24.66	52.89	74.00	-21.11	Pk
V	4880.00	43.73	30.55	5.77	24.66	43.61	54.00	-10.39	AV
V	7320.00	50.85	30.33	6.32	24.55	51.39	74.00	-22.61	Pk
V	7320.00	43.78	30.33	6.32	24.55	44.32	54.00	-9.68	AV
V	9760.00	54.58	30.85	7.45	24.69	55.87	74.00	-18.13	Pk
V	9760.00	43.96	30.85	7.45	24.69	45.25	54.00	-8.75	AV
V	12200.00	51.68	31.02	8.99	25.57	55.22	74.00	-18.78	Pk
V	12200.00	43.27	31.02	8.99	25.57	46.81	54.00	-7.19	AV
H	4880.00	51.69	30.55	5.77	24.66	51.57	74.00	-22.43	Pk
H	4880.00	43.85	30.55	5.77	24.66	43.73	54.00	-10.27	AV
H	7320.00	52.18	30.33	6.32	24.55	52.72	74.00	-21.28	Pk
H	7320.00	43.42	30.33	6.32	24.55	43.96	54.00	-10.04	AV
H	9760.00	51.88	30.85	7.45	24.69	53.17	74.00	-20.83	Pk
H	9760.00	43.84	30.85	7.45	24.69	45.13	54.00	-8.87	AV
H	12200.00	53.88	31.02	8.99	25.57	57.42	74.00	-16.58	Pk
H	12200.00	43.06	31.02	8.99	25.57	46.60	54.00	-7.40	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	53.68	30.55	5.77	24.66	53.56	74.00	-20.44	Pk
V	4960.00	43.80	30.55	5.77	24.66	43.68	54.00	-10.32	AV
V	7440.00	53.31	30.33	6.32	24.55	53.85	74.00	-20.15	Pk
V	7440.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
V	9920.00	51.04	30.85	7.45	24.69	52.33	74.00	-21.67	Pk
V	9920.00	43.77	30.85	7.45	24.69	45.06	54.00	-8.94	AV
V	12400.00	53.06	31.02	8.99	25.57	56.60	74.00	-17.40	Pk
V	12400.00	43.50	31.02	8.99	25.57	47.04	54.00	-6.96	AV
H	4960.00	53.54	30.55	5.77	24.66	53.42	74.00	-20.58	Pk
H	4960.00	43.92	30.55	5.77	24.66	43.80	54.00	-10.20	AV
H	7440.00	50.06	30.33	6.32	24.55	50.60	74.00	-23.40	Pk
H	7440.00	43.21	30.33	6.32	24.55	43.75	54.00	-10.25	AV
H	9920.00	51.13	30.85	7.45	24.69	52.42	74.00	-21.58	Pk
H	9920.00	43.39	30.85	7.45	24.69	44.68	54.00	-9.32	AV
H	12400.00	52.60	31.02	8.99	25.57	56.14	74.00	-17.86	Pk
H	12400.00	43.39	31.02	8.99	25.57	46.93	54.00	-7.07	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:




Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

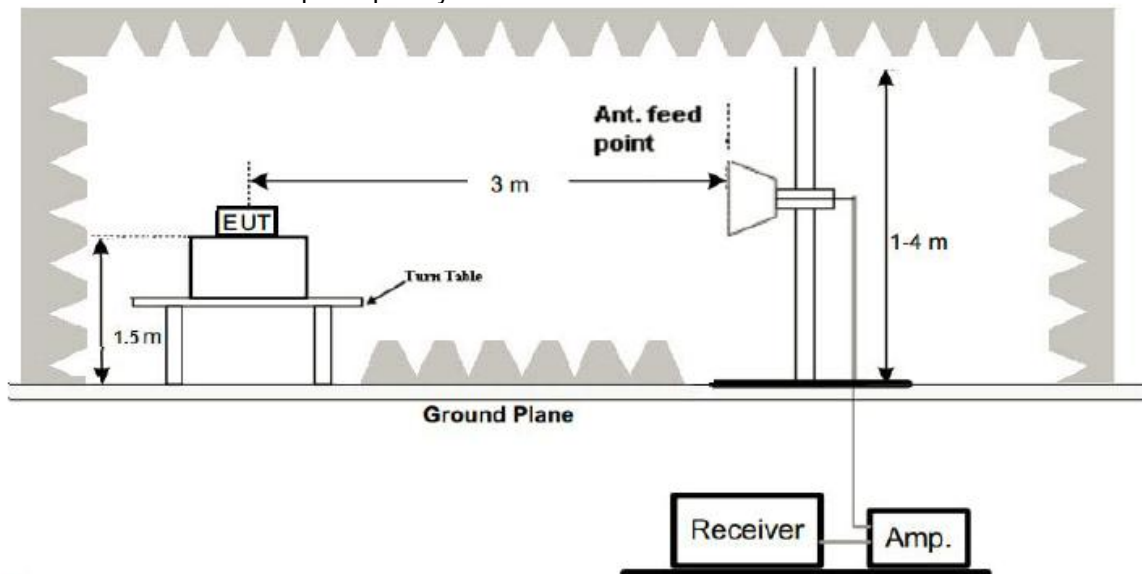

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

(Left ear headphones)

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	53.69	30.22	4.85	23.98	52.30	74.00	PK	PASS
	H	2390.00	44.93	30.22	4.85	23.98	43.54	54.00	AV	PASS
	H	2400.00	53.57	30.22	4.85	23.98	52.18	74.00	PK	PASS
	H	2400.00	44.48	30.22	4.85	23.98	43.09	54.00	AV	PASS
	V	2390.00	53.52	30.22	4.85	23.98	52.13	74.00	PK	PASS
	V	2390.00	44.88	30.22	4.85	23.98	43.49	54.00	AV	PASS
	V	2400.00	53.92	30.22	4.85	23.98	52.53	74.00	PK	PASS
	V	2400.00	44.01	30.22	4.85	23.98	42.62	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	54.16	30.22	4.85	23.98	52.77	74.00	PK	PASS
	H	2483.50	44.79	30.22	4.85	23.98	43.40	54.00	AV	PASS
	H	2500.00	54.94	30.22	4.85	23.98	53.55	74.00	PK	PASS
	H	2500.00	44.50	30.22	4.85	23.98	43.11	54.00	AV	PASS
	V	2483.50	54.77	30.22	4.85	23.98	53.38	74.00	PK	PASS
	V	2483.50	44.73	30.22	4.85	23.98	43.34	54.00	AV	PASS
	V	2500.00	53.81	30.22	4.85	23.98	52.42	74.00	PK	PASS
	V	2500.00	44.98	30.22	4.85	23.98	43.59	54.00	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										

(Right ear headphones)

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	53.31	30.22	4.85	23.98	51.92	74.00	PK	PASS
	H	2390.00	44.66	30.22	4.85	23.98	43.27	54.00	AV	PASS
	H	2400.00	53.39	30.22	4.85	23.98	52.00	74.00	PK	PASS
	H	2400.00	44.00	30.22	4.85	23.98	42.61	54.00	AV	PASS
	V	2390.00	53.91	30.22	4.85	23.98	52.52	74.00	PK	PASS
	V	2390.00	44.70	30.22	4.85	23.98	43.31	54.00	AV	PASS



	V	2400.00	53.94	30.22	4.85	23.98	52.55	74.00	PK	PASS
	V	2400.00	44.73	30.22	4.85	23.98	43.34	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	54.14	30.22	4.85	23.98	52.75	74.00	PK	PASS
	H	2483.50	44.73	30.22	4.85	23.98	43.34	54.00	AV	PASS
	H	2500.00	54.53	30.22	4.85	23.98	53.14	74.00	PK	PASS
	H	2500.00	44.84	30.22	4.85	23.98	43.45	54.00	AV	PASS
	V	2483.50	53.18	30.22	4.85	23.98	51.79	74.00	PK	PASS
	V	2483.50	44.25	30.22	4.85	23.98	42.86	54.00	AV	PASS
	V	2500.00	54.51	30.22	4.85	23.98	53.12	74.00	PK	PASS
	V	2500.00	44.27	30.22	4.85	23.98	42.88	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span ≥ 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



CH20



CH40





7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP





7.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Test Mode :	GFSK	Test Voltage :	DC 3.7V

Test channel	6dB bandwidthh (kHz)	Limit(KHz)	Result
Lowest	659.2	>500	Pass
Middle	656		
Highest	656.6		

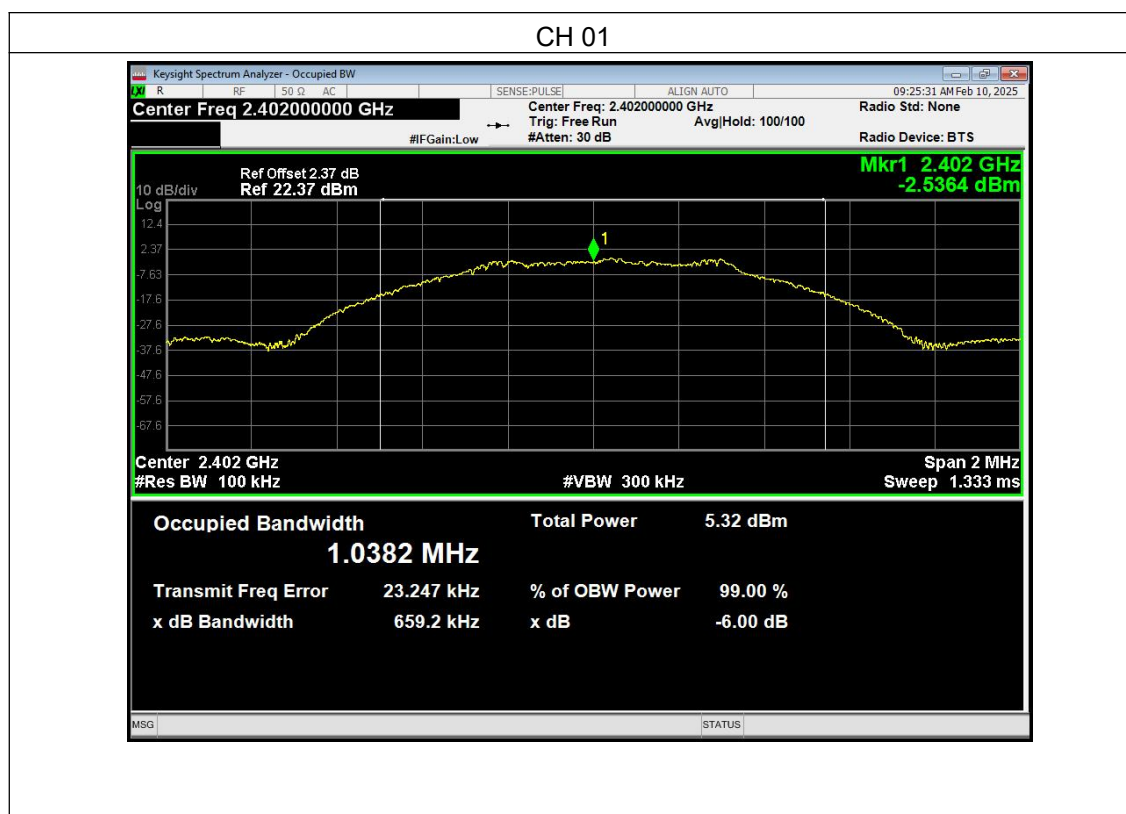





8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



8.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Test Mode :	GFSK	Test Voltage :	DC 3.7V

Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	-1.477	30.00	Pass
Middle	-1.447		
Highest	-2.394		



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

9.1 APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP




9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


9.6 TEST RESULTS



GFSK: Band Edge, Left Side

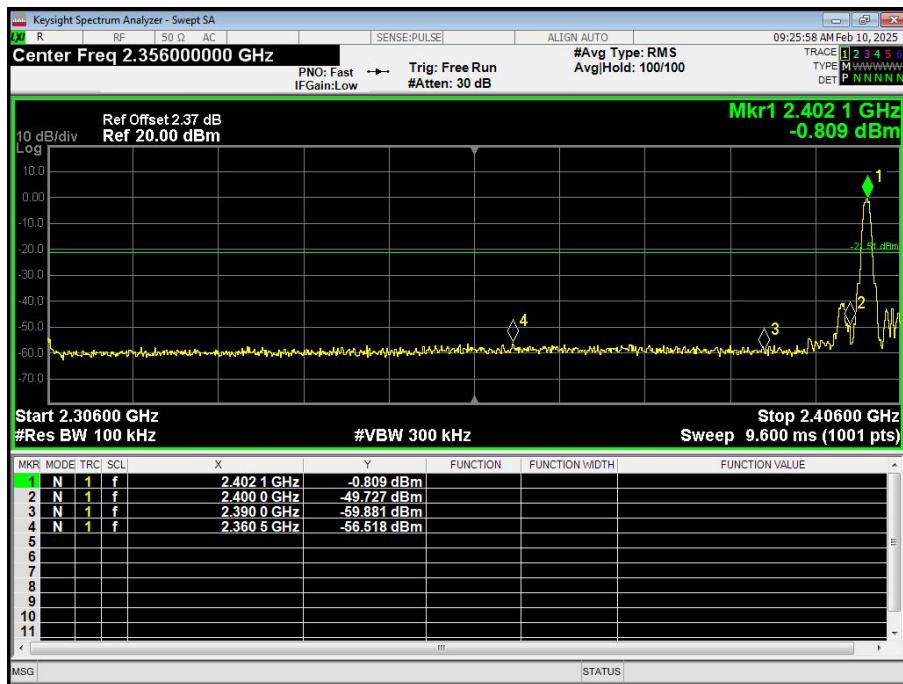


GFSK: Band Edge, Right Side

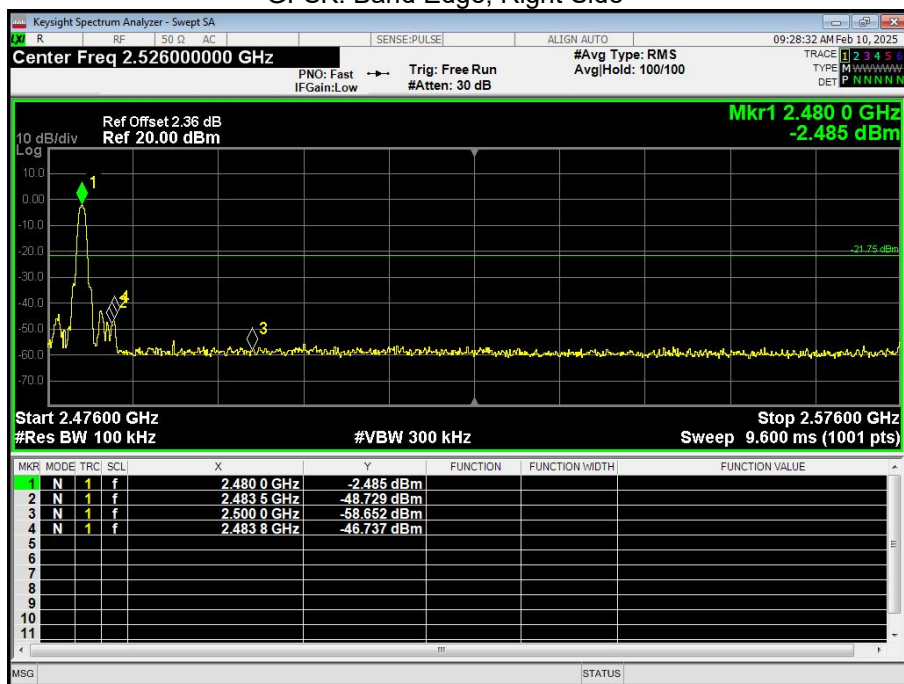





Lowest channel

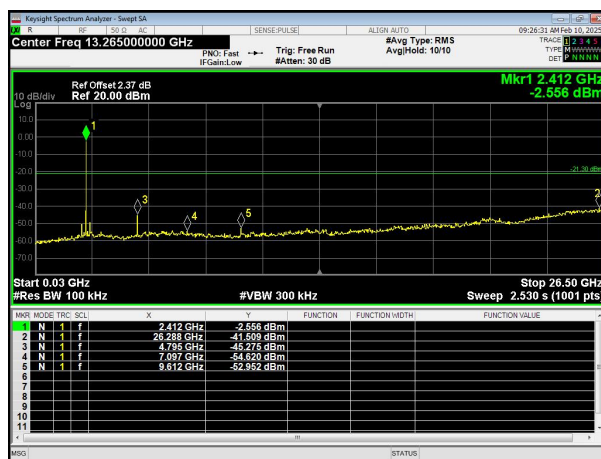

Middle channel

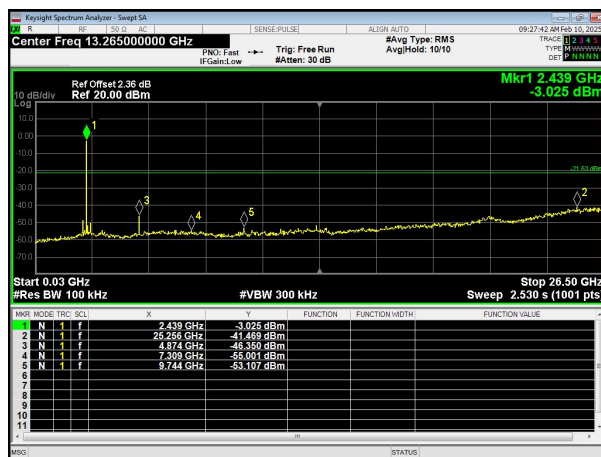

Highest channel

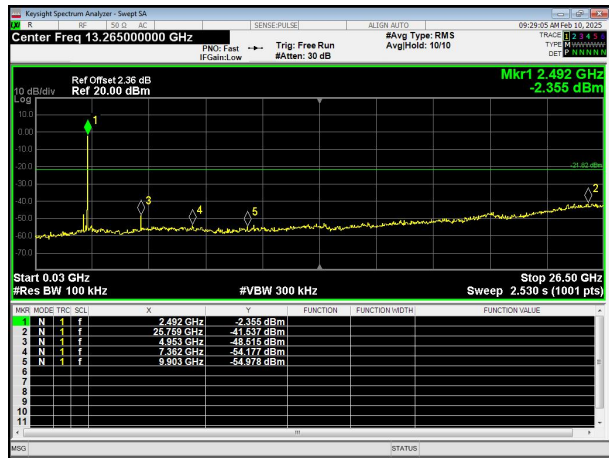



10. DUTY CYCLE

10.1 APPLIED PROCEDURES / LIMIT

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

10.2 DEVIATION FROM STANDARD

No deviation.


10.3 TEST SETUP





10.4 TEST RESULTS

Mode	Frequency (MHz)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Result
GFSK	2440	85.2	0.7	Pass

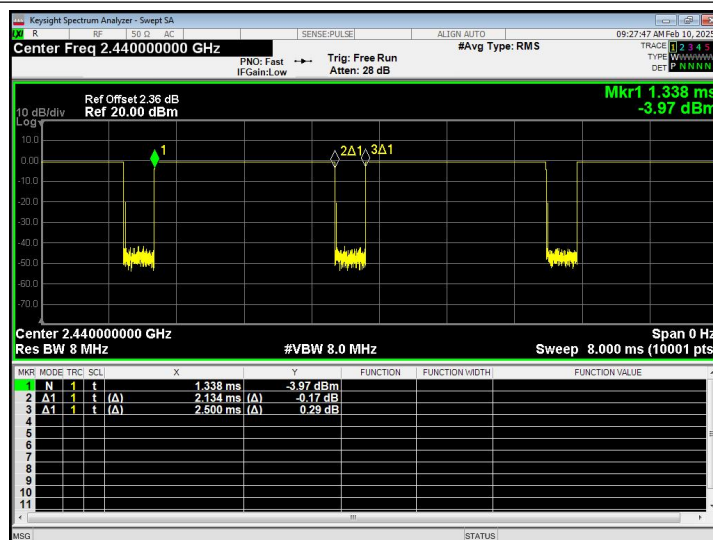

Note: All channel have been tested, and the report only record the worst case data.

Duty Cycle= Ton /Total*100%

Duty Cycle Correction Factor= $10\log(1/\text{Duty Cycle})$





11.ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is Chip ANT, the best case gain of the antennas is 2.7dBi, reference to the appendix II for details	



12. TEST SETUP PHOTO

Reference to the appendix I for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****