

# RF TEST REPORT

For

**Shenzhen Olin Precision Mould Plastic Co.,Ltd**

**Product Name: Wireless Mouse**

**Test Model(s): U6**

**Report Reference No.** : DACE241021003RF001

**FCC ID** : 2BL20-U6

**Applicant's Name** : Shenzhen Olin Precision Mould Plastic Co.,Ltd

**Address** : East Building 2, Huazhan Technology Park, No.30 ,Tianfu Road, Tianliao Community, Gongming Street, Guangming New District, Shenzhen

**Testing Laboratory** : Shenzhen DACE Testing Technology Co., Ltd.

**Address** : 102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

**Test Specification Standard** : 47 CFR Part 15.247

**Date of Receipt** : October 21, 2024

**Date of Test** : October 21, 2024 to October 29, 2024

**Data of Issue** : October 29, 2024

**Result** : Pass

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen DACE Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen DACE Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

## Apply for company information

|                                       |   |                                                                                                                                     |
|---------------------------------------|---|-------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant's Name</b>               | : | Shenzhen Olin Precision Mould Plastic Co.,Ltd                                                                                       |
| <b>Address</b>                        | : | East Building 2, Huazhan Technology Park, No.30 ,Tianfu Road, Tianliao Community, Gongming Street, Guangming New District, Shenzhen |
| <b>Product Name</b>                   | : | Wireless Mouse                                                                                                                      |
| <b>Test Model(s)</b>                  | : | U6                                                                                                                                  |
| <b>Series Model(s)</b>                | : | N/A                                                                                                                                 |
| <b>Test Specification Standard(s)</b> | : | 47 CFR Part 15.247                                                                                                                  |

### NOTE1:

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:

*Keren Huang*

Keren Huang / Test Engineer

October 29, 2024

Supervised by:

*Ben Tang*

Ben Tang / Project Engineer

October 29, 2024

Approved by:

*Machael Mo*

Machael Mo / Manager

October 29, 2024

## Revision History Of Report

| Version | Description | REPORT No.         | Issue Date       |
|---------|-------------|--------------------|------------------|
| V1.0    | Original    | DACE241021003RF001 | October 29, 2024 |
|         |             |                    |                  |
|         |             |                    |                  |
|         |             |                    |                  |
|         |             |                    |                  |

# CONTENTS

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1 TEST SUMMARY .....</b>                            | <b>6</b>  |
| 1.1 TEST STANDARDS .....                               | 6         |
| 1.2 SUMMARY OF TEST RESULT .....                       | 6         |
| <b>2 GENERAL INFORMATION .....</b>                     | <b>7</b>  |
| 2.1 CLIENT INFORMATION .....                           | 7         |
| 2.2 DESCRIPTION OF DEVICE (EUT) .....                  | 7         |
| 2.3 DESCRIPTION OF TEST MODES .....                    | 8         |
| 2.4 DESCRIPTION OF SUPPORT UNITS .....                 | 8         |
| 2.5 EQUIPMENTS USED DURING THE TEST .....              | 8         |
| 2.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....     | 10        |
| 2.7 IDENTIFICATION OF TESTING LABORATORY .....         | 10        |
| 2.8 ANNOUNCEMENT .....                                 | 10        |
| <b>3 EVALUATION RESULTS (EVALUATION) .....</b>         | <b>11</b> |
| 3.1 ANTENNA REQUIREMENT .....                          | 11        |
| 3.1.1 Conclusion: .....                                | 11        |
| <b>4 RADIO SPECTRUM MATTER TEST RESULTS (RF) .....</b> | <b>12</b> |
| 4.1 CONDUCTED EMISSION AT AC POWER LINE .....          | 12        |
| 4.1.1 E.U.T. Operation: .....                          | 12        |
| 4.1.2 Test Setup Diagram: .....                        | 12        |
| 4.1.3 Test Data: .....                                 | 13        |
| 4.2 OCCUPIED BANDWIDTH .....                           | 15        |
| 4.2.1 E.U.T. Operation: .....                          | 15        |
| 4.2.2 Test Setup Diagram: .....                        | 15        |
| 4.2.3 Test Data: .....                                 | 15        |
| 4.3 MAXIMUM CONDUCTED OUTPUT POWER .....               | 16        |
| 4.3.1 E.U.T. Operation: .....                          | 16        |
| 4.3.2 Test Setup Diagram: .....                        | 16        |
| 4.3.3 Test Data: .....                                 | 17        |
| 4.4 POWER SPECTRAL DENSITY .....                       | 18        |
| 4.4.1 E.U.T. Operation: .....                          | 18        |
| 4.4.2 Test Setup Diagram: .....                        | 18        |
| 4.4.3 Test Data: .....                                 | 18        |
| 4.5 EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS .....  | 19        |
| 4.5.1 E.U.T. Operation: .....                          | 19        |
| 4.5.2 Test Setup Diagram: .....                        | 19        |
| 4.5.3 Test Data: .....                                 | 19        |
| 4.6 BAND EDGE EMISSIONS (RADIATED) .....               | 20        |
| 4.6.1 E.U.T. Operation: .....                          | 20        |
| 4.6.2 Test Setup Diagram: .....                        | 20        |
| 4.6.3 Test Data: .....                                 | 21        |
| 4.7 EMISSIONS IN FREQUENCY BANDS (BELOW 1GHz) .....    | 25        |
| 4.7.1 E.U.T. Operation: .....                          | 26        |
| 4.7.2 Test Data: .....                                 | 26        |
| 4.8 EMISSIONS IN FREQUENCY BANDS (ABOVE 1GHz) .....    | 28        |
| 4.8.1 E.U.T. Operation: .....                          | 29        |
| 4.8.2 Test Data: .....                                 | 29        |

|                                 |    |
|---------------------------------|----|
| 5 TEST SETUP PHOTOS .....       | 35 |
| 6 PHOTOS OF THE EUT .....       | 37 |
| APPENDIX .....                  | 45 |
| 1. -6dB BANDWIDTH .....         | 46 |
| 2. 99% OCCUPIED BANDWIDTH ..... | 50 |
| 3. DUTY CYCLE .....             | 54 |
| 4. PEAK OUTPUT POWER .....      | 58 |
| 5. POWER SPECTRAL DENSITY ..... | 62 |
| 6. BANDEDGE .....               | 66 |
| 7. SPURIOUS EMISSION .....      | 70 |

# 1 TEST SUMMARY

## 1.1 Test Standards

The tests were performed according to following standards:

**47 CFR Part 15.247:** Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

## 1.2 Summary of Test Result

| Item                                        | Standard           | Method                                                                            | Requirement                      | Result |
|---------------------------------------------|--------------------|-----------------------------------------------------------------------------------|----------------------------------|--------|
| Antenna requirement                         | 47 CFR Part 15.247 |                                                                                   | 47 CFR 15.203                    | Pass   |
| Conducted Emission at AC power line         | 47 CFR Part 15.247 | ANSI C63.10-2013 section 6.2                                                      | 47 CFR 15.207(a)                 | Pass   |
| Occupied Bandwidth                          | 47 CFR Part 15.247 | ANSI C63.10-2013, section 11.8<br>KDB 558074 D01<br>15.247 Meas Guidance v05r02   | 47 CFR 15.247(a)(2)              | Pass   |
| Maximum Conducted Output Power              | 47 CFR Part 15.247 | ANSI C63.10-2013, section 11.9.1<br>KDB 558074 D01<br>15.247 Meas Guidance v05r02 | 47 CFR 15.247(b)(3)              | Pass   |
| Power Spectral Density                      | 47 CFR Part 15.247 | ANSI C63.10-2013, section 11.10<br>KDB 558074 D01<br>15.247 Meas Guidance v05r02  | 47 CFR 15.247(e)                 | Pass   |
| Emissions in non-restricted frequency bands | 47 CFR Part 15.247 | ANSI C63.10-2013 section 11.11<br>KDB 558074 D01<br>15.247 Meas Guidance v05r02   | 47 CFR 15.247(d), 15.209, 15.205 | Pass   |
| Band edge emissions (Radiated)              | 47 CFR Part 15.247 | ANSI C63.10-2013 section 6.10<br>KDB 558074 D01<br>15.247 Meas Guidance v05r02    | 47 CFR 15.247(d), 15.209, 15.205 | Pass   |
| Emissions in frequency bands (below 1GHz)   | 47 CFR Part 15.247 | ANSI C63.10-2013 section 6.6.4<br>KDB 558074 D01<br>15.247 Meas Guidance v05r02   | 47 CFR 15.247(d), 15.209, 15.205 | Pass   |
| Emissions in frequency bands (above 1GHz)   | 47 CFR Part 15.247 | ANSI C63.10-2013 section 6.6.4<br>KDB 558074 D01<br>15.247 Meas Guidance v05r02   | 47 CFR 15.247(d), 15.209, 15.205 | Pass   |

## 2 GENERAL INFORMATION

### 2.1 Client Information

**Applicant's Name** : Shenzhen Olin Precision Mould Plastic Co.,Ltd  
**Address** : East Building 2, Huazhan Technology Park, No.30 ,Tianfu Road, Tianliao Community, Gongming Street, Guangming New District, Shenzhen

**Manufacturer** : Shenzhen Olin Precision Mould Plastic Co.,Ltd  
**Address** : East Building 2, Huazhan Technology Park, No.30 ,Tianfu Road, Tianliao Community, Gongming Street, Guangming New District, Shenzhen

### 2.2 Description of Device (EUT)

|                       |                       |
|-----------------------|-----------------------|
| Product Name:         | Wireless Mouse        |
| Model/Type reference: | U6                    |
| Series Model:         | N/A                   |
| Model Difference:     | N/A                   |
| Trade Mark:           | UINEER                |
| Power Supply:         | Battery:DC3.7V 500mAh |
| Operation Frequency:  | 2402MHz to 2480MHz    |
| Number of Channels:   | 40                    |
| Modulation Type:      | GFSK                  |
| Antenna Type:         | PCB                   |
| Antenna Gain:         | 0.58dBi               |
| Hardware Version:     | V1.0                  |
| Software Version:     | V1.0                  |

(Remark:The Antenna Gain is supplied by the customer.DACE is not responsible for This data and the related calculations associated with it)

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2402 MHz  | 11      | 2422 MHz  | 21      | 2442 MHz  | 31      | 2462 MHz  |
| 2                                   | 2404 MHz  | 12      | 2424 MHz  | 22      | 2444 MHz  | 32      | 2464 MHz  |
| 3                                   | 2406 MHz  | 13      | 2426 MHz  | 23      | 2446 MHz  | 33      | 2466 MHz  |
| 4                                   | 2408 MHz  | 14      | 2428 MHz  | 24      | 2448 MHz  | 34      | 2468 MHz  |
| 5                                   | 2410 MHz  | 15      | 2430 MHz  | 25      | 2450 MHz  | 35      | 2470 MHz  |
| 6                                   | 2412 MHz  | 16      | 2432 MHz  | 26      | 2452 MHz  | 36      | 2472 MHz  |
| 7                                   | 2414 MHz  | 17      | 2434 MHz  | 27      | 2454 MHz  | 37      | 2474 MHz  |
| 8                                   | 2416 MHz  | 18      | 2436 MHz  | 28      | 2456 MHz  | 38      | 2476 MHz  |
| 9                                   | 2418 MHz  | 19      | 2438 MHz  | 29      | 2458 MHz  | 39      | 2478 MHz  |
| 10                                  | 2420 MHz  | 20      | 2440 MHz  | 30      | 2460 MHz  | 40      | 2480 MHz  |

Note:In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Test channel | Frequency (MHz) |
|--------------|-----------------|
|--------------|-----------------|

|                                                                          |         |
|--------------------------------------------------------------------------|---------|
|                                                                          | BLE     |
| Lowest channel                                                           | 2402MHz |
| Middle channel                                                           | 2440MHz |
| Highest channel                                                          | 2480MHz |
| Remark:Only the data of the worst mode would be recorded in this report. |         |

## 2.3 Description of Test Modes

| No  | Title           | Description                                                                                             |
|-----|-----------------|---------------------------------------------------------------------------------------------------------|
| TM1 | Lowest channel  | Keep the EUT connect to AC power line and works in continuously transmitting mode with GFSK modulation. |
| TM2 | Middle channel  | Keep the EUT connect to AC power line and works in continuously transmitting mode with GFSK modulation. |
| TM3 | Highest channel | Keep the EUT connect to AC power line and works in continuously transmitting mode with GFSK modulation. |

## 2.4 Description of Support Units

The EUT was tested as an independent device.

## 2.5 Equipments Used During The Test

| Occupied Bandwidth<br>Maximum Conducted Output Power<br>Power Spectral Density<br>Emissions in non-restricted frequency bands |                                                   |          |              |            |              |
|-------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|----------|--------------|------------|--------------|
| Equipment                                                                                                                     | Manufacturer                                      | Model No | Inventory No | Cal Date   | Cal Due Date |
| RF Test Software                                                                                                              | TACHOY                                            | RTS-01   | V1.0.0       | /          | /            |
| Power divider                                                                                                                 | MIDEWEST                                          | PWD-2533 | SMA-79       | 2023-05-11 | 2026-05-10   |
| RF Sensor Unit                                                                                                                | Tachoy Information Technology(she nzhen) Co.,Ltd. | TR1029-2 | 000001       | /          | /            |
| Wideband radio communication tester                                                                                           | R&S                                               | CMW500   | 113410       | 2024-06-12 | 2025-06-11   |
| Signal Generator                                                                                                              | Keysight                                          | N5181A   | MY48180415   | 2023-11-09 | 2024-11-08   |
| Signal Generator                                                                                                              | Keysight                                          | N5182A   | MY50143455   | 2023-11-09 | 2024-11-08   |
| Spectrum Analyzer                                                                                                             | Keysight                                          | N9020A   | MY53420323   | 2023-12-12 | 2024-12-11   |

| Emissions in frequency bands (below 1GHz) |                |                  |                        |            |              |
|-------------------------------------------|----------------|------------------|------------------------|------------|--------------|
| Emissions in frequency bands (above 1GHz) |                |                  |                        |            |              |
| Band edge emissions (Radiated)            |                |                  |                        |            |              |
| Equipment                                 | Manufacturer   | Model No         | Inventory No           | Cal Date   | Cal Due Date |
| EMI Test software                         | Farad          | EZ -EMC          | V1.1.42                | /          | /            |
| Positioning Controller                    | /              | MF-7802          | /                      | /          | /            |
| Amplifier(18-40G)                         | COM-POWER      | AH-1840          | 10100008-1             | 2022-04-05 | 2025-04-04   |
| Horn antenna                              | COM-POWER      | AH-1840 (18-40G) | 10100008               | 2023-04-05 | 2025-04-04   |
| Loop antenna                              | ZHINAN         | ZN30900C         | ZN30900C               | 2024-06-14 | 2026-06-13   |
| Cable(LF)#2                               | Schwarzbeck    | /                | /                      | 2024-02-19 | 2025-02-18   |
| Cable(LF)#1                               | Schwarzbeck    | /                | /                      | 2024-02-19 | 2025-02-18   |
| Cable(HF)#2                               | Schwarzbeck    | AK9515E          | 96250                  | 2024-03-20 | 2025-03-19   |
| Cable(HF)#1                               | Schwarzbeck    | SYV-50-3-1       | /                      | 2024-03-20 | 2025-03-19   |
| Power amplifier(LF)                       | Schwarzbeck    | BBV9743          | 9743-151               | 2024-06-12 | 2025-06-11   |
| Power amplifier(HF)                       | Schwarzbeck    | BBV9718          | 9718-282               | 2024-06-12 | 2025-06-11   |
| Wideband radio communication tester       | R&S            | CMW500           | 113410                 | 2024-06-12 | 2025-06-11   |
| Spectrum Analyzer                         | R&S            | FSP30            | 1321.3008K40-101729-jR | 2024-06-12 | 2025-06-11   |
| Test Receiver                             | R&S            | ESCI 3           | 1166.5950K03-101431-Jq | 2024-06-13 | 2025-06-12   |
| Horn Antenna                              | Sunol Sciences | DRH-118          | A091114                | 2023-05-13 | 2025-05-12   |
| Broadband Antenna                         | Sunol Sciences | JB6 Antenna      | A090414                | 2023-05-21 | 2025-05-20   |

## 2.6 Statement Of The Measurement Uncertainty

| Test Item                      | Measurement Uncertainty |
|--------------------------------|-------------------------|
| Occupied Bandwidth             | $\pm 3.63\%$            |
| RF conducted power             | $\pm 0.733\text{dB}$    |
| RF power density               | $\pm 0.234\%$           |
| Conducted Spurious emissions   | $\pm 1.98\text{dB}$     |
| Radiated Emission (Above 1GHz) | $\pm 5.46\text{dB}$     |
| Radiated Emission (Below 1GHz) | $\pm 5.79\text{dB}$     |

Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 2.7 Identification of Testing Laboratory

|               |                                                                                                                                                            |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Company Name: | Shenzhen DACE Testing Technology Co., Ltd.                                                                                                                 |
| Address:      | 102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China |
| Phone Number: | +86-13267178997                                                                                                                                            |
| Fax Number:   | 86-755-29113252                                                                                                                                            |

### Identification of the Responsible Testing Location

|                                |                                                                                                                                                            |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Company Name:                  | Shenzhen DACE Testing Technology Co., Ltd.                                                                                                                 |
| Address:                       | 102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China |
| Phone Number:                  | +86-13267178997                                                                                                                                            |
| Fax Number:                    | 86-755-29113252                                                                                                                                            |
| FCC Registration Number:       | 0032847402                                                                                                                                                 |
| Designation Number:            | CN1342                                                                                                                                                     |
| Test Firm Registration Number: | 778666                                                                                                                                                     |
| A2LA Certificate Number:       | 6270.01                                                                                                                                                    |

## 2.8 Announcement


- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by DACE and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

### 3 Evaluation Results (Evaluation)

#### 3.1 Antenna requirement

|                   |                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

##### 3.1.1 Conclusion:

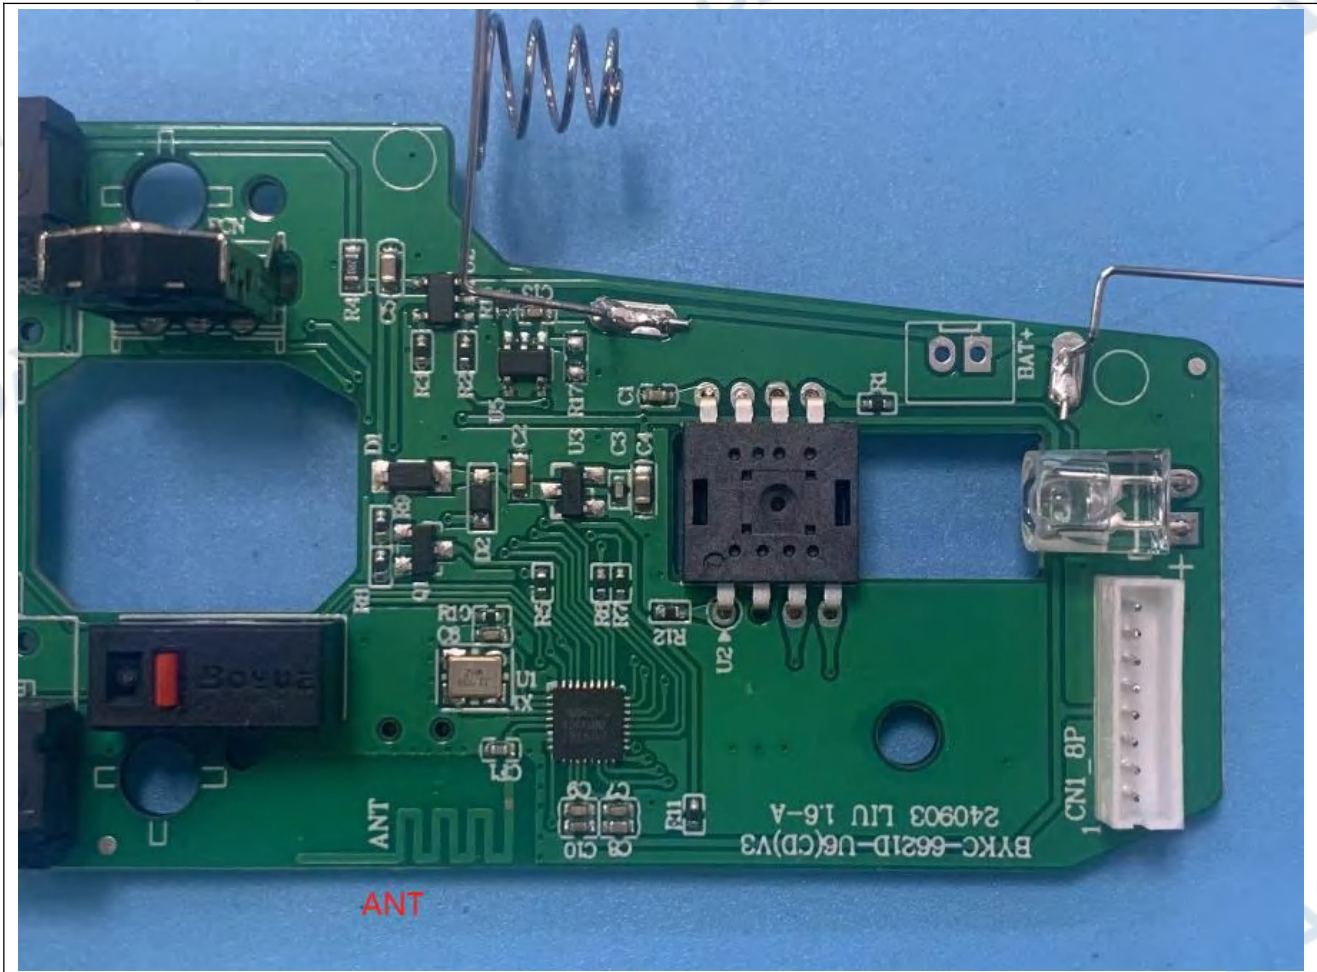

## 4 Radio Spectrum Matter Test Results (RF)


#### 4.1 Conducted Emission at AC power line

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              |           |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------|
| Test Requirement: | Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). |                              |           |
| Test Limit:       | Frequency of emission (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Conducted limit (dB $\mu$ V) |           |
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Quasi-peak                   | Average   |
|                   | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 66 to 56*                    | 56 to 46* |
|                   | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 56                           | 46        |
|                   | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 60                           | 50        |
|                   | *Decreases with the logarithm of the frequency.                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              |           |
| Test Method:      | ANSI C63.10-2013 section 6.2                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                              |           |
| Procedure:        | Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices                                                                                                                                                                                                                                                                                                                                              |                              |           |

#### 4.1.1 E.U.T. Operation:


|                        |         |           |      |                       |         |
|------------------------|---------|-----------|------|-----------------------|---------|
| Operating Environment: |         |           |      |                       |         |
| Temperature:           | 23.8 °C | Humidity: | 47 % | Atmospheric Pressure: | 102 kPa |
| Pretest mode:          |         | TM1       |      |                       |         |
| Final test mode:       |         | TM1       |      |                       |         |

#### 4.1.2 Test Setup Diagram:

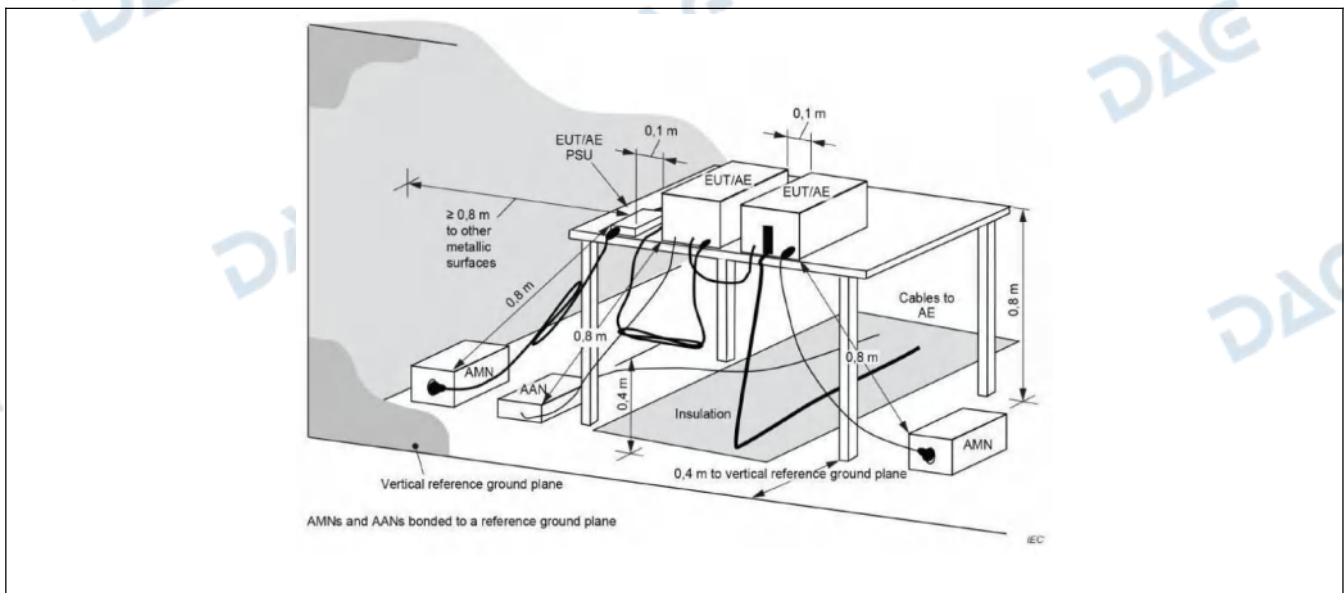


#### 4.1.3 Test Data:

TM1 / Line: Line / Band: 2400-2483.5 MHz / BW: 20 / CH: L  
Power: AC120V60Hz

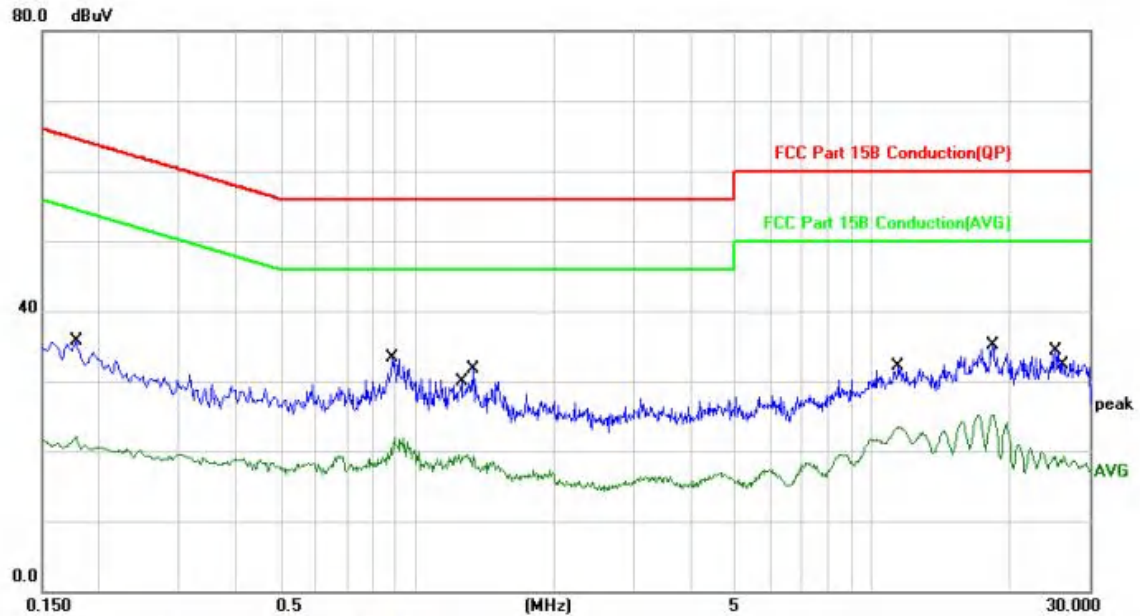

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.1780       | 15.69                    | 19.91                   | 35.60                    | 64.57         | -28.97     | QP       |         |
| 2   |     | 0.1780       | 2.15                     | 19.91                   | 22.06                    | 54.57         | -32.51     | AVG      |         |
| 3   | *   | 0.8820       | 13.94                    | 19.43                   | 33.37                    | 56.00         | -22.63     | QP       |         |
| 4   |     | 0.8900       | 2.52                     | 19.43                   | 21.95                    | 46.00         | -24.05     | AVG      |         |
| 5   |     | 1.2380       | 0.21                     | 19.36                   | 19.57                    | 46.00         | -26.43     | AVG      |         |
| 6   |     | 1.3260       | 12.27                    | 19.34                   | 31.61                    | 56.00         | -24.39     | QP       |         |
| 7   |     | 11.4180      | 12.99                    | 19.17                   | 32.16                    | 60.00         | -27.84     | QP       |         |
| 8   |     | 11.4180      | 4.40                     | 19.17                   | 23.57                    | 50.00         | -26.43     | AVG      |         |
| 9   |     | 18.3060      | 5.54                     | 19.66                   | 25.20                    | 50.00         | -24.80     | AVG      |         |
| 10  |     | 18.3860      | 15.51                    | 19.67                   | 35.18                    | 60.00         | -24.82     | QP       |         |
| 11  |     | 25.2180      | 13.92                    | 20.33                   | 34.25                    | 60.00         | -25.75     | QP       |         |
| 12  |     | 26.3260      | -1.07                    | 20.34                   | 19.27                    | 50.00         | -30.73     | AVG      |         |

TM1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 1 / CH: L  
Power: AC120V60Hz

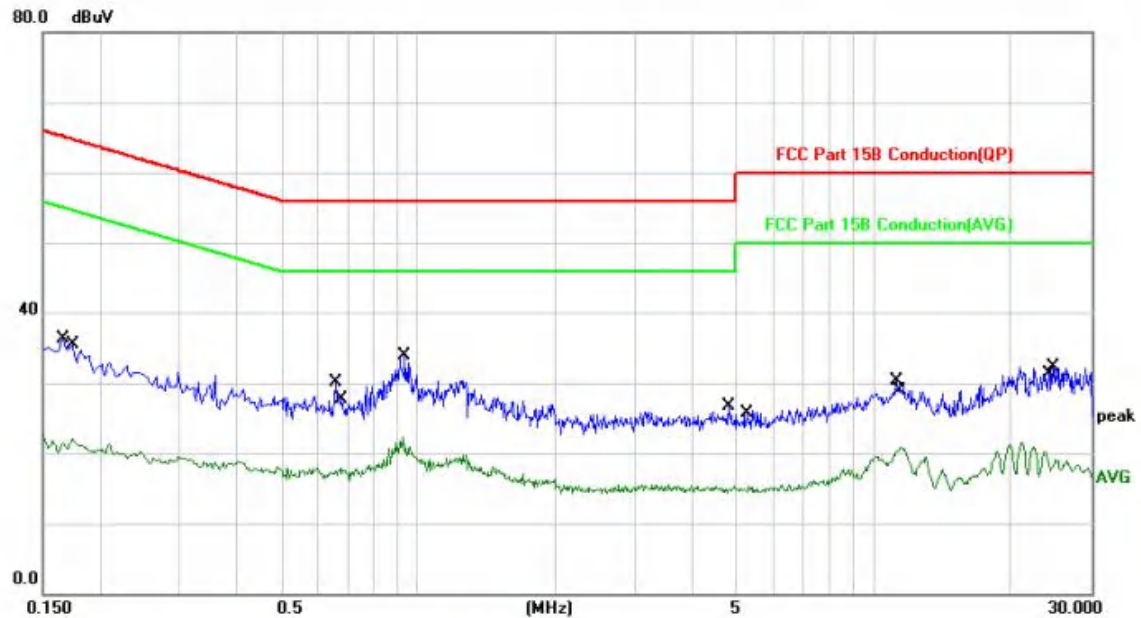

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.1660       | 16.32                    | 19.93                   | 36.25                    | 65.15         | -28.90     | QP       |         |
| 2   |     | 0.1740       | 2.15                     | 19.92                   | 22.07                    | 54.76         | -32.69     | AVG      |         |
| 3   |     | 0.6580       | 10.72                    | 19.48                   | 30.20                    | 56.00         | -25.80     | QP       |         |
| 4   |     | 0.6820       | -1.64                    | 19.47                   | 17.83                    | 46.00         | -28.17     | AVG      |         |
| 5   |     | 0.9260       | 2.95                     | 19.42                   | 22.37                    | 46.00         | -23.63     | AVG      |         |
| 6   | *   | 0.9340       | 14.47                    | 19.42                   | 33.89                    | 56.00         | -22.11     | QP       |         |
| 7   |     | 4.7980       | 7.33                     | 19.45                   | 26.78                    | 56.00         | -29.22     | QP       |         |
| 8   |     | 5.3180       | -4.10                    | 19.44                   | 15.34                    | 50.00         | -34.66     | AVG      |         |
| 9   |     | 11.2540      | 11.11                    | 19.16                   | 30.27                    | 60.00         | -29.73     | QP       |         |
| 10  |     | 11.4500      | 1.64                     | 19.18                   | 20.82                    | 50.00         | -29.18     | AVG      |         |
| 11  |     | 23.8940      | -0.49                    | 20.22                   | 19.73                    | 50.00         | -30.27     | AVG      |         |
| 12  |     | 24.7820      | 12.07                    | 20.31                   | 32.38                    | 60.00         | -27.62     | QP       |         |


## 4.2 Occupied Bandwidth

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR 15.247(a)(2)                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test Limit:       | Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.                                                                                                                                                                                                                                                                        |
| Test Method:      | ANSI C63.10-2013, section 11.8<br>KDB 558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                                                                                                                      |
| Procedure:        | a) Set RBW = 100 kHz.<br>b) Set the VBW $\geq [3 \times \text{RBW}]$ .<br>c) Detector = peak.<br>d) Trace mode = max hold.<br>e) Sweep = auto couple.<br>f) Allow the trace to stabilize.<br>g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. |

### 4.2.1 E.U.T. Operation:

|                        |               |           |      |                       |         |
|------------------------|---------------|-----------|------|-----------------------|---------|
| Operating Environment: |               |           |      |                       |         |
| Temperature:           | 22.7 °C       | Humidity: | 48 % | Atmospheric Pressure: | 102 kPa |
| Pretest mode:          | TM1, TM2, TM3 |           |      |                       |         |
| Final test mode:       | TM1, TM2, TM3 |           |      |                       |         |

### 4.2.2 Test Setup Diagram:

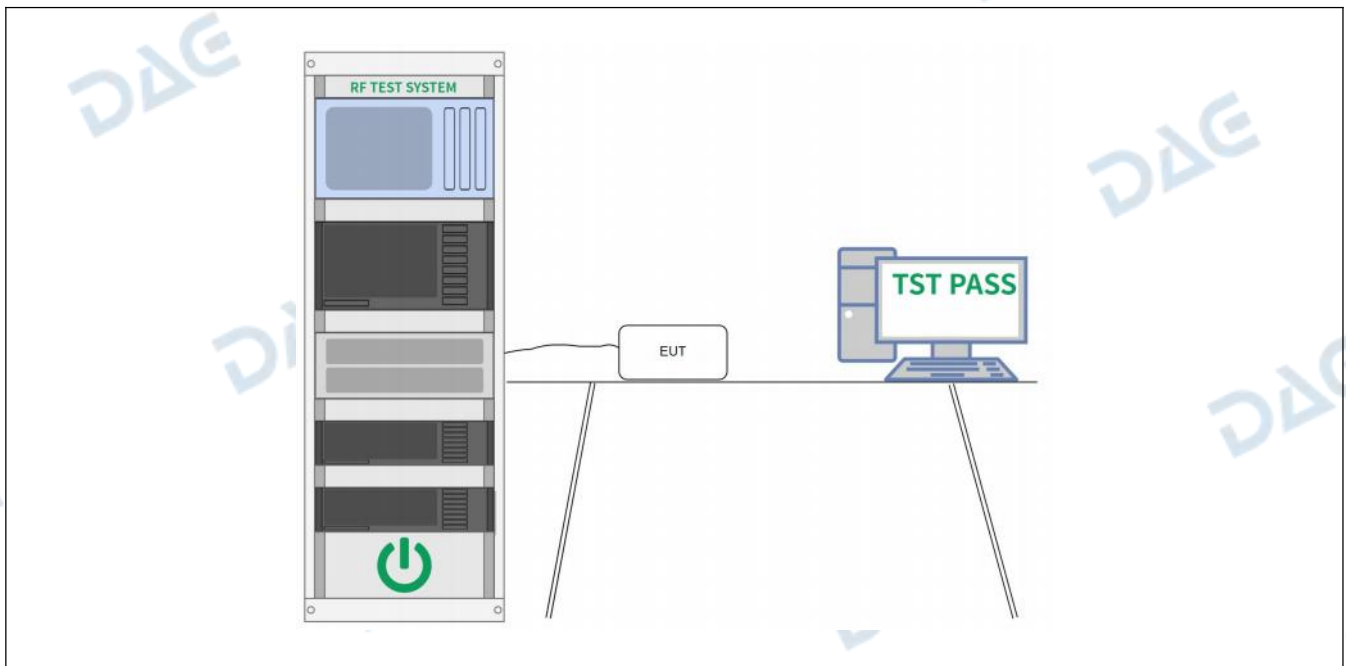

### 4.2.3 Test Data:

Please Refer to Appendix for Details.

### 4.3 Maximum Conducted Output Power


|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR 15.247(b)(3)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Test Limit:       | Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.                                                                                                                                                                                                 |
| Test Method:      | ANSI C63.10-2013, section 11.9.1<br>KDB 558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Procedure:        | ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power<br>Note:<br>Per ANSI C63.10-2013, if there are two or more antennas, the conducted powers at Core 0, Core 1, ..., Core i were first measured separately, as shown in the section above (this product only have one antenna). The measured values were then summed in linear power units then converted back to dBm.<br>Per ANSI C63.10-2013 Section 14.4.3.2.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.<br>For correlated unequal antenna gain<br>Directional gain = $10 \cdot \log[(10G_1/20 + 10G_2/20 + \dots + 10G_N/20)^2 / NANT]$ dBi<br>For completely uncorrelated unequal antenna gain<br>Directional gain = $10 \cdot \log[(10G_1/10 + 10G_2/10 + \dots + 10G_N/10) / NANT]$ dBi<br>Sample Multiple antennas Calculation: Core 0 + Core 1 + ... Core i. = MIMO/CDD<br>(i is the number of antennas)<br>(#VALUE! mW + mW) = #VALUE! mW = dBm<br>Sample e.i.r.p. Calculation:<br>e.i.r.p. (dBm) = Conducted Power (dBm) + Ant gain (dBi) |

#### 4.3.1 E.U.T. Operation:

|                        |               |           |      |                       |         |
|------------------------|---------------|-----------|------|-----------------------|---------|
| Operating Environment: |               |           |      |                       |         |
| Temperature:           | 22.7 °C       | Humidity: | 48 % | Atmospheric Pressure: | 102 kPa |
| Pretest mode:          | TM1, TM2, TM3 |           |      |                       |         |
| Final test mode:       | TM1, TM2, TM3 |           |      |                       |         |

#### 4.3.2 Test Setup Diagram:

|  |
|--|
|  |
|--|

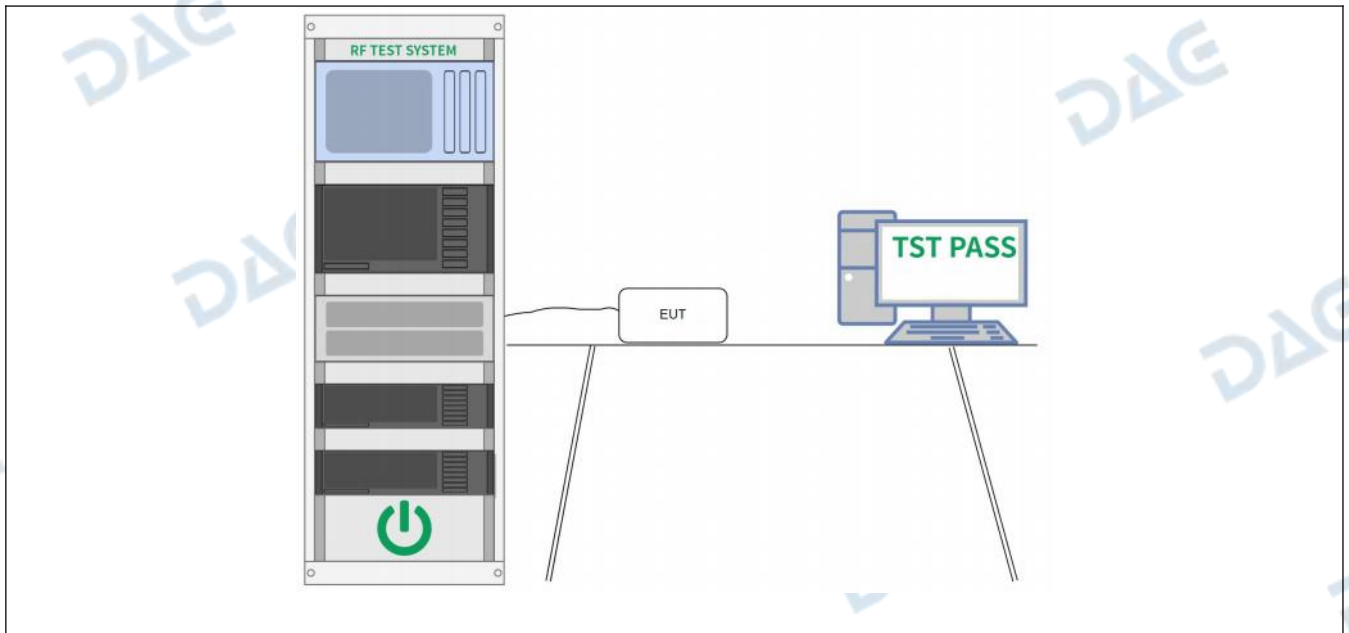

#### 4.3.3 Test Data:

Please Refer to Appendix for Details.


#### 4.4 Power Spectral Density

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR 15.247(e)                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Test Limit:       | Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density. |
| Test Method:      | ANSI C63.10-2013, section 11.10<br>KDB 558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                                                                                                                                             |
| Procedure:        | ANSI C63.10-2013, section 11.10, Maximum power spectral density level in the fundamental emission                                                                                                                                                                                                                                                                                                                                                                                         |

##### 4.4.1 E.U.T. Operation:

|                        |               |           |      |                       |         |
|------------------------|---------------|-----------|------|-----------------------|---------|
| Operating Environment: |               |           |      |                       |         |
| Temperature:           | 22.7 °C       | Humidity: | 48 % | Atmospheric Pressure: | 102 kPa |
| Pretest mode:          | TM1, TM2, TM3 |           |      |                       |         |
| Final test mode:       | TM1, TM2, TM3 |           |      |                       |         |

##### 4.4.2 Test Setup Diagram:

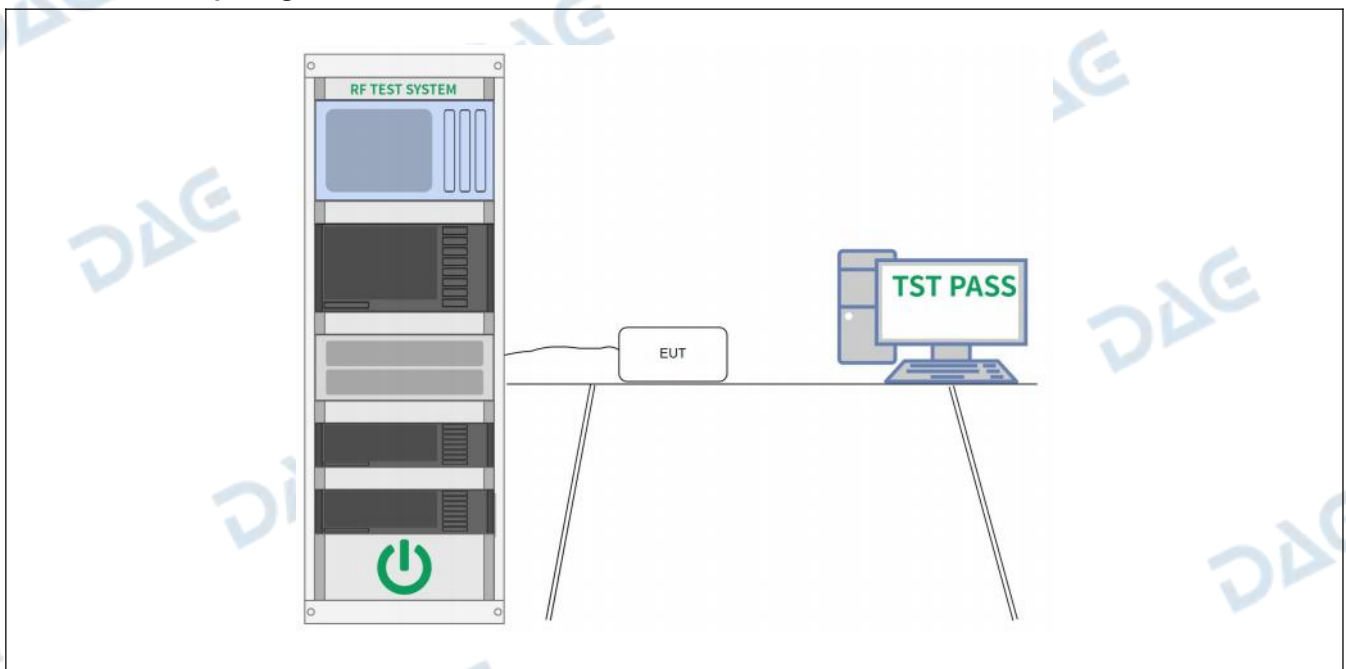

##### 4.4.3 Test Data:

Please Refer to Appendix for Details.


#### 4.5 Emissions in non-restricted frequency bands

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR 15.247(d), 15.209, 15.205                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test Limit:       | Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. |
| Test Method:      | ANSI C63.10-2013 section 11.11<br>KDB 558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Procedure:        | ANSI C63.10-2013<br>Section 11.11.1, Section 11.11.2, Section 11.11.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

##### 4.5.1 E.U.T. Operation:

|                        |               |           |      |                       |         |
|------------------------|---------------|-----------|------|-----------------------|---------|
| Operating Environment: |               |           |      |                       |         |
| Temperature:           | 22.7 °C       | Humidity: | 48 % | Atmospheric Pressure: | 102 kPa |
| Pretest mode:          | TM1, TM2, TM3 |           |      |                       |         |
| Final test mode:       | TM1, TM2, TM3 |           |      |                       |         |

##### 4.5.2 Test Setup Diagram:

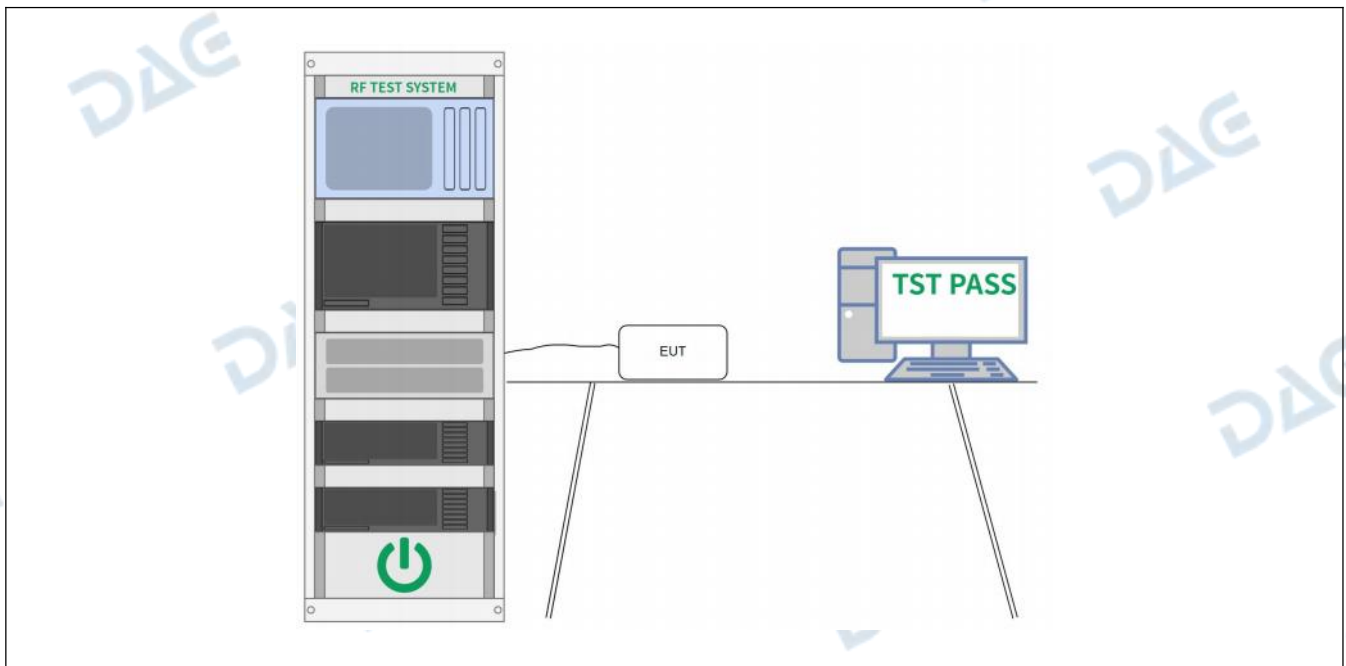


##### 4.5.3 Test Data:

Please Refer to Appendix for Details.




#### 4.6.3 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

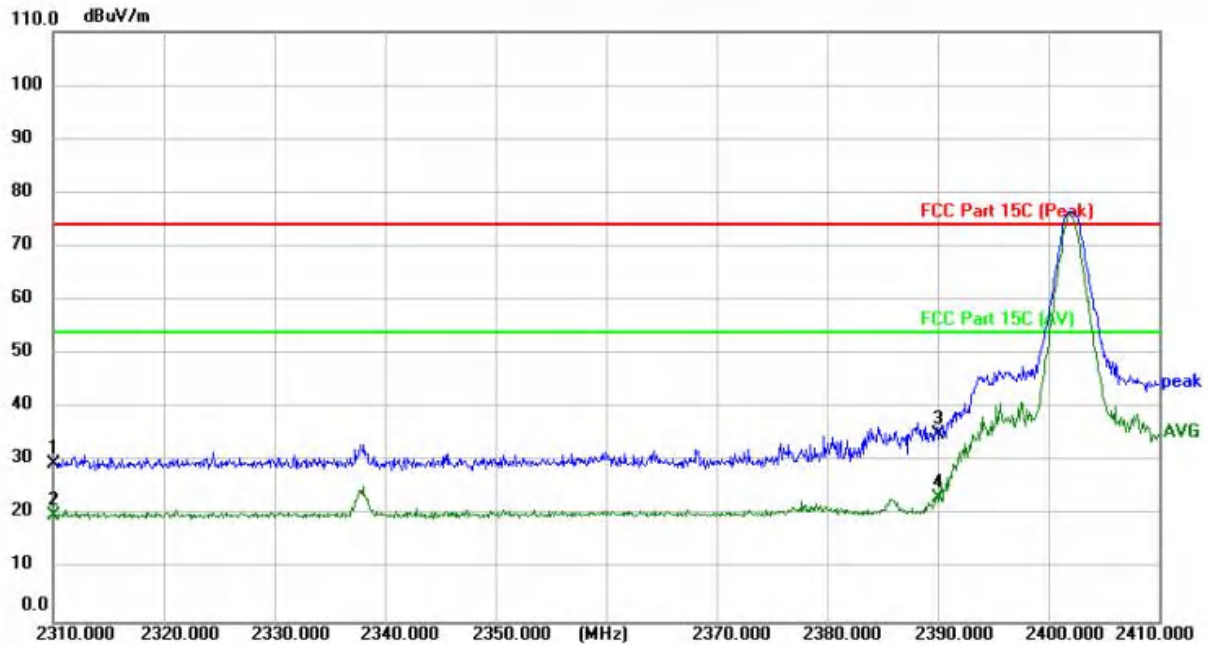

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 2310.000        | 33.30          | -3.63         | 29.67          | 74.00          | -44.33      | peak     | 149         |                | P   |        |
| 2   | 2310.000        | 23.65          | -3.63         | 20.02          | 54.00          | -33.98      | AVG      | 149         |                | P   |        |
| 3   | 2390.000        | 38.55          | -3.42         | 35.13          | 74.00          | -38.87      | peak     | 149         |                | P   |        |
| 4 * | 2390.000        | 26.58          | -3.42         | 23.16          | 54.00          | -30.84      | AVG      | 149         |                | P   |        |

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

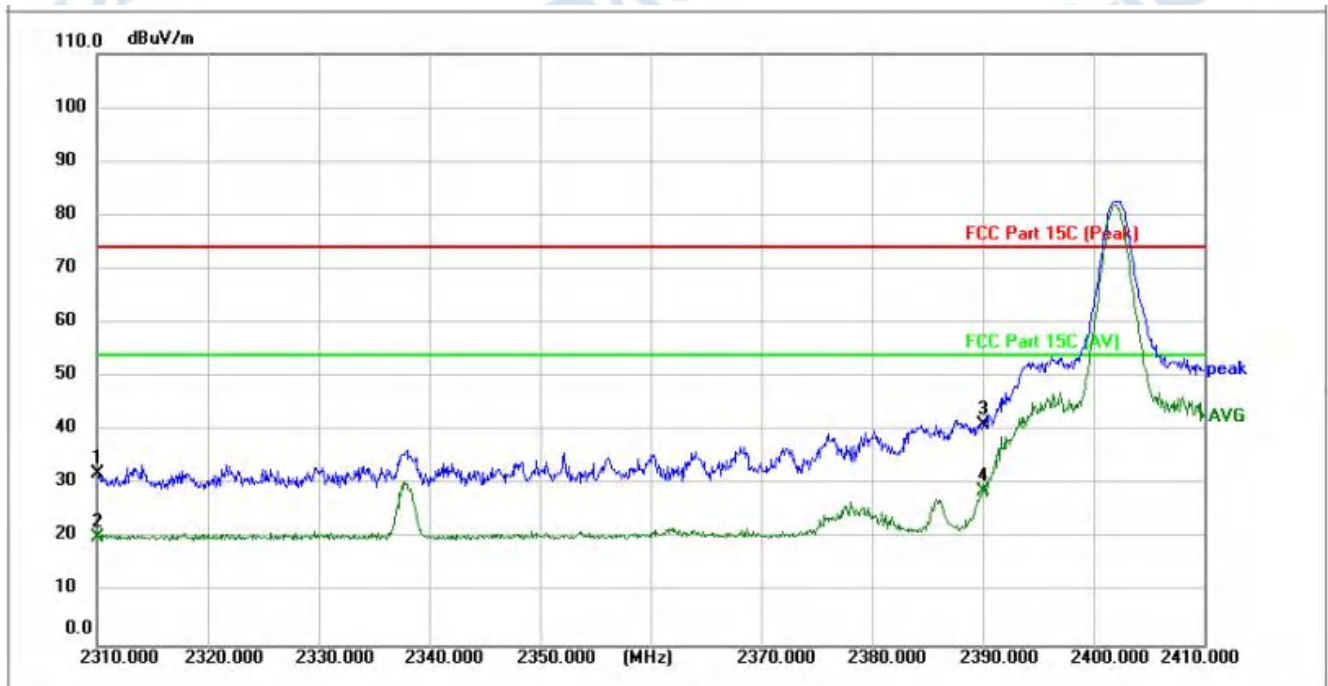


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 2310.000        | 35.73          | -3.63         | 32.10          | 74.00          | -41.90      | peak     | 149         |                | P   |        |
| 2   | 2310.000        | 23.85          | -3.63         | 20.22          | 54.00          | -33.78      | AVG      | 149         |                | P   |        |
| 3   | 2390.000        | 44.55          | -3.42         | 41.13          | 74.00          | -32.87      | peak     | 149         |                | P   |        |
| 4 * | 2390.000        | 32.10          | -3.42         | 28.68          | 54.00          | -25.32      | AVG      | 149         |                | P   |        |

TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: H



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 2483.500        | 59.37          | -3.17         | 56.20          | 74.00          | -17.80      | peak     | 149         |                | P   |        |
| 2 * | 2483.500        | 40.69          | -3.17         | 37.52          | 54.00          | -16.48      | AVG      | 149         |                | P   |        |
| 3   | 2500.000        | 42.77          | -3.13         | 39.64          | 74.00          | -34.36      | peak     | 149         |                | P   |        |
| 4   | 2500.000        | 23.39          | -3.13         | 20.26          | 54.00          | -33.74      | AVG      | 149         |                | P   |        |

TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: H

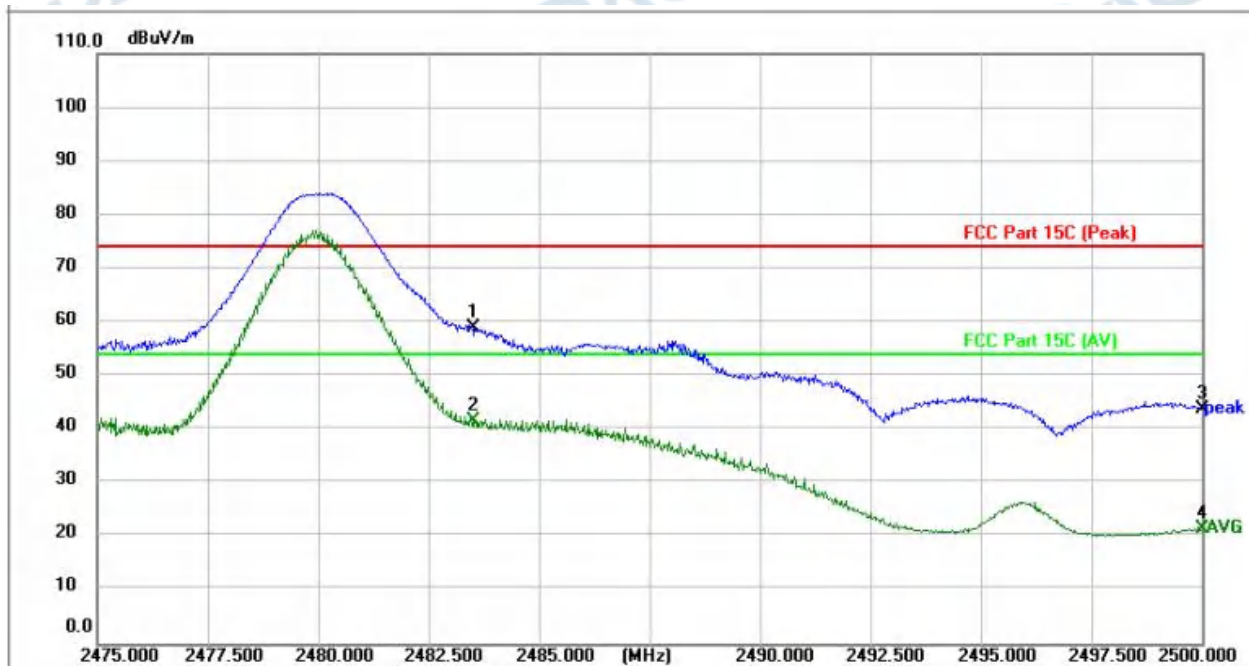

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 2483.500        | 62.14          | -3.17         | 58.97          | 74.00          | -15.03      | peak     | 149         |                | P   |        |
| 2 * | 2483.500        | 44.83          | -3.17         | 41.66          | 54.00          | -12.34      | AVG      | 149         |                | P   |        |
| 3   | 2500.000        | 47.04          | -3.13         | 43.91          | 74.00          | -30.09      | peak     | 149         |                | P   |        |
| 4   | 2500.000        | 24.63          | -3.13         | 21.50          | 54.00          | -32.50      | AVG      | 149         |                | P   |        |

#### 4.7 Emissions in frequency bands (below 1GHz)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                   |                               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-------------------------------|
| Test Requirement:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                   |                               |
| Test Limit:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Field strength (microvolts/meter) | Measurement distance (meters) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 0.009-0.490                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 2400/F(kHz)                       | 300                           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 0.490-1.705                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 24000/F(kHz)                      | 30                            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 1.705-30.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 30                                | 30                            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 30-88                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 100 **                            | 3                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 88-216                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 150 **                            | 3                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 216-960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 200 **                            | 3                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Above 960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 500                               | 3                             |
| <p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges.</p> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                   |                               |
| Test Method:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ANSI C63.10-2013 section 6.6.4<br>KDB 558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                   |                               |
| Procedure:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <p>a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>h. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <p>1) For emission below 1GHz, through pre-scan found the worst case is the lowest</p> |                                   |                               |

channel. Only the worst case is recorded in the report.  
 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor  
 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.


#### 4.7.1 E.U.T. Operation:

Operating Environment:

|                  |         |           |      |                       |         |
|------------------|---------|-----------|------|-----------------------|---------|
| Temperature:     | 22.7 °C | Humidity: | 48 % | Atmospheric Pressure: | 102 kPa |
| Pretest mode:    | TM1     |           |      |                       |         |
| Final test mode: | TM1     |           |      |                       |         |

#### 4.7.2 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

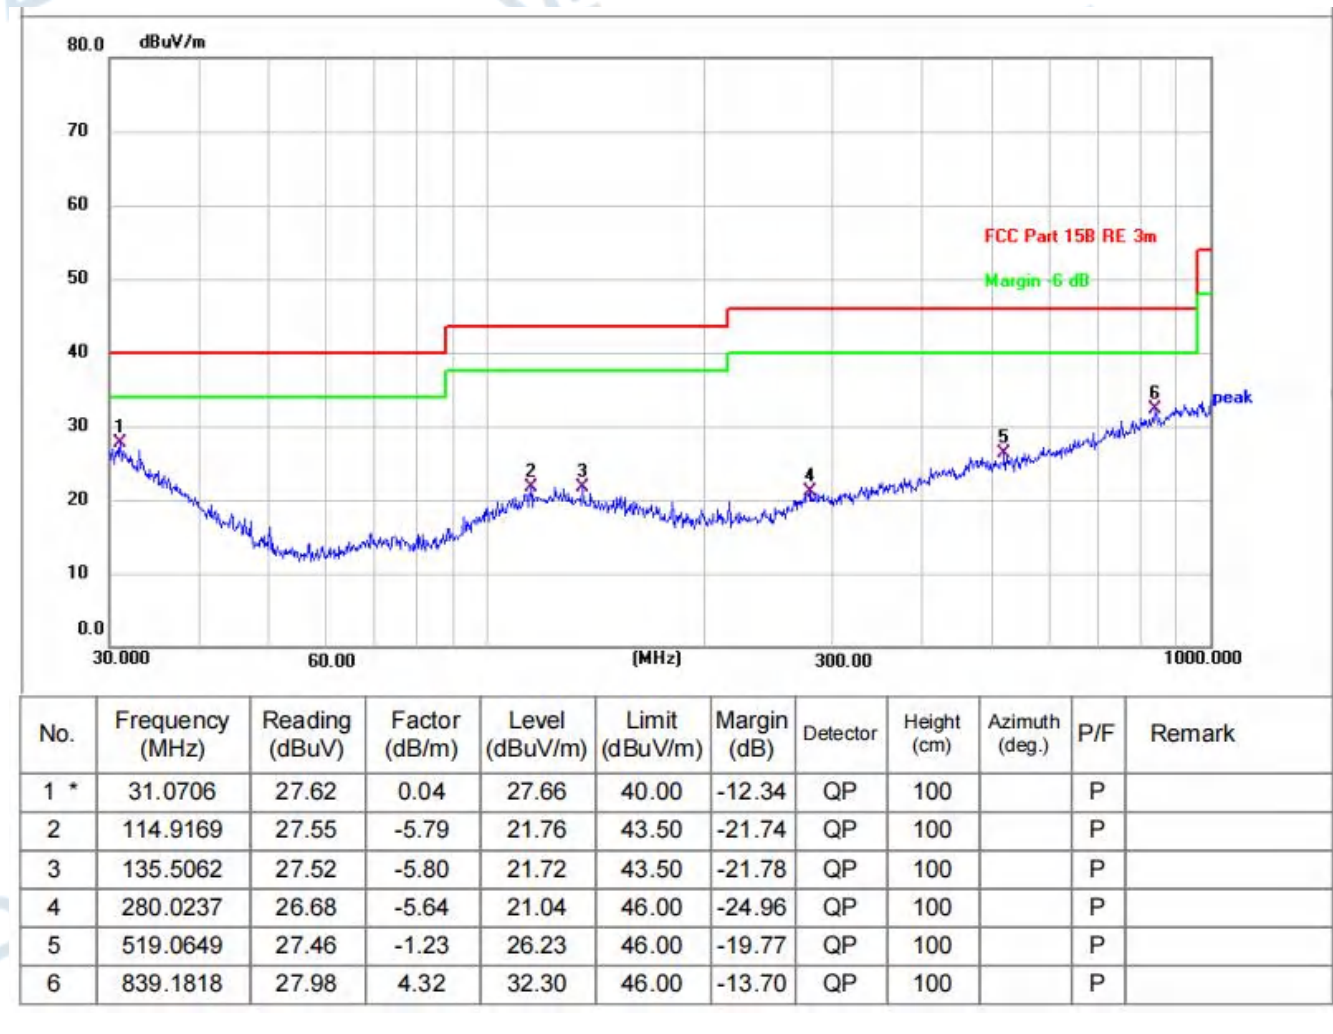

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 30.3173         | 27.61          | 0.62          | 28.23          | 40.00          | -11.77      | QP       | 100         |                | P   |        |
| 2   | 85.8984         | 32.80          | -11.43        | 21.37          | 40.00          | -18.63      | QP       | 100         |                | P   |        |
| 3   | 125.8864        | 26.76          | -5.39         | 21.37          | 43.50          | -22.13      | QP       | 100         |                | P   |        |
| 4   | 480.5276        | 27.14          | -1.20         | 25.94          | 46.00          | -20.06      | QP       | 100         |                | P   |        |
| 5   | 649.6597        | 27.33          | 0.88          | 28.21          | 46.00          | -17.79      | QP       | 100         |                | P   |        |
| 6   | 935.5463        | 26.93          | 5.72          | 32.65          | 46.00          | -13.35      | QP       | 100         |                | P   |        |

#### 4.8 Emissions in frequency bands (above 1GHz)

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                   |                               |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-------------------------------|
| Test Requirement: | In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                   |                               |
| Test Limit:       | Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Field strength (microvolts/meter) | Measurement distance (meters) |
|                   | 0.009-0.490                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 2400/F(kHz)                       | 300                           |
|                   | 0.490-1.705                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 24000/F(kHz)                      | 30                            |
|                   | 1.705-30.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 30                                | 30                            |
|                   | 30-88                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 100 **                            | 3                             |
|                   | 88-216                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 150 **                            | 3                             |
|                   | 216-960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 200 **                            | 3                             |
|                   | Above 960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 500                               | 3                             |
|                   | <p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges.</p> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                   |                               |
| Test Method:      | ANSI C63.10-2013 section 6.6.4<br>KDB 558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                   |                               |
| Procedure:        | <p>a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>h. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <p>1) For emission below 1GHz, through pre-scan found the worst case is the lowest</p> |                                   |                               |

channel. Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor

3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.

#### 4.8.1 E.U.T. Operation:

Operating Environment:

|                  |               |           |      |                       |         |
|------------------|---------------|-----------|------|-----------------------|---------|
| Temperature:     | 22.7 °C       | Humidity: | 48 % | Atmospheric Pressure: | 102 kPa |
| Pretest mode:    | TM1, TM2, TM3 |           |      |                       |         |
| Final test mode: | TM1           |           |      |                       |         |


#### 4.8.2 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L




| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 4807.000        | 37.48          | 3.31          | 40.79          | 74.00          | -33.21      | peak     | 149         |                | P   |        |
| 2   | 4807.000        | 24.07          | 3.31          | 27.38          | 54.00          | -26.62      | AVG      | 149         |                | P   |        |
| 3   | 7206.000        | 32.58          | 10.37         | 42.95          | 74.00          | -31.05      | peak     | 149         |                | P   |        |
| 4   | 7206.000        | 23.51          | 10.37         | 33.88          | 54.00          | -20.12      | AVG      | 149         |                | P   |        |
| 5   | 9608.000        | 34.56          | 15.09         | 49.65          | 74.00          | -24.35      | peak     | 149         |                | P   |        |
| 6 * | 9608.000        | 25.10          | 15.09         | 40.19          | 54.00          | -13.81      | AVG      | 149         |                | P   |        |

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

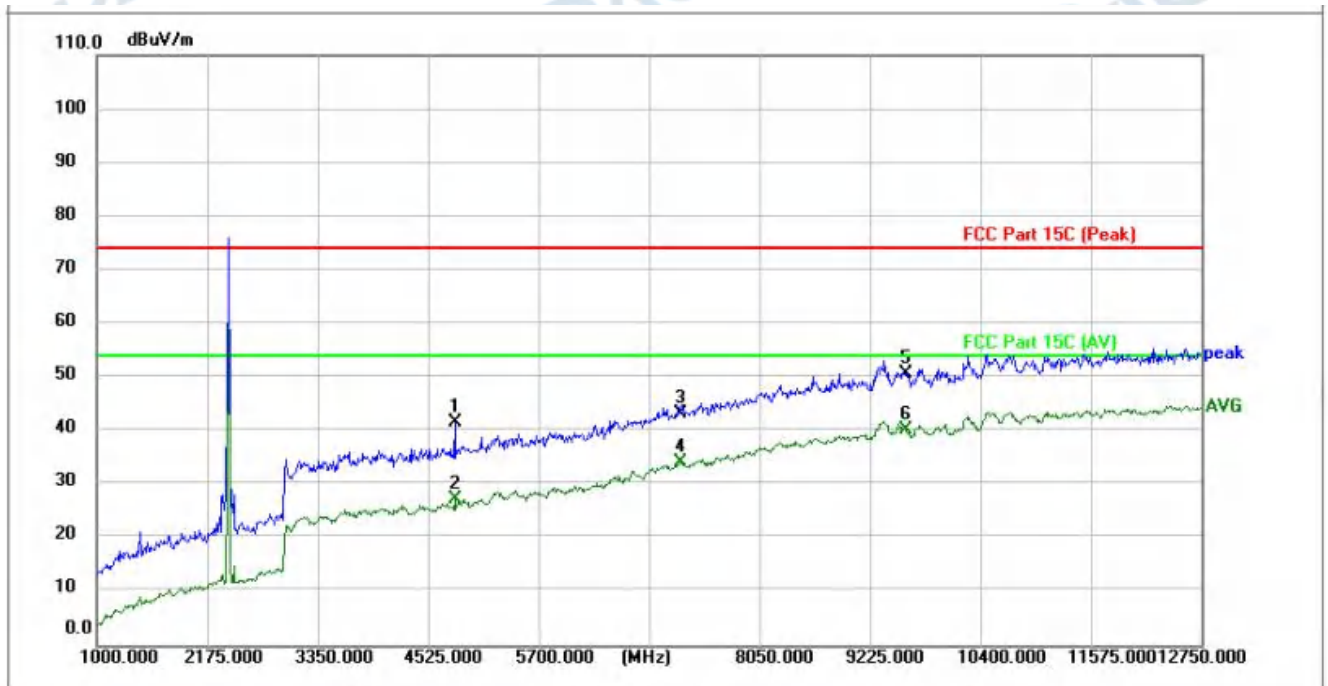


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 4807.000        | 38.32          | 3.31          | 41.63          | 74.00          | -32.37      | peak     | 149         |                | P   |        |
| 2   | 4807.000        | 24.13          | 3.31          | 27.44          | 54.00          | -26.56      | AVG      | 149         |                | P   |        |
| 3   | 7206.000        | 32.82          | 10.37         | 43.19          | 74.00          | -30.81      | peak     | 149         |                | P   |        |
| 4   | 7206.000        | 23.75          | 10.37         | 34.12          | 54.00          | -19.88      | AVG      | 149         |                | P   |        |
| 5   | 9608.000        | 35.54          | 15.09         | 50.63          | 74.00          | -23.37      | peak     | 149         |                | P   |        |
| 6 * | 9608.000        | 25.20          | 15.09         | 40.29          | 54.00          | -13.71      | AVG      | 149         |                | P   |        |

TM2 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: M

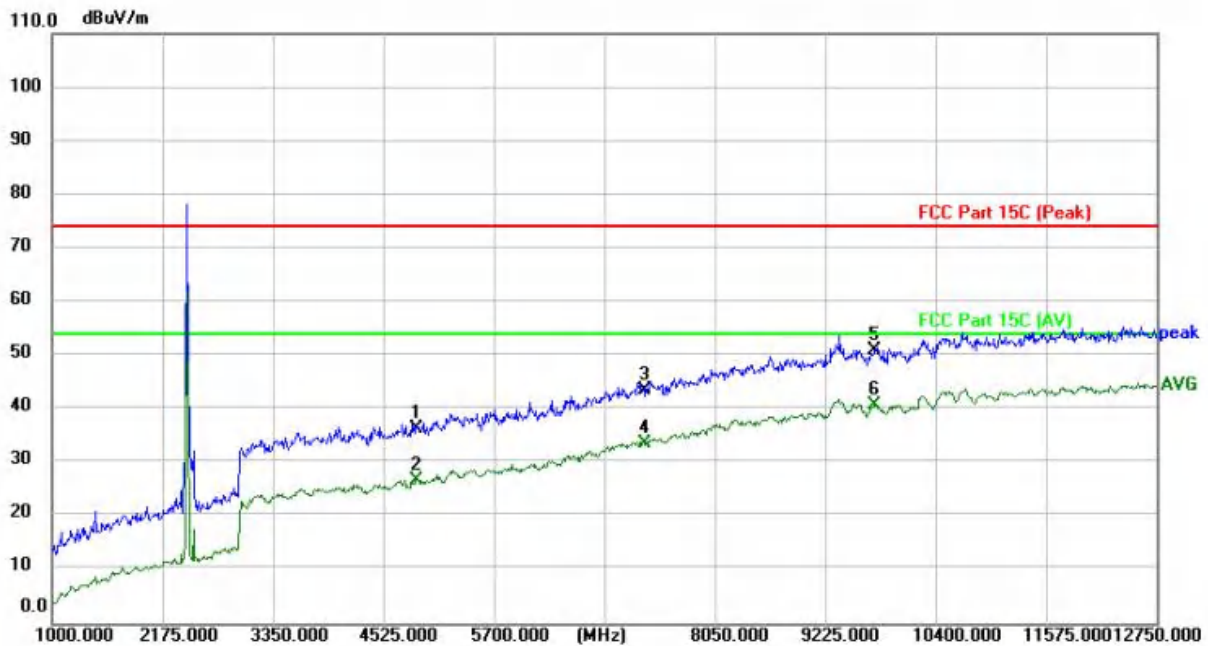


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 4880.000        | 32.85          | 3.55          | 36.40          | 74.00          | -37.60      | peak     | 149         |                | P   |        |
| 2   | 4880.000        | 23.26          | 3.55          | 26.81          | 54.00          | -27.19      | AVG      | 149         |                | P   |        |
| 3   | 7320.000        | 32.92          | 10.57         | 43.49          | 74.00          | -30.51      | peak     | 149         |                | P   |        |
| 4   | 7320.000        | 23.10          | 10.57         | 33.67          | 54.00          | -20.33      | AVG      | 149         |                | P   |        |
| 5   | 9760.000        | 35.86          | 15.09         | 50.95          | 74.00          | -23.05      | peak     | 149         |                | P   |        |
| 6 * | 9760.000        | 25.65          | 15.09         | 40.74          | 54.00          | -13.26      | AVG      | 149         |                | P   |        |

TM2 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: M

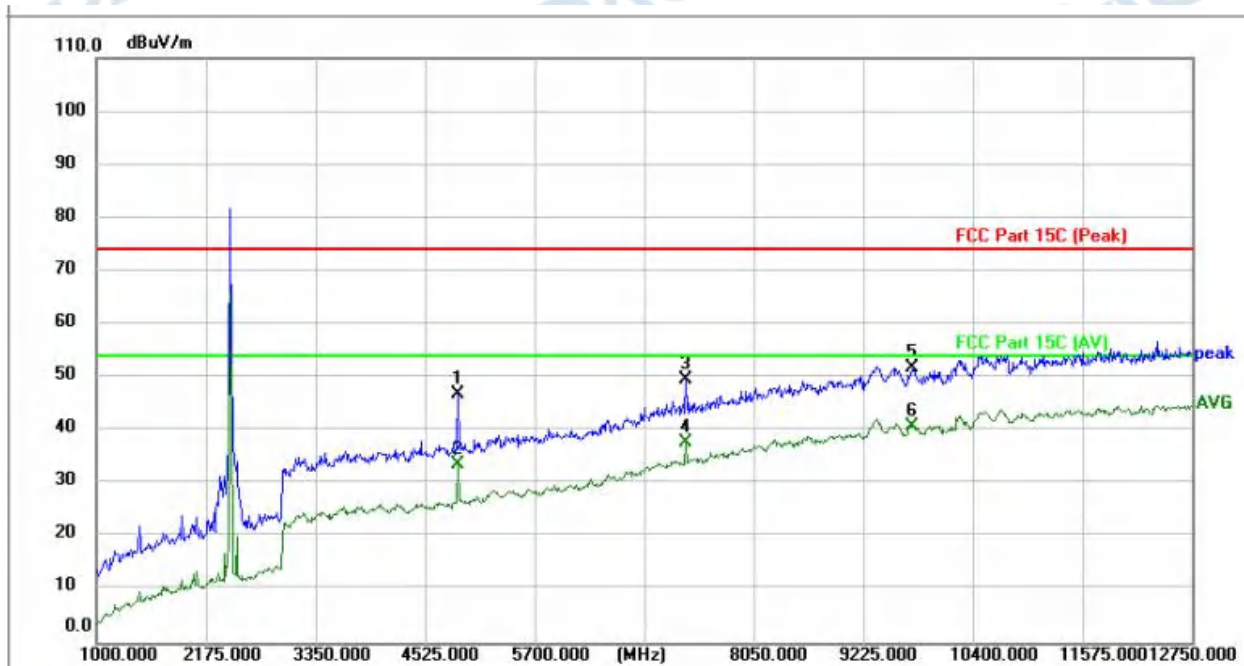

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 4877.500        | 43.35          | 3.55          | 46.90          | 74.00          | -27.10      | peak     | 149         |                | P   |        |
| 2   | 4877.500        | 30.14          | 3.55          | 33.69          | 54.00          | -20.31      | AVG      | 149         |                | P   |        |
| 3   | 7321.500        | 39.14          | 10.57         | 49.71          | 74.00          | -24.29      | peak     | 149         |                | P   |        |
| 4   | 7321.500        | 27.23          | 10.57         | 37.80          | 54.00          | -16.20      | AVG      | 149         |                | P   |        |
| 5   | 9760.000        | 36.65          | 15.09         | 51.74          | 74.00          | -22.26      | peak     | 149         |                | P   |        |
| 6 * | 9760.000        | 25.86          | 15.09         | 40.95          | 54.00          | -13.05      | AVG      | 149         |                | P   |        |

TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: H

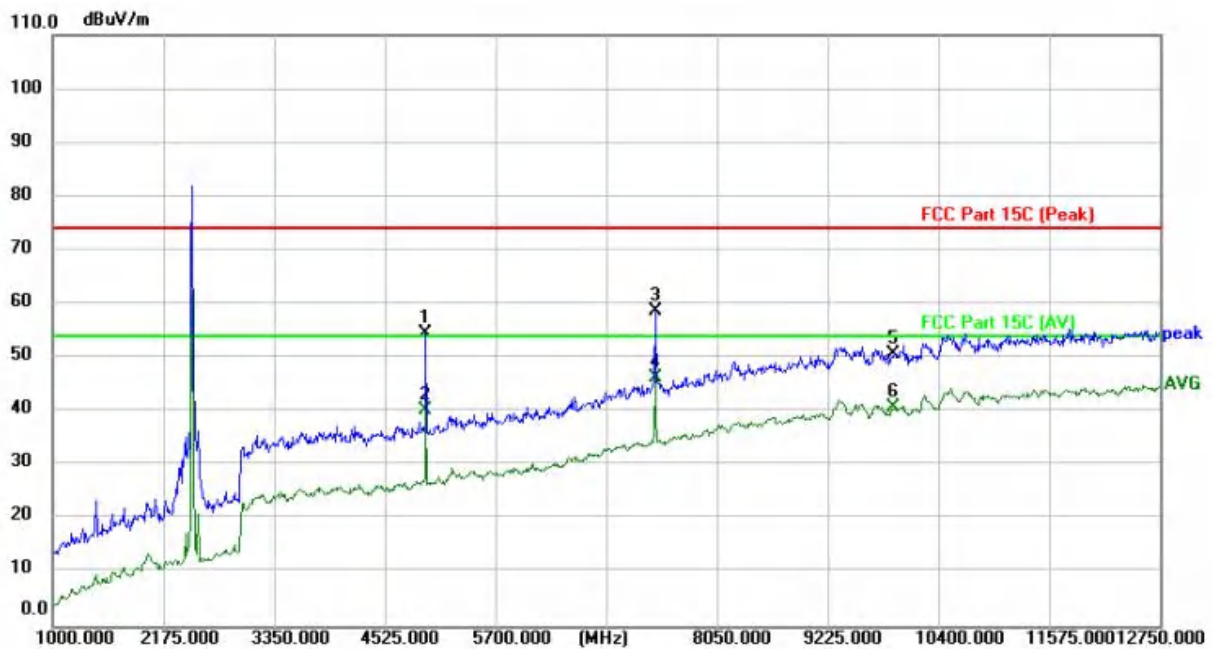

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 4959.750        | 50.77          | 3.83          | 54.60          | 74.00          | -19.40      | peak     | 149         |                | P   |        |
| 2   | 4959.750        | 36.38          | 3.83          | 40.21          | 54.00          | -13.79      | AVG      | 149         |                | P   |        |
| 3   | 7392.000        | 47.91          | 10.70         | 58.61          | 74.00          | -15.39      | peak     | 149         |                | P   |        |
| 4 * | 7392.000        | 35.57          | 10.70         | 46.27          | 54.00          | -7.73       | AVG      | 149         |                | P   |        |
| 5   | 9920.000        | 35.56          | 15.08         | 50.64          | 74.00          | -23.36      | peak     | 149         |                | P   |        |
| 6   | 9920.000        | 25.72          | 15.08         | 40.80          | 54.00          | -13.20      | AVG      | 149         |                | P   |        |

TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: H




| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 4959.750        | 46.35          | 3.83          | 50.18          | 74.00          | -23.82      | peak     | 149         |                | P   |        |
| 2   | 4959.750        | 32.18          | 3.83          | 36.01          | 54.00          | -17.99      | AVG      | 149         |                | P   |        |
| 3   | 7440.000        | 33.31          | 10.78         | 44.09          | 74.00          | -29.91      | peak     | 149         |                | P   |        |
| 4   | 7440.000        | 23.54          | 10.78         | 34.32          | 54.00          | -19.68      | AVG      | 149         |                | P   |        |
| 5   | 9920.000        | 35.48          | 15.08         | 50.56          | 74.00          | -23.44      | peak     | 149         |                | P   |        |
| 6 * | 9920.000        | 25.58          | 15.08         | 40.66          | 54.00          | -13.34      | AVG      | 149         |                | P   |        |

## 5 TEST SETUP PHOTOS

Occupied Bandwidth



Emissions in frequency bands (below 1GHz)

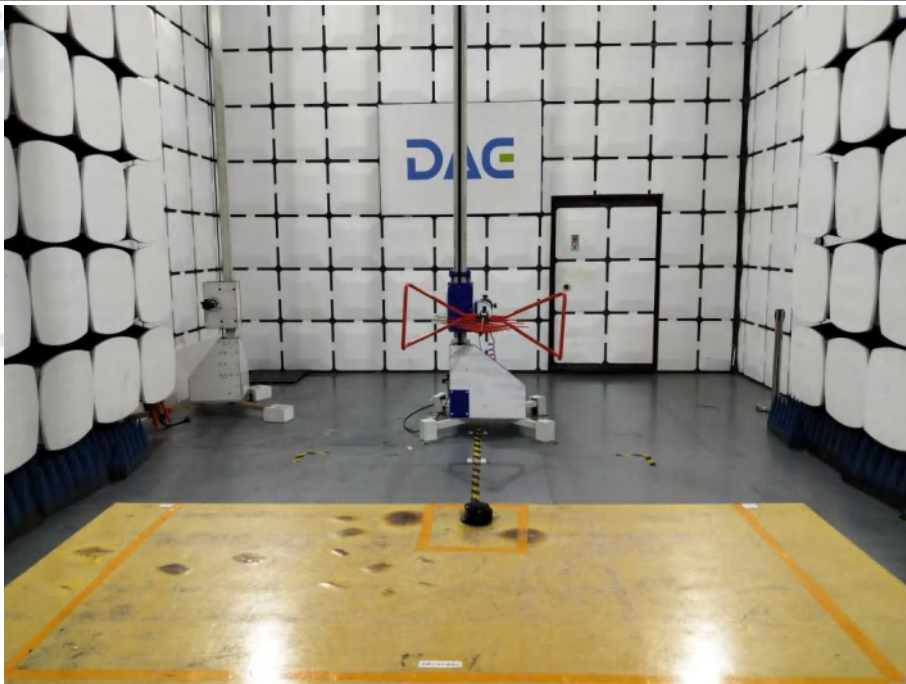

**Emissions in frequency bands (above 1GHz)**

## 6 PHOTOS OF THE EUT

### External















### Internal



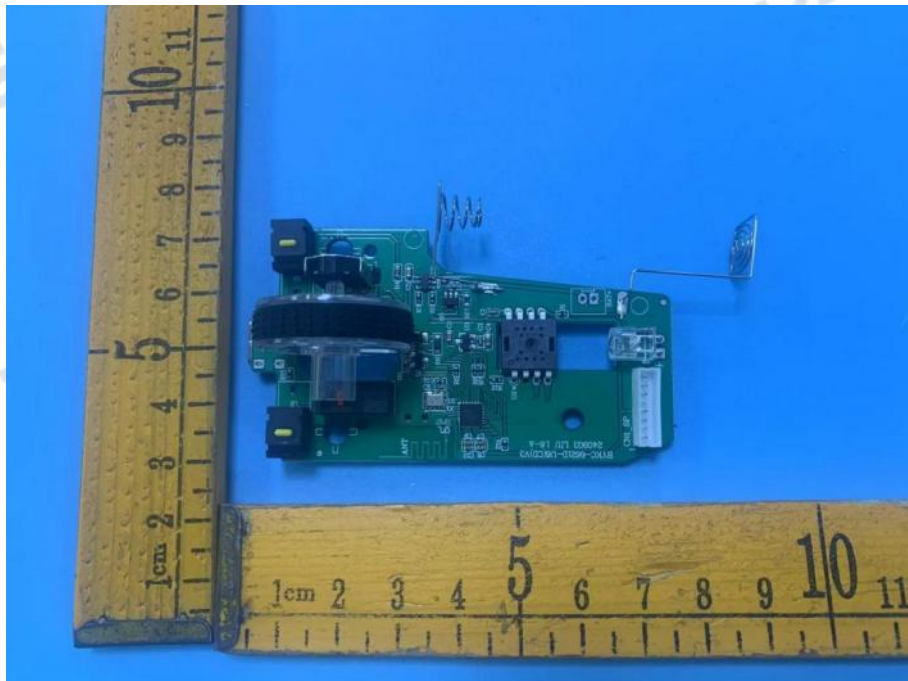

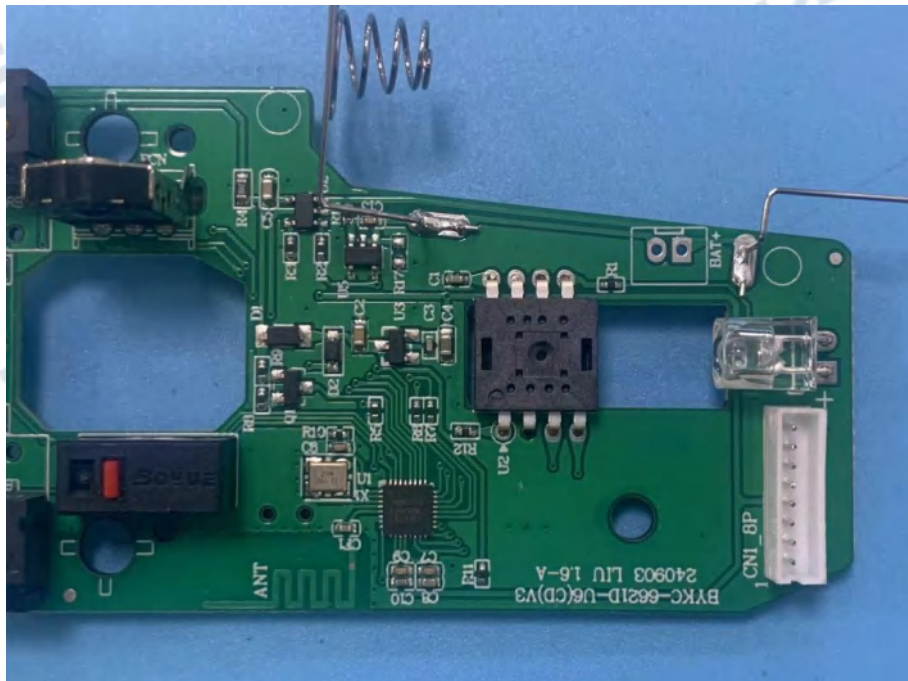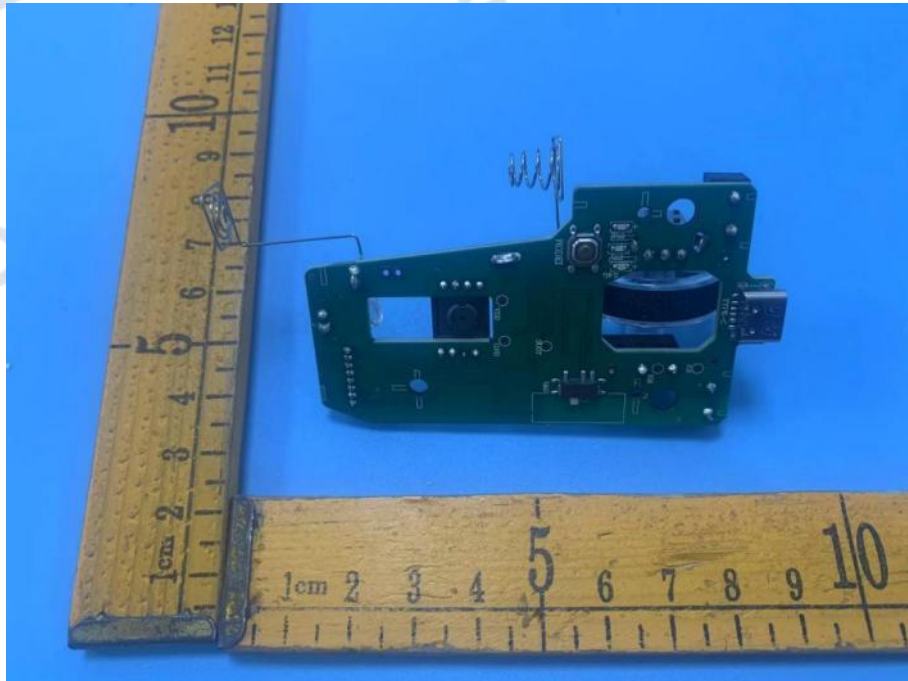

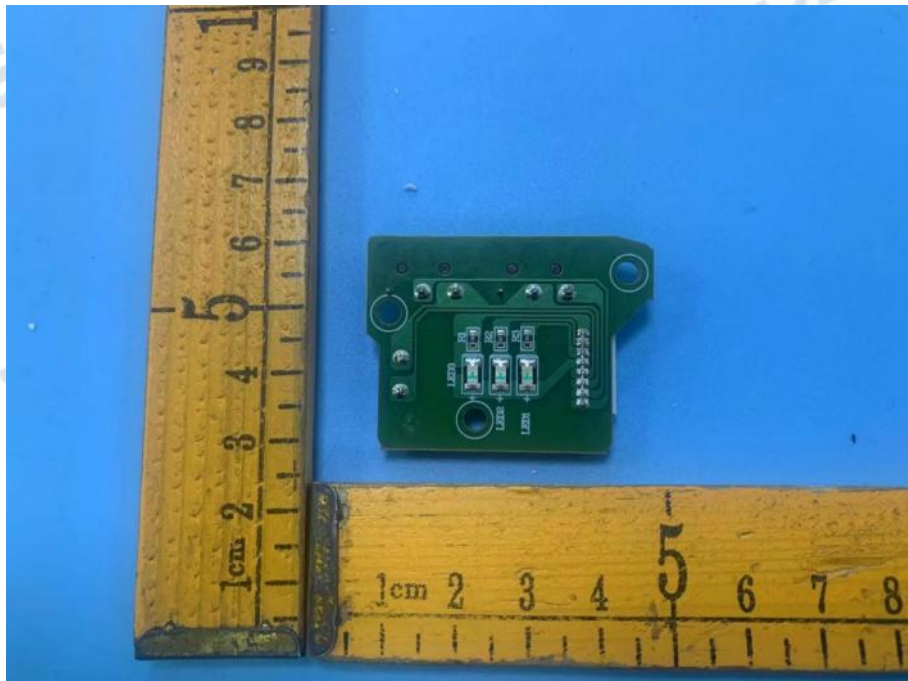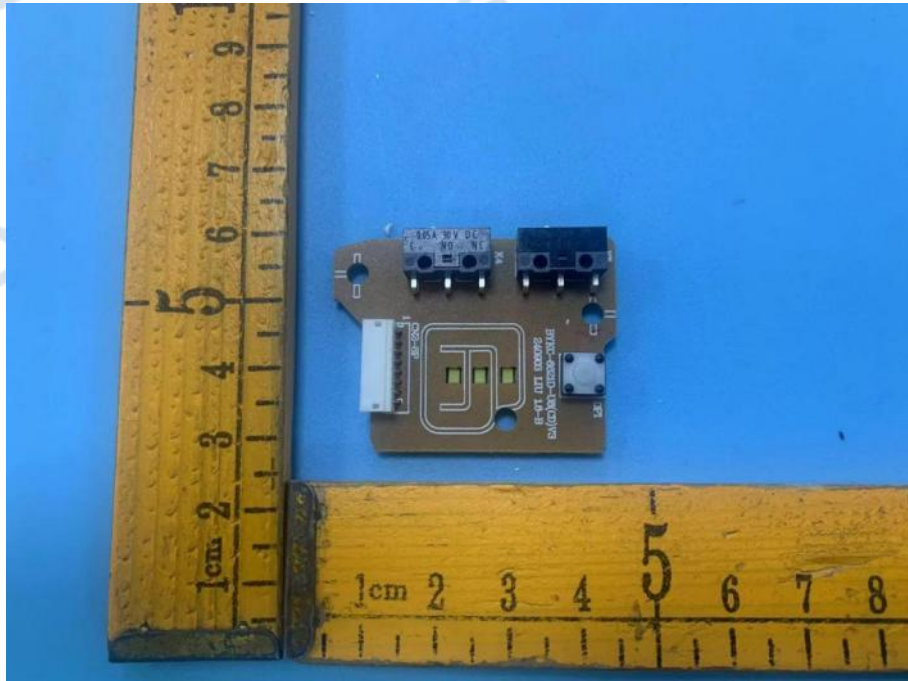

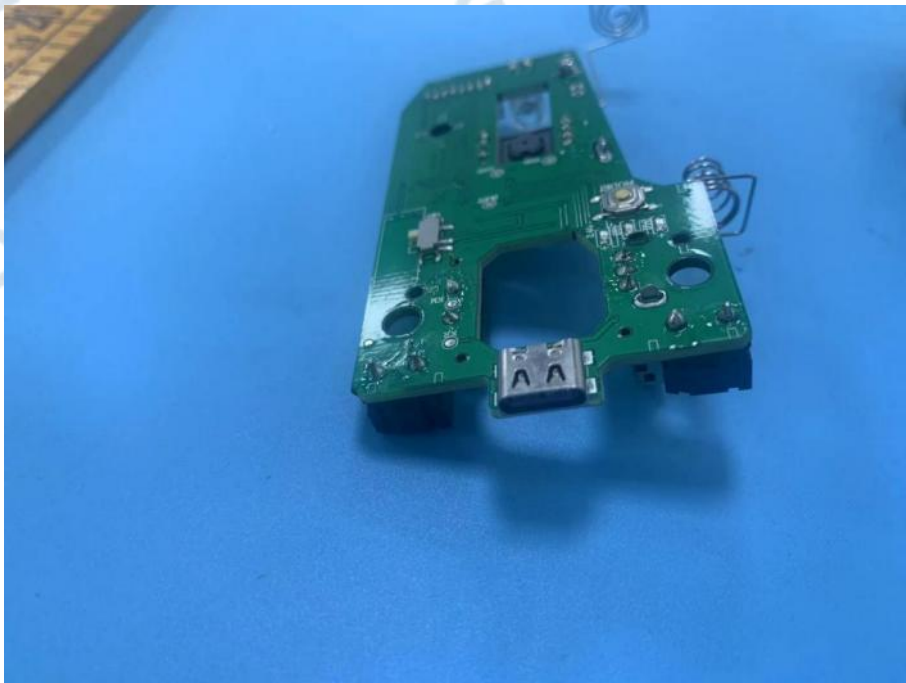


# Appendix

# HT241021001--U6--BLE--FCC FCC\_BLE (Part15.247) Test Data


## 1. -6dB Bandwidth

| Condition | Antenna | Rate  | Frequency (MHz) | -6dB BW(kHz) | limit(kHz) | Result |
|-----------|---------|-------|-----------------|--------------|------------|--------|
| NVNT      | ANT1    | 1Mbps | 2402.00         | 651.30       | 500        | Pass   |
| NVNT      | ANT1    | 1Mbps | 2440.00         | 651.61       | 500        | Pass   |
| NVNT      | ANT1    | 1Mbps | 2480.00         | 650.32       | 500        | Pass   |
| NVNT      | ANT1    | 2Mbps | 2402.00         | 858.14       | 500        | Pass   |
| NVNT      | ANT1    | 2Mbps | 2440.00         | 692.18       | 500        | Pass   |
| NVNT      | ANT1    | 2Mbps | 2480.00         | 864.76       | 500        | Pass   |


-6dB\_Bandwidth\_NVNT\_ANT1\_1Mbps\_2402

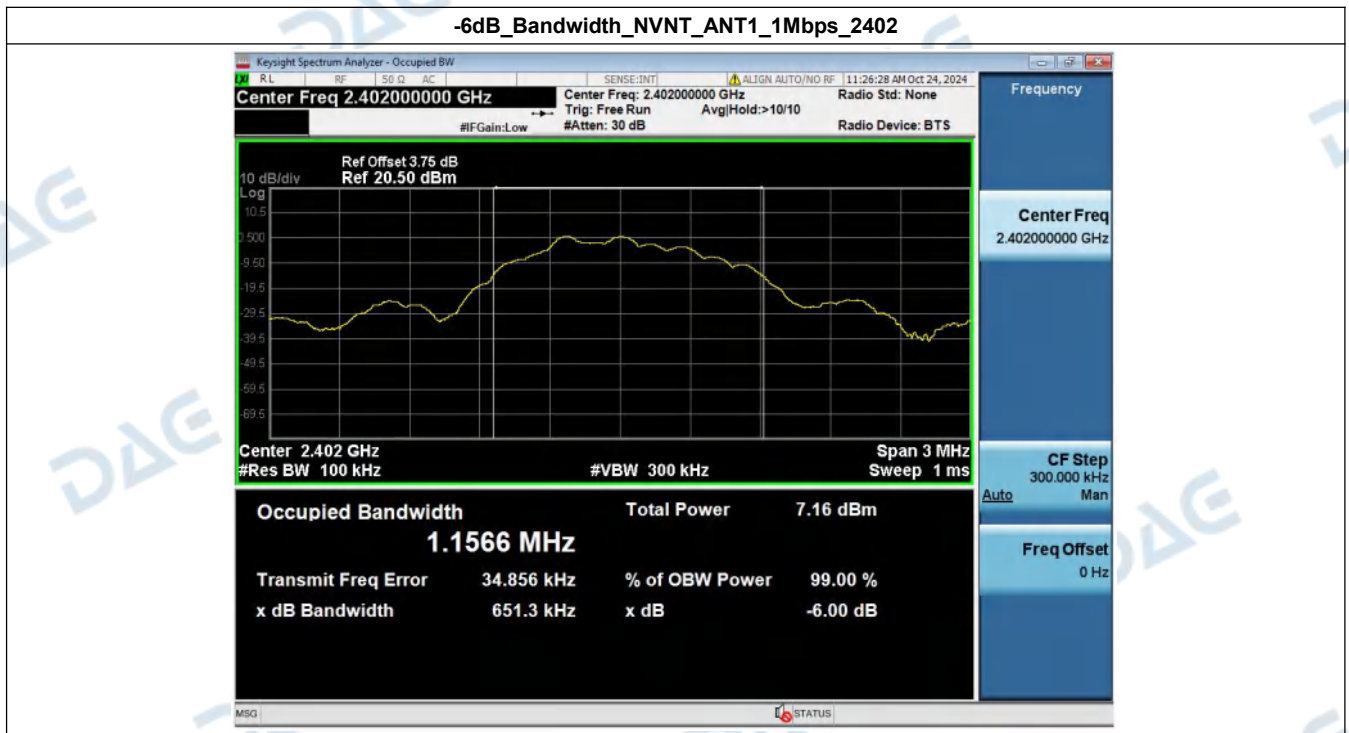

### -6dB\_Bandwidth\_NVNT\_ANT1\_1Mbps\_2440

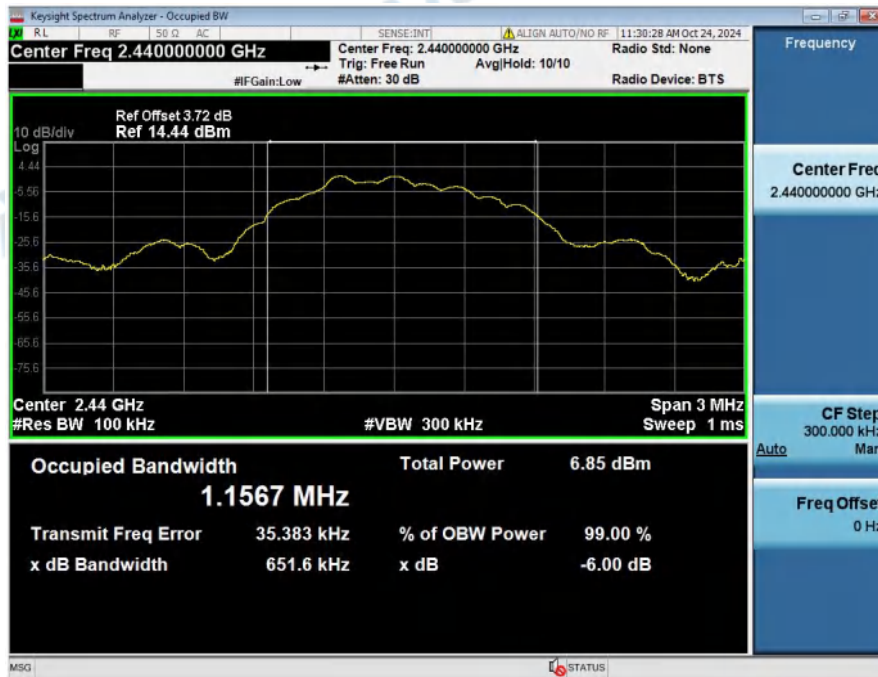

### -6dB\_Bandwidth\_NVNT\_ANT1\_1Mbps\_2480

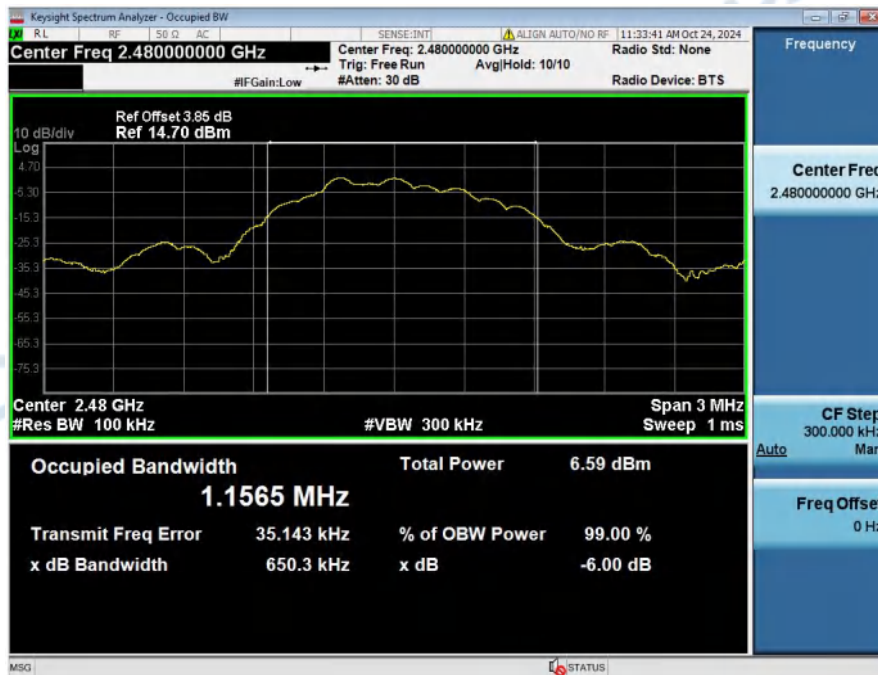

## -6dB\_Bandwidth\_NVNT\_ANT1\_2Mbps\_2402



## -6dB\_Bandwidth\_NVNT\_ANT1\_2Mbps\_2440



-6dB\_Bandwidth\_NVNT\_ANT1\_2Mbps\_2480



## 2. 99% Occupied Bandwidth

| Condition | Antenna | Rate  | Frequency (MHz) | 99% BW (MHz) |
|-----------|---------|-------|-----------------|--------------|
| NVNT      | ANT1    | 1Mbps | 2402.00         | 1.096        |
| NVNT      | ANT1    | 1Mbps | 2440.00         | 1.095        |
| NVNT      | ANT1    | 1Mbps | 2480.00         | 1.093        |
| NVNT      | ANT1    | 2Mbps | 2402.00         | 2.214        |
| NVNT      | ANT1    | 2Mbps | 2440.00         | 2.252        |
| NVNT      | ANT1    | 2Mbps | 2480.00         | 2.254        |

99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_1Mbps\_2402



### 99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_1Mbps\_2440



### 99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_1Mbps\_2480



### 99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_2Mbps\_2402



### 99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_2Mbps\_2440




99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_2Mbps\_2480




### 3. Duty Cycle

| Condition | Antenna | Rate  | Frequency (MHz) | Dutycycle(%) | Duty_factor |
|-----------|---------|-------|-----------------|--------------|-------------|
| NVNT      | ANT1    | 1Mbps | 2402.00         | 28.13        | 5.51        |
| NVNT      | ANT1    | 1Mbps | 2440.00         | 29.03        | 5.37        |
| NVNT      | ANT1    | 1Mbps | 2480.00         | 25.81        | 5.88        |
| NVNT      | ANT1    | 2Mbps | 2402.00         | 16.13        | 7.92        |
| NVNT      | ANT1    | 2Mbps | 2440.00         | 19.35        | 7.13        |
| NVNT      | ANT1    | 2Mbps | 2480.00         | 15.63        | 8.06        |


Duty\_Cycle\_NVNT\_ANT1\_1Mbps\_2402

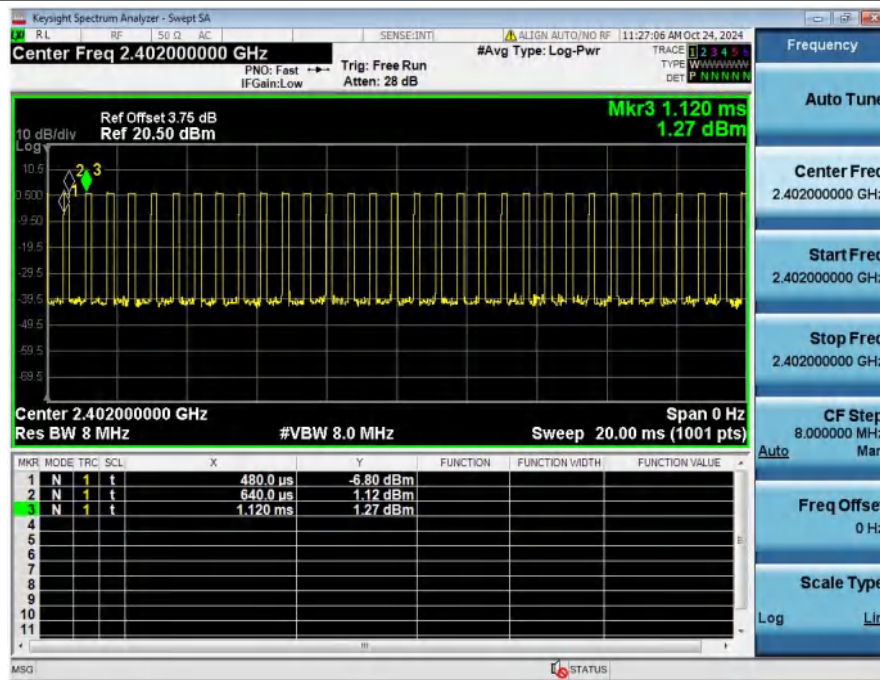


### Duty\_Cycle\_NVNT\_ANT1\_1Mbps\_2440

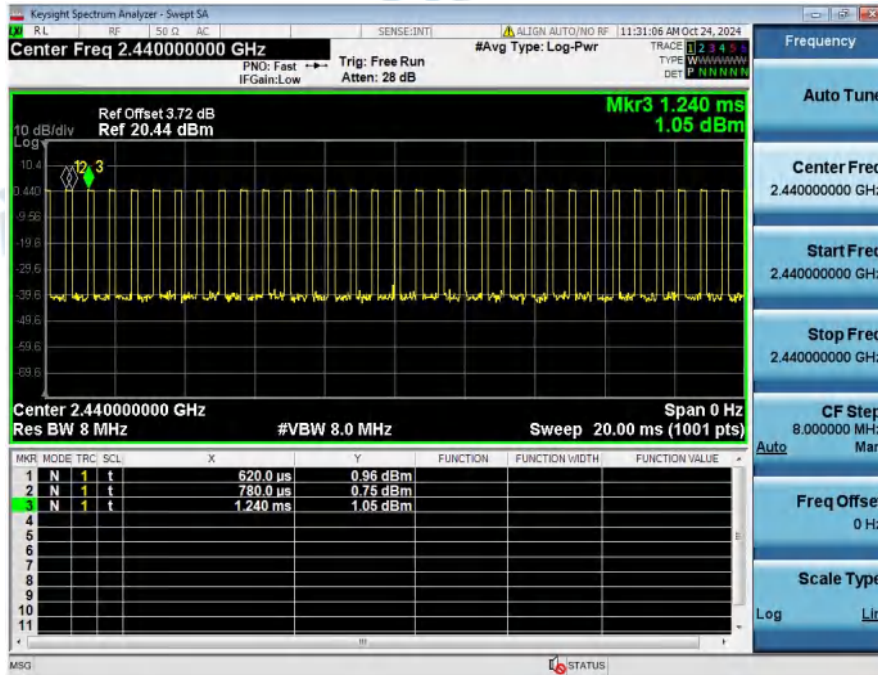


### Duty\_Cycle\_NVNT\_ANT1\_1Mbps\_2480

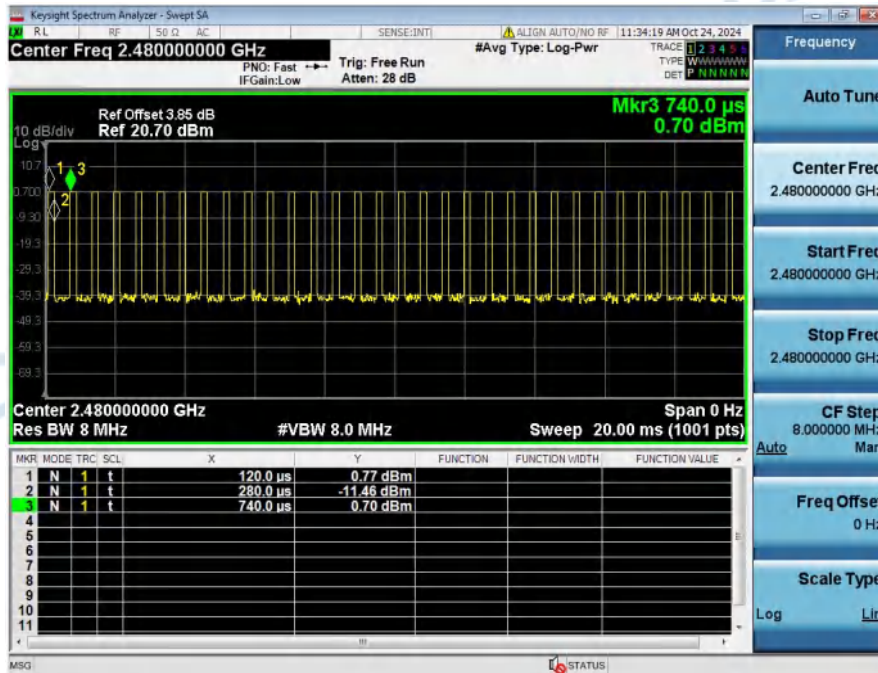


## Duty\_Cycle\_NVNT\_ANT1\_2Mbps\_2402

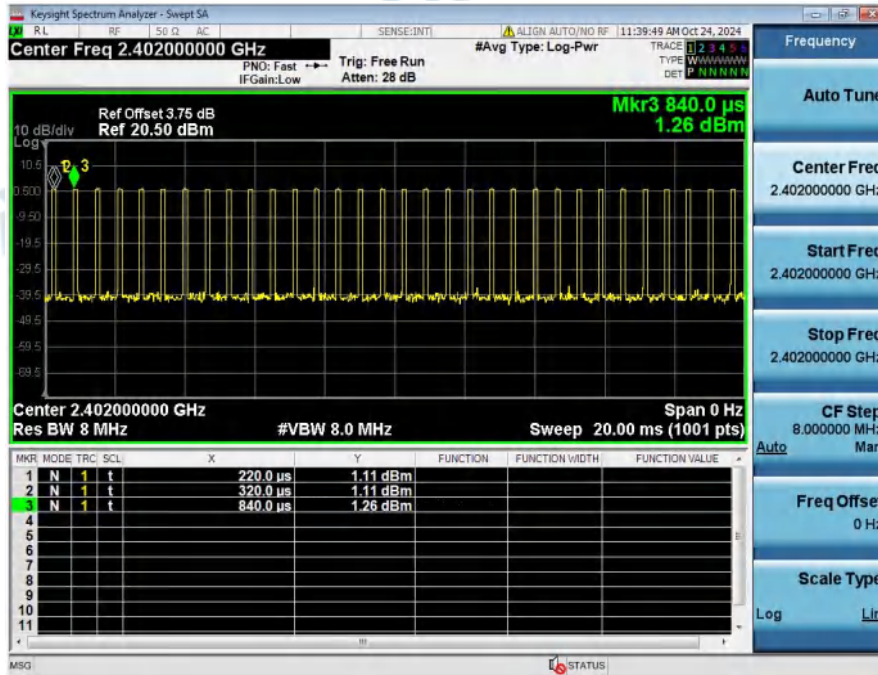

## Duty\_Cycle\_NVNT\_ANT1\_2Mbps\_2440

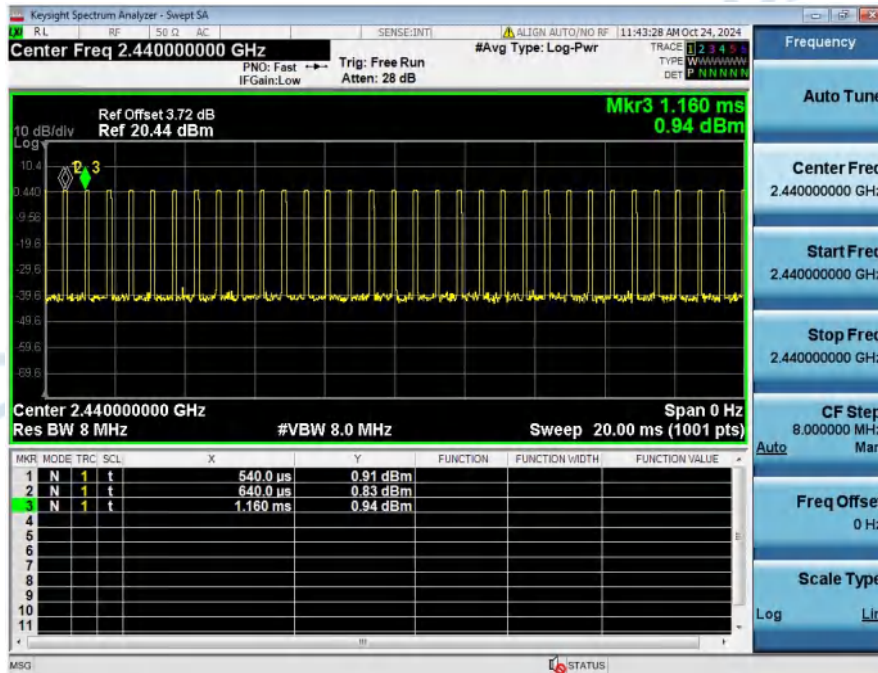

Duty\_Cycle\_NVNT\_ANT1\_2Mbps\_2480

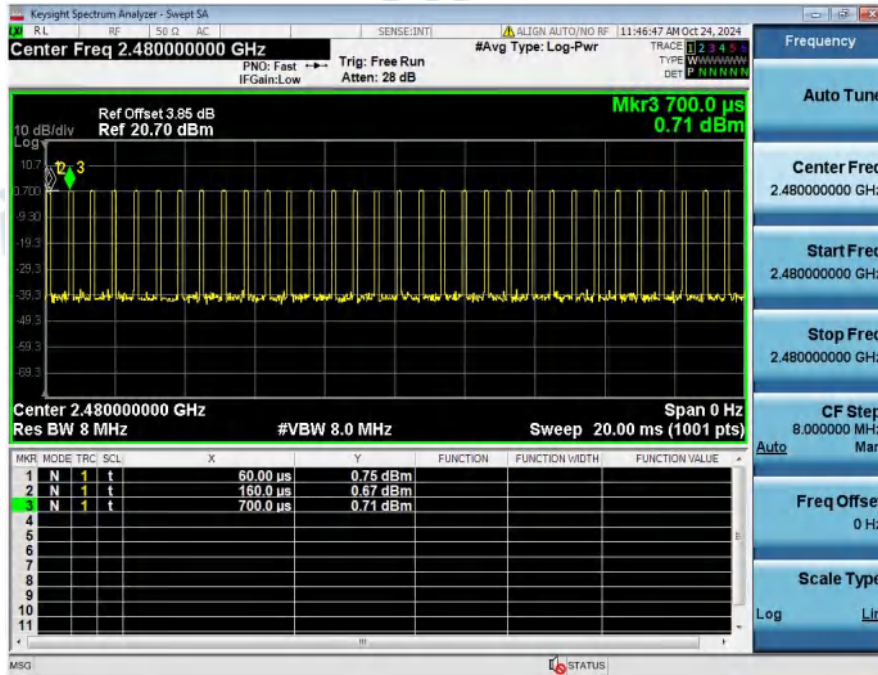

#### 4. Peak Output Power

| Condition | Antenna | Rate  | Frequency (MHz) | Max. Conducted Power(dBm) | Max. Conducted Power(mW) | Limit(mW) | Result |
|-----------|---------|-------|-----------------|---------------------------|--------------------------|-----------|--------|
| NVNT      | ANT1    | 1Mbps | 2402.00         | 1.18                      | 1.31                     | 1000      | Pass   |
| NVNT      | ANT1    | 1Mbps | 2440.00         | 0.83                      | 1.21                     | 1000      | Pass   |
| NVNT      | ANT1    | 1Mbps | 2480.00         | 0.62                      | 1.15                     | 1000      | Pass   |
| NVNT      | ANT1    | 2Mbps | 2402.00         | 1.20                      | 1.32                     | 1000      | Pass   |
| NVNT      | ANT1    | 2Mbps | 2440.00         | 0.90                      | 1.23                     | 1000      | Pass   |
| NVNT      | ANT1    | 2Mbps | 2480.00         | 0.73                      | 1.18                     | 1000      | Pass   |

Peak\_Output\_Power\_NVNT\_ANT1\_1Mbps\_2402




### Peak\_Output\_Power\_NVNT\_ANT1\_1Mbps\_2440




### Peak\_Output\_Power\_NVNT\_ANT1\_1Mbps\_2480



### Peak\_Output\_Power\_NVNT\_ANT1\_2Mbps\_2402

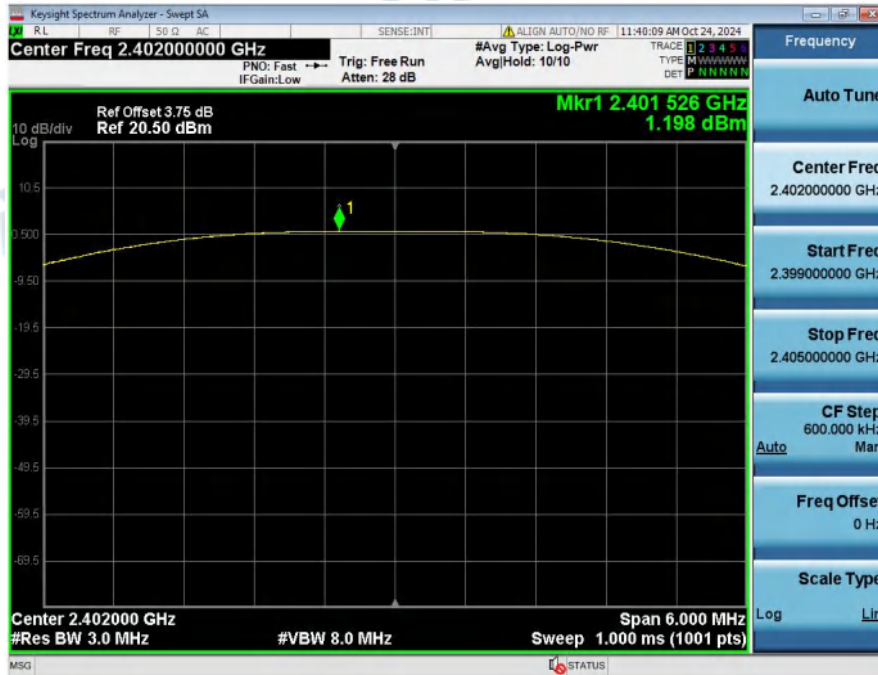

### Peak\_Output\_Power\_NVNT\_ANT1\_2Mbps\_2440

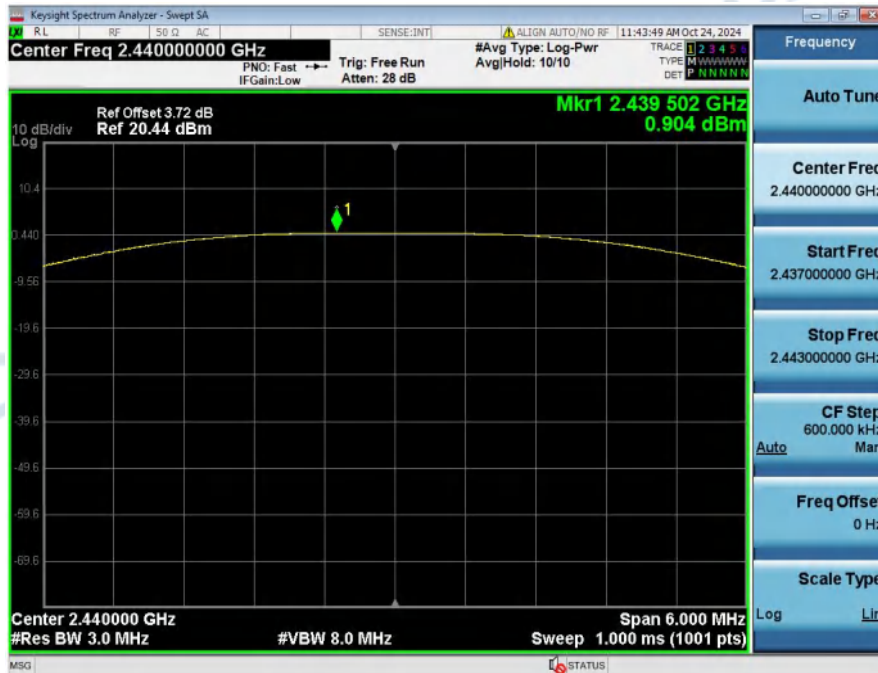

Peak\_Output\_Power\_NVNT\_ANT1\_2Mbps\_2480



## 5. Power Spectral Density

| Condition | Antenna | Rate  | Frequency (MHz) | Power Spectral Density(dBm) | Limit(dBm/3kHz) | Result |
|-----------|---------|-------|-----------------|-----------------------------|-----------------|--------|
| NVNT      | ANT1    | 1Mbps | 2402.00         | -14.23                      | 8               | Pass   |
| NVNT      | ANT1    | 1Mbps | 2440.00         | -14.55                      | 8               | Pass   |
| NVNT      | ANT1    | 1Mbps | 2480.00         | -14.80                      | 8               | Pass   |
| NVNT      | ANT1    | 2Mbps | 2402.00         | -17.44                      | 8               | Pass   |
| NVNT      | ANT1    | 2Mbps | 2440.00         | -17.75                      | 8               | Pass   |
| NVNT      | ANT1    | 2Mbps | 2480.00         | -17.83                      | 8               | Pass   |


Power\_Spectral\_Density\_NVNT\_ANT1\_1Mbps\_2402




### Power\_Spectral\_Density\_NVNT\_ANT1\_1Mbps\_2440




### Power\_Spectral\_Density\_NVNT\_ANT1\_1Mbps\_2480

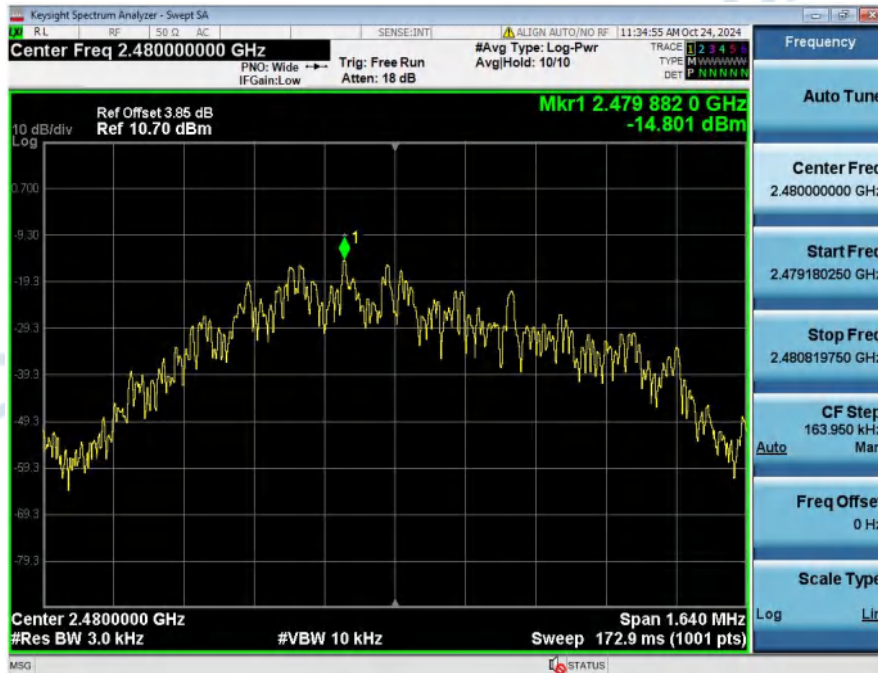


### Power\_Spectral\_Density\_NVNT\_ANT1\_2Mbps\_2402

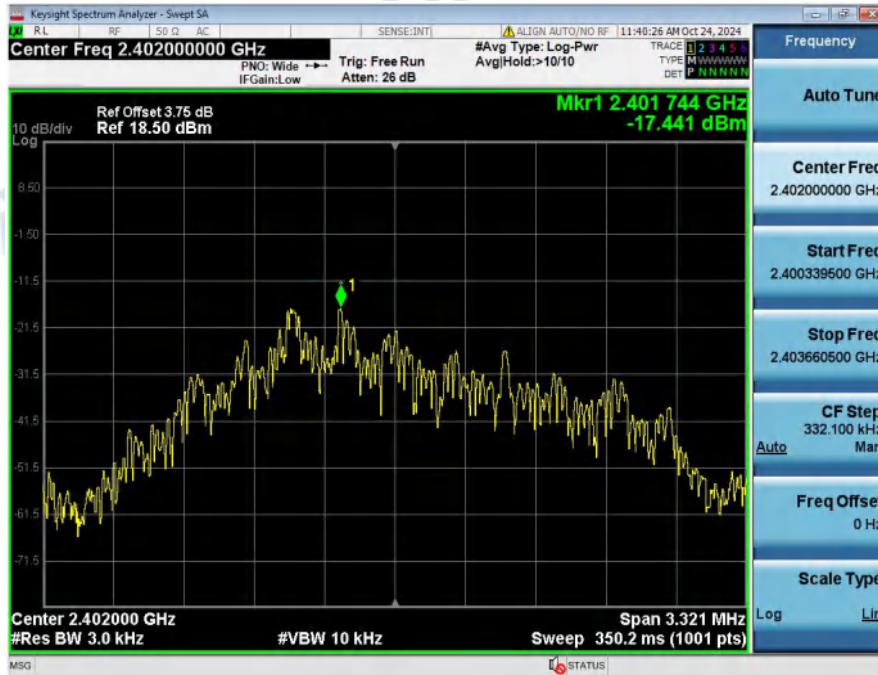

### Power\_Spectral\_Density\_NVNT\_ANT1\_2Mbps\_2440

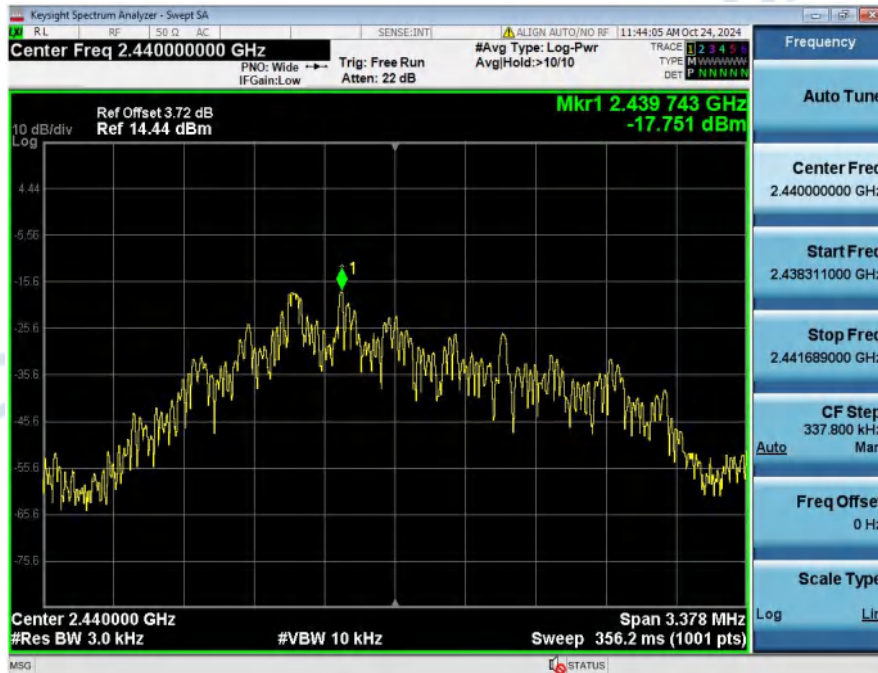

Power\_Spectral\_Density\_NVNT\_ANT1\_2Mbps\_2480

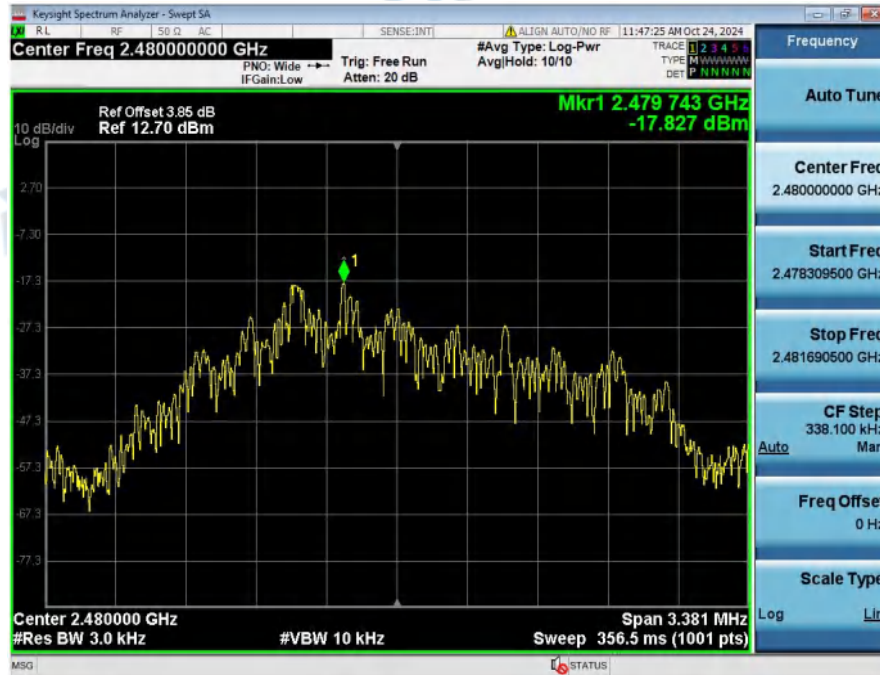


## 6. Bandedge

| Condition | Antenna | Rate  | TX_Frequency (MHz) | Max. Mark Frequency (MHz) | Spurious level(dBm) | limit(dBm) | Result |
|-----------|---------|-------|--------------------|---------------------------|---------------------|------------|--------|
| NVNT      | ANT1    | 1Mbps | 2402.00            | 2393.980                  | -29.842             | -18.882    | Pass   |
| NVNT      | ANT1    | 1Mbps | 2480.00            | 2484.450                  | -29.598             | -19.435    | Pass   |
| NVNT      | ANT1    | 2Mbps | 2402.00            | 2399.965                  | -24.363             | -18.868    | Pass   |
| NVNT      | ANT1    | 2Mbps | 2480.00            | 2484.000                  | -32.812             | -19.312    | Pass   |

1\_Reference\_Level\_NVNT\_ANT1\_1Mbps\_2402



2\_Bandedge\_NVNT\_ANT1\_1Mbps\_2402

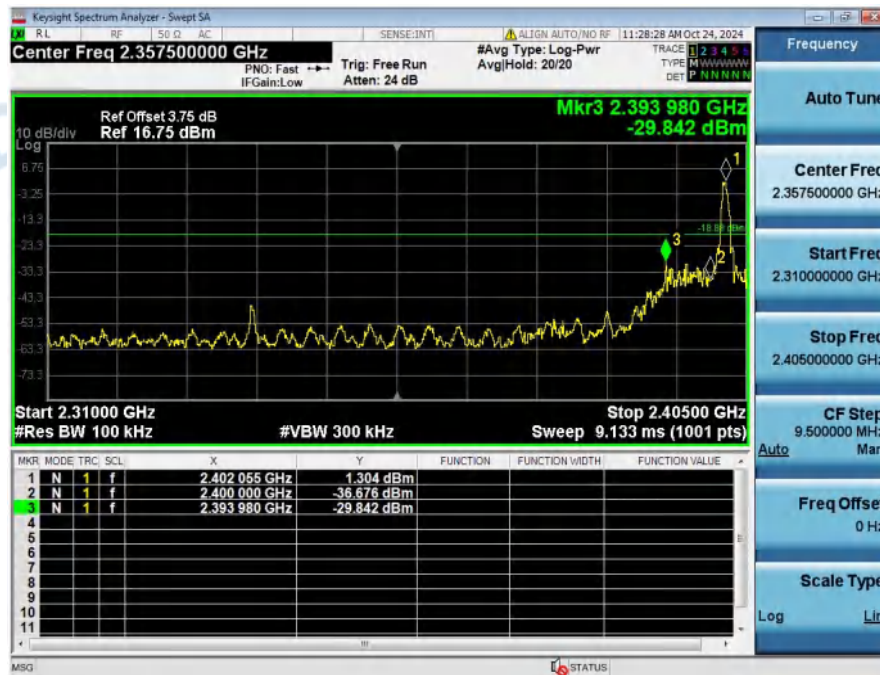

### 1\_Reference\_Level\_NVNT\_ANT1\_1Mbps\_2480



### 2\_Bandedge\_NVNT\_ANT1\_1Mbps\_2480



### 1\_Reference\_Level\_NVNT\_ANT1\_2Mbps\_2402



### 2\_Bandedge\_NVNT\_ANT1\_2Mbps\_2402



### 1\_Reference\_Level\_NVNT\_ANT1\_2Mbps\_2480



### 2\_Bandedge\_NVNT\_ANT1\_2Mbps\_2480




## 7. Spurious Emission

| Condition | Antenna | Rate  | TX_Frequency(MHz) | Spurious MAX.Value(dBm) | Limit   | Result |
|-----------|---------|-------|-------------------|-------------------------|---------|--------|
| NVNT      | ANT1    | 1Mbps | 2402.00           | -39.620                 | -18.882 | Pass   |
| NVNT      | ANT1    | 1Mbps | 2440.00           | -41.143                 | -19.257 | Pass   |
| NVNT      | ANT1    | 1Mbps | 2480.00           | -43.085                 | -19.435 | Pass   |
| NVNT      | ANT1    | 2Mbps | 2402.00           | -39.206                 | -18.868 | Pass   |
| NVNT      | ANT1    | 2Mbps | 2440.00           | -41.578                 | -19.197 | Pass   |
| NVNT      | ANT1    | 2Mbps | 2480.00           | -43.318                 | -19.312 | Pass   |

1\_Reference\_Level\_NVNT\_ANT1\_1Mbps\_2402




2\_Spurious\_Emission\_NVNT\_ANT1\_1Mbps\_2402

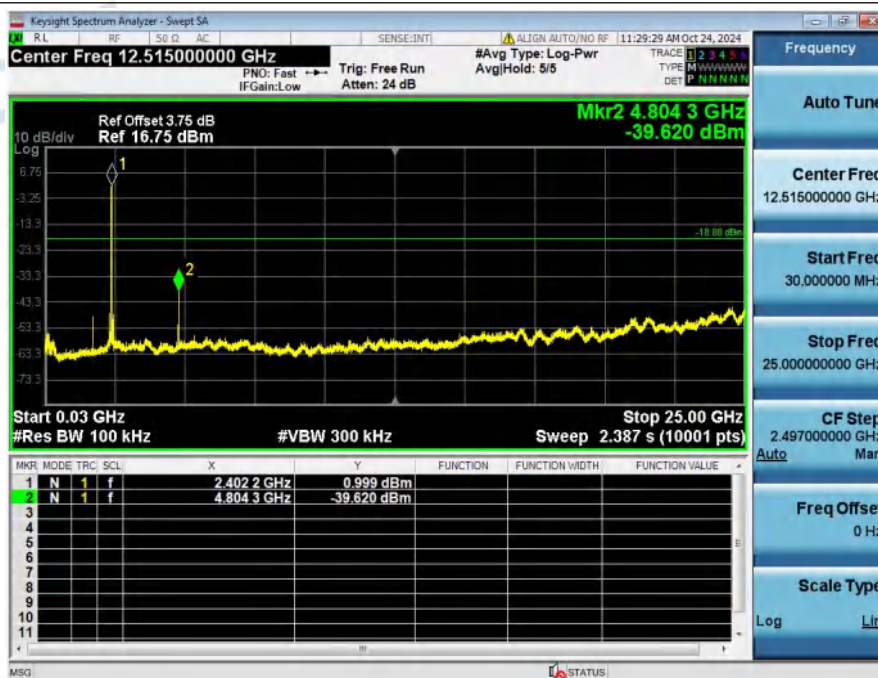

### 1\_Reference\_Level\_NVNT\_ANT1\_1Mbps\_2440




### 2\_Spurious\_Emission\_NVNT\_ANT1\_1Mbps\_2440

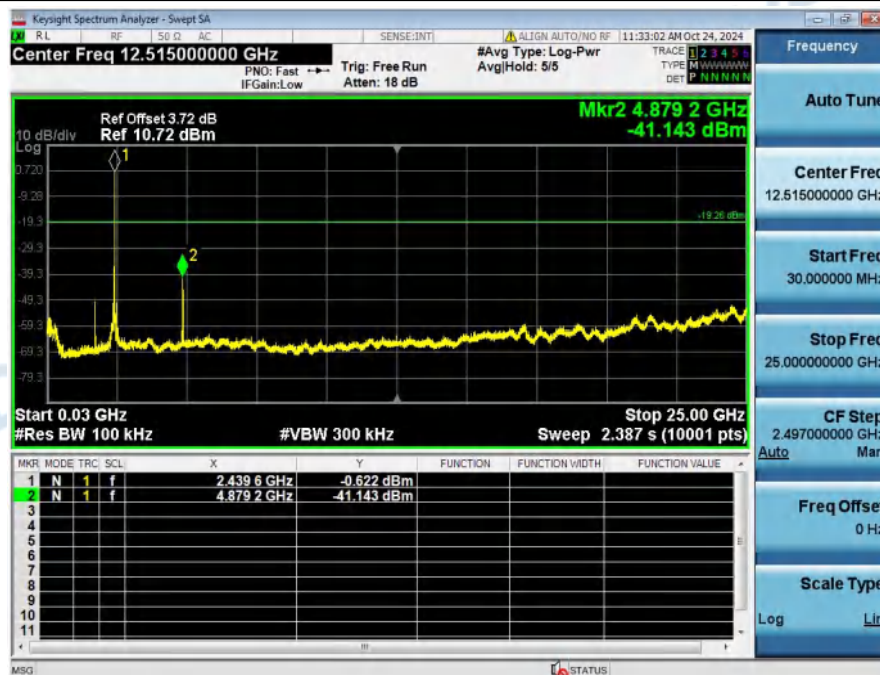

### 1\_Reference\_Level\_NVNT\_ANT1\_1Mbps\_2480




### 2\_Spurious\_Emission\_NVNT\_ANT1\_1Mbps\_2480

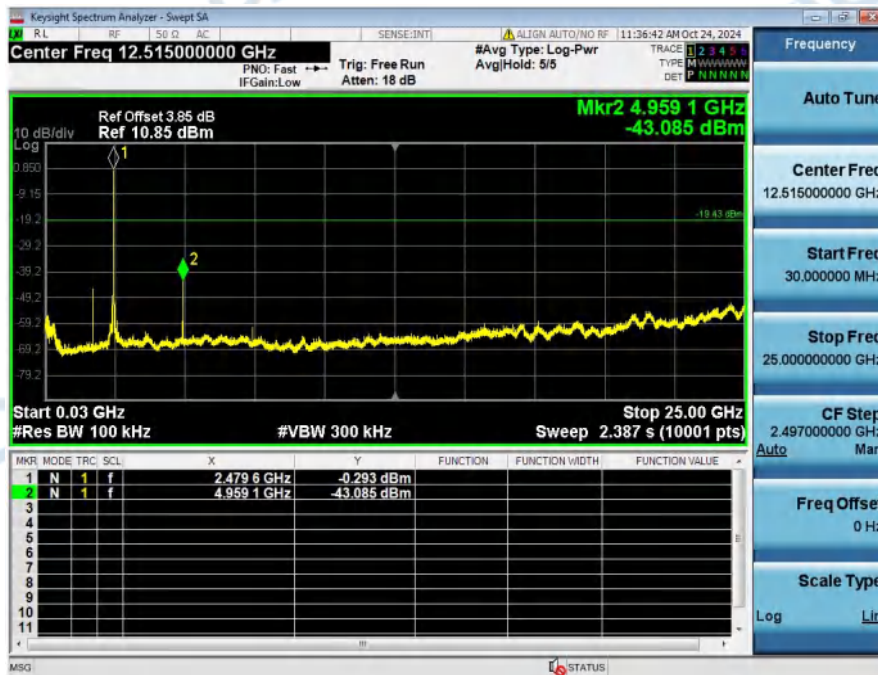

### 1\_Reference\_Level\_NVNT\_ANT1\_2Mbps\_2402




### 2\_Spurious\_Emission\_NVNT\_ANT1\_2Mbps\_2402

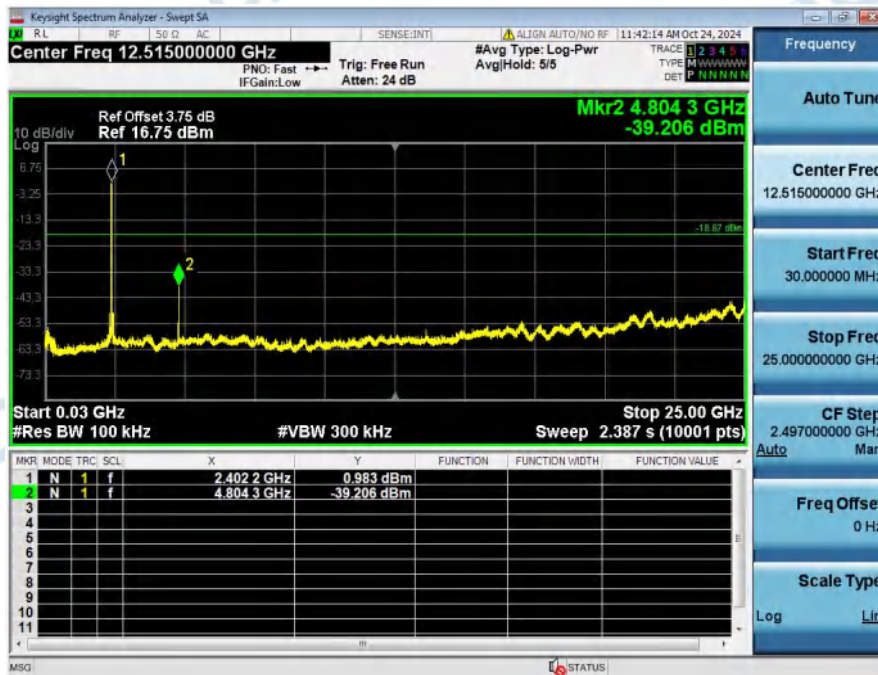

### 1\_Reference\_Level\_NVNT\_ANT1\_2Mbps\_2440




### 2\_Spurious\_Emission\_NVNT\_ANT1\_2Mbps\_2440

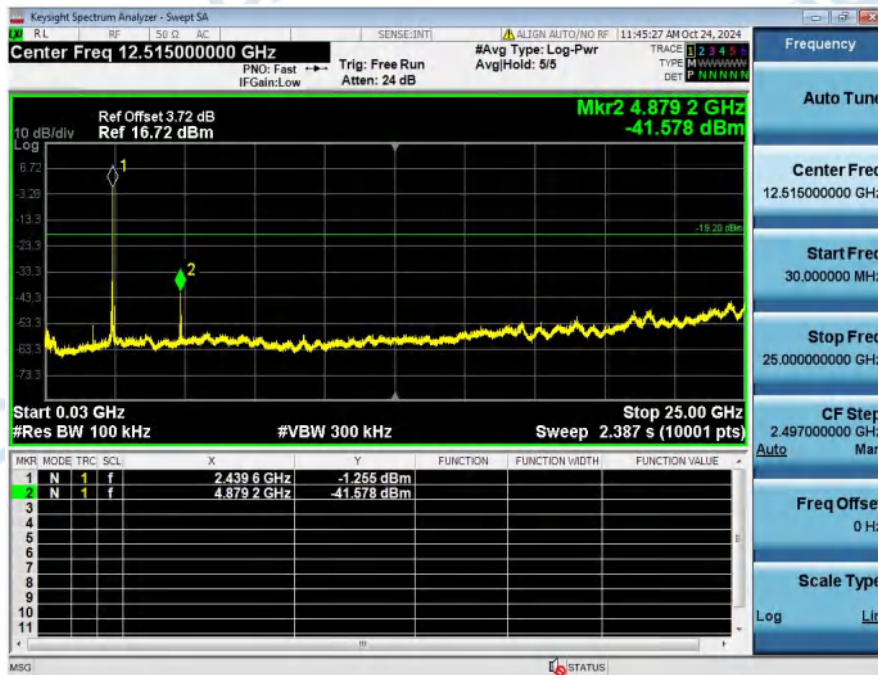

### 1\_Reference\_Level\_NVNT\_ANT1\_2Mbps\_2480



### 2\_Spurious\_Emission\_NVNT\_ANT1\_2Mbps\_2480

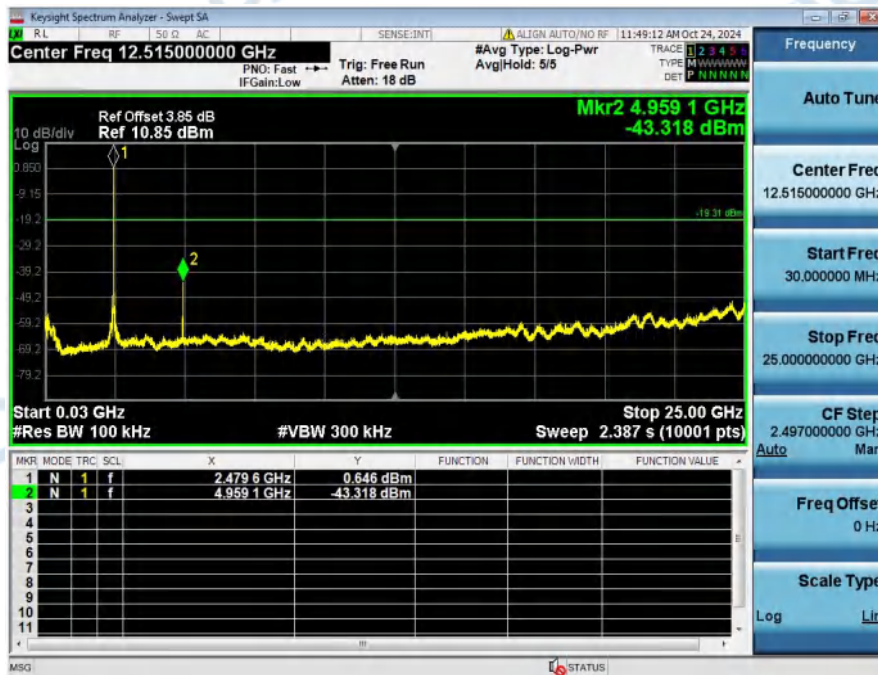

\*\*\*\*\* End of Report \*\*\*\*\*