

endiio Wireless Module v2

User Manual

Prepared By:

Omar Gorgies



Freiburg, 30.01.2025

v1.1

Revision History

Revision	Date	Description
v1.0	12.12.2024	Initial Release
v1.1	30.01.2025	Adding Note in Section Electrical & Mechanical Specification

Table of Contents

1	Introduction.....	3
2	Product Marketing Information	3
3	Electrical & Mechanical Specification.....	4
4	Product Photo.....	5
5	Pinout	6
6	Certifications and Compatibilities	6
6.1	CE RED (Europe)	6
6.2	FCC Part 15 (USA) and ISED RSS (Canada)	7
6.3	RF Exposure Information	7

List of Figures

Figure 1: Modified Antenna at endiio	4
Figure 2: endiio Wireless Module v2.....	5

List of Tables

Table 1 Product Marketing Information.....	3
Table 2 Product Electrical and Mechanical Specification.....	4
Table 3 endiio Wireless Module Pinout	6

1 Introduction

The endiio Wireless Module is a Sub-GHz (915MHz) wireless device based on the CC1352P7 microcontroller.

It allows the wireless communication between the low energy wireless sensor nodes and the central unit (Gateway). It Supports the 2.4GHz wireless communication as well but this feature is not implemented.

The endiio Wireless module has the ability to communicate with a big variety of sensors over the I²C and SPI buses and a couple of Analog and digital lines.

2 Product Marketing Information

Table 1 Product Marketing Information

Module Name	Endiio Wireless Module v2
UPN (Unique Product Nr.)	ENWM2
PMN (Product Marketing Nr.)	endiio WM
HVIN (Hardware Version Id Nr.)	V2.2
HMN (Host Marketing Name)	endiio Wireless System
FCC ID	2BL4CEN-WM2
IC Number	33310-ENWM2

3 Electrical & Mechanical Specification

Table 2 Product Electrical and Mechanical Specification

Input Voltage	2.9 – 3.6 V
Operating Temperature	-30 – 120 °C
Wireless Frequency Band	902 – 928 MHz
No. of Wireless Channels	4 (915.4, 915.6, 915.8, 916.0 MHz)
Maximum Output Transmission Power	8 dBm
Antenna	MikroTik 868 Omni antenna
Antenna Gain	4.5 dBi
Wireless Modulation	GFSK
Wireless Protocol	IEEE 802.15.4
Sampling Rate	15 min.
Polling Rate	30 sec.
Dimensions (W x H x D)	32 x 3.2 x 23 mm

Note: The Omni-Antenna is realized with SMA connector by manufacturing. A SMA-RPSMA adapter is mounted and glued to the antenna using epoxy compound at our factory prior to shipment, see the figures below. Thus, the antenna would be shipped with a unique connector.

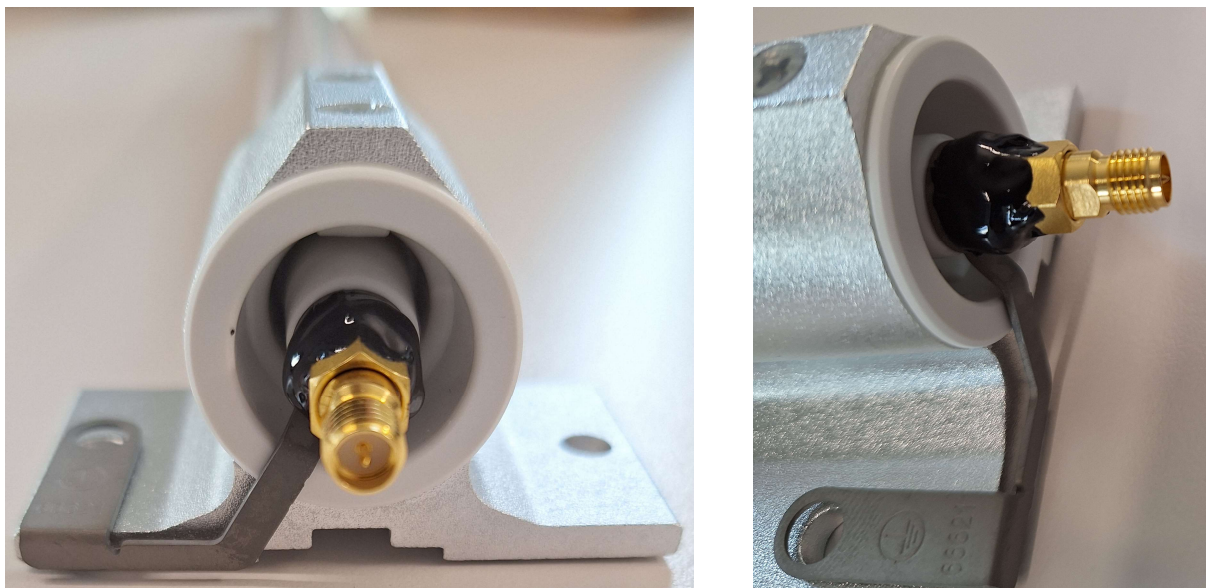


Figure 1: Modified Antenna at endiio

4 Product Photo

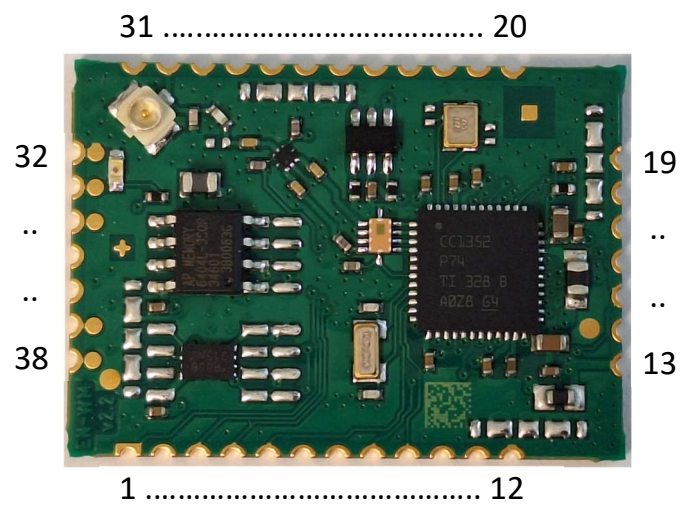


Figure 2: endiio Wireless Module v2

5 Pinout

Table 3 endiio Wireless Module Pinout

Pin#	I/O	Functionality	Pin#	I/O	Functionality
1	I/O	DIO26	20	Power	GND
2	I	HOST_SPI/UART-_(DIO19)	21	O	SPI_CS_RAM_(DIO7)
3	O	Mem_Power_Enable_(DIO27)	22	I/O	DIO14
4	I/O	DIO28	23		NC
5	I	Comm_Req_(DIO5)	24	I	SPI_B_MISO_(DIO8)
6	I/O	SDA_(DIO21)	25	O	SPI_B_MOSI_(DIO9)
7	O	SCK_(DIO20)	26	O	SPI_B_CLK_(DIO10)
8	I/O	DIO15	27	O	SPI_A_MOSI_(DIO13)
9	O	LED_PCB_(DIO6)	28	I	SPI_A_MISO_(DIO12)
10	I	INT#1_(DIO29)	29	Power	GND
11	I	INT#2_(DIO30)	30	I/O	RF Port
12	Power	GND	31	Power	GND
13	Power	VDD (2.9 – 3.6 V)	32	Power	GND
14	I	Ain3_(DIO25)	33	I	JTAG - tms
15	I	nRst	34	I	JTAG - tck
16	I	Ain2_(DIO24)	35	I/O	JTAG - tdo/LED_(DIO16)
17	I	Ain1_(DIO23)	36	I/O	JTAG - tdi/HF_Ctrl2_(DIO17)
18	O	SPI_A_CLK_(DIO18)	37	I	nRst
19	Power	GND	38	Power	VDD (2.9 – 3.6 V)

6 Certifications and Compatibilities

6.1 CE RED (Europe)

The device is RED (Radio Equipment Directive) certified for the Sub-GHz. Frequency band (868 MHz).

6.2 FCC Part 15 (USA) and ISED RSS (Canada)

This wireless module contains licence-exempt transmitter/receiver that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s) and complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage.
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

6.3 RF Exposure Information

This equipment complies with FCC and ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

Ce transmetteur ne doit pas être placé au même endroit ou utilisé simultanément avec un autre transmetteur ou antenne.

Note: Changes or modifications made to this equipment not expressly approved by endiio Engineering GmbH may void the FCC authorization to operate this equipment.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.