

**SPECIFICATIONS**

**Technical Specifications**

A/D/A Converter: 24-bit  
Sampling Frequency: 44.1kHz  
SNR: 103dB  
Maximum Simultaneous Effects: 8  
Preset Memory: 100 Presets Slots, 50 Factory Presets

**Analog Input Connections**  
INPUT: 1/4" (6.35mm) Unbalanced (TS), 1MΩ

**Analog Output Connections**  
STEREO OUTPUT (PHONES): 1/4" (6.35mm) Stereo (TRS), 100Ω

**Digital Connections**  
USB Port: USB 2.0 Type-C Port

**USB Recording Specification**  
Sample Rate: 44.1kHz  
Bit Depth: 16-bit

**Size and Weight**  
Dimensions: 170mm (W) × 120mm (D) × 57.5mm (H)  
Unit Weight: 493g

**Power**  
Power Requirements: DC 9V 500mA

**iE-550 Master Series**  
Multi-Effect Processor

**Quick User Guide**

**DK**

**FCC Warning**


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
- Reorient or relocate the receiving antenna.  
- Increase the separation between the equipment and receiver.  
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

**DK**

**iE-550 Master Series**  
Multi-Effect Processor

**用户快速指南**

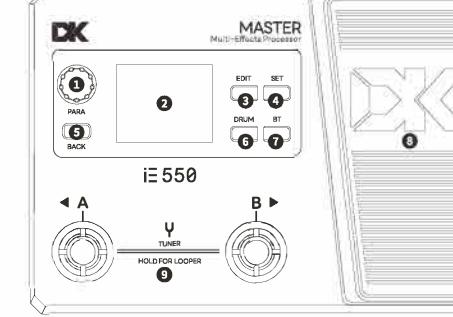

**1 旋转或按下该旋钮以调整参数**  
**2 1.77" LCD彩色显示屏:显示预设信息、可调参数、蓝牙开关等**  
**3 按下进入编辑效果链界面、切换效果模块,长按进入保存预设界面**  
**4 按下进入全局设置界面、切换设置选项**  
**5 按下返回上一层**

**规格参数**

**技术指标**  
A/D/A转换:24-bit  
采样率:44.1kHz  
信噪比:103dB  
效果模块:最大支持8个效果模块  
预设数量:100个预设位置,50个出厂预设

**模拟输入连接**  
吉他输入:  
6.35mm (1/4") 非平衡输入 (TS) 接口, 阻抗1MΩ

**模拟输出连接**  
立体声(耳机)输出:  
6.35mm (1/4") TRS接口, 阻抗100Ω

**数字连接**  
USB 接口:USB 2.0 Type-C接口

**USB录音规格**  
采样频率:44.1kHz  
采样深度:16位

**尺寸及重量**  
尺寸:  
170mm (W) × 120mm (D) × 57.5mm (H)  
重量:493克

**电源**  
电源要求:DC 9V 500mA

技术要求:

180g书纸,400\*100mm(折后200\*100mm),单色印刷,折页