

Product specification


Quick Reference Date

	Antenna module on the system board	
Frequency	2400MHz~2500MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-2.3 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.3	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	-2.3 (58.5%)	
Gain (dBi)	1.7dBi	
Maximum Power (dBm)	1.3 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Max/Min Ratio (dB)	5.3(XY-plane)	
Max/Avg Ratio (dB)	1.8(XY-plane)	
Min/Avg Ratio (dB)	-3.5(XY-plane)	
Average Gain (dB)	-0.5 (Avg Gain XY-plane)	



All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & system board




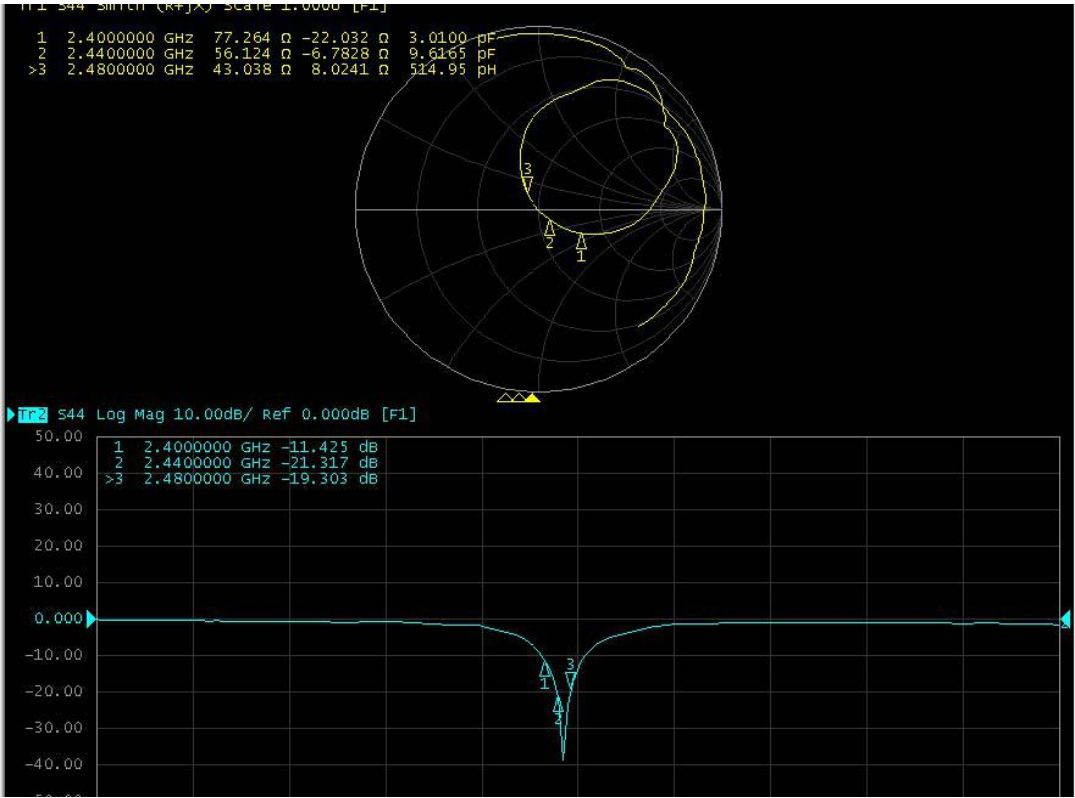




Return Loss

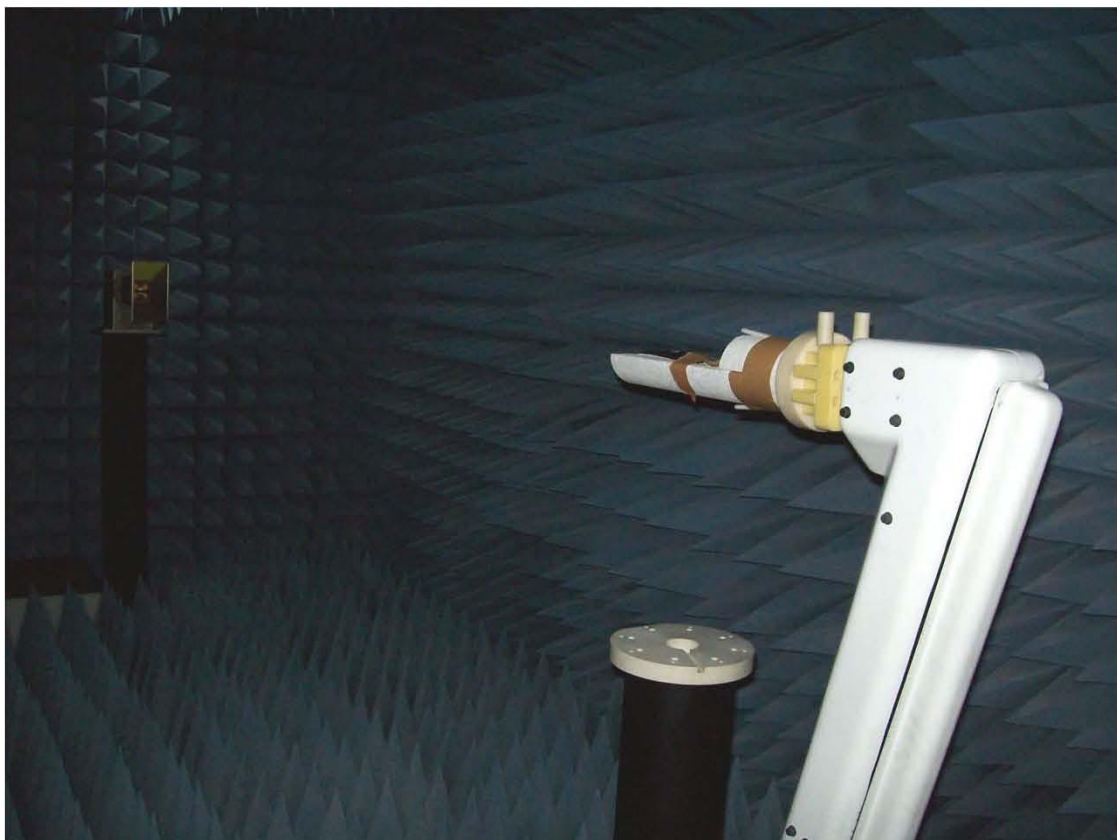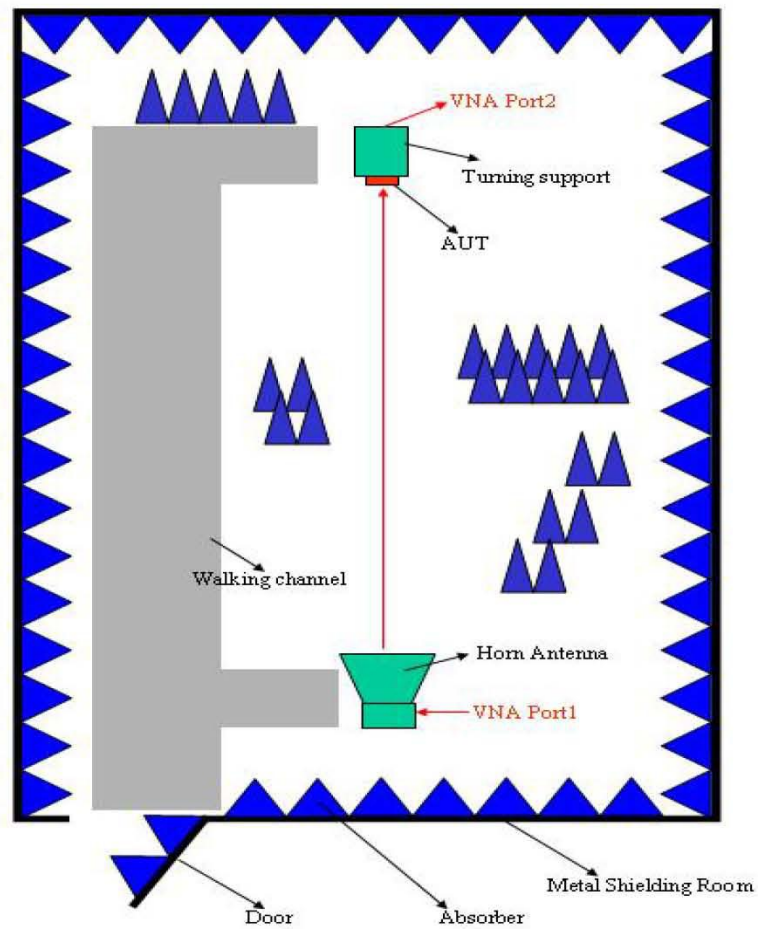

The Environment of Antenna Radiation Pattern

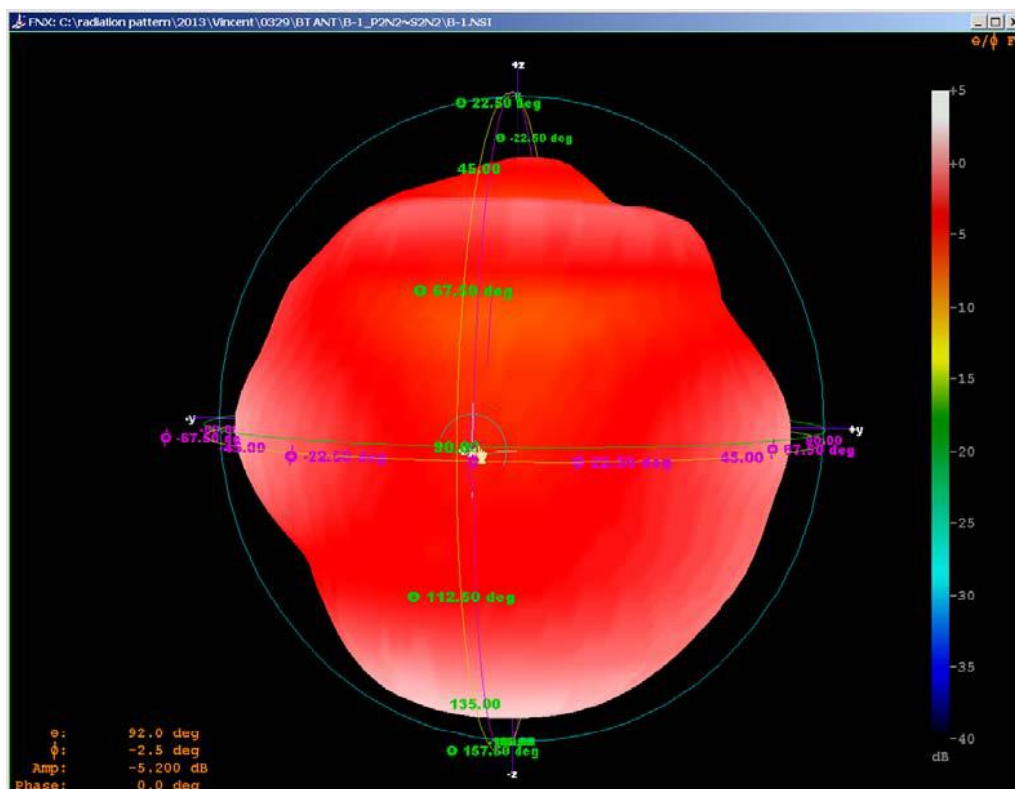

3D radiation pattern diagram

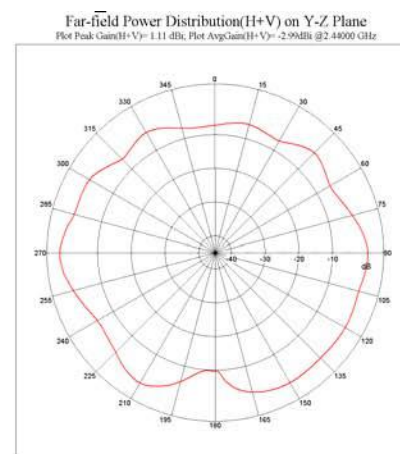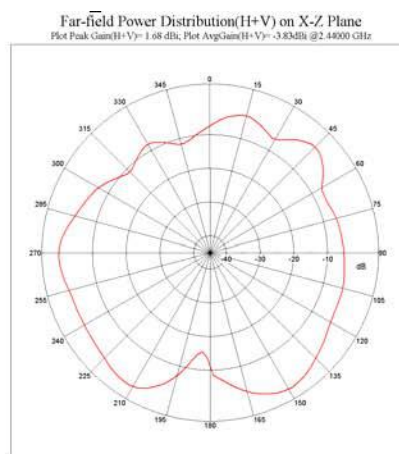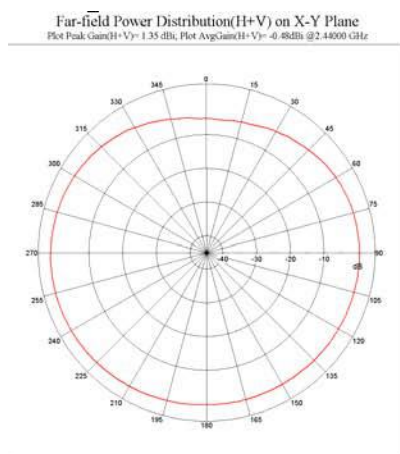

XY-plane XZ-plane YZ-plane

Manufacturer: Shenzhen bellwether Technology Co., Ltd
Address: C201, Building C and D, Gongchuang Ying Industrial Park,
No. 8 Baodan Road, Danzhutou Community, Nanwan Street, Longgang
District, Shenzhen