



# Antenna Specification

Manufacture: TUYA

Product Name: WBRU Antenna

Antenna Type: PCB

Test Date: 2021.04.23

Tested by: Quan Cai

Approved by: Licco



## Content

|                               |   |
|-------------------------------|---|
| 1.General Description .....   | 1 |
| 2.Test Configurations .....   | 2 |
| 2.1 Test Environment .....    | 2 |
| 2.2 Test Equipment .....      | 2 |
| 2.3 Test Principle .....      | 2 |
| 3.Test Results .....          | 3 |
| 3.1 Gain and Efficiency ..... | 3 |
| 3.2 Radiation Pattern .....   | 4 |
| 4.Antenna Dimensions .....    | 6 |
| 5.EUT Photo .....             | 6 |
| 6.Test Setup Photo .....      | 7 |



## 1.General Description

|                |                                                                                                |
|----------------|------------------------------------------------------------------------------------------------|
| Manufacturer   | Hangzhou Tuya Information Technology Co.,Ltd                                                   |
| Address        | Room 701,Building 3,More Center,No.87 GuDun Road,<br>Hangzhou, Zhejiang,China                  |
| Test Location  | Room 106, Building 3, Letong Science Park, No. 500,<br>Qiuyi Road, Binjiang District, Hangzhou |
| Product Name   | WBRU Antenna                                                                                   |
| Product model  | WBRU                                                                                           |
| Antenna Type   | PCB Antenna                                                                                    |
| Test Items     | Gain; Efficiency; Radiation Pattern                                                            |
| Test Frequency | 2400-2500MHz                                                                                   |
| Test Standard  | ANSI/IEEE Std 149-1979                                                                         |

## 2.Test Configurations


### 2.1 Test Environment

|                            |       |
|----------------------------|-------|
| Temperature (°C)           | 25    |
| Humidity (%RH)             | 60    |
| Atmospheric Pressure (kPa) | 100.5 |

### 2.2 Test Equipment

|                 |                                      |
|-----------------|--------------------------------------|
| Test System     | TEM 24 Multi-probe Microwave Chamber |
| Test Instrument | Agilent E5071B                       |

### 2.3 Test Principle

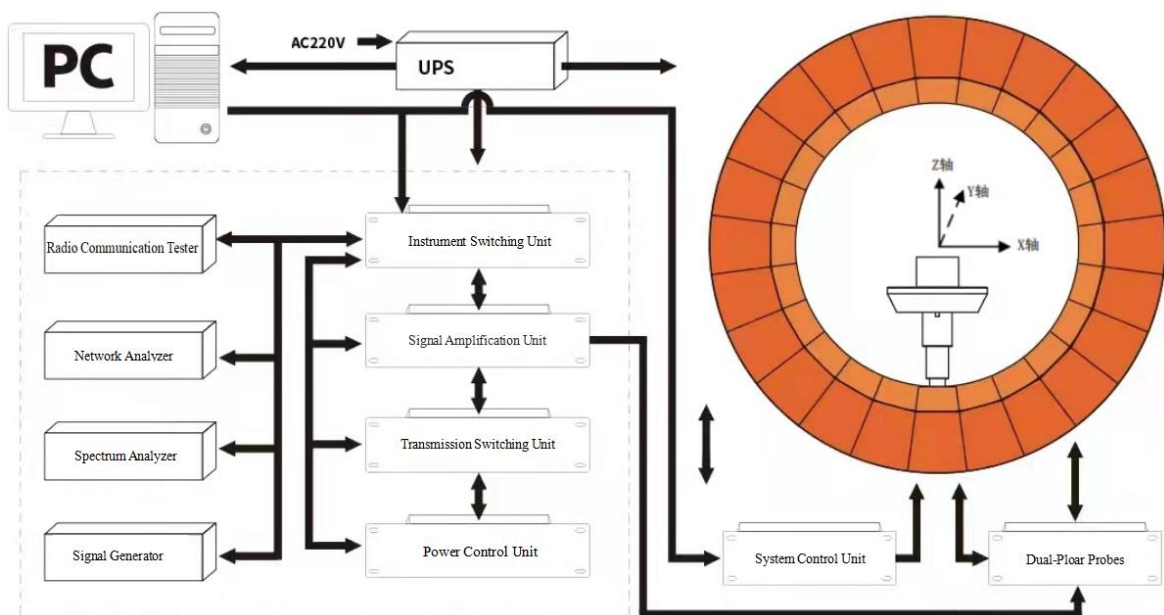




## 3.Test Results

### 3.1 Gain and Efficiency


| Frequency (MHz) | Peak Gain (dBi) | Efficiency (%) |
|-----------------|-----------------|----------------|
| 2400            | -0.58           | 34.91          |
| 2410            | -0.14           | 38.82          |
| 2420            | 0.22            | 41.21          |
| 2430            | 0.41            | 42.85          |
| 2440            | 0.56            | 43.85          |
| 2450            | 0.56            | 44.57          |
| 2460            | 0.99            | 46.88          |
| 2470            | 1.16            | 47.32          |
| 2480            | 1.01            | 46.24          |
| 2490            | 0.91            | 43.15          |
| 2500            | 0.52            | 40.27          |

## 3.2 Radiation Pattern


Phi 0 2D

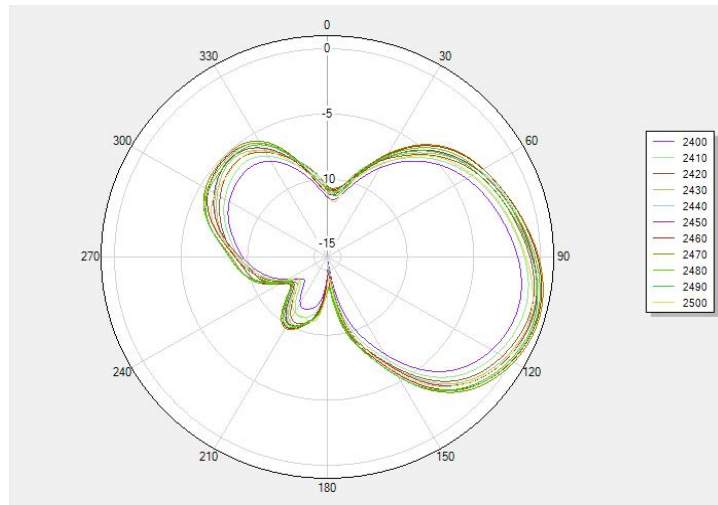


Phi 90 2D

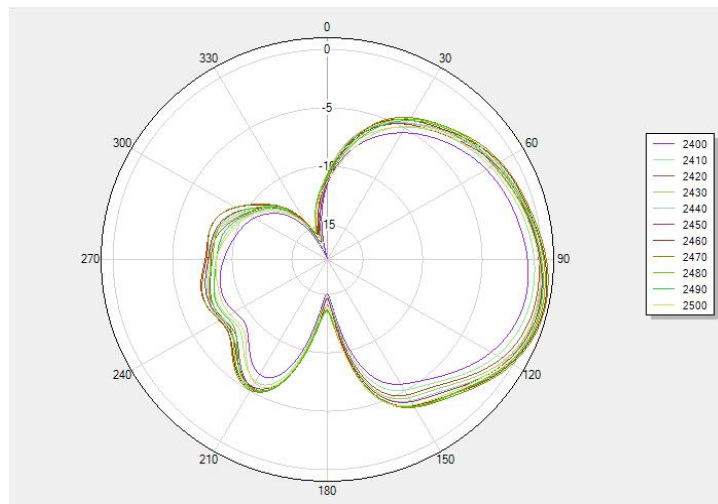


Theta 90 2D

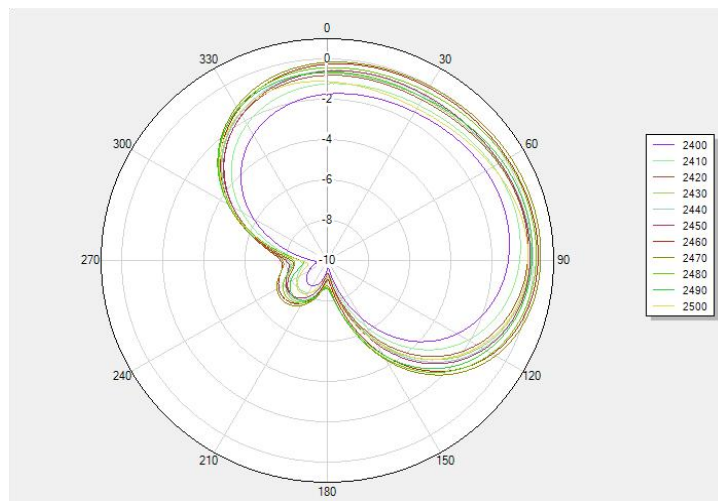


2400MHz 3D

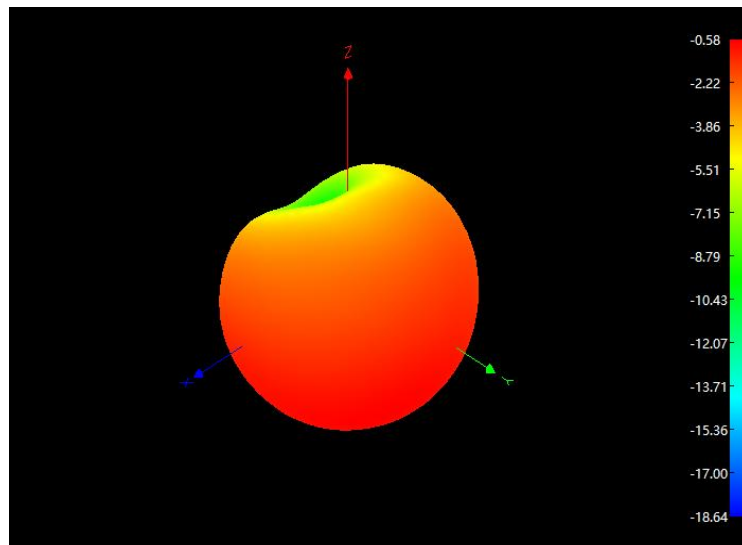


2450MHz 3D

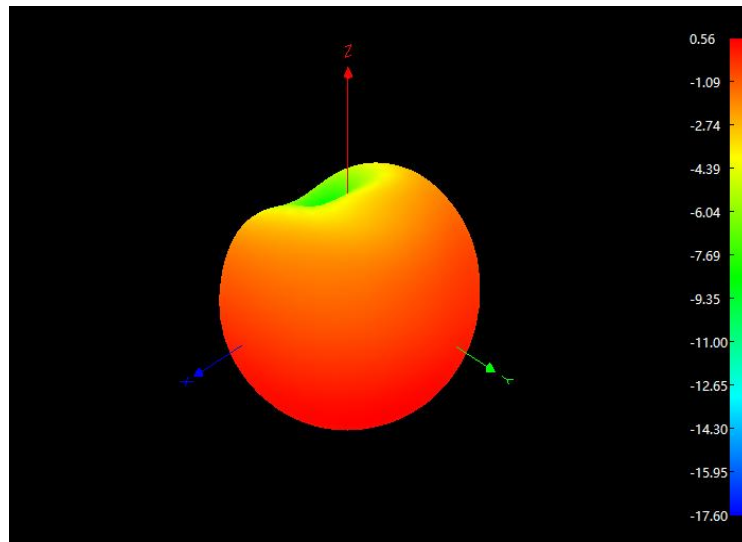


2500MHz 3D

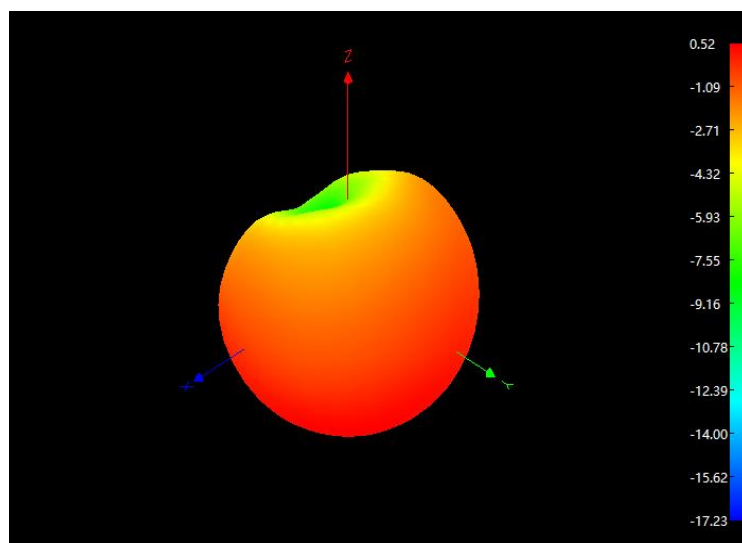

## 4. Antenna Dimensions

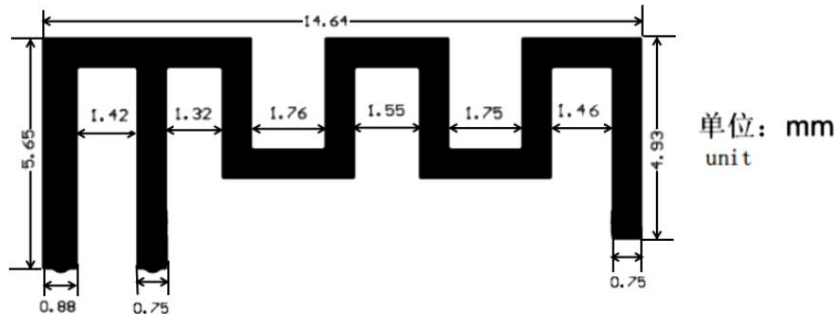

## 5. EUT Photo

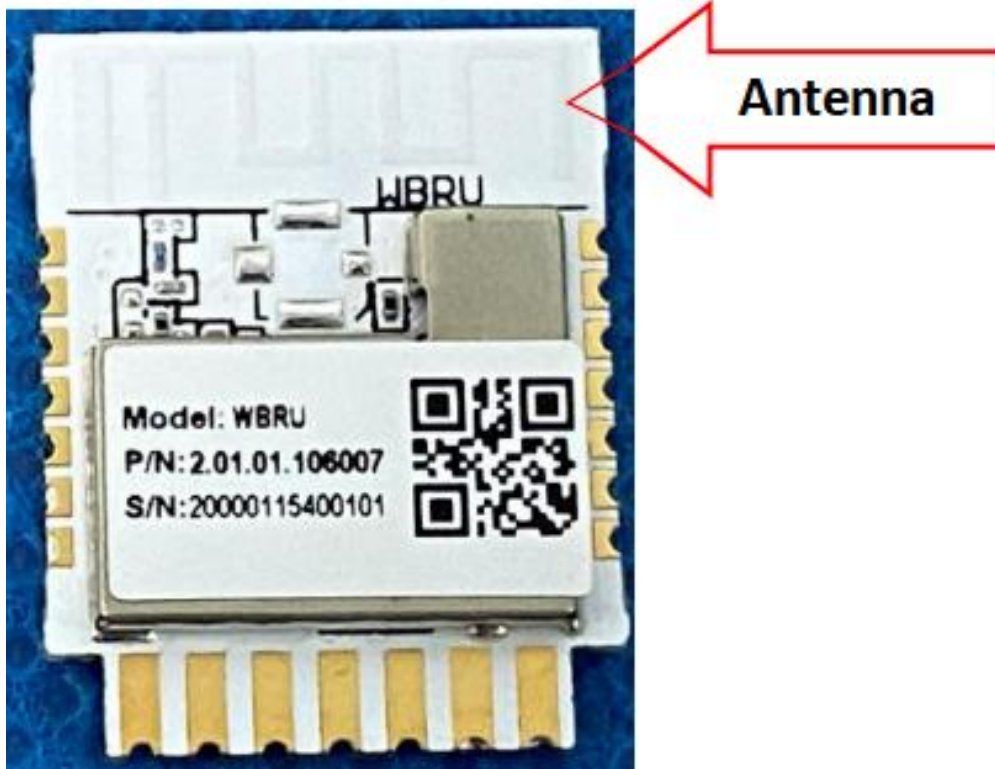



## 6.Test Setup Photo

