


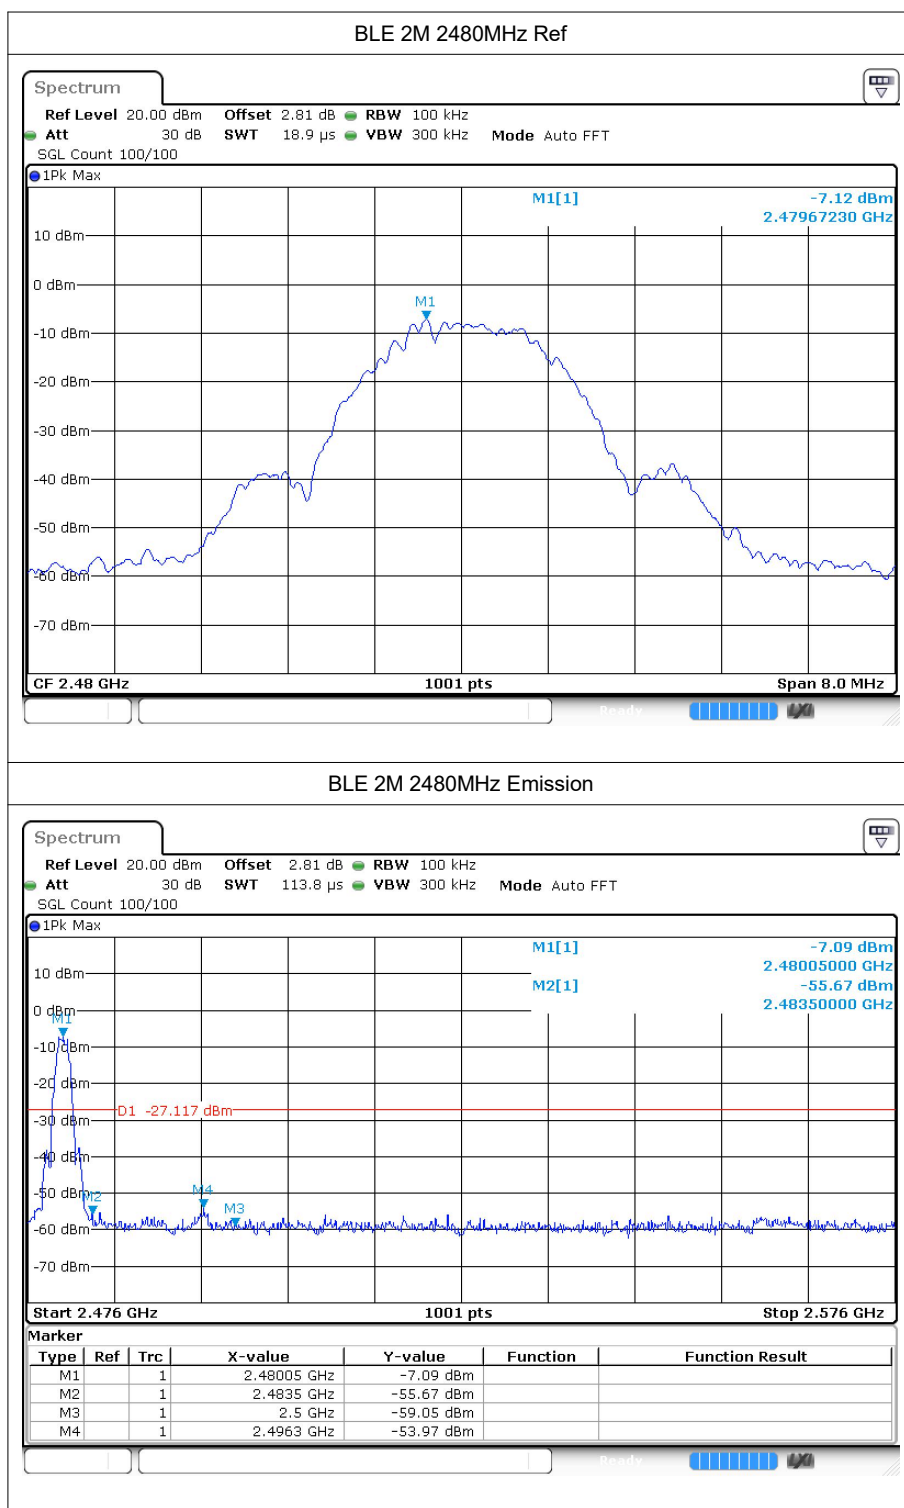



6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-39.5	-20	Pass
BLE 1M	2440	-38.43	-20	Pass
BLE 1M	2480	-38.63	-20	Pass
BLE 2M	2402	-36.48	-20	Pass
BLE 2M	2440	-36.32	-20	Pass
BLE 2M	2480	-35.83	-20	Pass


6.2 Test Graphs

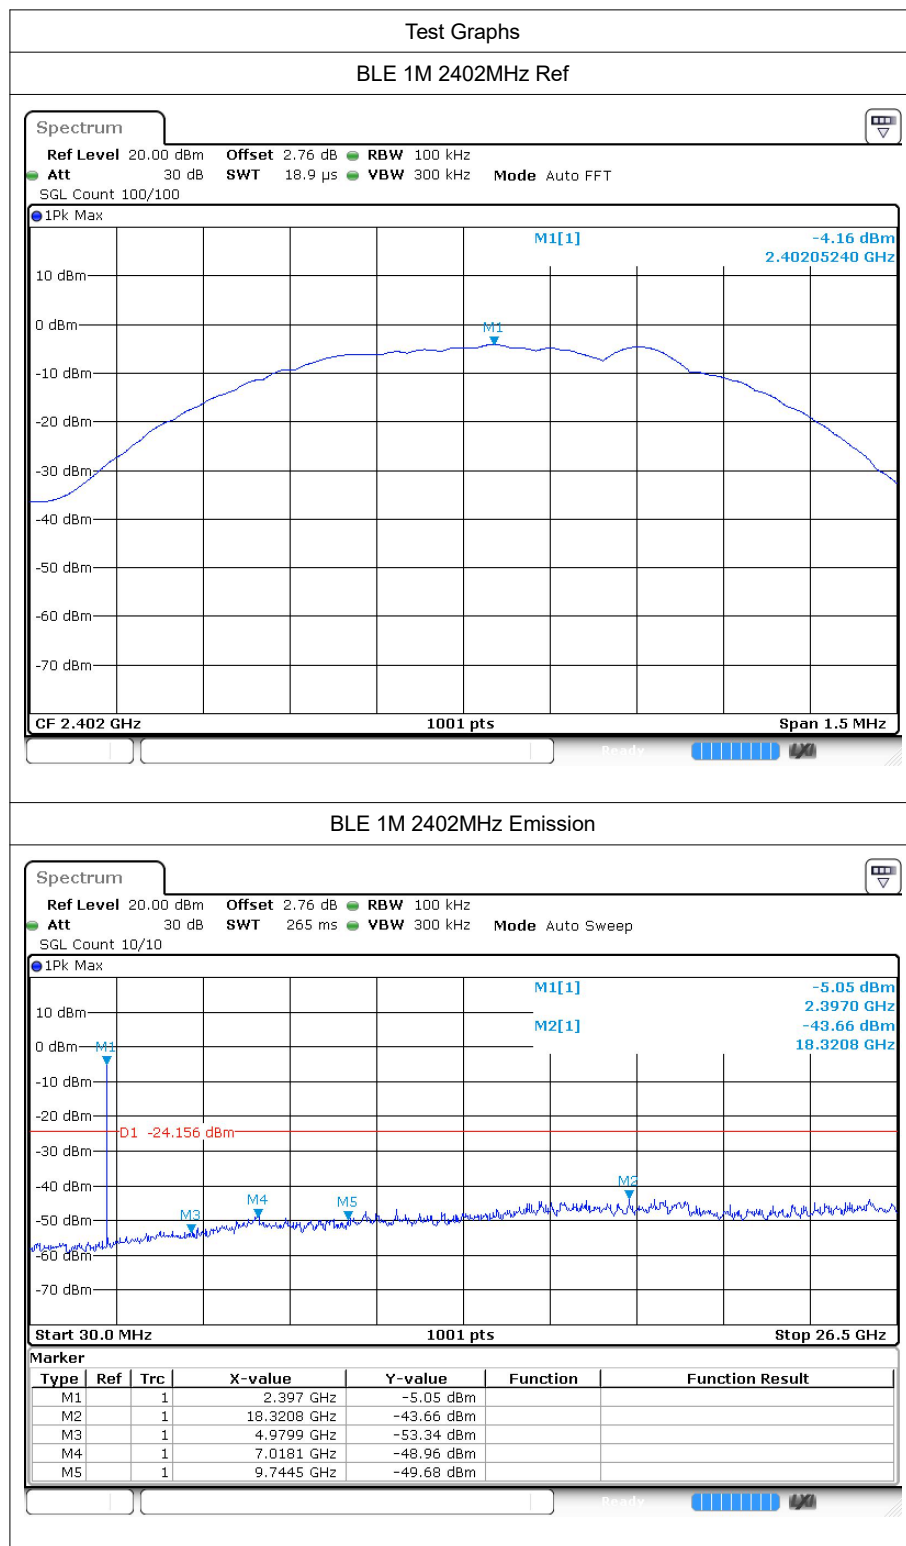


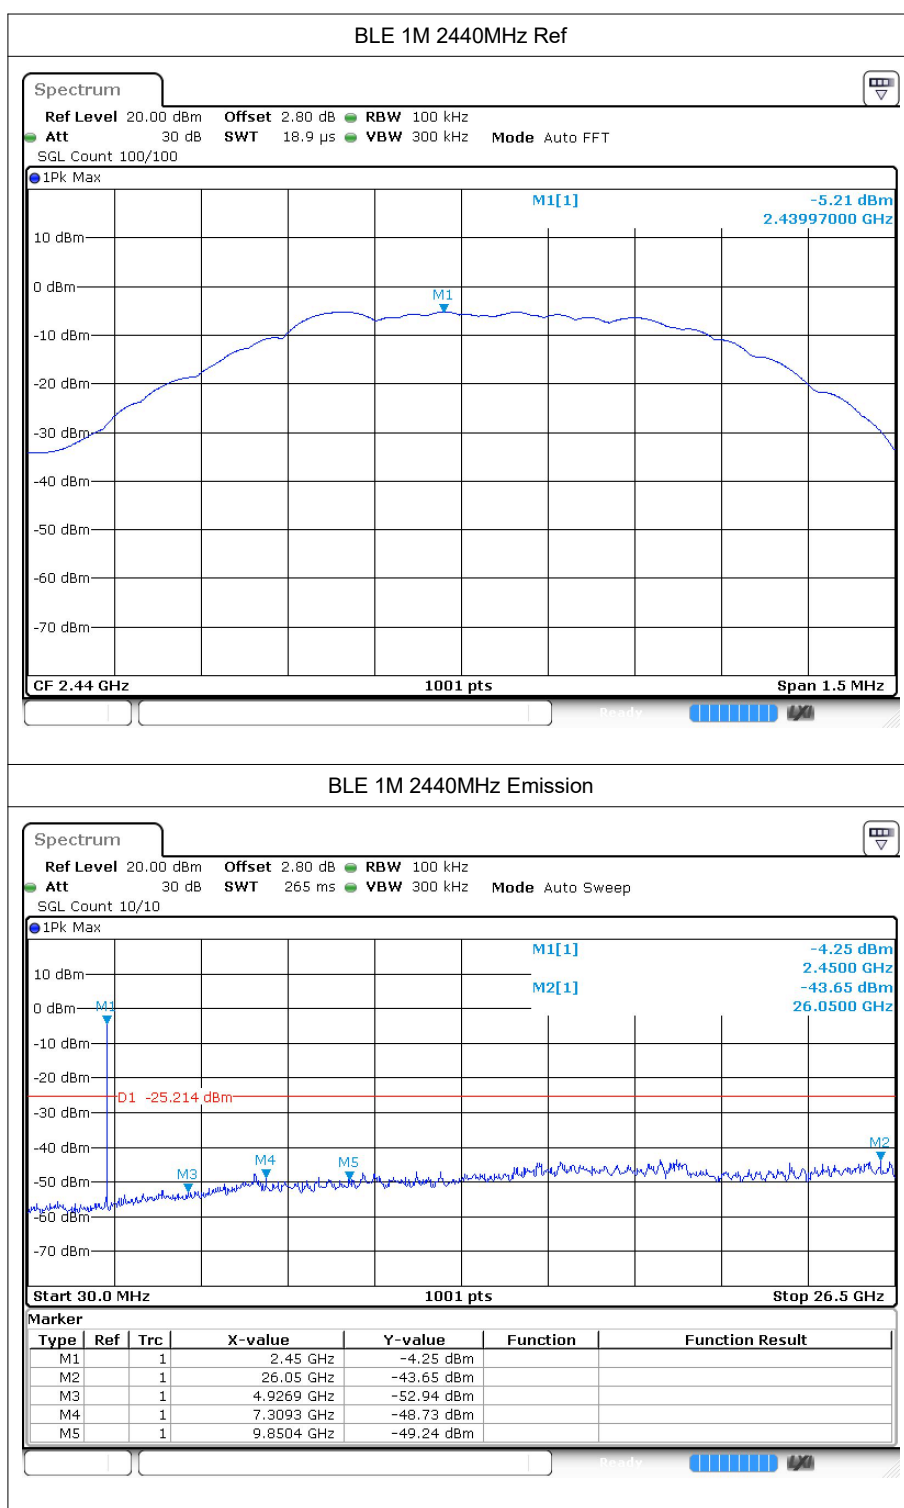

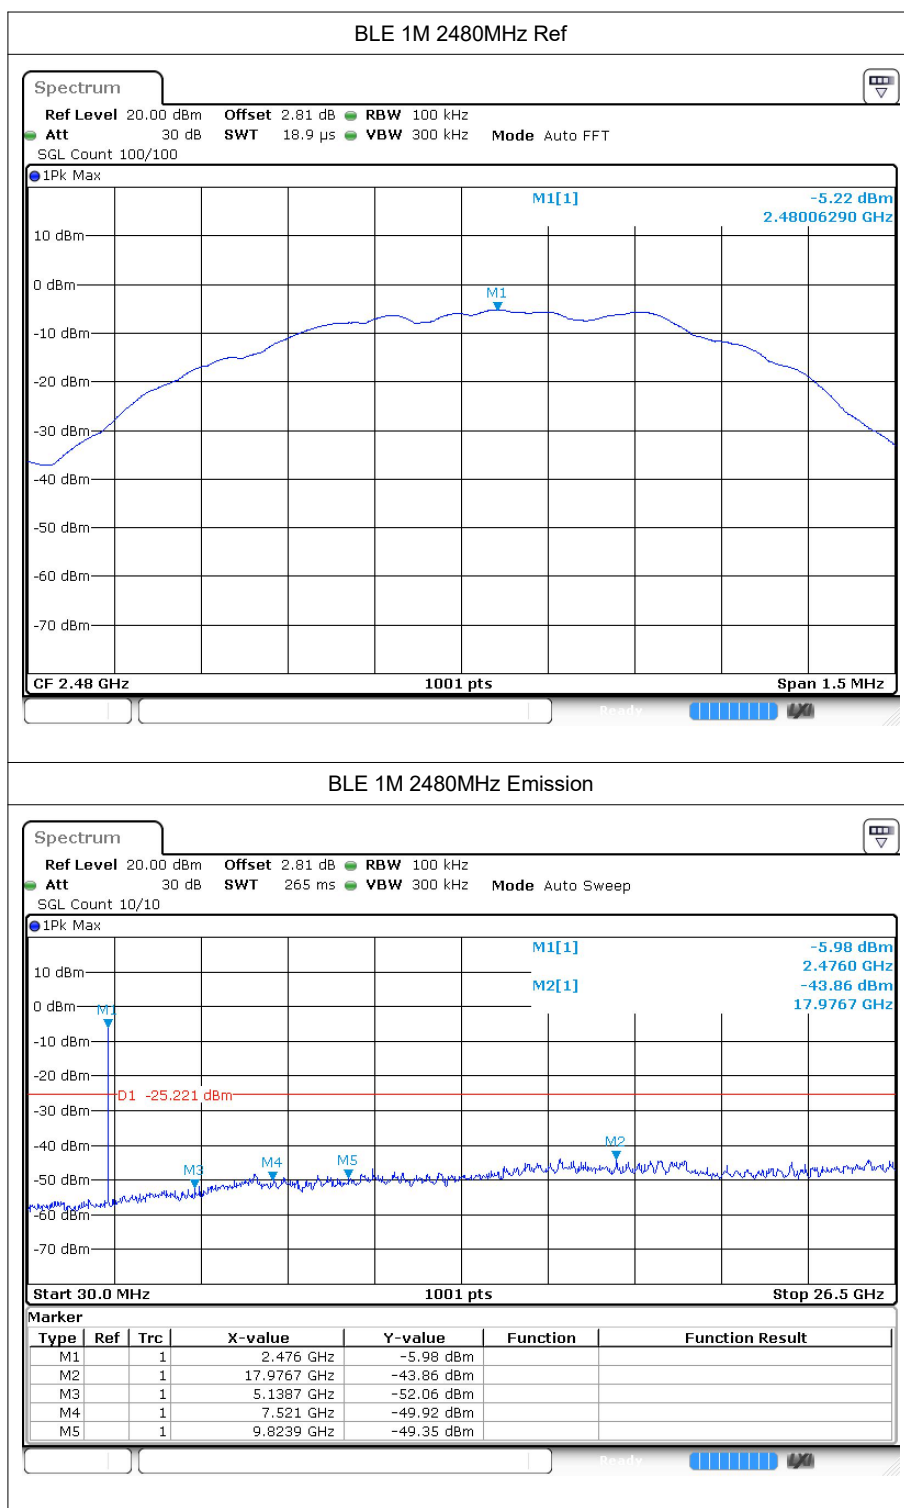

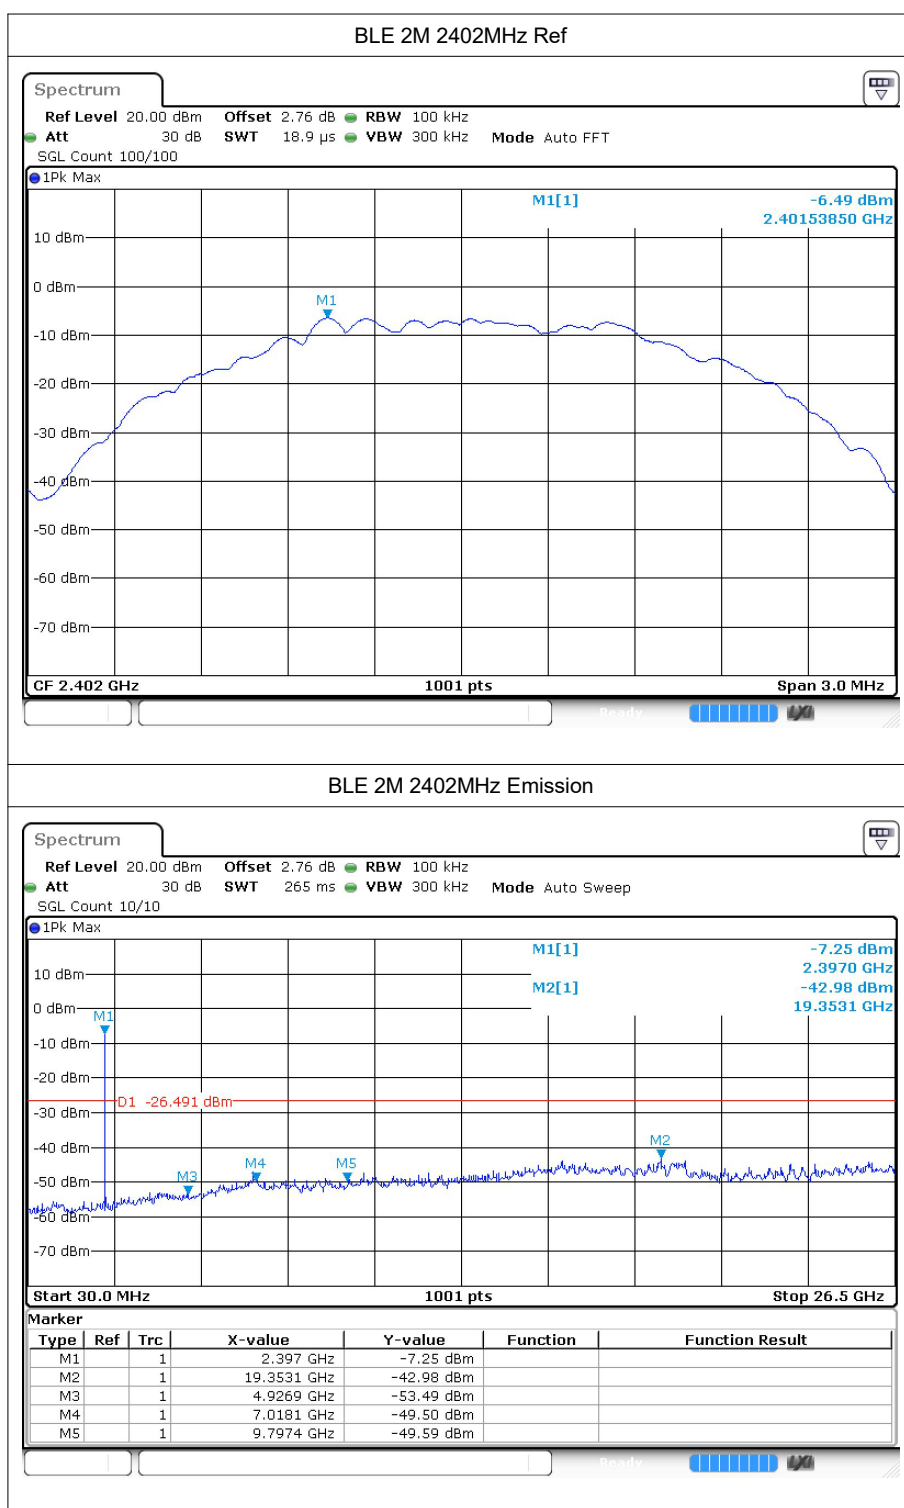

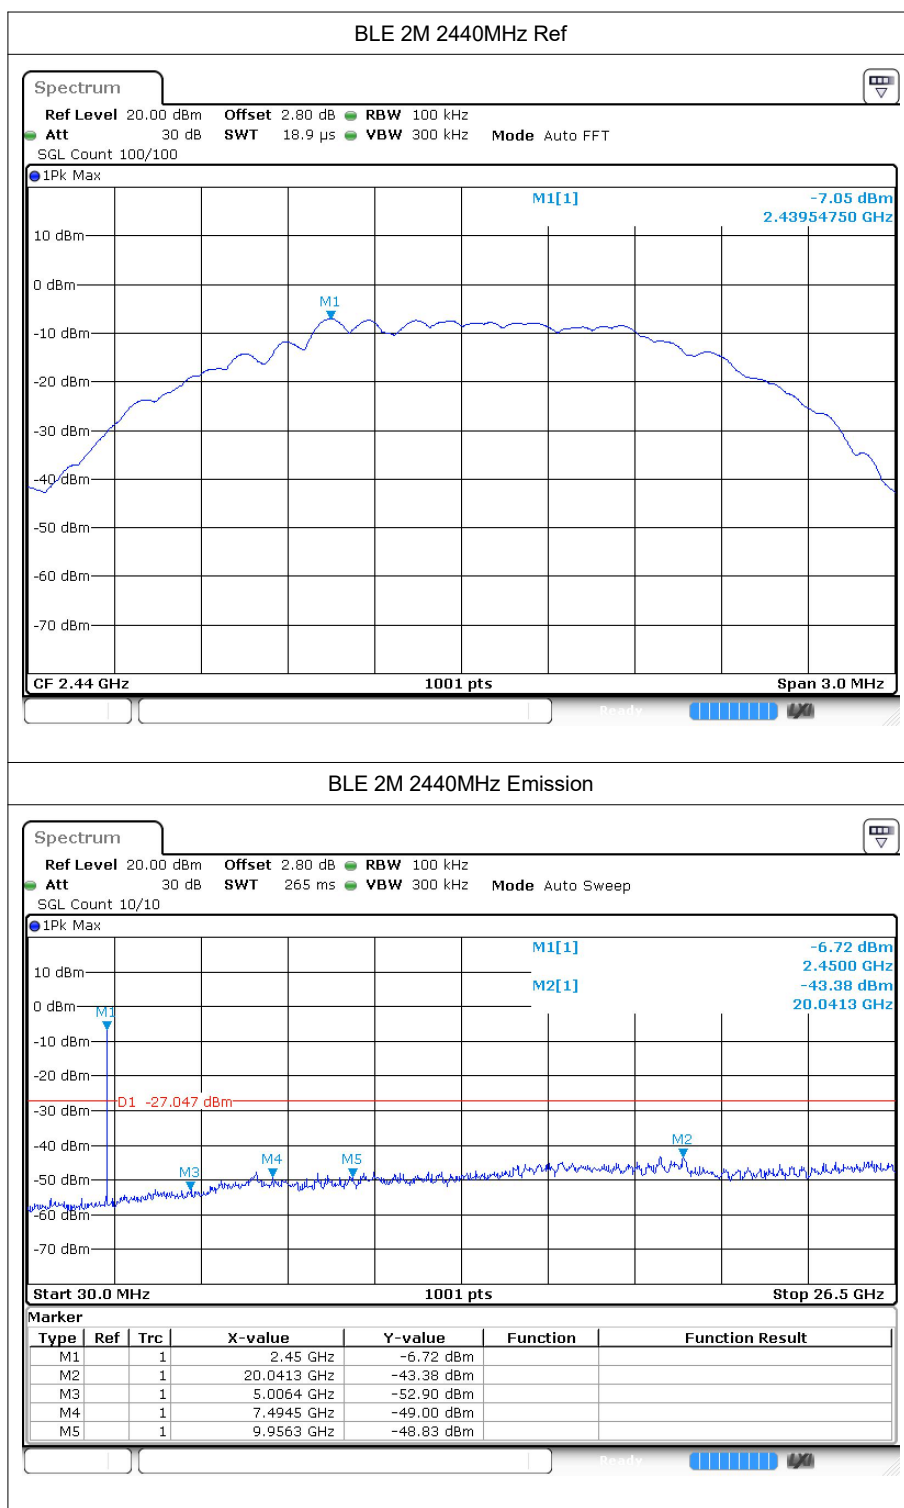

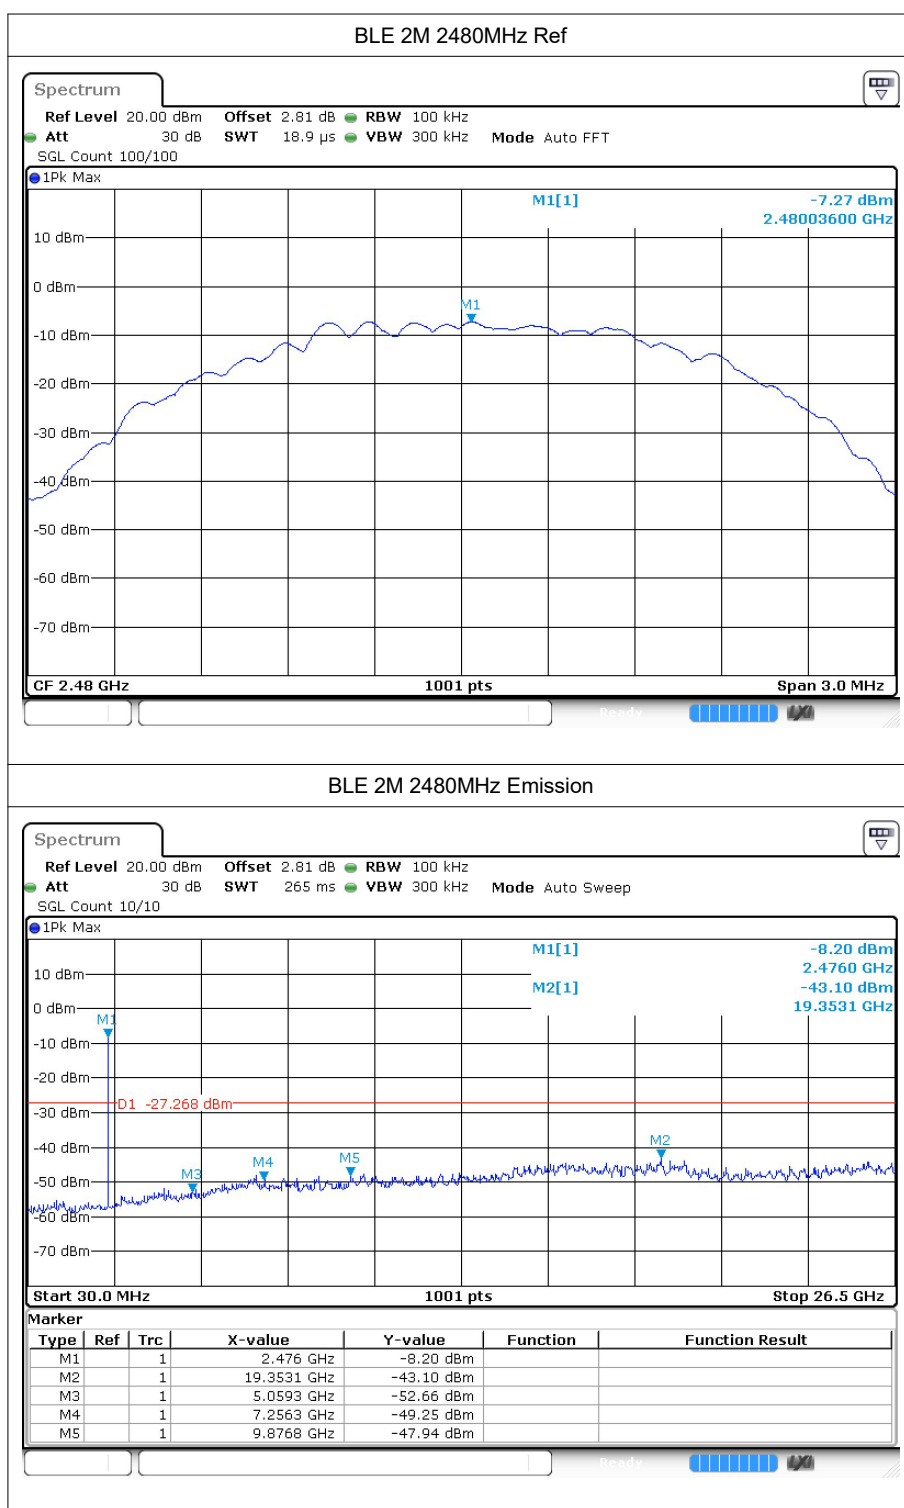





7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-49.22	2	-	48.04	Peak	74	Pass
BLE 1M	2402	2310	-57	2	0	40.26	Average	54	Pass
BLE 1M	2402	2338.224	-46.9	2	-	50.36	Peak	74	Pass
BLE 1M	2402	2386.032	-52.29	2	0	44.97	Average	54	Pass
BLE 1M	2402	2390	-50.81	2	-	46.45	Peak	74	Pass
BLE 1M	2402	2390	-57.3	2	0	39.96	Average	54	Pass
BLE 1M	2480	2483.5	-47.2	2	-	50.06	Peak	74	Pass
BLE 1M	2480	2483.5	-55.57	2	0	41.69	Average	54	Pass
BLE 1M	2480	2495.632	-46.8	2	-	50.46	Peak	74	Pass
BLE 1M	2480	2496.088	-53.51	2	0	43.75	Average	54	Pass
BLE 1M	2480	2500	-49.28	2	-	47.98	Peak	74	Pass
BLE 1M	2480	2500	-56.83	2	0	40.43	Average	54	Pass
BLE 2M	2402	2310	-49.34	2	-	47.92	Peak	74	Pass
BLE 2M	2402	2310	-56.32	2	0	40.94	Average	54	Pass
BLE 2M	2402	2385.648	-46.26	2	-	51	Peak	74	Pass
BLE 2M	2402	2386.128	-52.98	2	0	44.28	Average	54	Pass
BLE 2M	2402	2390	-50.96	2	-	46.3	Peak	74	Pass
BLE 2M	2402	2390	-57.28	2	0	39.98	Average	54	Pass
BLE 2M	2480	2483.5	-48.06	2	-	49.2	Peak	74	Pass
BLE 2M	2480	2483.5	-54.79	2	0	42.47	Average	54	Pass
BLE 2M	2480	2489.848	-46.15	2	-	51.11	Peak	74	Pass
BLE 2M	2480	2496.232	-53.84	2	0	43.42	Average	54	Pass
BLE 2M	2480	2500	-49.42	2	-	47.84	Peak	74	Pass
BLE 2M	2480	2500	-56.29	2	0	40.97	Average	54	Pass

7.2 Test Graphs

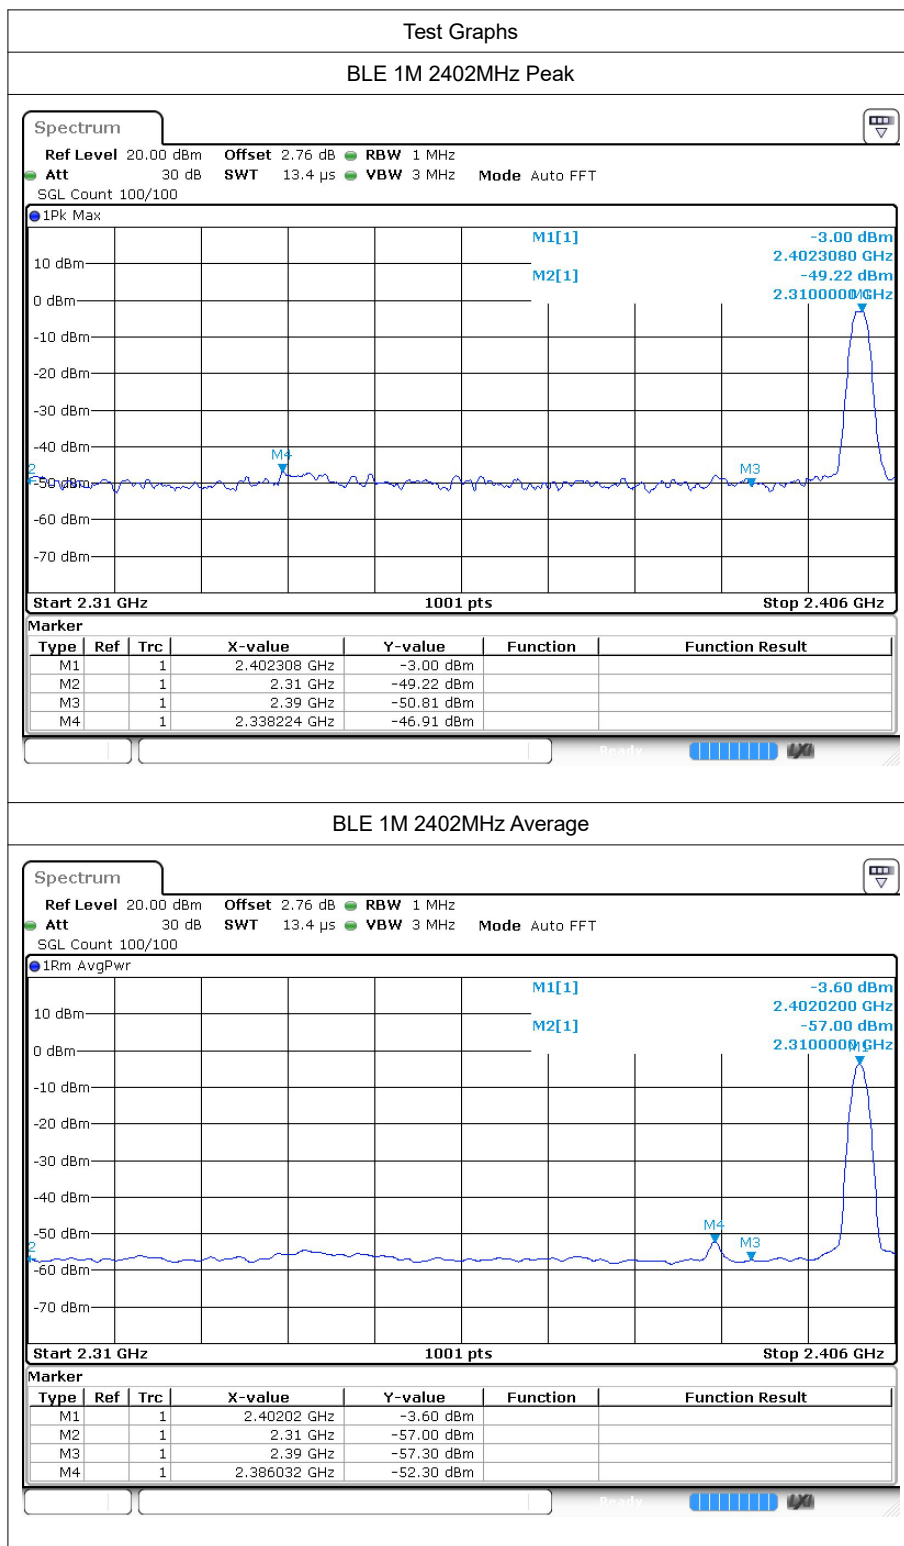

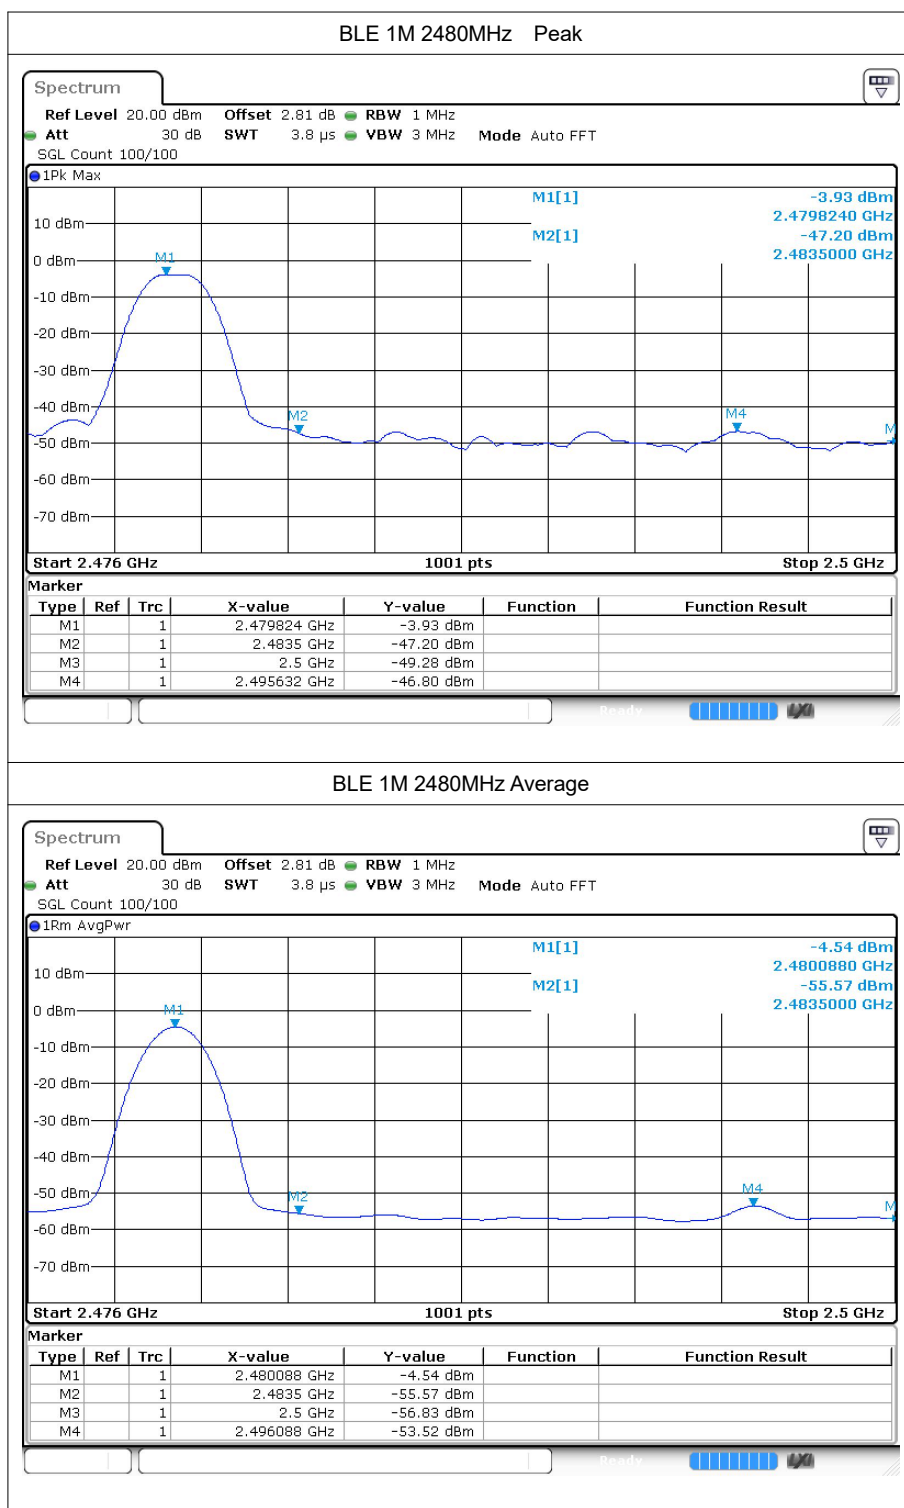

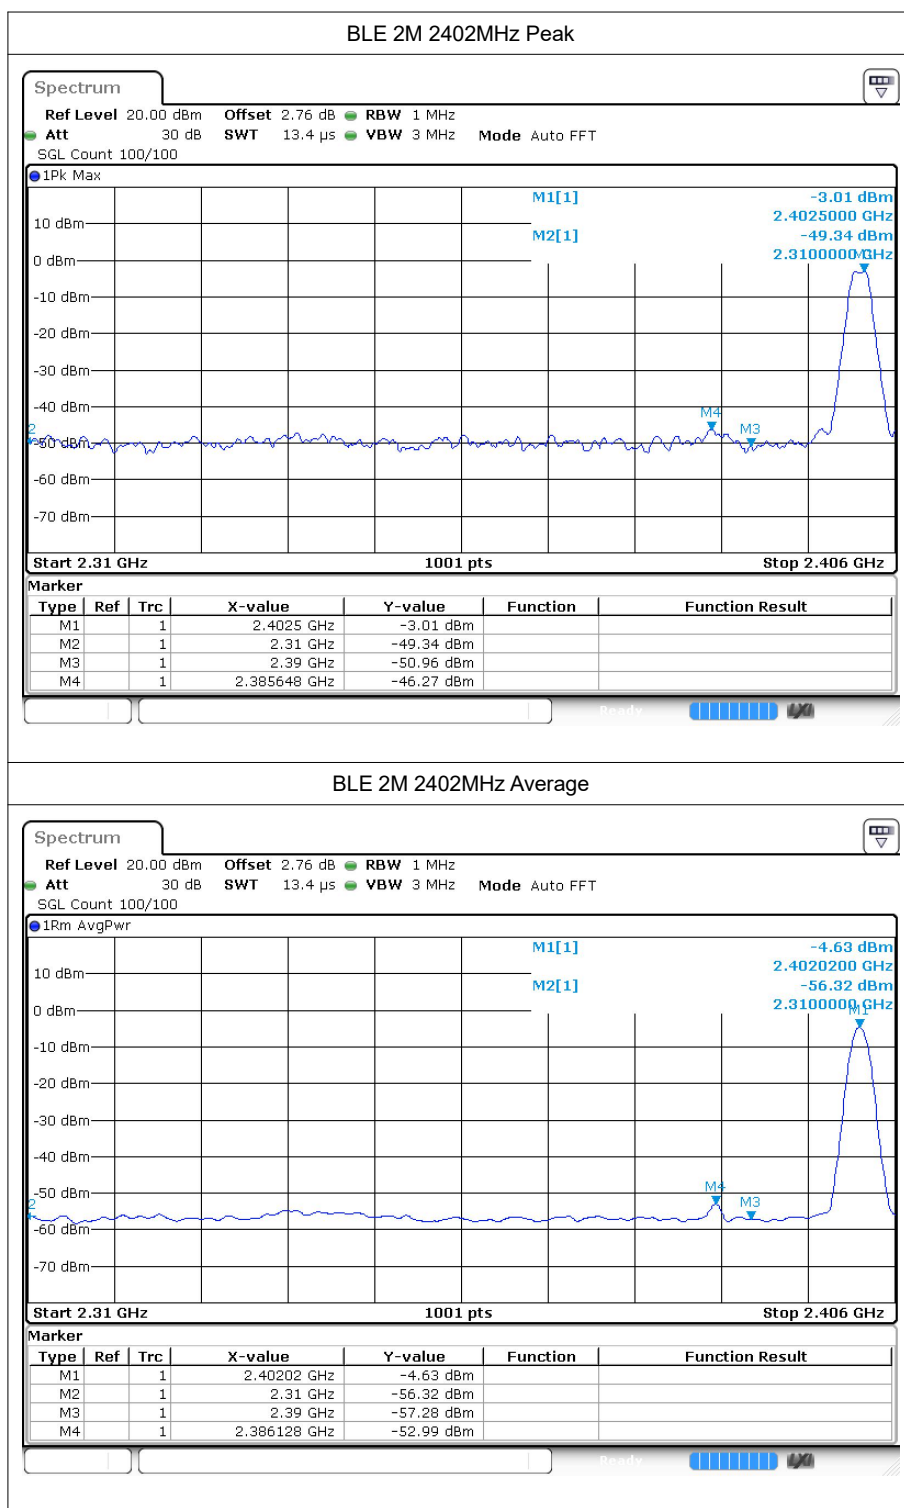

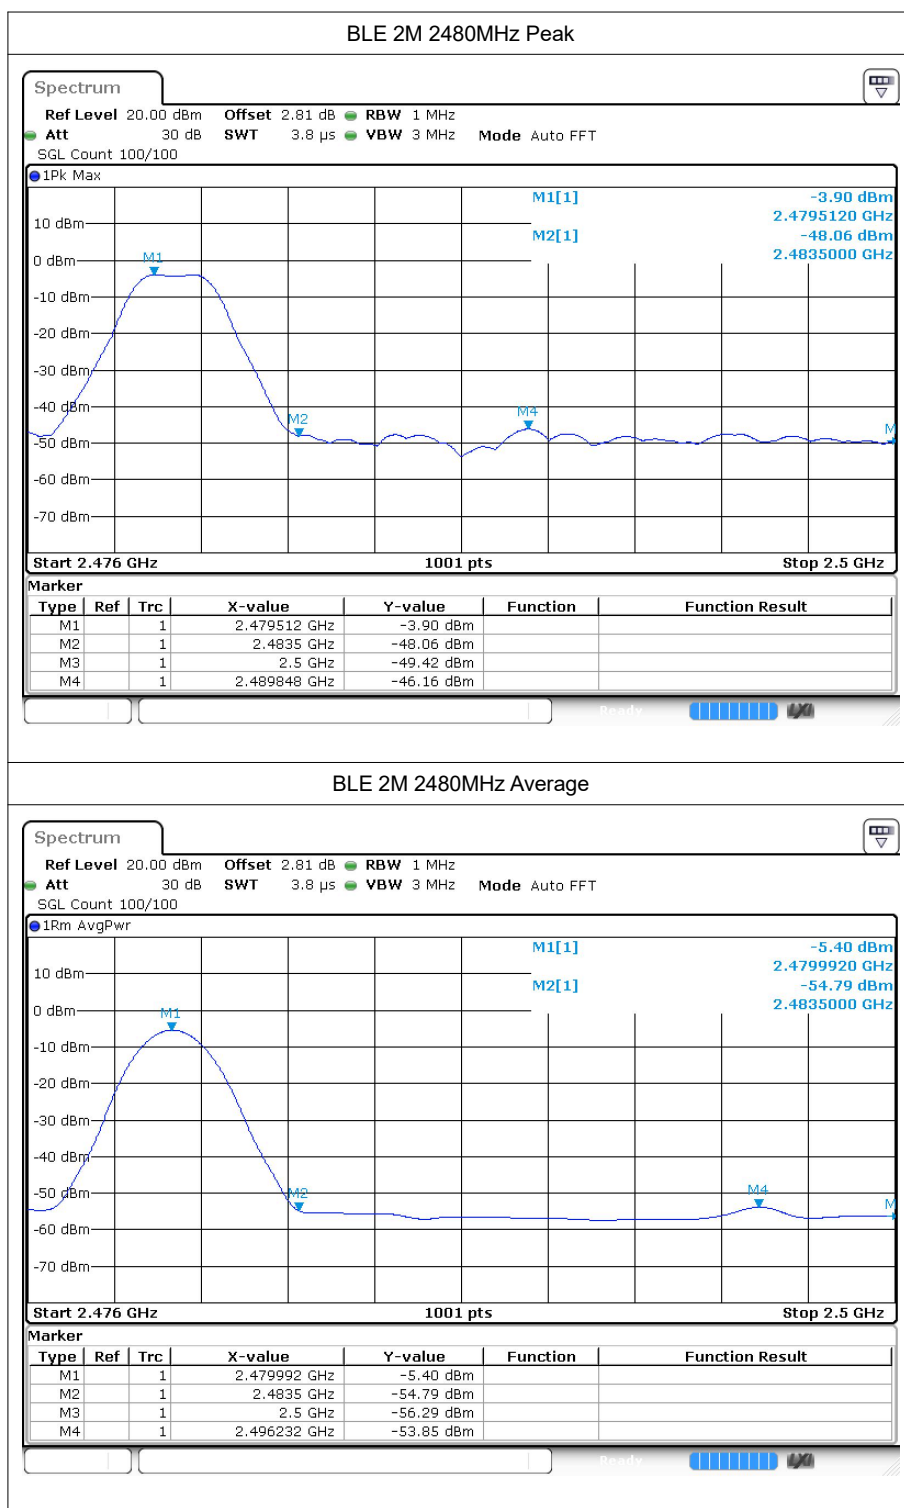

---The End---