



# FCC TEST REPORT

## FCC ID: 2BL5O-ZX800-VG

|            |   |                      |
|------------|---|----------------------|
| Product    | : | LTE module           |
| Model Name | : | ZX800-VG             |
| Brand      | : | ZXInfoTek            |
| Report No. | : | PTC25042000101E-FC01 |

### Prepared for

ZXInfoTek(Shenzhen) Co., Ltd.

19A, Block C, Electronic Technology Building, No. 2070, Shennan Middle Road,  
Fuqiang Community, Huaqiangbei Sub-district, Futian District, Shenzhen City,  
Guangdong Province

### Prepared by

Precise Testing & Certification Co., Ltd

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China



## 1 Test Result Certification

Applicant's name : ZXInfoTek(Shenzhen) Co., Ltd.  
Address : Room 301, Building 4, Shenzhen Software Industry Base, No. 19, 17 and 18, Haitian First Road, Binhai Community, Yuehai Street, Nanshan District, Shenzhen City  
Manufacturer's name : ZXInfoTek(Shenzhen) Co., Ltd.  
Address : Room 301, Building 4, Shenzhen Software Industry Base, No. 19, 17 and 18, Haitian First Road, Binhai Community, Yuehai Street, Nanshan District, Shenzhen City  
Product name : LTE module  
Model name : ZX800-VG  
Standards : FCC CFR Title 47 Part 2,22H,24E,27L&M, ANSI C63.26-2015, ANSI TIA-603-E-2016, KDB 971168 D01 Power Meas License Digital Systems v03r01  
Test Date : May. 19, 2025 to July. 25, 2025  
Date of Issue : July. 25, 2025  
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Jack Zhou / Engineer

Technical Manager:

Simon Pu / Manager



## **TABLE OF CONTENTS**

|                                                           |           |
|-----------------------------------------------------------|-----------|
| <b>1 Test Result Certification.....</b>                   | <b>2</b>  |
| <b>2. General Description Of Eut .....</b>                | <b>4</b>  |
| <b>1. Facilities and Accreditations .....</b>             | <b>5</b>  |
| 1.1. TEST FACILITY .....                                  | 5         |
| 1.2. DESCRIPTION OF TEST CHANNELS AND TEST MODES .....    | 6         |
| 1.3. EQUIPMENT MODIFICATIONS .....                        | 7         |
| <b>2. Summary Of Test Requirements And Results.....</b>   | <b>8</b>  |
| <b>3. Measurement Instruments .....</b>                   | <b>11</b> |
| <b>4. EFFECTIVE (ISOTROPIC) RADIATED POWER .....</b>      | <b>13</b> |
| 4.1. CONDUCTED OUTPUT POWER .....                         | 13        |
| 4.2. EFFECTIVE (ISOTROPIC) RADIATED POWER .....           | 13        |
| <b>5. SPURIOUS EMISSION (Conducted and Radiated).....</b> | <b>14</b> |
| 5.1. MEASUREMENT RESULT (PRE-MEASUREMENT).....            | 14        |
| <b>6. Occupied Bandwidth and Emission Bandwidth .....</b> | <b>21</b> |
| <b>7. Band Edge.....</b>                                  | <b>25</b> |
| <b>8. Frequency Stability.....</b>                        | <b>27</b> |
| 8.1. MEASUREMENT RESULT (WORST).....                      | 28        |
| <b>15 APPENDIX I -- TEST SETUP PHOTOGRAPH.....</b>        | <b>29</b> |
| <b>16 APPENDIX II -- EUT PHOTOGRAPH.....</b>              | <b>30</b> |



## 2. General Description Of Eut

|                             |                                                                                                                                                                                                                                   |                                           |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| <b>Equipment Type:</b>      | LTE module                                                                                                                                                                                                                        |                                           |
| <b>Model Name:</b>          | ZX800-VG                                                                                                                                                                                                                          |                                           |
| <b>Hardware version:</b>    | N/A                                                                                                                                                                                                                               |                                           |
| <b>Software version:</b>    | N/A                                                                                                                                                                                                                               |                                           |
| <b>LTE Support Band:</b>    | E-UTRA Bands:<br><input checked="" type="checkbox"/> E-UTRA Band 2<br><input checked="" type="checkbox"/> E-UTRA Band 4<br><input checked="" type="checkbox"/> E-UTRA Band 5<br><input checked="" type="checkbox"/> E-UTRA Band 7 |                                           |
| <b>Frequency Range</b>      | E-UTRA Band 2:                                                                                                                                                                                                                    | Tx:1850 MHZ-1910 MHz;Rx:1930 MHz-1990 MHZ |
|                             | E-UTRA Band 4:                                                                                                                                                                                                                    | Tx:1710 MHz-1755 MHz;Rx:2110 MHz-2155 MHz |
|                             | E-UTRA Band 5:                                                                                                                                                                                                                    | Tx: 824MHz-849MHz;Rx:869 MHz-894 MHz      |
|                             | E-UTRA Band 7:                                                                                                                                                                                                                    | Tx:2500MHz-2570 MHz;Rx:2620 MHz-2690 MHz  |
| <b>Antenna Type:</b>        | PIFA Antenna                                                                                                                                                                                                                      |                                           |
| <b>Modulation Type:</b>     | <input checked="" type="checkbox"/> QPSK <input checked="" type="checkbox"/> 16QAM <input checked="" type="checkbox"/> 64QAM(Downlink Only)                                                                                       |                                           |
| <b>Antenna gain:</b>        | E-UTRA Band 2: 2.10dBi<br>E-UTRA Band 4: 1.95dBi<br>E-UTRA Band 5: 1.36dBi<br>E-UTRA Band 7: 2.35dBi                                                                                                                              |                                           |
| <b>UE-Categories:</b>       | UE-Category1                                                                                                                                                                                                                      |                                           |
| <b>Power Supply:</b>        | 3.3-4.5VDC(Powered by mainboard)                                                                                                                                                                                                  |                                           |
| <b>Extreme Vol. Limits:</b> | DC 3.3V to 4.5V (Normal: DC 3.9V)                                                                                                                                                                                                 |                                           |

**Table 2.1 The Basic Technical Specification for Working BAND(S).**

| OPERATION BAND(S) | Power Class | Mod.  | Max ERP(dBm) |
|-------------------|-------------|-------|--------------|
| E-UTRA BAND 2     | Class 3     | QPSK  | /            |
| E-UTRA BAND 2     | Class 3     | 16QAM | /            |
| E-UTRA BAND 4     | Class 3     | QPSK  | /            |
| E-UTRA BAND 4     | Class 3     | 16QAM | /            |
| E-UTRA BAND 5     | Class 3     | QPSK  | /            |
| E-UTRA BAND 5     | Class 3     | 16QAM | /            |
| E-UTRA BAND 7     | Class 3     | QPSK  | /            |
| E-UTRA BAND 7     | Class 3     | 16QAM | /            |

## 1. Facilities and Accreditations

### 1.1. Test Facility

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A

## 1.2. Description Of Test Channels And Test Modes

### Test channels:

| E-UTRA Band 2     |                  |                 |                           |                 |                            |
|-------------------|------------------|-----------------|---------------------------|-----------------|----------------------------|
| Test Frequency ID | Bandwidth[MHz]   | N <sub>UL</sub> | Frequency of Uplink [MHz] | N <sub>DL</sub> | Frequency of Downlink[MHz] |
| Low Range         | 1.4              | 18607           | 1850.7                    | 607             | 1930.7                     |
|                   | 3                | 18615           | 1851.5                    | 615             | 1931.5                     |
|                   | 5                | 18625           | 1852.5                    | 625             | 1932.5                     |
|                   | 10               | 18650           | 1855                      | 650             | 1935                       |
|                   | 15               | 18675           | 1857.5                    | 675             | 1937.5                     |
|                   | 20               | 18700           | 1860                      | 700             | 1940                       |
| Mid Range         | 1.4/3/5/10/15/20 | 18900           | 1880                      | 900             | 1960                       |
| High Range        | 1.4              | 19193           | 1909.3                    | 1193            | 1989.3                     |
|                   | 3                | 19185           | 1908.5                    | 1185            | 1988.5                     |
|                   | 5                | 19175           | 1907.5                    | 1175            | 1987.5                     |
|                   | 10               | 19150           | 1905                      | 1150            | 1985                       |
|                   | 15               | 19125           | 1902.5                    | 1125            | 1982.5                     |
|                   | 20               | 19100           | 1900                      | 1100            | 1980                       |

| E-UTRA Band 4     |                  |                 |                           |                 |                            |
|-------------------|------------------|-----------------|---------------------------|-----------------|----------------------------|
| Test Frequency ID | Bandwidth[MHz]   | N <sub>UL</sub> | Frequency of Uplink [MHz] | N <sub>DL</sub> | Frequency of Downlink[MHz] |
| Low Range         | 1.4              | 19957           | 1710.7                    | 1957            | 2110.7                     |
|                   | 3                | 19965           | 1711.5                    | 1965            | 2111.5                     |
|                   | 5                | 19975           | 1712.5                    | 1975            | 2112.5                     |
|                   | 10               | 20000           | 1715                      | 2000            | 2115                       |
|                   | 15               | 20025           | 1717.5                    | 2025            | 2117.5                     |
|                   | 20               | 20050           | 1720                      | 2050            | 2120                       |
| Mid Range         | 1.4/3/5/10/15/20 | 20175           | 1732.5                    | 2175            | 2132.5                     |
| High Range        | 1.4              | 20393           | 1754.3                    | 2393            | 2154.3                     |
|                   | 3                | 20385           | 1753.5                    | 2385            | 2153.5                     |
|                   | 5                | 20375           | 1752.5                    | 2375            | 2152.5                     |
|                   | 10               | 20350           | 1750                      | 2350            | 2150                       |
|                   | 15               | 20325           | 1747.5                    | 2325            | 2147.5                     |
|                   | 20               | 20300           | 1745                      | 2300            | 2145                       |

| E-UTRA Band 5     |                |                 |                           |                 |                            |
|-------------------|----------------|-----------------|---------------------------|-----------------|----------------------------|
| Test Frequency ID | Bandwidth[MHz] | N <sub>UL</sub> | Frequency of Uplink [MHz] | N <sub>DL</sub> | Frequency of Downlink[MHz] |
| Low Range         | 1.4            | 20407           | 824.7                     | 2407            | 869.7                      |
|                   | 3              | 20415           | 825.5                     | 2415            | 870.5                      |
|                   | 5              | 20425           | 826.5                     | 2425            | 871.5                      |
|                   | 10             | 20450           | 829                       | 2450            | 874                        |
| Mid Range         | 1.4/3/5/10     | 20525           | 836.5                     | 2525            | 881.5                      |
| High Range        | 1.4            | 20643           | 848.3                     | 2643            | 893.3                      |
|                   | 3              | 20635           | 847.5                     | 2635            | 892.5                      |
|                   | 5              | 20625           | 846.5                     | 2625            | 891.5                      |
|                   | 10             | 20600           | 844                       | 2600            | 889                        |



| E-UTRA Band 7     |                |                 |                           |                 |                            |
|-------------------|----------------|-----------------|---------------------------|-----------------|----------------------------|
| Test Frequency ID | Bandwidth[MHz] | N <sub>UL</sub> | Frequency of Uplink [MHz] | N <sub>DL</sub> | Frequency of Downlink[MHz] |
| Low Range         | 5              | 20775           | 2502.5                    | 2775            | 2622.5                     |
|                   | 10             | 20800           | 2505                      | 2800            | 2625                       |
|                   | 15             | 20825           | 2507.5                    | 2825            | 2627.5                     |
|                   | 20             | 20850           | 2510                      | 2850            | 2630                       |
| Mid Range         | 5/10/15/20     | 21100           | 2535                      | 3100            | 2655                       |
| High Range        | 5              | 21425           | 2567.5                    | 3425            | 2687.5                     |
|                   | 10             | 21400           | 2565                      | 3400            | 2685                       |
|                   | 15             | 21375           | 2562.5                    | 3375            | 2682.5                     |
|                   | 20             | 21350           | 2560                      | 3350            | 2680                       |

Note 1.both QPSK&16QAM modulation has been measured;  
2. The worst condition was recorded in the test report if no other modes test data.

### 1.3. Equipment Modifications

Not available for this EUT intended for grant.



## 2. Summary Of Test Requirements And Results

### E-UTRA Band 2(Transmit: 1850 MHz -1910 MHz; Receive: 1930 MHz-1990 MHz):

| Test Item                              | FCC Rule No.          | Requirements                                                                                                       | Judgement |
|----------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------|-----------|
| Effective (Isotropic) Radiated Power   | §2.1046,<br>§24.232   | EIRP ≤ 2W                                                                                                          | Pass      |
| Peak-Average Ratio                     | §2.1046,<br>§24.232   | FCC: Limit≤ 13dB                                                                                                   | Pass      |
| Modulation Characteristics             | §2.1047               | Digital modulation                                                                                                 | N/A       |
| Occupied Bandwidth                     | §2.1049               | OBW: No limit.                                                                                                     | Pass      |
| Emission Bandwidth                     | 22.917(b)             | EBW: No limit.                                                                                                     | Pass      |
| Band Edges Compliance                  | §2.1051<br>§24.238(a) | ≤-13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.                           | Pass      |
| Spurious Emission at Antenna Terminals | §2.1051,<br>§24.238   | FCC: ≤-13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges. | Pass      |
| Field Strength of Spurious Radiation   | §2.1053,<br>§24.238   | FCC: ≤-13 dBm/1 MHz.                                                                                               | Pass      |
| Frequency Stability                    | §2.1055,<br>§24.235   | FCC: within authorized frequency block.                                                                            | Pass      |

Note: For the Judgement, the "N/A" denotes "not applicable", the "N/Tde notes "not tested".

### E-UTRA Band 4(Transmit: 1710 MHz - 1755 MHz; Receive: 2110 MHz- 2155 MHz):

| Test Item                              | FCC Rule No.         | Requirements                                                                                                       | Judgement |
|----------------------------------------|----------------------|--------------------------------------------------------------------------------------------------------------------|-----------|
| Effective (Isotropic) Radiated Power   | §2.1046,<br>§27.5(d) | EIRP ≤ 1W                                                                                                          | Pass      |
| Peak-Average Ratio                     | §2.1046,<br>§27.5(d) | FCC: Limit≤ 13dB                                                                                                   | Pass      |
| Modulation Characteristics             | §2.1047              | Digital modulation                                                                                                 | N/A       |
| Occupied Bandwidth                     | §2.1049              | OBW: No limit.                                                                                                     | Pass      |
| Emission Bandwidth                     | §2.1049              | EBW: No limit.                                                                                                     | Pass      |
| Band Edges Compliance                  | §2.1051<br>§27.53(h) | ≤-13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.                           | Pass      |
| Spurious Emission at Antenna Terminals | §2.1051<br>§27.53(h) | FCC: ≤-13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges. | Pass      |
| Field Strength of Spurious Radiation   | §2.1053,<br>§22.917  | FCC: ≤-13 dBm/100 kHz.                                                                                             | Pass      |
| Frequency Stability                    | §2.1055,<br>§27.54   | the fundamental emissions stay within the authorized bands of operation.                                           | Pass      |

Note: For the Judgement, the "N/A" denotes "not applicable", the "N/Tde notes "not tested".

**E-UTRA Band 5(Transmit: 824 MHz - 849 MHz; Receive: 869 MHz - 894 MHz):**

| Test Item                              | FCC Rule No.       | Requirements                                                                                           | Judgement |
|----------------------------------------|--------------------|--------------------------------------------------------------------------------------------------------|-----------|
| Effective (Isotropic) Radiated Power   | §2.1046, §22.913   | ERP ≤ 7W                                                                                               | Pass      |
| Peak-Average Ratio                     | §2.1046, §27.5(d)  | FCC: Limit≤ 13dB                                                                                       | Pass      |
| Modulation Characteristics             | §2.1047            | Digital modulation                                                                                     | N/A       |
| Occupied Bandwidth                     | §2.1049            | OBW: No limit.                                                                                         | Pass      |
| Emission Bandwidth                     | §2.1049            | EBW: No limit.                                                                                         | Pass      |
| Band Edges Compliance                  | §2.1051<br>§22.917 | ≤-13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.               | Pass      |
| Spurious Emission at Antenna Terminals | §2.1051<br>§22.917 | FCC: ≤-13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. | Pass      |
| Field Strength of Spurious Radiation   | §2.1053, §22.917   | FCC: ≤-13 dBm/100 kHz.                                                                                 | Pass      |
| Frequency Stability                    | §2.1055, §22.355   | the fundamental emissions stay within the authorized bands of operation. (2.5ppm)                      | Pass      |

**Note: For the Judgement, the "N/A" denotes "not applicable", the "N/Tde notes "not tested".**

**E-UTRA Band 7(Transmit: 2500 MHz - 2570 MHz; Receive: 2620MHz -2690MHz);**

| Test Item                              | FCC Rule No.          | Requirements                                                                                | Judgement |
|----------------------------------------|-----------------------|---------------------------------------------------------------------------------------------|-----------|
| Effective (Isotropic) Radiated Power   | §2.1046, §27.50(h)    | EIRP ≤ 2W(33dBm)                                                                            | Pass      |
| Peak-Average Ratio                     | §2.1046, §27.5(d)     | FCC: Limit≤ 13dB                                                                            | Pass      |
| Modulation Characteristics             | §2.1047               | Digital modulation                                                                          | N/A       |
| Occupied Bandwidth                     | §2.1049               | OBW: No limit.<br>EBW: No limit.                                                            | Pass      |
| Emission Bandwidth                     | §2.1049               | EBW: No limit.                                                                              | Pass      |
| Band Edges Compliance                  | §27.53(m)(4)          | §27.53(m)(4)                                                                                | Pass      |
| Spurious Emission at Antenna Terminals | §27.53(m)(4)          | ≤-13dBm/1MHz, from 9kHz to10th harmonics but outside authorized operating frequency ranges. | Pass      |
| Radiated spurious emission             | §2.1053, §27.53(m)(4) | -25dBm/MHz                                                                                  | Pass      |



Report No.: PTC25042000101E-FC01

|                     |                    |                                                                                   |      |
|---------------------|--------------------|-----------------------------------------------------------------------------------|------|
| Frequency Stability | §2.1055,<br>§27.54 | the fundamental emissions stay within the authorized bands of operation. (2.5ppm) | Pass |
|---------------------|--------------------|-----------------------------------------------------------------------------------|------|

Note: For the Judgement, the "N/A" denotes "not applicable", the "N/Tde notes "not tested".



### 3. Measurement Instruments

#### RF Conducted Test

| Name of Equipment             | Manufacturer  | Model   | Serial No.    | Characteristics | Last Calibration | Calibration Interval |
|-------------------------------|---------------|---------|---------------|-----------------|------------------|----------------------|
| MXG Signal Analyzer           | Agilent       | N9020A  | SER MY5111038 | 10Hz-30GHz      | Aug. 15, 2024    | 1 Year               |
| Coaxial Cable                 | CDS           | 79254   | 46107086      | 10Hz-30GHz      | Aug. 15, 2024    | 1 Year               |
| Power Meter                   | Anritsu       | ML2495A | 0949003       | 300MHz-40GHz    | Aug. 15, 2024    | 1 Year               |
| Power Sensor                  | Anritsu       | MA2411B | 0917017       | 300MHz-40GHz    | Aug. 15, 2024    | 1 Year               |
| Signal Analyzer 40GHz         | Rohde&Schwarz | FSV40   | 101456        | 10Hz-40GHz      | Aug. 15, 2024    | 1 Year               |
| Wireless Communication Tester | Rohde&Schwarz | CMW500  | 134930        | /               | Aug. 15, 2024    | 1 year               |

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

| Name of Equipment            | Manufacturer  | Model      | Serial No.       | Characteristics | Last Calibration | Calibration Interval |
|------------------------------|---------------|------------|------------------|-----------------|------------------|----------------------|
| EMI Test Receiver            | Rohde&Schwarz | ESCI7      | 101671           | 9KHz-7GHz       | Aug. 15, 2024    | 1 Year               |
| Loop Antenna                 | Schwarzbeck   | FMZB 1519B | 192              | 9 KHz -30MHz    | Aug. 15, 2024    | 1 Year               |
| Bilog Antenna                | SCHWARZBEC K  | VULB9160   | 9160-3355        | 25MHz-2GHz      | Sep. 10, 2024    | 1 Year               |
| Preamplifier (low frequency) | SCHWARZBEC K  | BBV 9475   | 9745-0013        | 1MHz-1GHz       | Mar. 23,2025     | 1 Year               |
| Cable                        | Schwarzbeck   | PLF-100    | 549489           | 9KHz-3GHz       | Aug. 15, 2024    | 1 Year               |
| Spectrum Analyzer            | Rohde&Schwarz | FSV40      | 6625-01-588-5515 | 9KHz-40GHz      | Aug. 15, 2024    | 1 Year               |
| Horn Antenna                 | SCHWARZBEC K  | 9120D      | 9120D-1246       | 1GHz-18GHz      | Aug. 15, 2024    | 1 Year               |
| Power Amplifier              | ZHINAN        | ZN3380C    | 15002            | 1GHz-26.5GHz    | Aug. 15, 2024    | 1 Year               |



Report No.: PTC25042000101E-FC01

|                                          |                 |           |            |                  |               |        |
|------------------------------------------|-----------------|-----------|------------|------------------|---------------|--------|
| Horn Antenna                             | SCHWARZBEC<br>K | BBHA 9170 | 9170-1066  | 15GHz-<br>40GHz  | Jul. 19, 2024 | 1 Year |
| Amplifier                                | SCHWARZBEC<br>K | BBV 9721  | 9721-205   | 18GHz-<br>40GHz  | Jul. 19, 2024 | 1 Year |
| Cable                                    | H+S             | CBL-26    | N/A        | 1GHz-<br>26.5GHz | Aug. 15, 2024 | 1 Year |
| RF Cable                                 | R&S             | R204      | R21X       | 1GHz-40GHz       | Aug. 15, 2024 | 1 Year |
| MXG Vector<br>Signal Generator           | Agilent         | N5182A    | MY49060455 | -                | Aug. 15, 2024 | 1 Year |
| ESG Series<br>Analog signal<br>generator | Agilent         | E4421B    | GB40051240 | -                | Aug. 15, 2024 | 1 Year |



## 4. EFFECTIVE (ISOTROPIC) RADIATED POWER

### 4.1. Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

### 4.2. Effective (Isotropic) Radiated Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 ; C63.26 (2015).

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

#### Test Result:

1. For E-UTRA Band 2, please refer to Appendix Band 2: Section Appendix A.
2. For E-UTRA Band 4, please refer to Appendix Band 4: Section Appendix A.
3. For E-UTRA Band 5, please refer to Appendix Band 5: Section Appendix A.
4. For E-UTRA Band 7, please refer to Appendix Band7: Section Appendix A.



## 5. SPURIOUS EMISSION (Conducted and Radiated)

### 5.1. Measurement Result (Pre-measurement)

We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of E-UTRA Band 2, E-UTRA Band 4, E-UTRA Band 5, E-UTRA Band 7: recorded worst case for each Channel Bandwidth of E-UTRA Band 2, E-UTRA Band 4, E-UTRA Band 5, E-UTRA Band 7.

**Note:** Radiated spurious emission, All RB configurations combined with QPSK and 16QAM all pretested and recorded the worst case.


**Test Plot(s)****Conducted method****Test limit:**

The spurious (unwanted) emission limits specified in the individual FCC rule parts applicable to licensed digital transmitters (typically referred to under the heading 'emission limits') normally apply to any and all emissions that are present outside of the authorized frequency band/block and apply to emissions in both the out-of-band and spurious domains. In some rule parts, the unwanted emission limits are specified by an emission mask that defines the applicable limit as a function of the frequency range relative to the authorized frequency block.

Typically, unwanted emissions are required by the licensed rule parts to be attenuated below the transmitter power by a factor of at least  $X + 10\log(P)$  dB, where  $P$  represents the transmitter power expressed in watts and  $X$  is a specified scalar value (e.g., 43). This specification can be interpreted in one of two equivalent ways. First, the required attenuation can be construed to be relative to the mean carrier power, with the resultant of the equation  $X + 10\log(P)$  being expressed in dBc (dB relative to the maximum carrier power). Alternatively, the specification can be interpreted as an absolute limit when the specified attenuation is actually subtracted from the maximum permissible transmitter power [i.e.,  $10\log(P) - \{X + 10\log(P)\}$ ], resulting in an absolute level of  $-X$  dBW [or  $(-X + 30)$  dBm]. See section 4.

**Test procedure:**

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz below 1 GHz and 1 MHz above 1 GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.

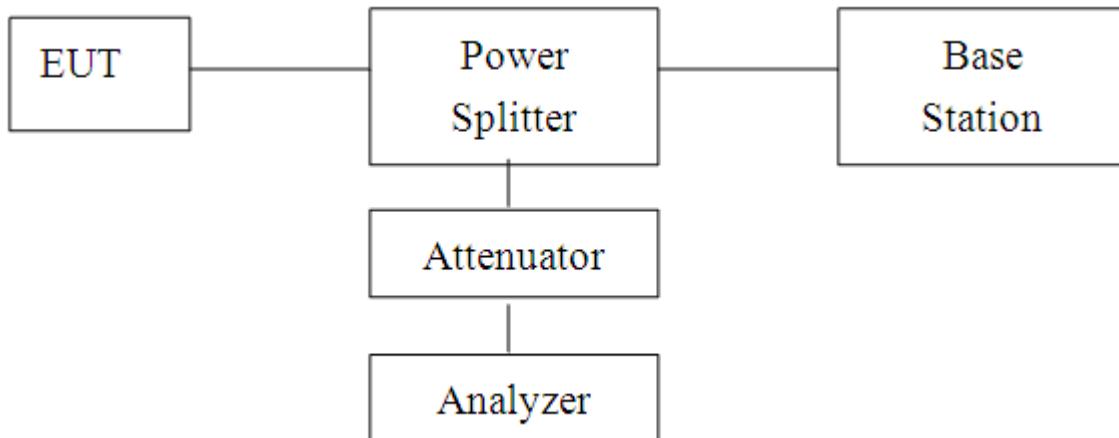**Conducted Emission Test-Up:**



**Test data:**

1. For E-UTRA Band 2, please refer to Appendix Band 2: Section Appendix E.
2. For E-UTRA Band 4, please refer to Appendix Band 4: Section Appendix E.
3. For E-UTRA Band 5, please refer to Appendix Band 5: Section Appendix E.
4. For E-UTRA Band 7, please refer to Appendix Band7: Section Appendix E.

## Radiated method

### Test limit:

The spurious (unwanted) emission limits specified in the individual FCC rule parts applicable to licensed digital transmitters (typically referred to under the heading 'emission limits') normally apply to any and all emissions that are present outside of the authorized frequency band/block and apply to emissions in both the out-of-band and spurious domains. In some rule parts, the unwanted emission limits are specified by an emission mask that defines the applicable limit as a function of the frequency range relative to the authorized frequency block.


Typically, unwanted emissions are required by the licensed rule parts to be attenuated below the transmitter power by a factor of at least  $X + 10\log(P)$  dB, where  $P$  represents the transmitter power expressed in watts and  $X$  is a specified scalar value (e.g., 43). This specification can be interpreted in one of two equivalent ways. First, the required attenuation can be construed to be relative to the mean carrier power, with the resultant of the equation  $X + 10\log(P)$  being expressed in dBc (dB relative to the maximum carrier power). Alternatively, the specification can be interpreted as an absolute limit when the specified attenuation is actually subtracted from the maximum permissible transmitter power [i.e.,  $10\log(P) - \{X + 10\log(P)\}$ ], resulting in an absolute level of  $-X$  dBW [or  $(-X + 30)$  dBm]. See section 4.

### Test procedure:


The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site. The resolution bandwidth of the spectrum analyzer was set at 100 kHz below 1 GHz and 1 MHz above 1 GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.

### Test setup:

#### (A) Radiated Emission Test-Up Frequency 30MHz~1GHz

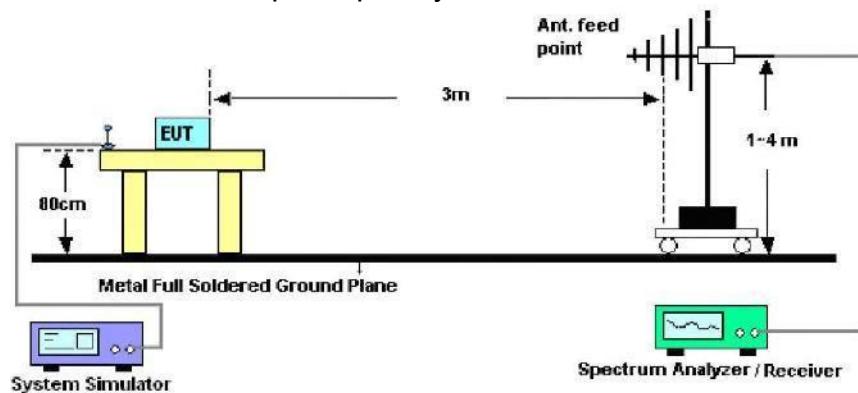

#### (B) Radiated Emission Test-Up Frequency Above 1GHz

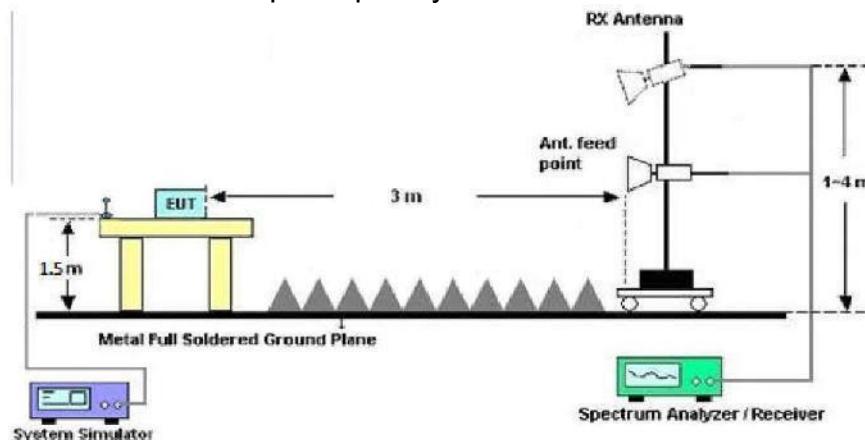

### Note:

- 1, Below 30MHz no Spurious found.
- 2, UE is positioned at 3 axis at the pre-scan stage, and only the measurement of the worst case(bandwidth:20MHz /Full RB /QPSK) is reported in this part.

**List of final test modes:****E-UTRA BANDS****This is the worst pattern data****E-UTRA Band 2:**

| Mode | Bandwidth | UL Channel | Frequency | Modulation | Judgement |
|------|-----------|------------|-----------|------------|-----------|
| 1    | 1.4       | 18900      | 1880      | QPSK       | Pass      |

**E-UTRA Band 4:**

| Mode | Bandwidth | UL Channel | Frequency | Modulation | Judgement |
|------|-----------|------------|-----------|------------|-----------|
| 1    | 1.4       | 20175      | 1732.5    | QPSK       | Pass      |

**E-UTRA Band 5:**

| Mode | Bandwidth | UL Channel | Frequency | Modulation | Judgement |
|------|-----------|------------|-----------|------------|-----------|
| 1    | 1.4       | 20525      | 836.5     | QPSK       | Pass      |

**E-UTRA Band 7:**

| Mode | Bandwidth | UL Channel | Frequency | Modulation | Judgement |
|------|-----------|------------|-----------|------------|-----------|
| 1    | 5         | 21100      | 2535      | QPSK       | Pass      |



Test record:

**E-UTRA BANDS Radiated spurious emissions Spot-check :****E-UTRA band 2 \_1.4MHz bandwidth \_Middle Channel****Below 1G:**

| Frequency(MHz) | Reading level(dBm) | Factor(dB) | Level (dBm) | Limit (dBm) | Margin (dBm) | Polarity   |
|----------------|--------------------|------------|-------------|-------------|--------------|------------|
| 35.82          | -64.15             | -11.60     | -75.75      | -13.00      | 62.75        | Horizontal |
| 50.13          | -68.52             | -10.82     | -79.34      | -13.00      | 66.34        | Vertical   |

**Above 1G:**

| Frequency(MHz) | Reading level(dBm) | Factor(dB) | Level (dBm) | Limit (dBm) | Margin (dBm) | Polarity   |
|----------------|--------------------|------------|-------------|-------------|--------------|------------|
| 3760.00        | -48.12             | -1.05      | -49.17      | -13.00      | 36.17        | Horizontal |
| 5640.00        | -44.31             | 7.15       | -37.16      | -13.00      | 24.16        | Horizontal |
| 7520.00        | -53.28             | 11.45      | -41.83      | -13.00      | 28.83        | Horizontal |
| 3760.00        | -50.07             | 1.53       | -48.54      | -13.00      | 35.54        | Vertical   |
| 5640.00        | -42.54             | 4.45       | -38.10      | -13.00      | 25.10        | Vertical   |
| 7520.00        | -53.47             | 9.96       | -43.51      | -13.00      | 30.51        | Vertical   |

**E-UTRA band 4 \_1.4MHz bandwidth \_Middle Channel****Below 1G:**

| Frequency(MHz) | Reading level(dBm) | Factor(dB) | Level (dBm) | Limit (dBm) | Margin (dBm) | Polarity   |
|----------------|--------------------|------------|-------------|-------------|--------------|------------|
| 58.62          | -69.17             | -11.24     | -80.41      | -13.00      | 67.41        | Horizontal |
| 50.37          | -64.86             | -10.79     | -75.65      | -13.00      | 62.65        | Vertical   |

**Above 1G:**

| Frequency(MHz) | Reading level(dBm) | Factor(dB) | Level (dBm) | Limit (dBm) | Margin (dBm) | Polarity   |
|----------------|--------------------|------------|-------------|-------------|--------------|------------|
| 3465.00        | -48.23             | -2.43      | -50.66      | -13.00      | 37.66        | Horizontal |
| 5197.50        | -40.56             | 4.14       | -36.42      | -13.00      | 23.42        | Horizontal |
| 6930.20        | -49.14             | 10.97      | -38.17      | -13.00      | 25.17        | Horizontal |
| 3465.00        | -48.8              | -2.18      | -50.98      | -13.00      | 37.98        | Vertical   |
| 5197.50        | -41.82             | 3.76       | -38.06      | -13.00      | 25.06        | Vertical   |
| 6930.20        | -47.99             | 9.52       | -38.47      | -13.00      | 25.47        | Vertical   |

**E-UTRA band 5 \_1.4MHz bandwidth \_Middle Channel****Below 1G:**

| Frequency(MHz) | Reading level(dBm) | Factor(dB) | Level (dBm) | Limit (dBm) | Margin (dBm) | Polarity   |
|----------------|--------------------|------------|-------------|-------------|--------------|------------|
| 152.71         | -66.28             | -9.23      | -75.51      | -13.00      | 62.51        | Horizontal |
| 133.79         | -66.09             | -9.99      | -76.08      | -13.00      | 63.08        | Vertical   |

**Above 1G:**

| Frequency(MHz) | Reading level(dBm) | Factor(dB) | Level (dBm) | Limit (dBm) | Margin (dBm) | Polarity   |
|----------------|--------------------|------------|-------------|-------------|--------------|------------|
| 1673.00        | -48.23             | -11.02     | -59.25      | -13.00      | 46.25        | Horizontal |
| 2509.50        | -41.04             | -6.13      | -47.17      | -13.00      | 34.17        | Horizontal |
| 3346.00        | -48.68             | -4.93      | -53.61      | -13.00      | 40.61        | Horizontal |
| 1673.00        | -49.04             | -11.02     | -60.06      | -13.00      | 47.06        | Vertical   |
| 2509.50        | -42.04             | -6.13      | -48.17      | -13.00      | 35.17        | Vertical   |
| 3346.00        | -47.34             | -4.93      | -52.27      | -13.00      | 39.27        | Vertical   |



Report No.: PTC25042000101E-FC01

**E-UTRA band 7\_5MHz bandwidth\_Middle Channel**

**Below 1G:**

| Frequency(MHz) | Reading level(dBm) | Factor(dB) | Level (dBm) | Limit (dBm) | Margin (dBm) | Polarity   |
|----------------|--------------------|------------|-------------|-------------|--------------|------------|
| 800.18         | -67.39             | 2.32       | -65.07      | -13.00      | 52.07        | Horizontal |
| 965.57         | -67.95             | 5.48       | -62.47      | -13.00      | 49.47        | Vertical   |

**Above 1G:**

| Frequency(MHz) | Reading level(dBm) | Factor(dB) | Level (dBm) | Limit (dBm) | Margin (dBm) | Polarity   |
|----------------|--------------------|------------|-------------|-------------|--------------|------------|
| 5070.00        | -49.73             | 4.20       | -45.53      | -25         | 20.53        | Horizontal |
| 7605.00        | -49.81             | 11.35      | -38.46      | -25         | 13.46        | Horizontal |
| 10140.00       | -53.06             | 18.37      | -34.69      | -25         | 9.69         | Horizontal |
| 5070.00        | -51.39             | 3.72       | -47.67      | -25         | 22.67        | Vertical   |
| 7605.00        | -51.36             | 10.84      | -40.52      | -25         | 15.52        | Vertical   |
| 10140.00       | -52.85             | 17.09      | -35.76      | -25         | 10.76        | Vertical   |

Note:1. Level= Reading level+ Factor; Margin= Limit- Level.

## 6. Occupied Bandwidth and Emission Bandwidth

### Test limit:

The occupied bandwidth (OBW), that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission, shall be measured when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user. [i2.1049(h)]

Many of the individual rule parts specify a relative OBW in lieu of the 99% OBW. In such cases, the OBW is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

The relative OBW must be measured and reported when it is specified in the applicable rule part; otherwise, the 99% OBW shall be measured and reported. The test report shall specify which OBW is reported.

A spectrum/signal analyzer or other instrument providing a spectral display is recommended for these measurements and the video bandwidth shall be set to a value at least three times greater than the IF/resolution bandwidth to avoid any amplitude smoothing. Video filtering shall not be used during occupied bandwidth tests.

The OBW shall be measured for all operating conditions that will affect the bandwidth results (e.g. variable modulations, coding, or channel bandwidth settings). See section 4.

### Test procedure:

#### Occupied bandwidth – relative measurement procedure

The reference value is the highest level of the spectral envelope of the modulated signal.

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

b) The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

c) Set the reference level of the instrument as required to prevent the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least  $10\log(\text{OBW} / \text{RBW})$  below the reference level.

d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.

e) The dynamic range of the spectrum analyzer at the selected RBW shall be at least 10 dB below the target “-X dB down” requirement (i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference value).

f) Set the detection mode to peak, and the trace mode to max hold.

g) Determine the reference value: Set the EUT to transmit a modulated signal. Allow the



trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).

h) Determine the “-X dB down amplitude” as equal to (Reference Value – X). Alternatively, this calculation can be performed by the analyzer by using the marker-delta function.

i) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step g). If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

j) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Occupied bandwidth – power bandwidth (99%) measurement procedure

The following procedure shall be used for measuring (99 %) power bandwidth

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).

b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least 10log (OBW / RBW) below the reference level.

d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.


e) Set the detection mode to peak, and the trace mode to max hold..

f) Use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.

g) If the instrument does not have a 99 % power bandwidth function, the trace data points are to be recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % power bandwidth is the difference between these two frequencies.

h) The OBW shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Test setup:

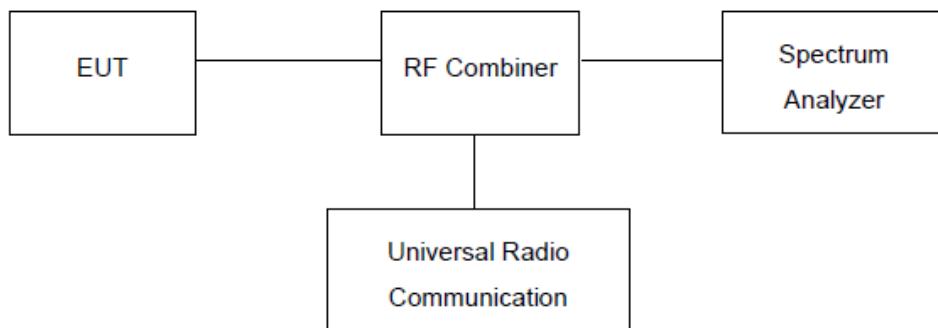



**Measurement Result:**

1. For E-UTRA Band 2, please refer to Appendix Band 2: Section Appendix C.
2. For E-UTRA Band 4, please refer to Appendix Band 4: Section Appendix C.
3. For E-UTRA Band 5, please refer to Appendix Band 5: Section Appendix C.
4. For E-UTRA Band 7, please refer to Appendix Band7: Section Appendix C.

Note: The equipment UE-Categories:UE-Category1,Bandwidths above 10M do not support full RB of 16QAM modulation.

## 7. Band Edge


### Test Limit:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified. See section 4.

### Test procedure:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

### Test setup:

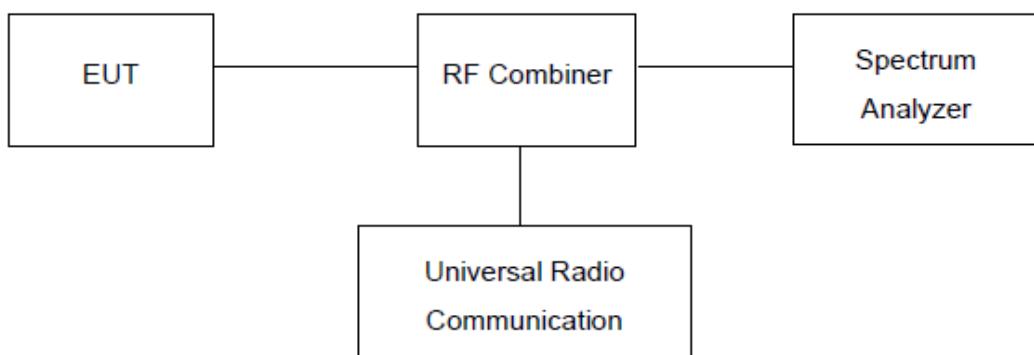



Report No.: PTC25042000101E-FC01

## Measurement Result

1. For E-UTRA Band 2, please refer to Appendix Band 2: Section Appendix D.
2. For E-UTRA Band 4, please refer to Appendix Band 4: Section Appendix D.
3. For E-UTRA Band 5, please refer to Appendix Band 5: Section Appendix D.
4. For E-UTRA Band 7, please refer to Appendix Band7: Section Appendix D.

## 8. Frequency Stability


### Test limit:

The frequency stability of the transmitter shall be measured while varying the ambient temperatures and supply voltages over the ranges specified in §2.1055. The specific frequency stability limits are provided in the relevant rules section(s). see section 4.

### Test procedure:

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

### Test setup:

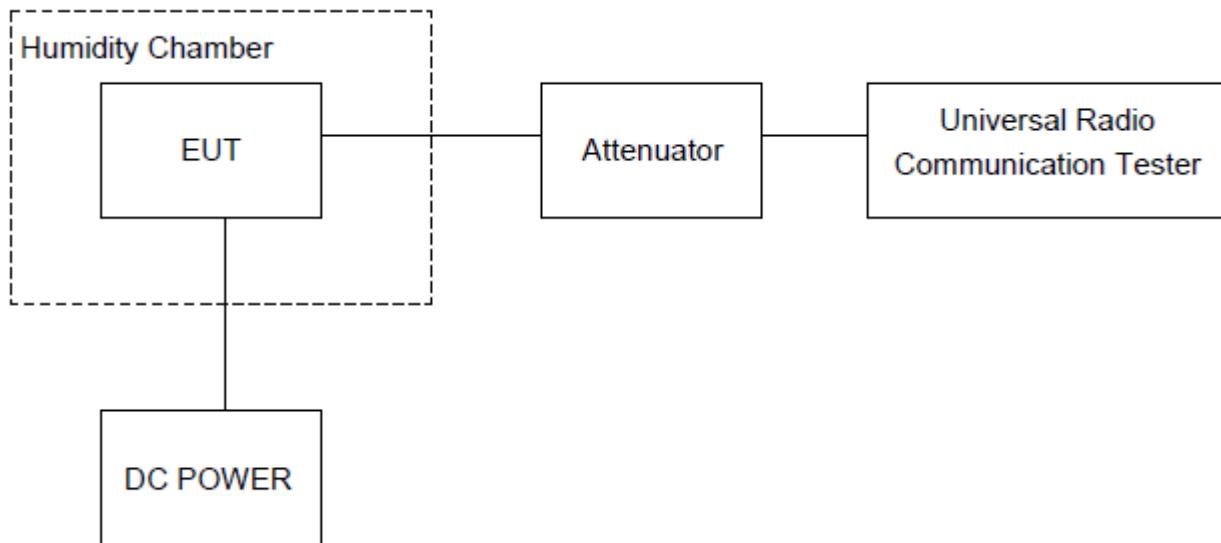



## 8.1. Measurement Result (Worst)

1. For E-UTRA Band 2, please refer to Appendix Band 2: Section Appendix F.
2. For E-UTRA Band 4, please refer to Appendix Band 4: Section Appendix F.
3. For E-UTRA Band 5, please refer to Appendix Band 5: Section Appendix F.
4. For E-UTRA Band 7, please refer to Appendix Band7: Section Appendix F.



Report No.: PTC25042000101E-FC01

## 15 APPENDIX I -- TEST SETUP PHOTOGRAPH

Refer to "Test Setup Photos".



Report No.: PTC25042000101E-FC01

## 16 APPENDIX II -- EUT PHOTOGRAPH

Refer to " External Photos" and "Internal Photos".

\*\*\*\*\*THE END REPORT\*\*\*\*\*