

# Test Report

<b>Applicant</b>	: Unavi USA, Inc.
<b>Address</b>	: 15032 Red Hill Ave, Suite F, Tustin, CA 92780, USA
<b>Product Name</b>	: Portable Car Stereo with CarPlay & Android Auto
<b>Brand Mark</b>	: Unavi
<b>Model</b>	: Unavi Anyway Go U-8801
<b>Series model</b>	: ZAOAWUVODA
<b>FCC ID</b>	: 2BL9Z-U8801
<b>Report Number</b>	: BLA-EMC-202410-A2604
<b>Date of Receipt</b>	: 2024.10.12
<b>Date of Test</b>	: 2024.10.12 to 2024.11.01
<b>Test Standard</b>	: 47 CFR Part 15, Subpart C 15.247
<b>Test Result</b>	: Pass

Compiled by: *Hugh*

Review by: *Sweet*

Approved by: *Blue.Zheng*

Issued Date: 2024.11.01

**BlueAsia of Technical Services(Shenzhen) Co., Ltd.**

Address: Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China



The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

## Table of Contents

<b>1</b>	<b>General information</b>	<b>4</b>
1.1	General information	4
1.2	General description of EUT	4
<b>2</b>	<b>Test summary</b>	<b>5</b>
<b>3</b>	<b>Test Configuration</b>	<b>6</b>
3.1	Test mode	6
3.2	Operation Frequency each of channel	7
3.3	Test channel	7
3.4	Configuration diagram of EUT	7
3.5	Auxiliary equipment	8
3.6	Test environment	8
<b>4</b>	<b>Laboratory information</b>	<b>9</b>
4.1	Laboratory and accreditations	9
4.2	Measurement uncertainty	9
<b>5</b>	<b>Test equipment</b>	<b>10</b>
<b>6</b>	<b>Test result</b>	<b>12</b>
6.1	Antenna requirement	12
6.2	Conducted Average output Power	13
6.3	Minimum 6dB bandwidth	14
6.4	Power spectrum density	15
6.5	Conducted Band Edges Measurement	16
6.6	Conducted spurious emissions	17
6.7	Radiated spurious emissions	18
6.8	Radiated emissions which fall in the restricted bands	29
<b>7</b>	<b>Appendix A</b>	<b>48</b>
<b>Appendix B: photographs of test setup</b>		<b>105</b>
<b>Appendix C: photographs of EUT</b>		<b>106</b>

## Revise Record

Version No.	Date	Description
01	2024.11.01	Original

## 1 General information

### 1.1 General information

Applicant	Unavi USA, Inc.
Address	15032 Red Hill Ave, Suite F, Tustin, CA 92780, USA
Manufacturer	Shenzhen Shengpai Technology Co.,LTD
Address	7/F, Building A, Guancheng Low Carbon Industrial Park, Shangcun, Gongming Street, Guangming District, Shenzhen, Guangdong, China.
Factory	N/A
Address	N/A

### 1.2 General description of EUT

Product name	Portable Car Stereo with CarPlay & Android Auto
Model no.	Unavi Anyway Go U-8801
Series model	ZAOAWUVODA
Note	
Operation Frequency:	2412MHz-2462MHz
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	5MHz
Number of Channels:	802.11b/g/n(HT20):11 802.11n(HT40):7
Antenna Type:	FPC antenna
Antenna Gain:	0.55 dBi (Provided by customer)
Power supply or adapter information	DC12V
Hardware Version	N/A
Software Version	N/A
<p><i>Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.</i></p>	

## 2 Test summary

No.	Test item	Result	Remark
1	Antenna Requirement	Pass	
2	Conducted Emissions at AC Power Line (150kHz-30MHz)	N/A	
3	Conducted Average Output Power	Pass	
4	Minimum 6dB Bandwidth	Pass	
5	Power Spectrum Density	Pass	
6	Conducted Band Edges Measurement	Pass	
7	Conducted Spurious Emissions	Pass	
8	Radiated Spurious Emissions	Pass	
9	Radiated Emissions which fall in the restricted bands	Pass	

## 3 Test Configuration

### 3.1 Test mode

Test Mode <sup>Note 1</sup>	Description
TX	Keep the EUT in continuously transmitting mode with modulation. (Duty cycle>98%)
RX	Keep the EUT in receiving mode
TX Low channel	Keep the EUT in continuously transmitting mode in low channel
TX middle channel	Keep the EUT in continuously transmitting mode in middle channel
TX high channel	Keep the EUT in continuously transmitting mode in high channel

*Note 1: The EUT was configured to measure its highest possible emission and/or immunity level. The test modes were adapted according to the operation manual for use; the EUT was operated in the engineering mode <sup>Note 2</sup> to fix the TX or Rx frequency that was for the purpose of the measurements.*

### 3.2 Operation Frequency each of channel


Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	5	2432MHz	9	2452MHz	--	--
2	2417MHz	6	2437MHz	10	2457MHz	--	--
3	2422MHz	7	2442MHz	11	2462MHz	--	--
4	2427MHz	8	2447MHz	--	--	--	--

Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz	--	--	--	--
4	2427MHz	8	2447MHz	--	--	--	--
5	2432MHz	9	2452MHz	--	--	--	--
6	2437MHz	--	--	--	--	--	--

### 3.3 Test channel

For 802.11b/g/n (HT20), the lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz); 802.11n HT40, the lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

### 3.4 Configuration diagram of EUT



#### Support equipment

Name	Device type	Brand	Mode	Series No	Remark
(1)	PC	Lenovo	E460C	N/A	N/A
(2)	Fixed frequency board	N/A	N/A	N/A	N/A

### 3.5 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	Lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)

**Note:**  
“--” mean no any auxiliary device during testing.

### 3.6 Test environment

Environment	Temperature	Voltage
Normal	25°C	DC 12V

## 4 Laboratory information

### 4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

Company name:	BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Address:	Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
CNAS accredited No.:	L9788
A2LA Cert. No.:	5071.01
FCC Designation No.:	CN1252
ISED CAB identifier No.:	CN0028
Telephone:	+86-755-28682673
FAX:	+86-755-28682673

### 4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	$\pm 4.34$ dB
Radiated Emission(30Mz-1000MHz)	$\pm 4.24$ dB
Radiated Emission(1GHz-18GHz)	$\pm 4.68$ dB
AC Power Line Conducted Emission(150kHz-30MHz)	$\pm 3.45$ dB
Occupied Channel Bandwidth	$\pm 5$ %
RF output power, conducted	$\pm 1.5$ dB
Power Spectral Density, conducted	$\pm 3.0$ dB
Unwanted Emissions, conducted	$\pm 3.0$ dB
Temperature	$\pm 3$ °C
Supply voltages	$\pm 3$ %
Time	$\pm 5$ %

## 5 Test equipment

### RF conducted

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-003	Shield room	5*3*3	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-016	Signal Generator	N5182A	Agilent	MY52420 567	2024/06/28	2025/06/27
BLA-EMC-038	Spectrum	N9020A	Agilent	MY49100 060	2024/08/08	2025/08/07
BLA-EMC-042	Power sensor	RPR3006W	DARE	14I00889 SN042	2024/08/08	2025/08/07
BLA-EMC-044	Radio communication tester	CMW500	R&S	132429	2024/08/08	2025/08/07
BLA-EMC-064	Signal Generator	N5182B	KEYSIGHT	MY58108 892	2024/06/28	2025/06/27
BLA-EMC-079	Spectrum	N9020A	Agilent	MY54420 161	2024/08/08	2025/08/07
BLA-EMC-088	Audio Analyzer	ATS-1	Audio Precision	ATS1410 94	2024/06/28	2025/06/27

### Radiated Spurious Emissions (Below 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-002-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-002-02	Control room	966 control room	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2024/08/08	2025/08/07
BLA-EMC-043	Loop antenna	FMZB1519B	Schwarzbeck	00102	2024/06/29	2026/06/28
BLA-EMC-065	Broadband antenna	VULB9168	Schwarzbeck	01065P	2024/06/29	2026/06/27
BLA-XC-01	Coaxial Cable	N/A	BlueAsia	V01	N/A	N/A
BLA-XC-02	Coaxial Cable	N/A	BlueAsia	V02	N/A	N/A

### Radiated Spurious Emissions (Above 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-001-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-001-02	Control Room	966 control room	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2024/08/08	2025/08/07
BLA-EMC-012	Broadband antenna	VULB9168	Schwarzbeck	00836 P:00227	2022/10/12	2025/10/11
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarzbeck	01892	2024/06/29	2026/06/28
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA201804 3003	2024/08/08	2025/08/07
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2024/06/28	2025/06/27
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2024/06/28	2025/06/27
BLA-EMC-066	Amplifier	LNPA_30M01 G-30	SKET	SK202106 0801	2024/06/28	2025/06/27
BLA-EMC-086	Amplifier	LNPA_18G40 G-50dB	SKET	SK202207 1301	2024/06/28	2025/06/27
BLA-EMC-087	Horn Antenna	BBHA 9170	Schwarzbeck	1106	2024/06/29	2026/06/28
BLA-XC-03	Coaxial Cable	N/A	BlueAsia	V03	N/A	N/A

*BlueAsia of Technical Services (Shenzhen) Co.,Ltd.*

Tel: +86-755-23059481

Email: [marketing@cblueasia.com](mailto:marketing@cblueasia.com) [www.cblueasia.com](http://www.cblueasia.com)

BLA-XC-04	Coaxial Cable	N/A	BlueAsia	V04	N/A	N/A
-----------	---------------	-----	----------	-----	-----	-----

**Test Software Record:**

Software No.	Software Name	Manufacture	Software version	Test site
BLA-EMC-S001	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S002	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S010	MTS 8310	MW	2.0.0.0	RF
BLA-EMC-S014	Bluetooth and WiFi Test System	Tonscend	2.5.77.0418	RF

## 6 Test result

### 6.1 Antenna requirement

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

#### 6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of a so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### EUT antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.55 dBi.


## 6.2 Conducted Average output Power

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX

### 6.2.1 Limit

<b>Frequency range(MHz)</b>	<b>Output power of the intentional radiator(watt)</b>
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 6.2.2 Test setup

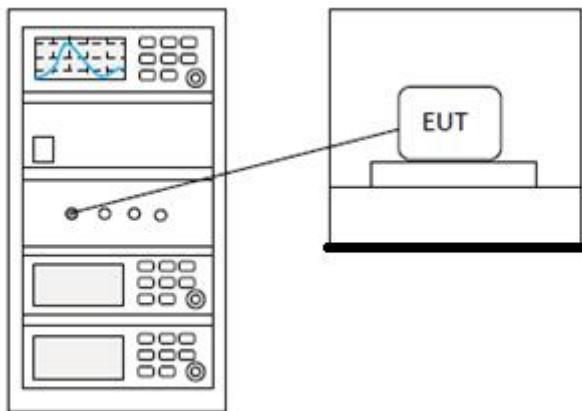

### 6.2.3 Test data

Pass: Please refer to appendix A for details


## 6.3 Minimum 6dB bandwidth

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 11.8.1
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX

### 6.3.1 Limit

$\geq 500$  kHz

### 6.3.2 Test setup

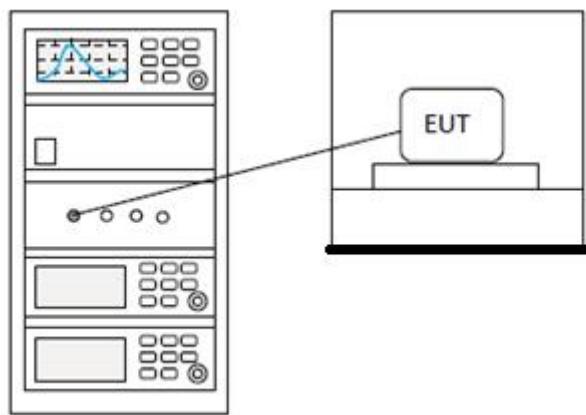

### 6.3.3 Test data

Pass: Please refer to appendix A for details


## 6.4 Power spectrum density

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 11.10.2
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX

### 6.4.1 Limit

≤8dBm in any 3 kHz band during any time interval of continuous transmission

### 6.4.2 Test setup

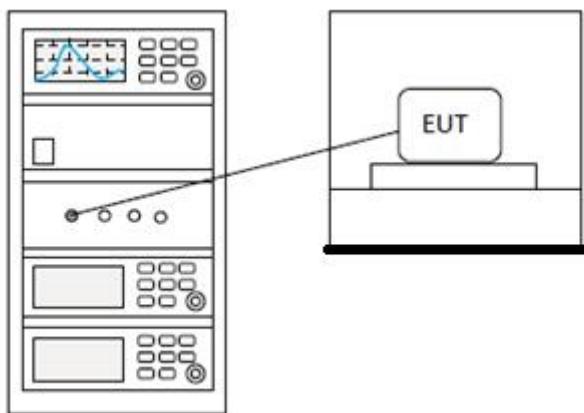

### 6.4.3 Test data

Pass: Please refer to appendix A for details

## 6.5 Conducted Band Edges Measurement

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX

### 6.5.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.5.2 Test setup

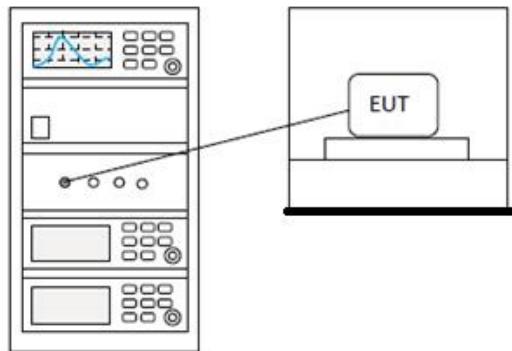

### 6.5.3 Test data

Pass: Please refer to appendix A for details

## 6.6 Conducted spurious emissions

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX

### 6.6.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.6.2 Test setup

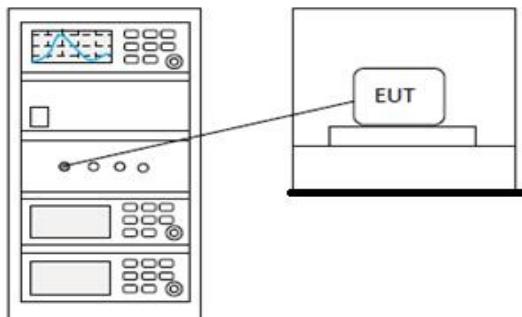

### 6.6.3 Test data

Pass: Please refer to appendix A for details

## 6.7 Radiated spurious emissions

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.4,6.5,6.6
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX


### 6.7.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


*Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.*

### 6.7.2 Test setup


Below 1GHz:

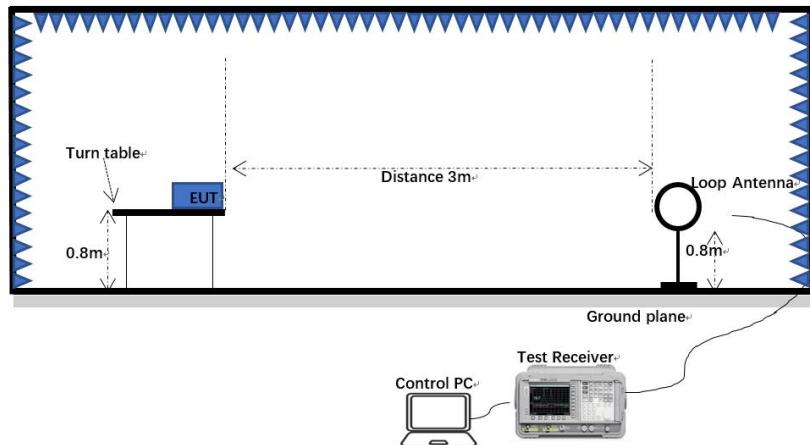

30MHz-1GHz:

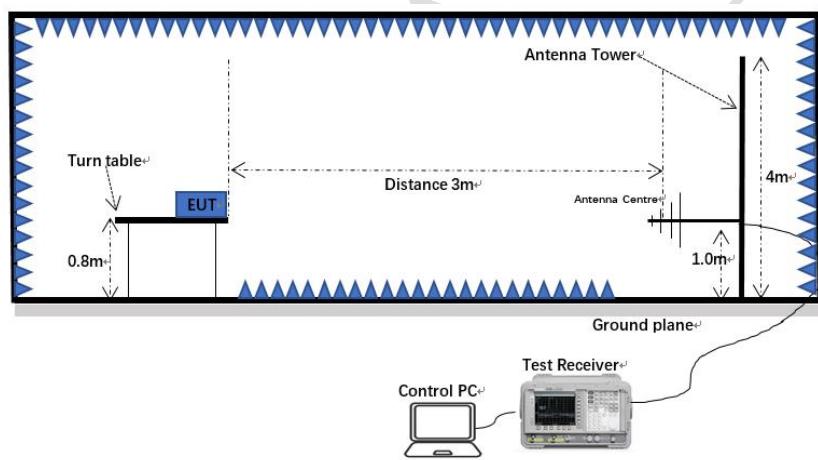

Above 1GHz:

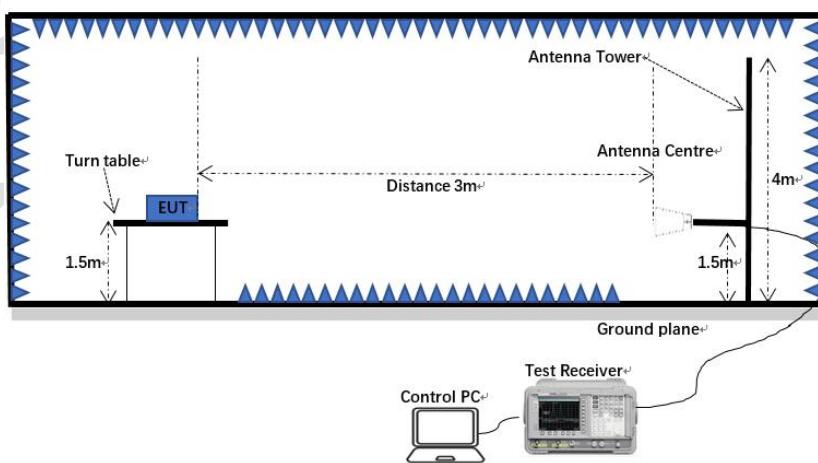

### 6.7.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

*Note 1: Scan from 9 kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.*

*Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.*


*Note 3: The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:*

$$\text{Level (dBuV)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

### 6.7.4 Test data


Below 1GHz

[Test mode: TX]; [Polarity: Horizontal]

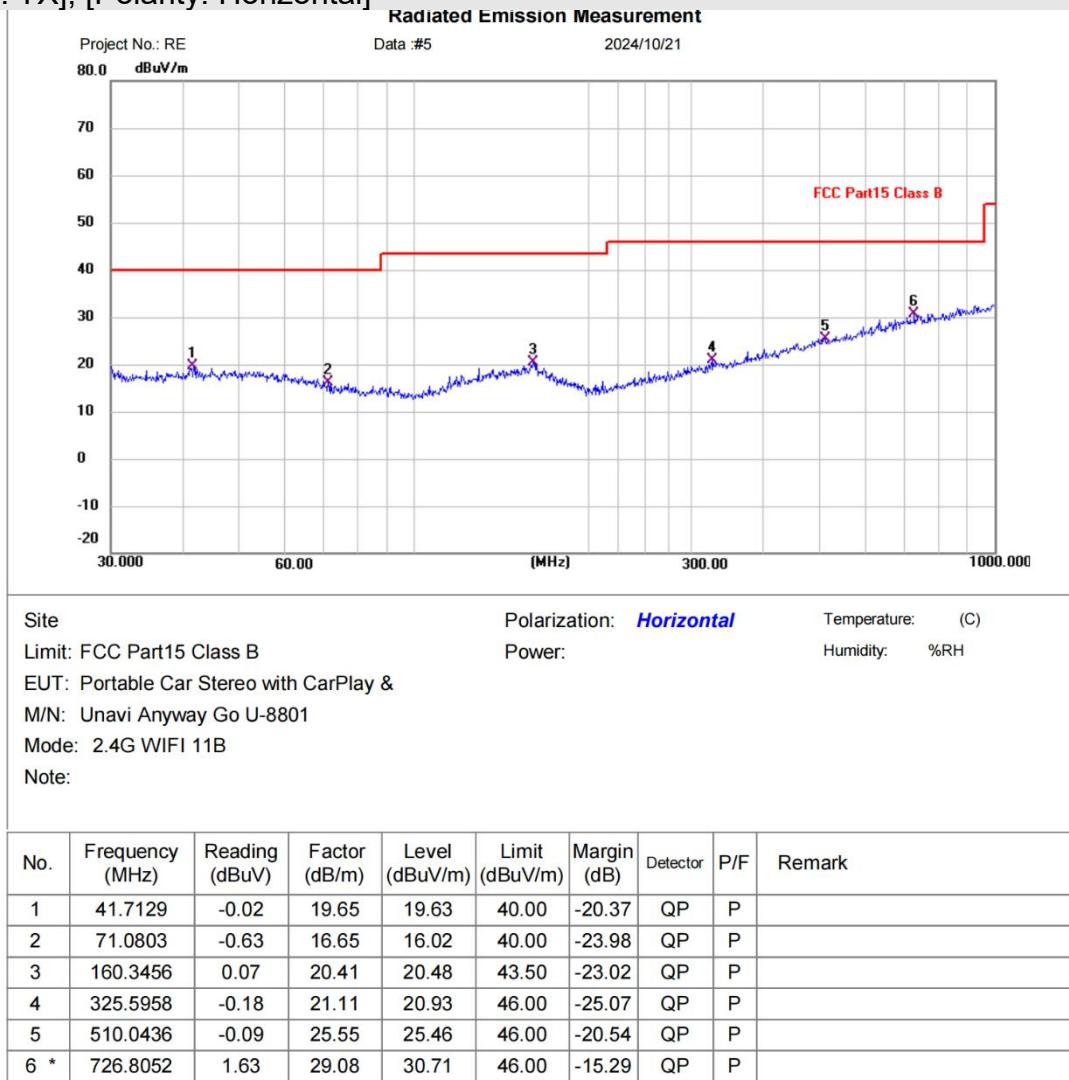

**Test Result: Pass**

[Test mode: TX]; [Polarity: Vertical]

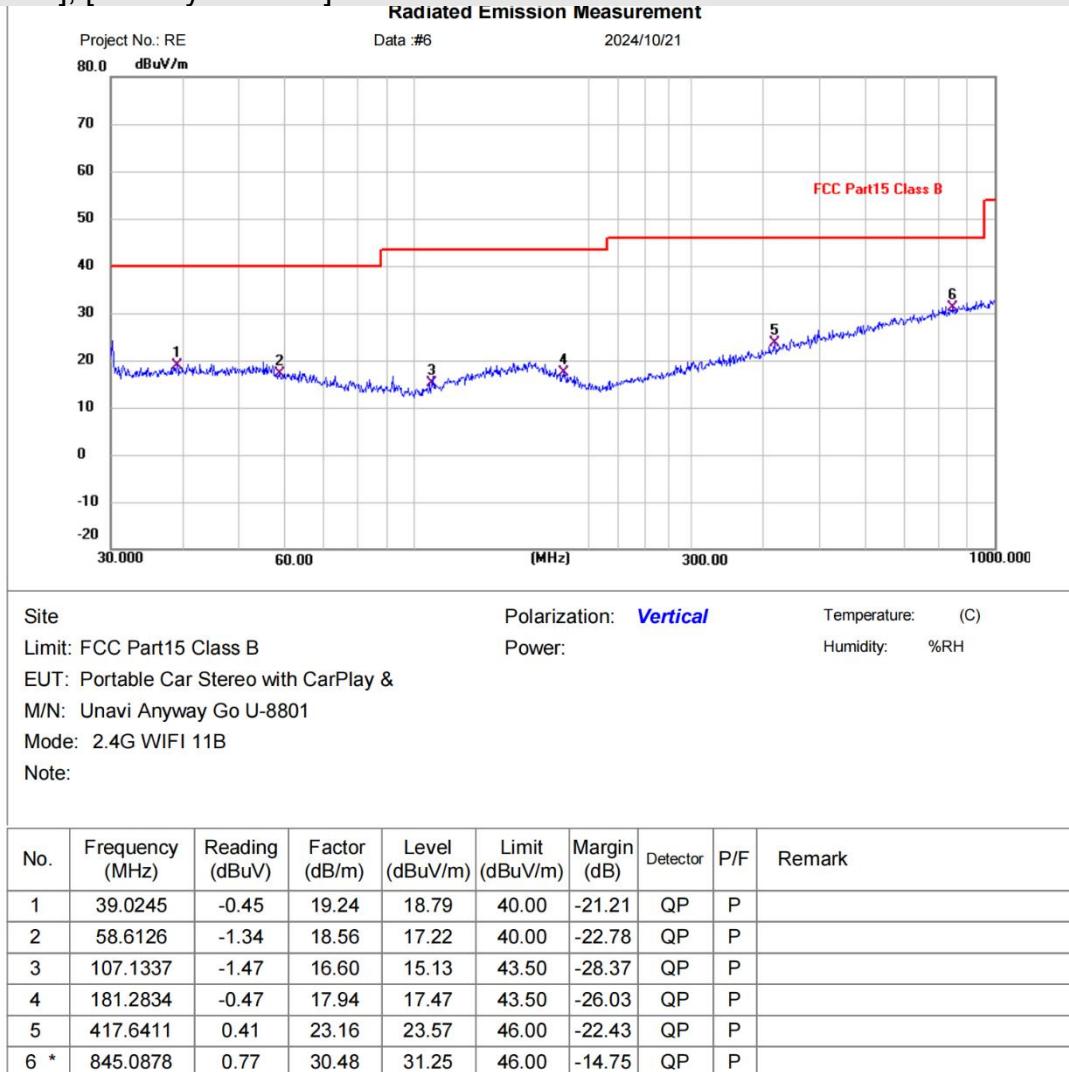

**Test Result: Pass**

Above 1GHz:

*Remark: During the test, pre-scan the 802.11b/g/n mode, and found the 802.11b mode which is worse case.*

[Test mode: TX low channel]; [Polarity: Horizontal]

**Radiated Emission Measurement**

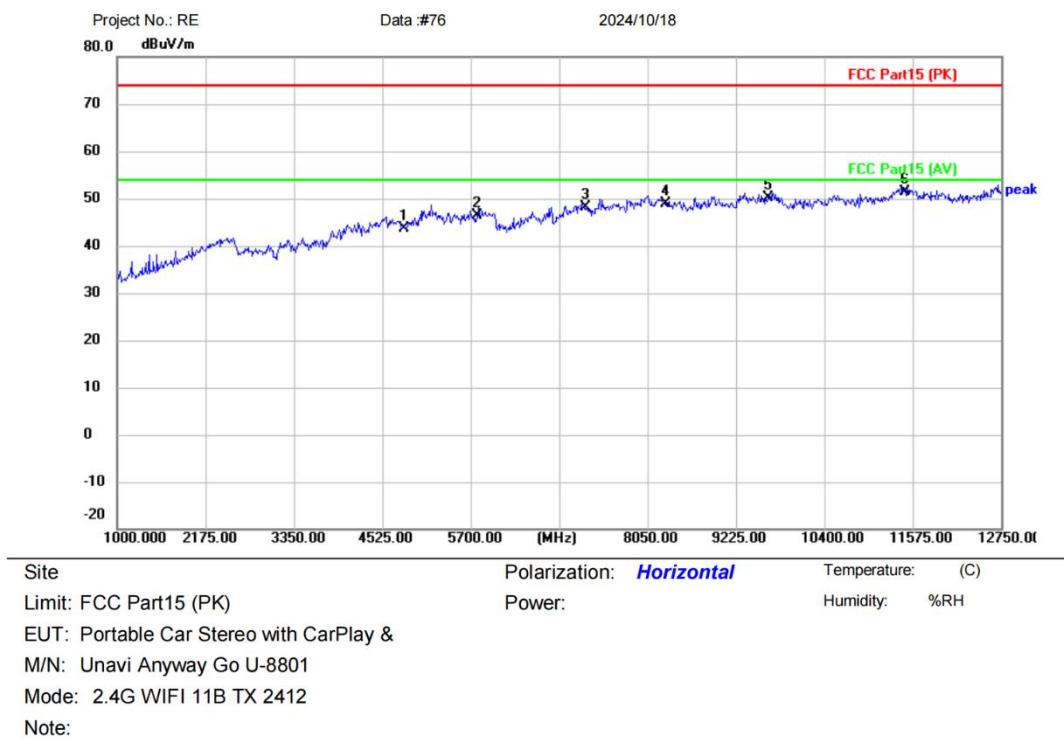

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit		Over Detector	Comment
						Limit dBuV/m	Over dB		
1		4824.000	37.24	6.29	43.53	74.00	-30.47	peak	
2		5782.250	37.63	8.67	46.30	74.00	-27.70	peak	
3		7236.000	37.73	10.45	48.18	74.00	-25.82	peak	
4		8296.750	37.96	11.00	48.96	74.00	-25.04	peak	
5		9648.000	36.62	13.50	50.12	74.00	-23.88	peak	
6	*	11469.25	36.23	15.21	51.44	74.00	-22.56	peak	

\*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[**Test mode: TX low channel]; [**Polarity: Vertical]****
**Radiated Emission Measurement**


Site      Polarization: **Vertical**      Temperature: (C)  
Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
EUT: Portable Car Stereo with CarPlay &  
M/N: Unavi Anyway Go U-8801  
Mode: 2.4G WIFI 11B TX 2412  
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4824.000	37.41	6.29	43.70	74.00	-30.30	peak	
2		5982.000	36.51	8.98	45.49	74.00	-28.51	peak	
3		7236.000	37.42	10.45	47.87	74.00	-26.13	peak	
4		8261.500	37.27	11.15	48.42	74.00	-25.58	peak	
5		9648.000	35.55	13.50	49.05	74.00	-24.95	peak	
6	*	11504.50	36.09	15.37	51.46	74.00	-22.54	peak	


\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only⟩

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

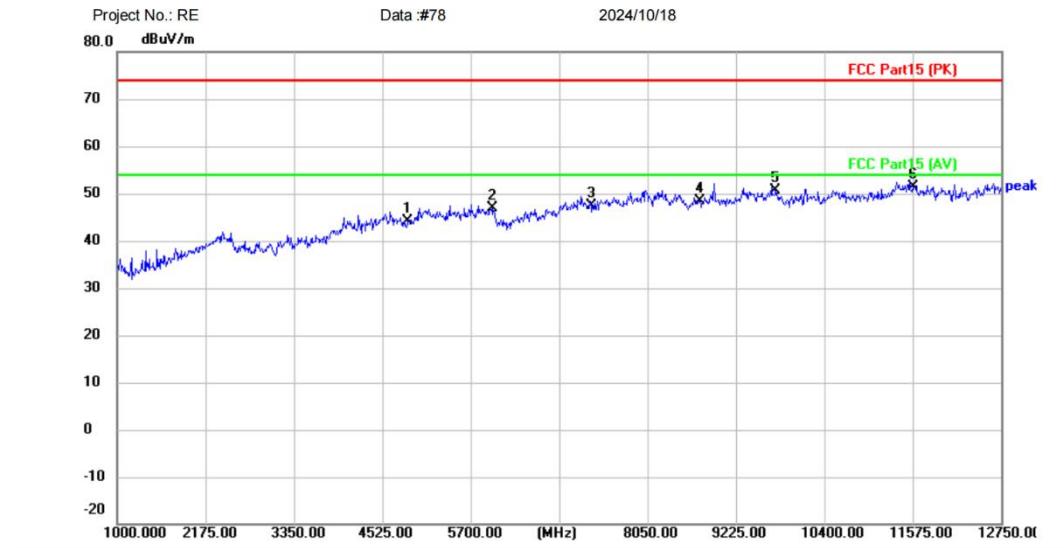**[Test mode: TX middle channel]; [Polarity: Horizontal]**
**Radiated Emission Measurement**


Site      Polarization: **Horizontal**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: Portable Car Stereo with CarPlay &  
 M/N: Unavi Anyway Go U-8801  
 Mode: 2.4G WIFI 11B TX 2437  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4874.000	37.72	6.39	44.11	74.00	-29.89	peak	
2		5982.000	37.78	8.98	46.76	74.00	-27.24	peak	
3		7311.000	37.32	9.98	47.30	74.00	-26.70	peak	
4		8743.250	36.67	11.79	48.46	74.00	-25.54	peak	
5		9748.000	36.85	13.81	50.66	74.00	-23.34	peak	
6	*	11575.00	36.13	15.26	51.39	74.00	-22.61	peak	

\*:Maximum data    x:Over limit    !:over margin


(Reference Only)

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[**Test mode: TX middle channel**]; [**Polarity: Vertical**]

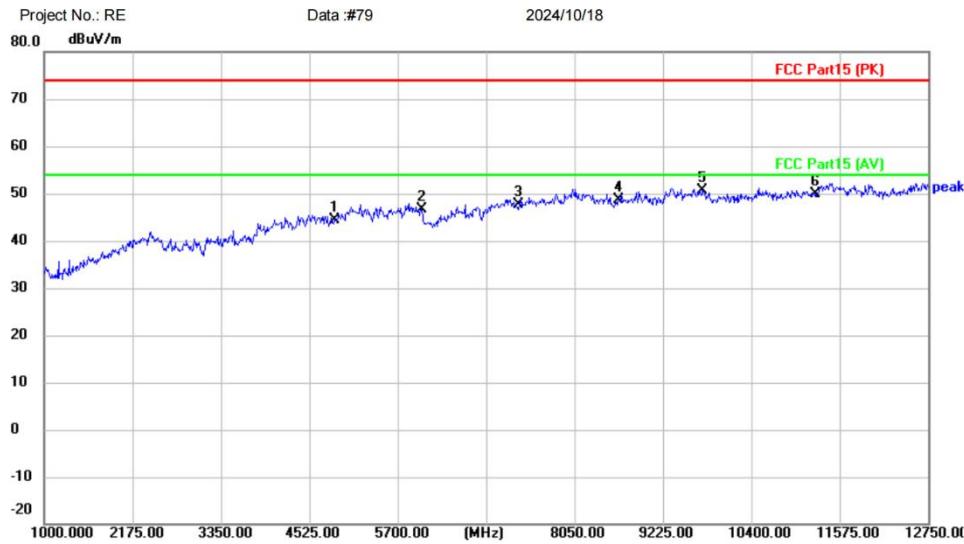**Radiated Emission Measurement**


Site      Polarization: **Vertical**      Temperature: (C)  
 Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
 EUT: Portable Car Stereo with CarPlay &  
 M/N: Unavi Anyway Go U-8801  
 Mode: 2.4G WIFI 11B TX 2437  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4874.000	38.11	6.39	44.50	74.00	-29.50	peak	
2		6017.250	40.77	5.96	46.73	74.00	-27.27	peak	
3		7311.000	37.68	9.98	47.66	74.00	-26.34	peak	
4		8637.500	36.99	11.69	48.68	74.00	-25.32	peak	
5	*	9748.000	36.70	13.81	50.51	74.00	-23.49	peak	
6		11257.75	36.07	13.83	49.90	74.00	-24.10	peak	

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only⟩

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**




[Test mode: TX High channel]; [Polarity: Horizontal]; [Predicted Envelope]

## Radiated Emission Measurement

Project No.: RE

Data :#80

2024/10/18

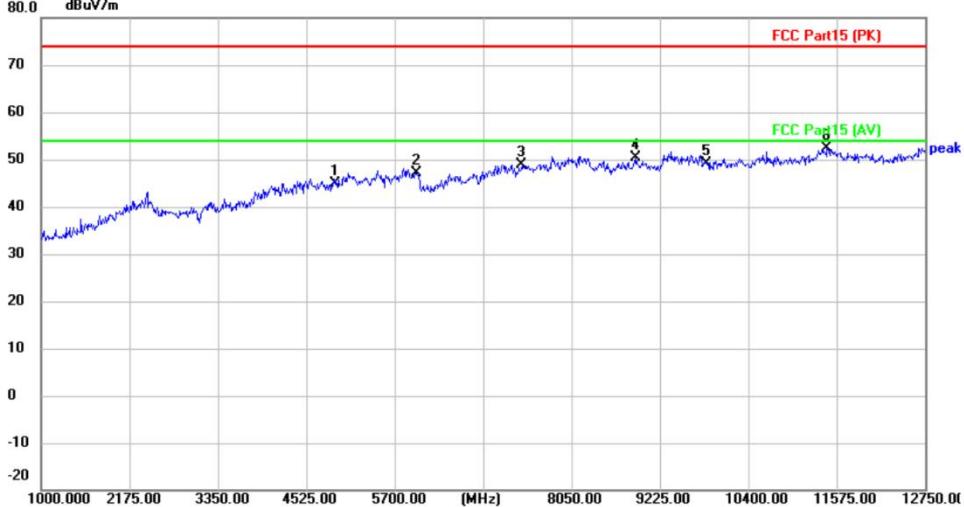

---

## Site

Polarization: *Horizontal*

Temperature: (C)

Limit: FCC Part15 (PK)

## Power:

Humidity: %RH

EUT: Portable Car Stereo with CarPlay &

M/N: Unavi Anyway Go U-8801

Mode: 2.4G WIFI 11B TX 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	37.89	6.89	44.78	74.00	-29.22	peak	
2		5993.750	38.26	8.96	47.22	74.00	-26.78	peak	
3		7386.000	38.41	10.39	48.80	74.00	-25.20	peak	
4		8907.750	37.76	12.57	50.33	74.00	-23.67	peak	
5		9848.000	35.58	13.44	49.02	74.00	-24.98	peak	
6	*	11445.75	37.40	15.08	52.48	74.00	-21.52	peak	

\*:Maximum data x:Over limit !:over margin


〈Reference Only

Receiver: ESR 1

### Spectrum Analyzer: FS

FSP40

## Test Result: Pass

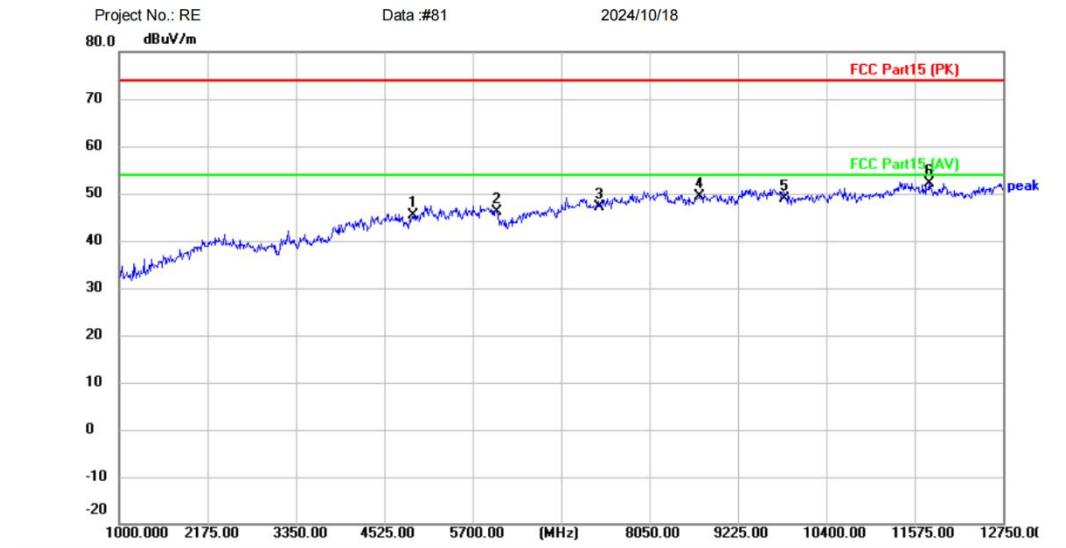[**Test mode: TX High channel]; [Polarity: Vertical]**
**Radiated Emission Measurement**


Site      Polarization: **Vertical**      Temperature: (C)  
Limit: FCC Part15 (PK)      Power:      Humidity: %RH  
EUT: Portable Car Stereo with CarPlay &  
M/N: Unavi Anyway Go U-8801  
Mode: 2.4G WIFI 11B TX 2462  
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4924.000	38.48	6.89	45.37	74.00	-28.63	peak	
2		6017.250	40.08	5.96	46.04	74.00	-27.96	peak	
3		7386.000	36.80	10.39	47.19	74.00	-26.81	peak	
4		8708.000	37.53	11.80	49.33	74.00	-24.67	peak	
5		9848.000	35.47	13.44	48.91	74.00	-25.09	peak	
6	*	11763.00	38.25	13.85	52.10	74.00	-21.90	peak	

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only⟩

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

## 6.8 Radiated emissions which fall in the restricted bands

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.10.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX


### 6.8.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


*Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.*

### 6.8.2 Test setup


Below 1GHz:

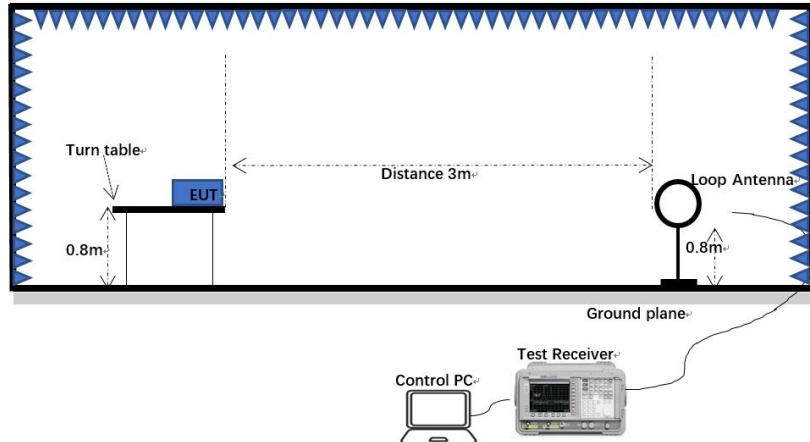

30MHz-1GHz:

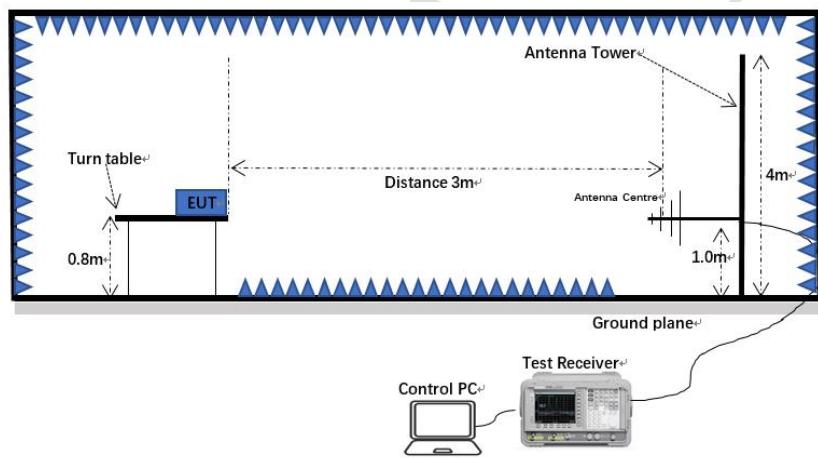

Above 1GHz:

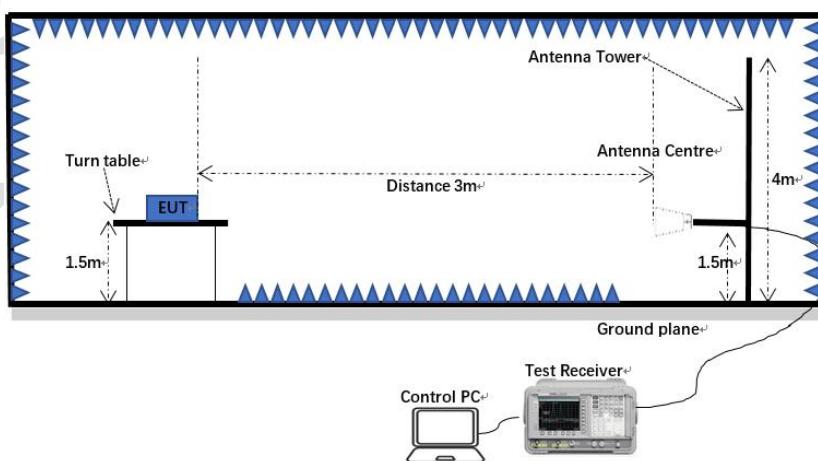

### 6.8.3 Procedure


- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

### 6.8.4 Test data

[Test mode: TX b low channel]; [Polarity: Horizontal]

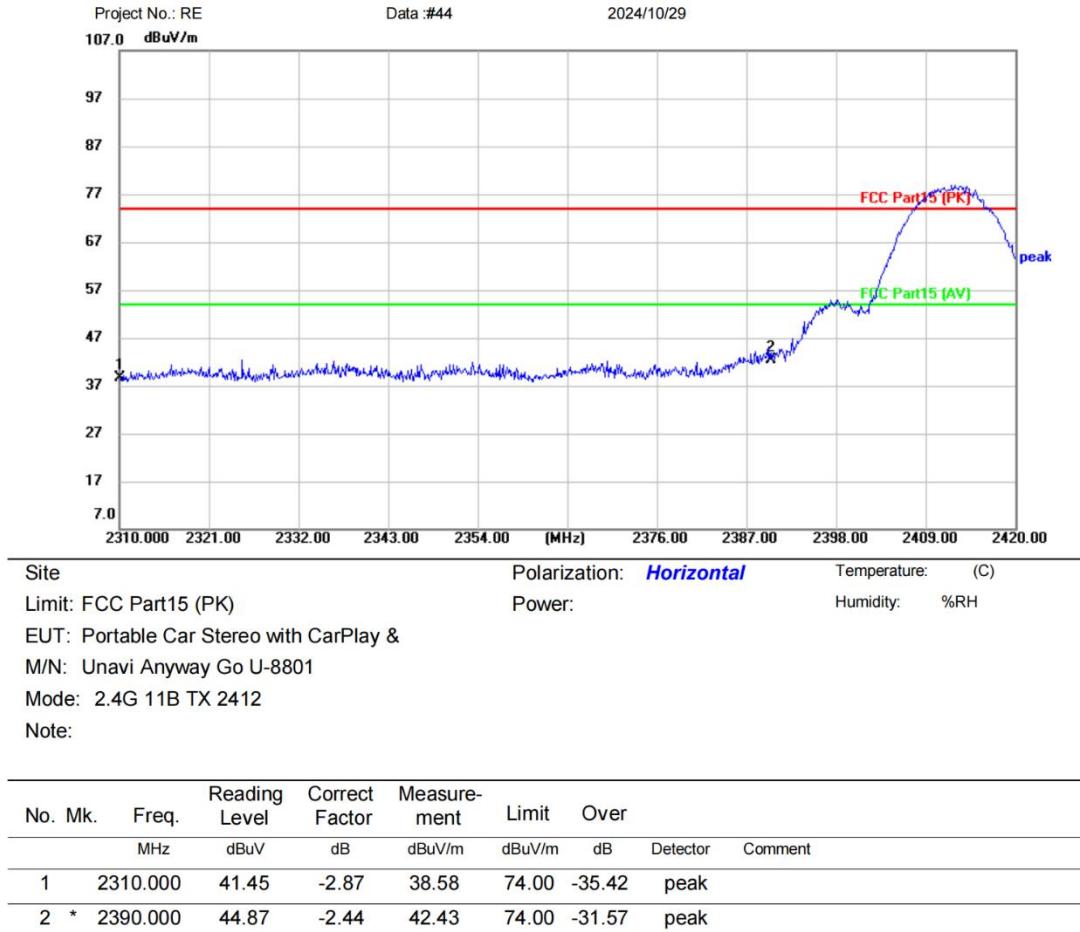

\*:Maximum data x:Over limit !:over margin

(Reference Only)

**Test Result: Pass**

[**Test mode: TX b low channel**]; [**Polarity: Vertical**]


**Radiated Emission measurement**

Project No.: RE

Data #: 45

2024/10/29

107.0 dBuV/m

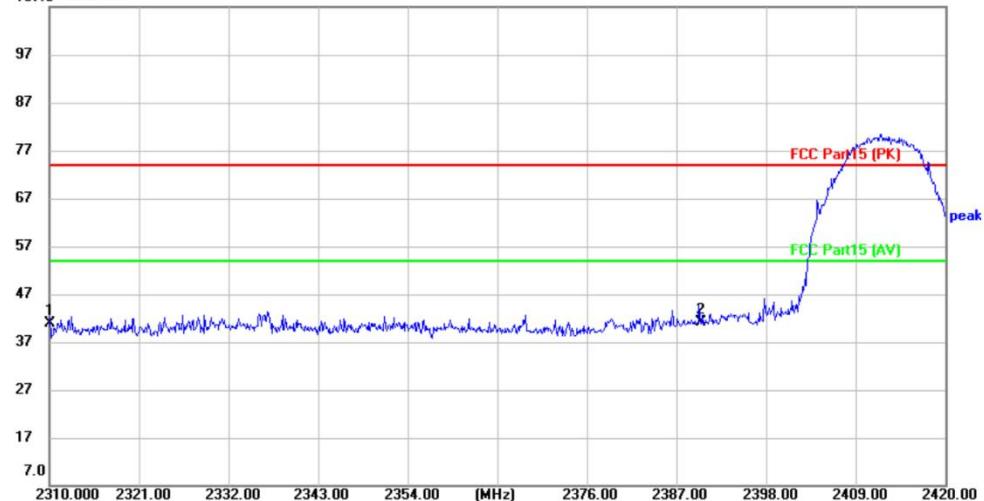

Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Portable Car Stereo with CarPlay &amp;

M/N: Unavi Anyway Go U-8801

Mode: 2.4G 11B TX 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	43.84	-2.87	40.97	74.00	-33.03	peak	
2	*	2390.000	43.49	-2.44	41.05	74.00	-32.95	peak	


\*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

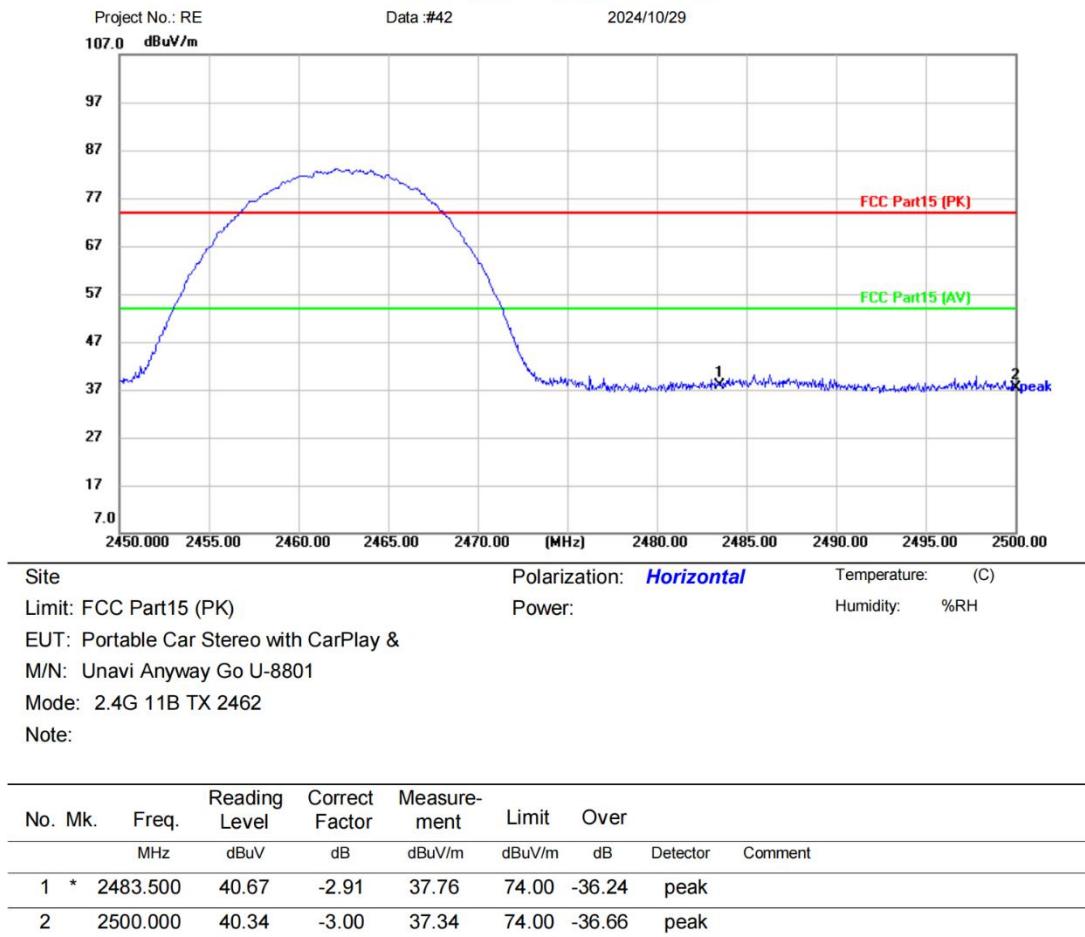**[Test mode: TX b High channel]; [Polarity: Horizontal]**


\*:Maximum data x:Over limit !:over margin

⟨Reference Only

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**


[**Test mode: TX b High channel]; [Polarity: Vertical]**
**Radiated Emission measurement**

Project No.: RE

Data #: 43

2024/10/29

107.0 dBuV/m

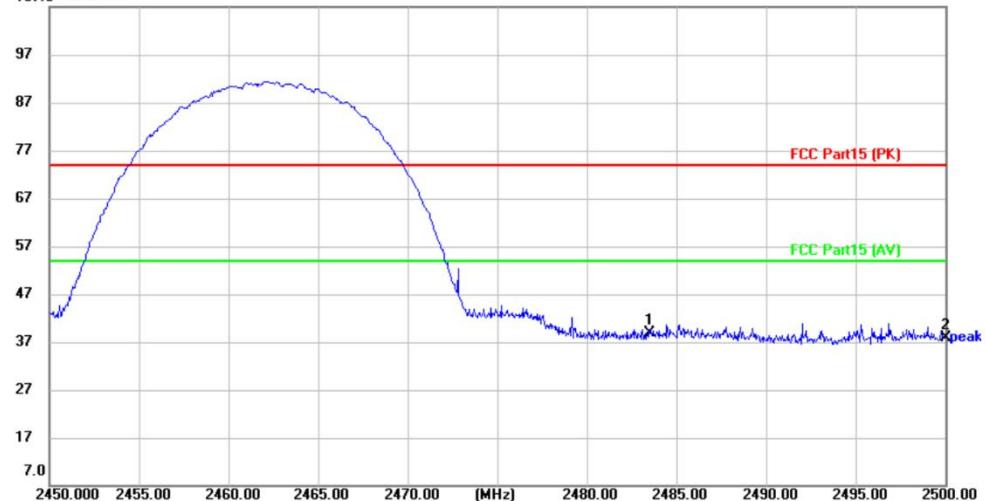

Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Portable Car Stereo with CarPlay &amp;

M/N: Unavi Anyway Go U-8801

Mode: 2.4G 11B TX 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	41.91	-2.91	39.00	74.00	-35.00	peak	
2		2500.000	40.86	-3.00	37.86	74.00	-36.14	peak	


\*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

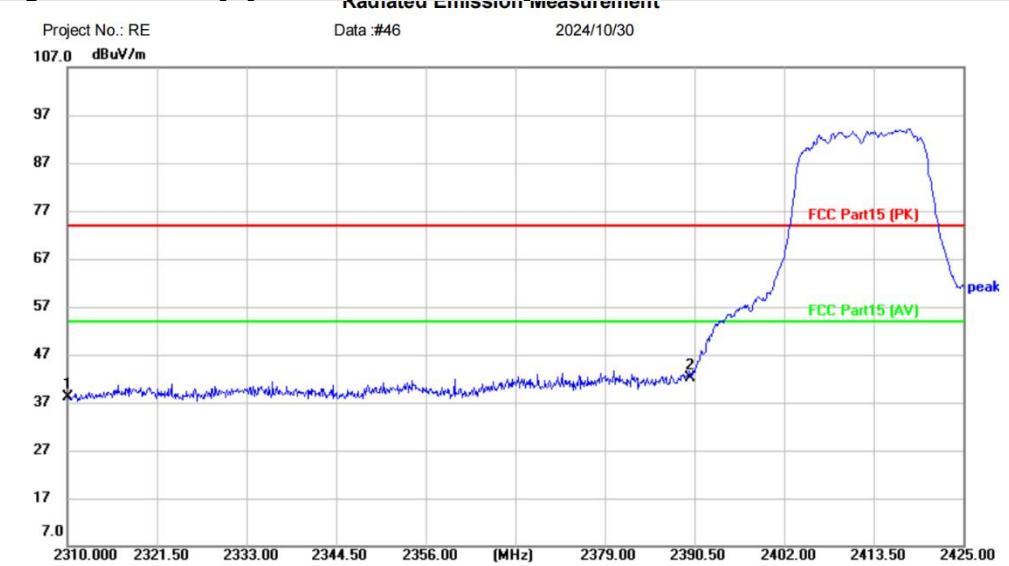[**Test mode: TX g low channel**]; [**Polarity: Horizontal**]


Site: Polarization: **Horizontal** Temperature: (C)  
 Limit: FCC Part15 (PK) Power: Humidity: %RH  
 EUT: Portable Car Stereo with CarPlay &  
 M/N: Unavi Anyway Go U-8801  
 Mode: 2.4G 11G TX 2412  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2310.000	40.99	-2.87	38.12	74.00	-35.88	peak	
2	*	2390.000	44.62	-2.44	42.18	74.00	-31.82	peak	

\*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[**Test mode: TX g low channel**]; [**Polarity: Vertical**]


**Radiated Emission measurement**

Project No.: RE

Data #: 47

2024/10/30

107.0 dBuV/m

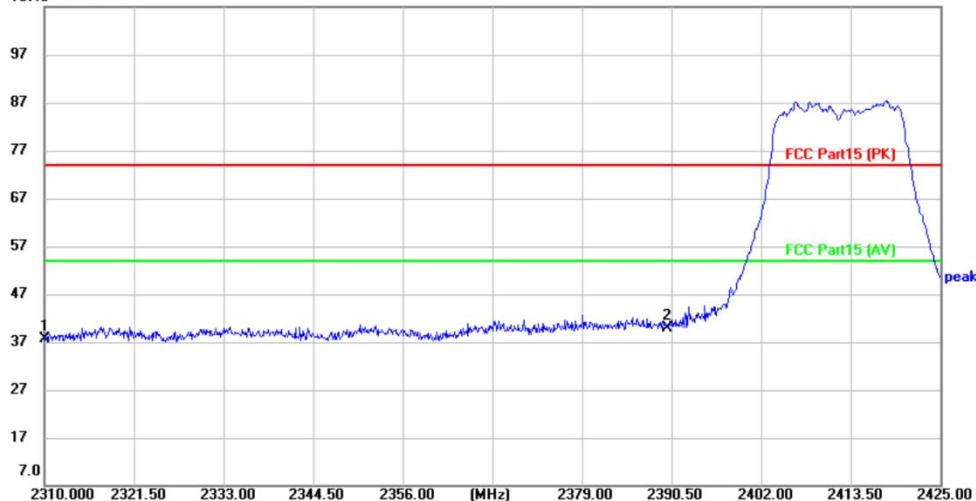

Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Portable Car Stereo with CarPlay &amp;

M/N: Unavi Anyway Go U-8801

Mode: 2.4G 11G TX 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	40.41	-2.87	37.54	74.00	-36.46	peak	
2	*	2390.000	42.25	-2.44	39.81	74.00	-34.19	peak	

\*:Maximum data x:Over limit !:over margin

(Reference Only)


Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[**Test mode: TX g High channel]; [Polarity: Horizontal]**

Radiated Emission Measurement

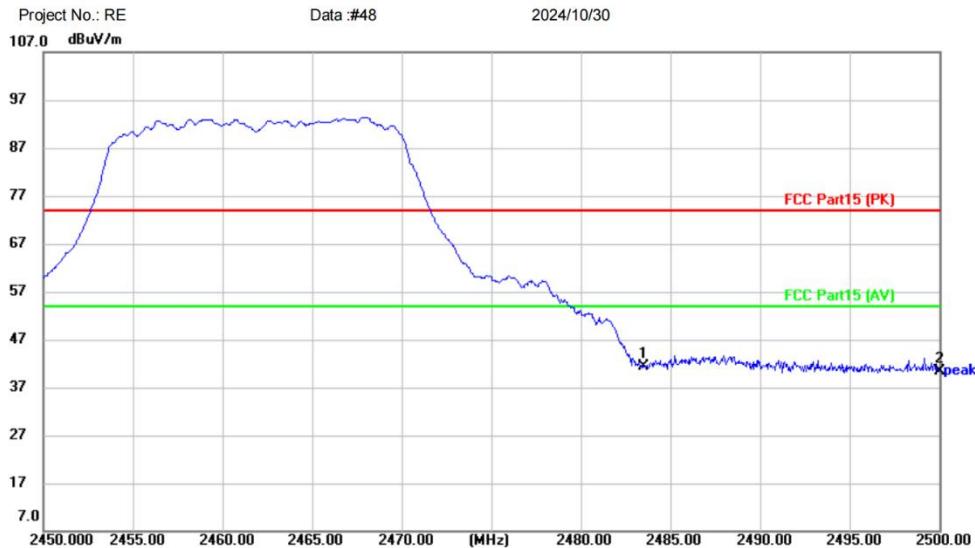
Site      Polarization: **Horizontal**      Temperature: (C)

Limit: FCC Part15 (PK)      Power:      Humidity: %RH

EUT: Portable Car Stereo with CarPlay &amp;

M/N: Unavi Anyway Go U-8801

Mode: 2.4G 11G TX 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	44.37	-2.91	41.46	74.00	-32.54	peak	
2		2500.000	43.33	-3.00	40.33	74.00	-33.67	peak	

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only⟩

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode: TX g High channel]; [Polarity: Vertical]


## Radiated Emission Measurement

Project No.: RE

Data #: 49

2024/10/30

107.0 dBuV/m

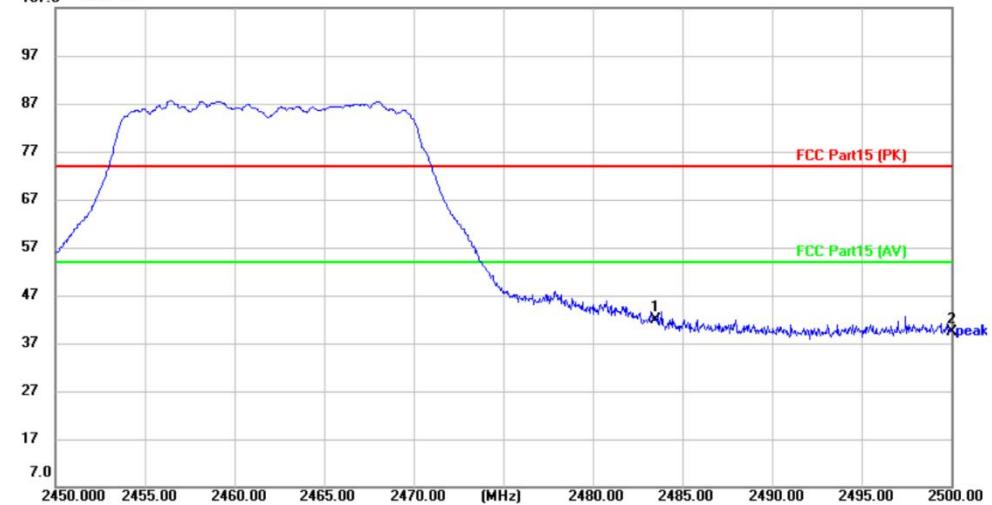

Site

 Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Portable Car Stereo with CarPlay &amp;

M/N: Unavi Anyway Go U-8801

Mode: 2.4G 11G TX 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	44.88	-2.91	41.97	74.00	-32.03	peak	
2		2500.000	42.37	-3.00	39.37	74.00	-34.63	peak	

\*:Maximum data x:Over limit !:over margin

(Reference Only)


Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode: TX n20 low channel]; [Polarity: Horizontal]

Rawated Emission Measurement

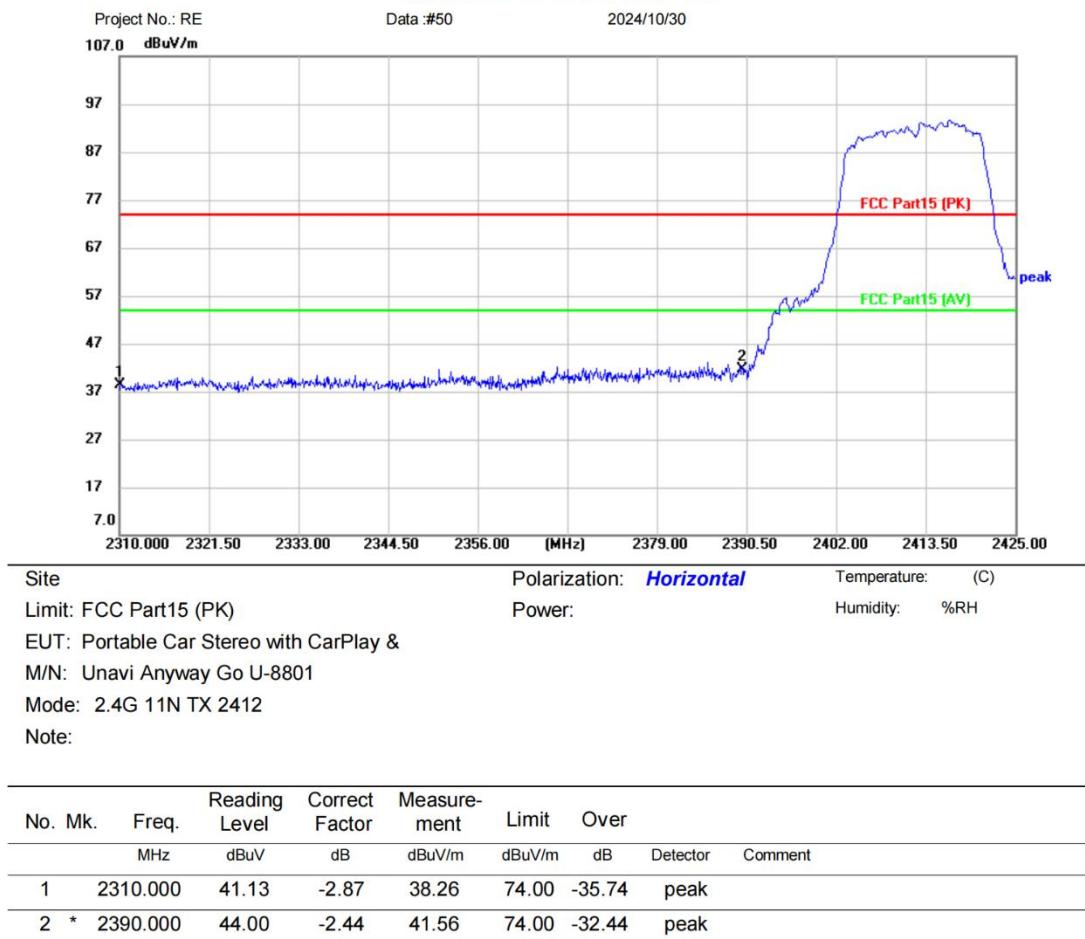

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**


[**Test mode: TX n20 low channel]; [Polarity: Vertical]**
**Radiated Emission Measurement**

Project No.: RE

Data :#51

2024/10/30

107.0 dBuV/m

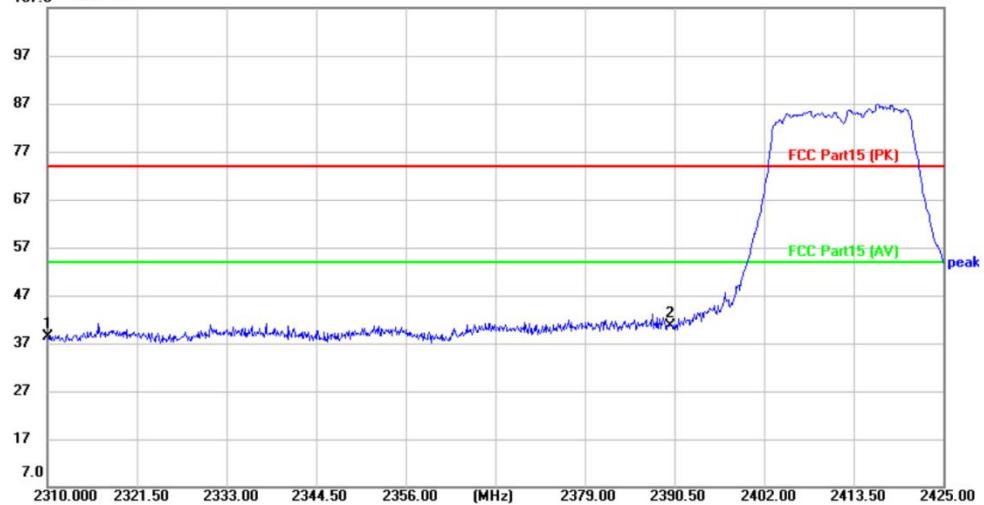

Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Portable Car Stereo with CarPlay &amp;

M/N: Unavi Anyway Go U-8801

Mode: 2.4G 11N TX 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		2310.000	41.24	-2.87	38.37	74.00	-35.63	peak
2	*	2390.000	43.13	-2.44	40.69	74.00	-33.31	peak

\*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode: TX n20 High channel]; [Polarity: Horizontal]

Radiated Emission Measurement

Project No.: RE

Data #: 52

2024/10/30

107.0 dBuV/m



Site

 Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Portable Car Stereo with CarPlay &amp;

M/N: Unavi Anyway Go U-8801

Mode: 2.4G 11N TX 2462

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2483.500	45.23	-2.91	42.32	74.00	-31.68	peak	
2		2500.000	42.97	-3.00	39.97	74.00	-34.03	peak	

\*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode: TX n20 High channel]; [Polarity: Vertical]


## Radiated Emission Measurement

Project No.: RE

Data #: 53

2024/10/30

107.0 dBuV/m

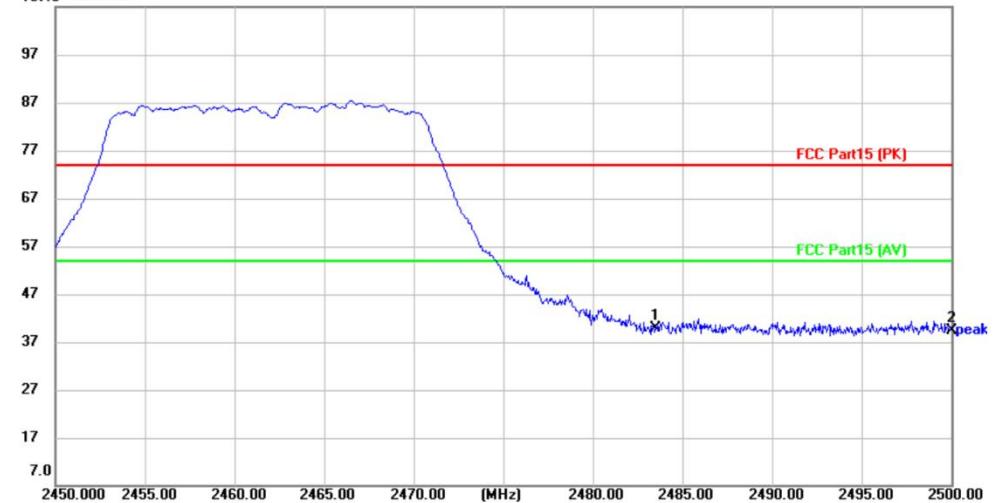

Site

 Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Portable Car Stereo with CarPlay &amp;

M/N: Unavi Anyway Go U-8801

Mode: 2.4G 11N TX 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	42.79	-2.91	39.88	74.00	-34.12	peak	
2		2500.000	42.32	-3.00	39.32	74.00	-34.68	peak	


\*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

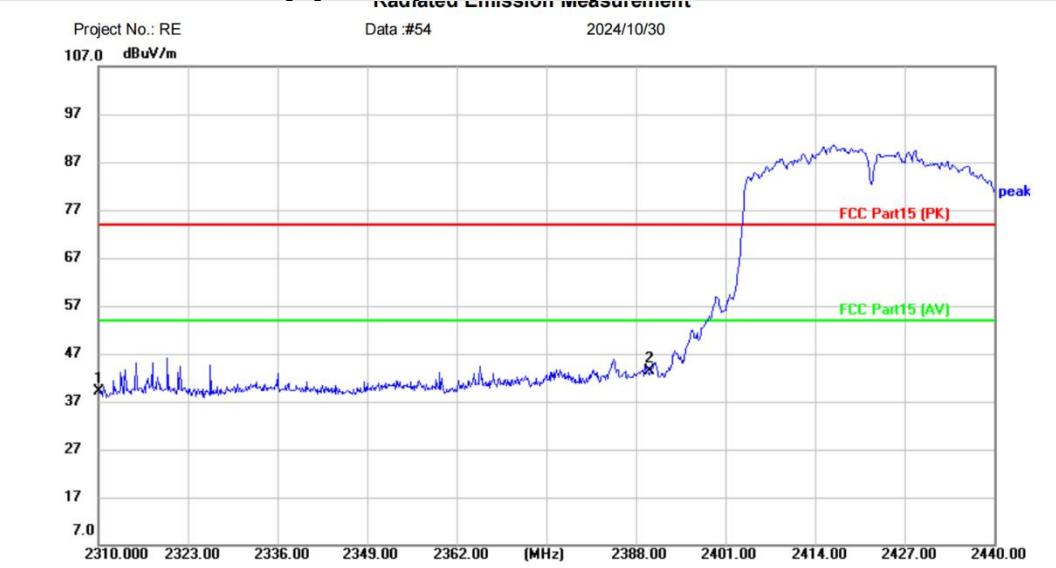[**Test mode: TX n40 low channel]; [Polarity: Horizontal]**


Site: Polarization: **Horizontal** Temperature: (C)  
 Limit: FCC Part15 (PK) Power: Humidity: %RH  
 EUT: Portable Car Stereo with CarPlay &  
 M/N: Unavi Anyway Go U-8801  
 Mode: 2.4G 11N40 TX 2422  
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2310.000	42.04	-2.87	39.17	74.00	-34.83	peak	
2	*	2390.000	45.71	-2.44	43.27	74.00	-30.73	peak	

\*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**


[**Test mode: TX n40 low channel]; [Polarity: Vertical]**
**Calibrated Emission Measurement**

Project No.: RE

Data #: 55

2024/10/30

107.0 dBuV/m

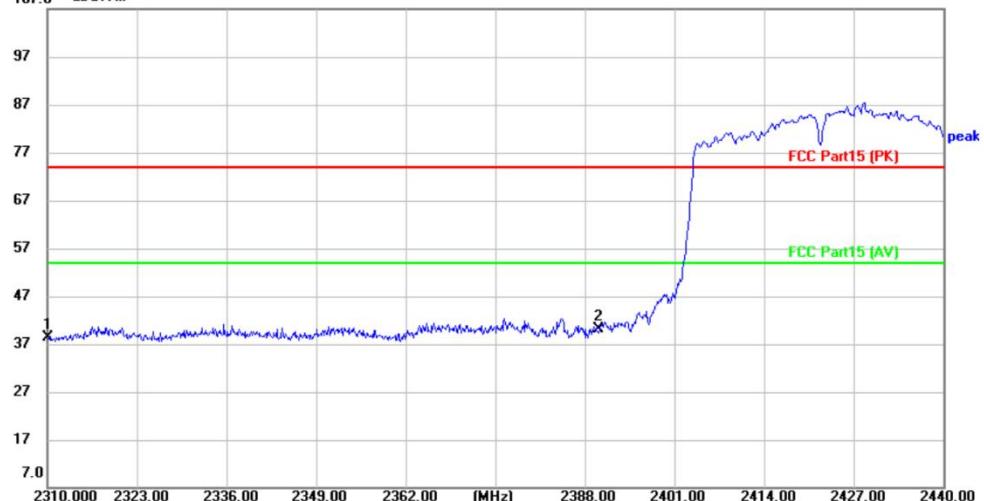

Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Portable Car Stereo with CarPlay &amp;

M/N: Unavi Anyway Go U-8801

Mode: 2.4G 11N40 TX 2422

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	41.25	-2.87	38.38	74.00	-35.62	peak	
2	*	2390.000	42.50	-2.44	40.06	74.00	-33.94	peak	

\*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR\_1

Spectrum Analyzer: FSP40

**Test Result: Pass**

[Test mode: TX n40 High channel]; [Polarity: Horizontal]

#### Quantity: Horizontal radiation emission measurement

Project No.: RE

Data :#56

2024/10/30



---

## Site

Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

## Power:

Humidity: %RH

EUT: Portable Car Stereo with CarPlay &

M/N: Unavi Anyway Go U-8801

Mode: 2.4G 11N40 TX 2452

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
1	*	2483.500	45.77	-2.91	42.86	74.00	-31.14	peak
2		2500.000	43.25	-3.00	40.25	74.00	-33.75	peak

\*:Maximum data    x:Over limit    l:over margin

⟨Reference Only

Receiver: ESR 1

### Spectrum Analyzer:

FSP40

## Test Result: Pass


[**Test mode: TX n40 High channel]; [Polarity: Vertical]**
**Radiated Emission Measurement**

Project No.: RE

Data #: 57

2024/10/30

107.0 dBuV/m

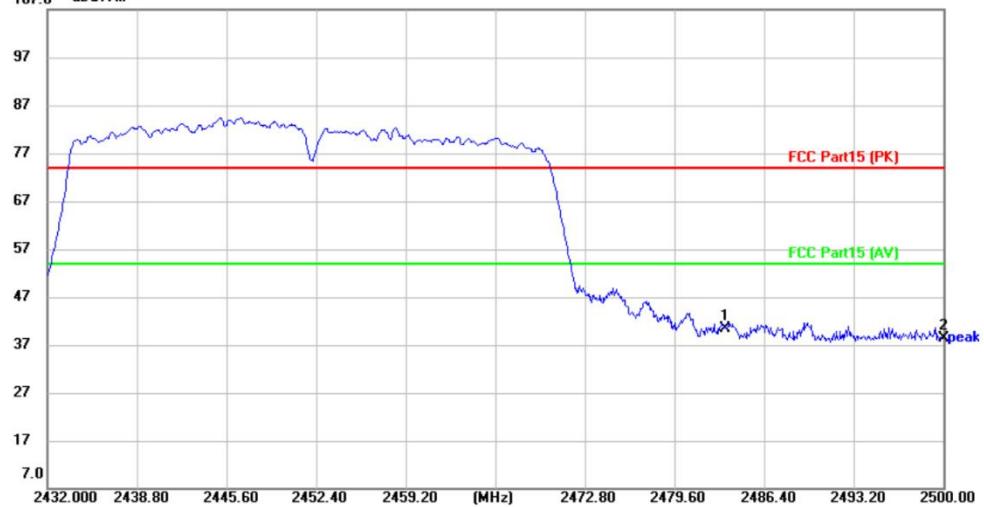

Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Portable Car Stereo with CarPlay &amp;

M/N: Unavi Anyway Go U-8801

Mode: 2.4G 11N40 TX 2452

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	43.33	-2.91	40.42	74.00	-33.58	peak	
2		2500.000	41.49	-3.00	38.49	74.00	-35.51	peak	

\*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR\_1

Spectrum Analyzer: FSP40


**Test Result: Pass**

## 7 Appendix A


### Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	b	2412	Ant1	99.77	0.01
NVNT	b	2437	Ant1	99.76	0.01
NVNT	b	2462	Ant1	99.76	0.01
NVNT	g	2412	Ant1	34.24	4.66
NVNT	g	2437	Ant1	34.27	4.65
NVNT	g	2462	Ant1	34.28	4.65
NVNT	n20	2412	Ant1	32.52	4.88
NVNT	n20	2437	Ant1	32.53	4.88
NVNT	n20	2462	Ant1	32.53	4.88
NVNT	n40	2422	Ant1	22.21	6.53
NVNT	n40	2437	Ant1	22.06	6.56
NVNT	n40	2452	Ant1	22.18	6.54


Duty Cycle NVNT b 2412MHz Ant1

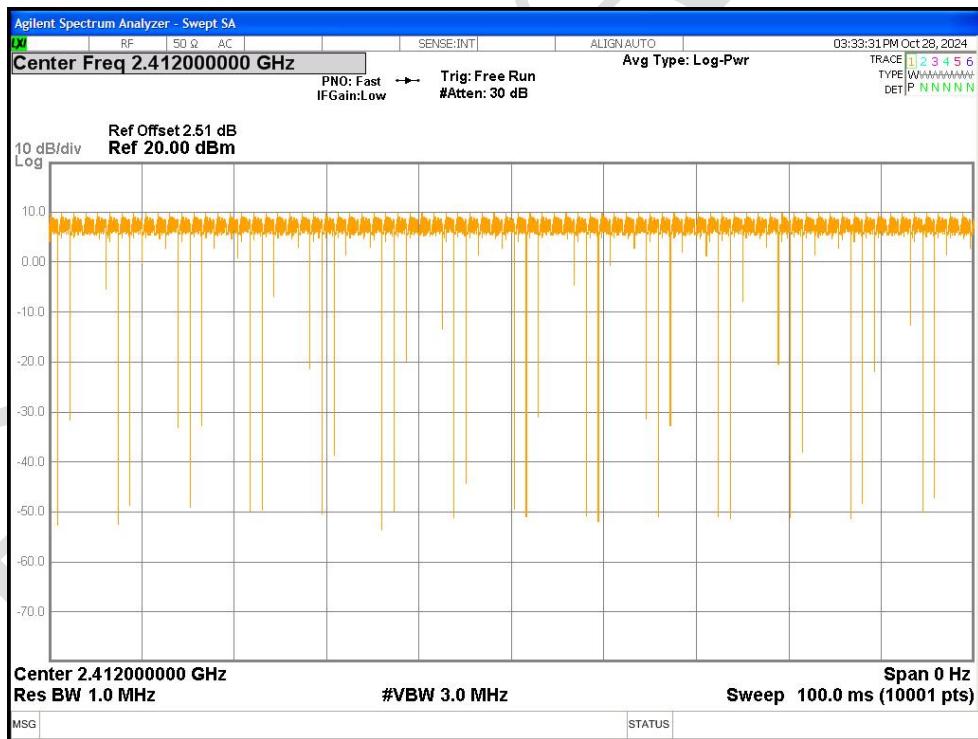


Duty Cycle NVNT b 2437MHz Ant1

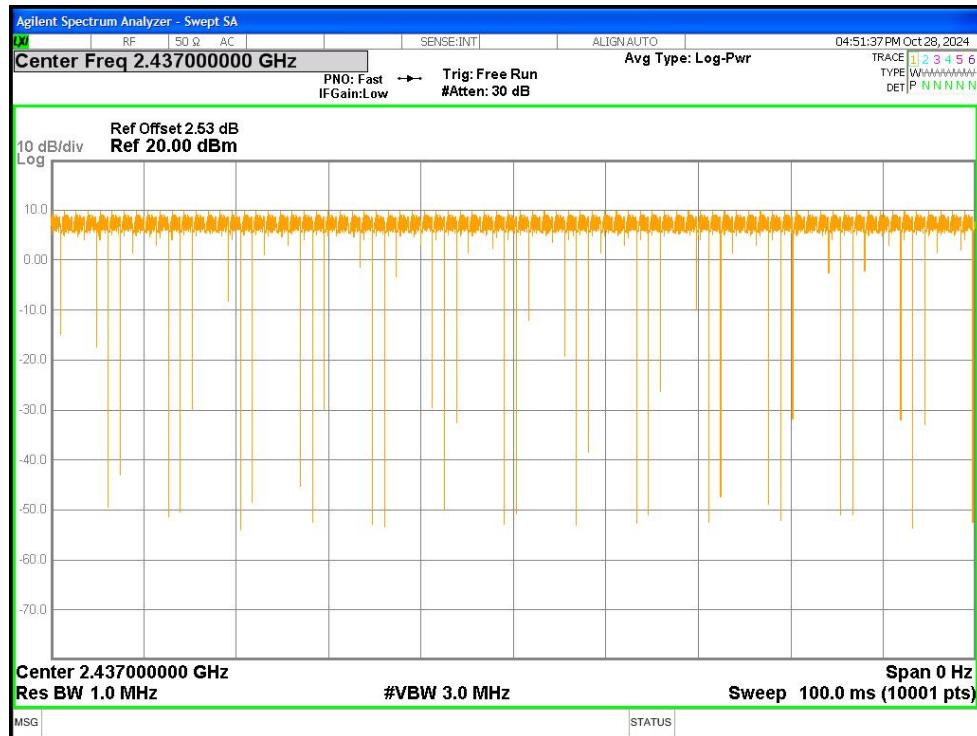


Duty Cycle NVNT b 2462MHz Ant1

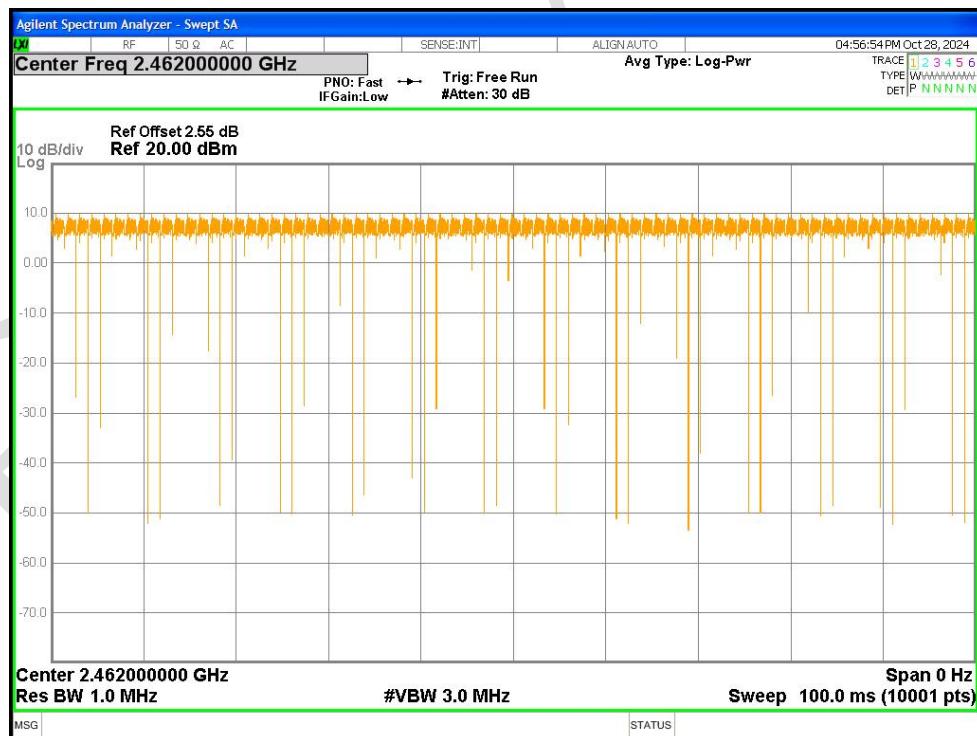


Duty Cycle NVNT g 2412MHz Ant1

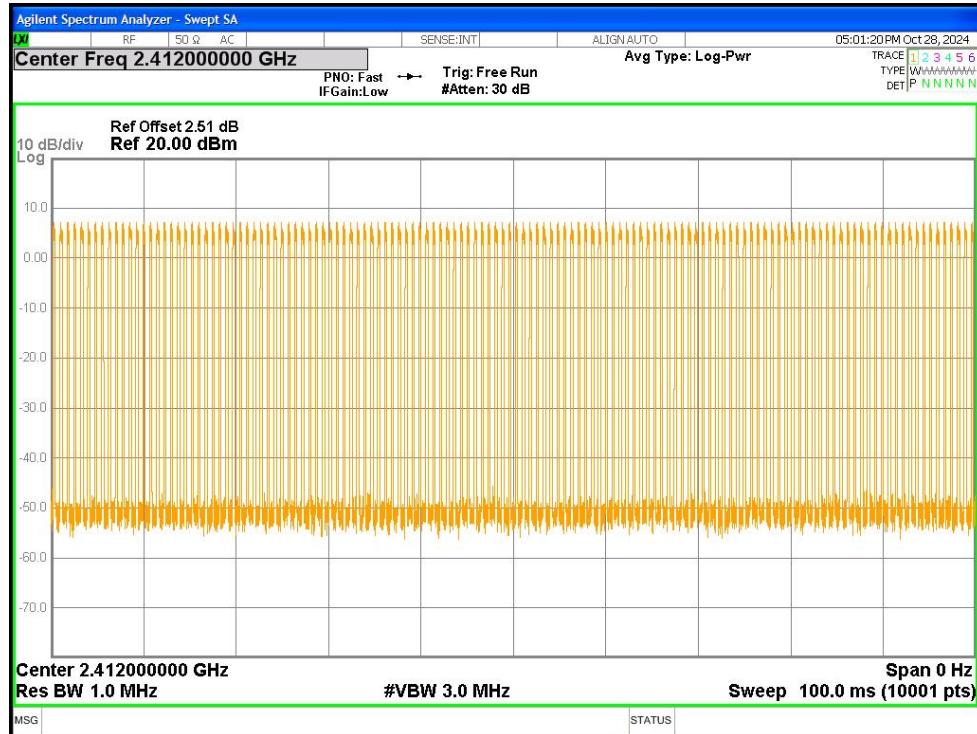


Duty Cycle NVNT g 2437MHz Ant1

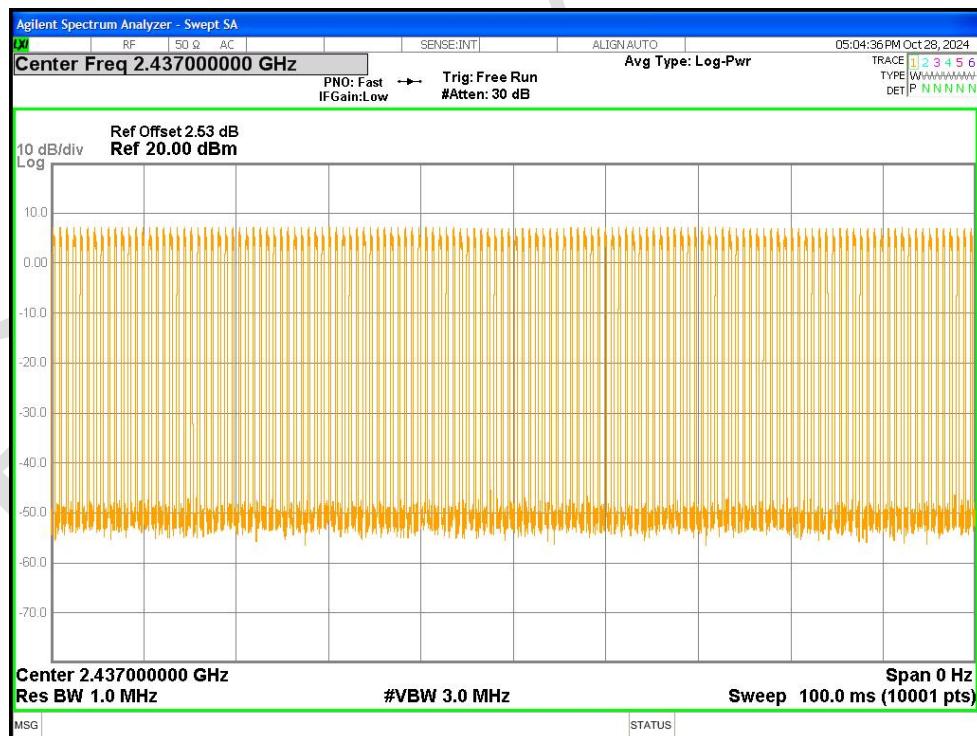


Duty Cycle NVNT g 2462MHz Ant1

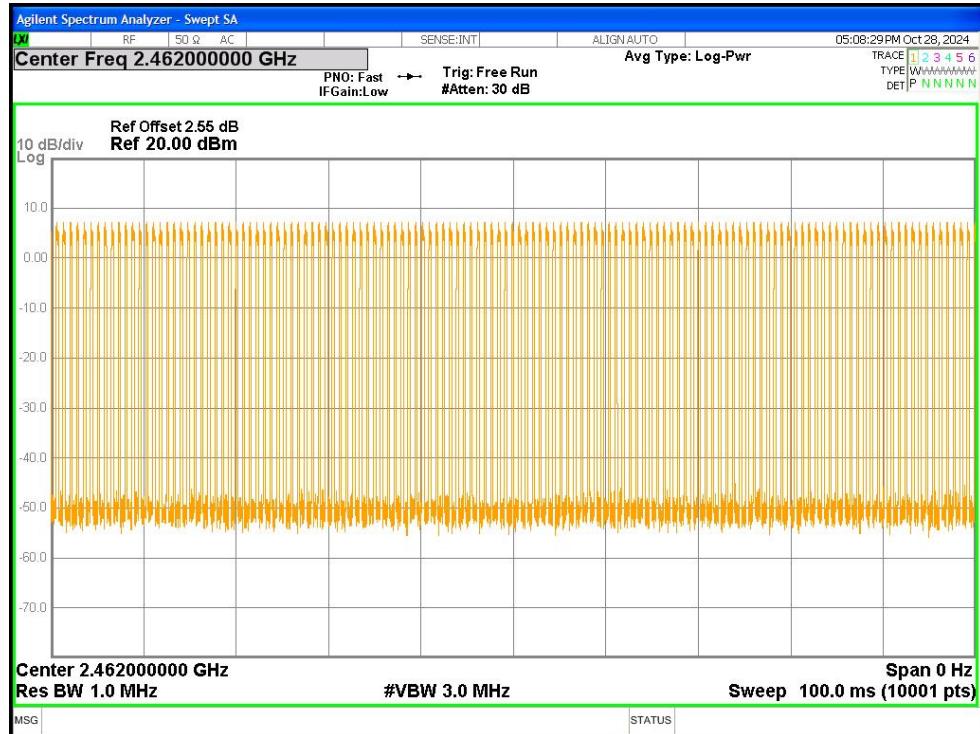


Duty Cycle NVNT n20 2412MHz Ant1

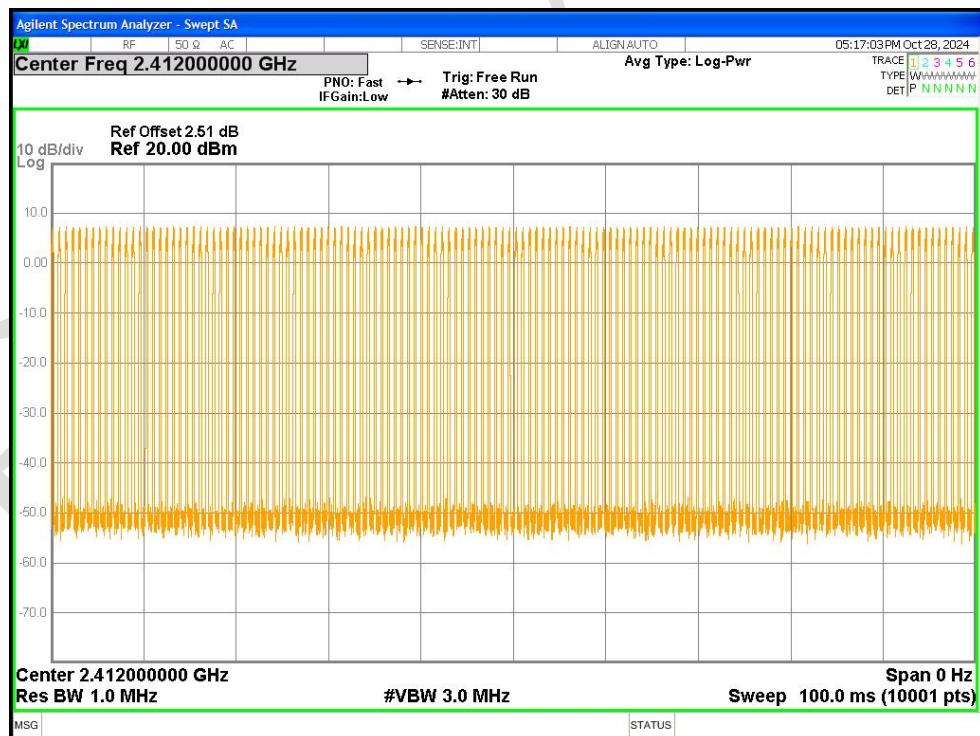

Duty Cycle NVNT n20 2437MHz Ant1

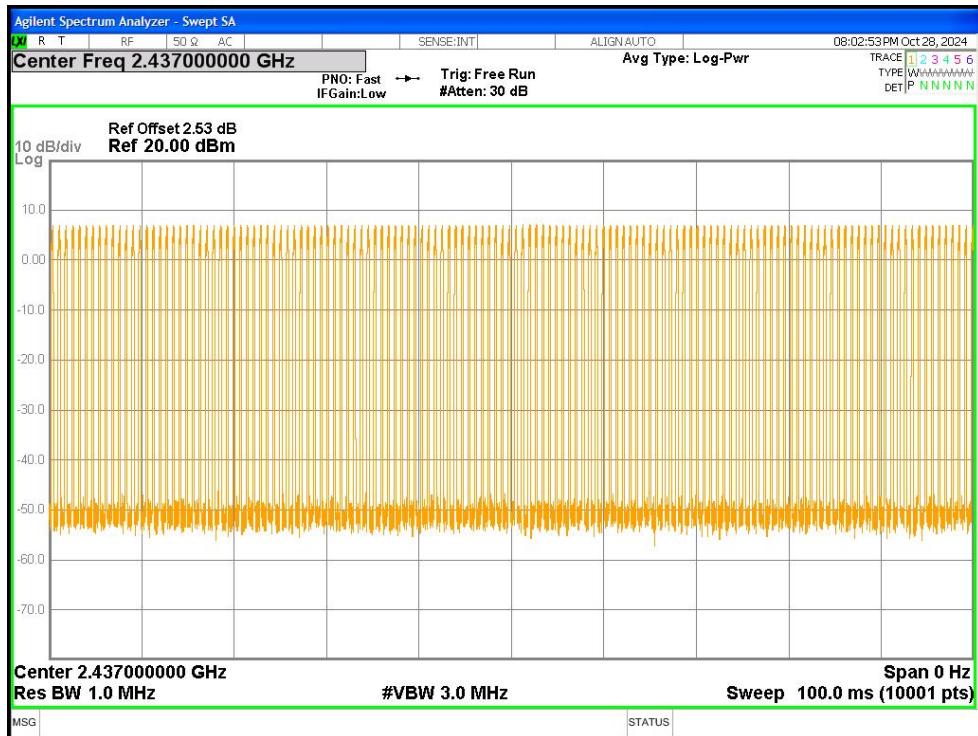

Duty Cycle NVNT n20 2462MHz Ant1

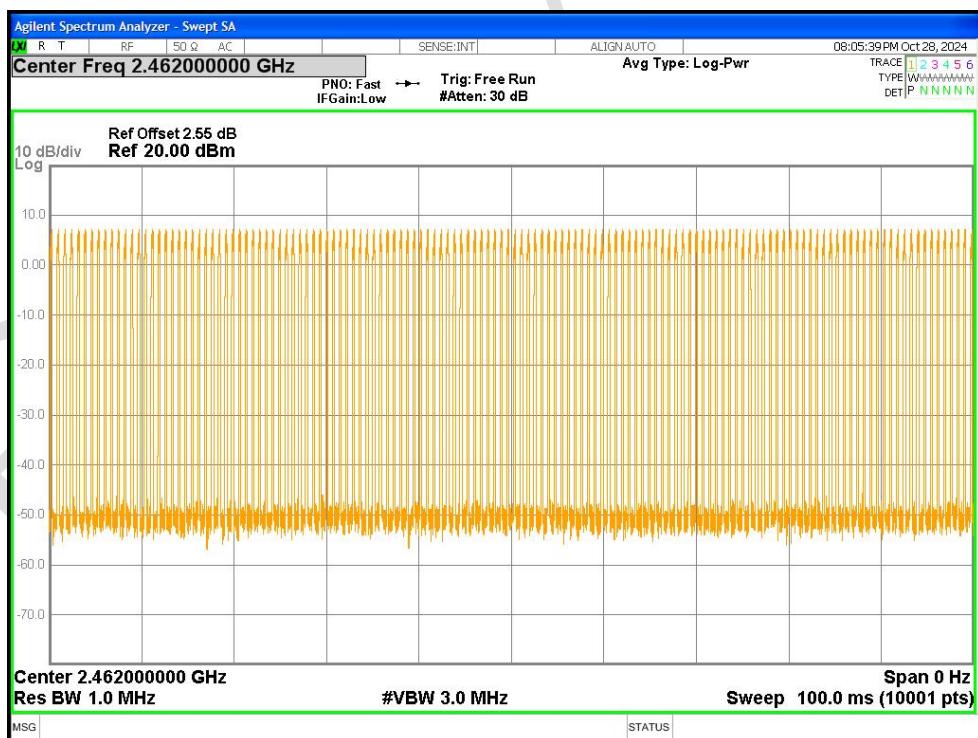

Duty Cycle NVNT n40 2422MHz Ant1