

# TEST REPORT

Product Name : TUBULAR MOTOR  
Model Number : GM25TE-1.1Nm/28rpm, GM25TE-1.5Nm/28rpm,  
GM25TE-2Nm/25rpm, GM25CE-1.1Nm/28rpm,  
GM25CE-1.5Nm/28rpm, GM25CE-2Nm/25rpm,  
GM25LE/U-1.1Nm/28rpm, GM25LE/U-1.5Nm/28rpm,  
GM25LE/U-2Nm/25rpm, GM25LE/J-1.1Nm/28rpm,  
GM25LE/J-1.5Nm/28rpm, GM25LE/J-2Nm/25rpm  
FCC ID : 2BLA7-GM25

Prepared for : NINGBO GERWIN MECHANIC&ELECTRONICS  
TECHNOLOGY CO., LTD  
Address : Tianhu Road, Luotuo Street, Ningbo, Zhejiang, China  
Prepared by : EMTEK (NINGBO) CO., LTD.  
Address : No. 8, Building 8, Lane 216, Qingyi Road, Ningbo Hi-Tech  
Zone, Ningbo, Zhejiang, China  
Tel: +86-574-27907998  
Fax: +86-574-27721538

Report Number : ENB2407090145W00101R  
Date(s) of Tests : July 09, 2024 to September 20, 2024  
Date of Issue : October 26, 2024

## Table of Contents

|                                              |           |
|----------------------------------------------|-----------|
| <b>1 TEST RESULT CERTIFICATION</b>           | <b>3</b>  |
| <b>2 EUT TECHNICAL DESCRIPTION</b>           | <b>5</b>  |
| <b>3 SUMMARY OF TEST RESULT</b>              | <b>6</b>  |
| <b>4 TEST METHODOLOGY</b>                    | <b>7</b>  |
| 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS | 7         |
| 4.2 MEASUREMENT EQUIPMENT USED               | 7         |
| 4.3 DESCRIPTION OF TEST MODES                | 8         |
| 4.4 TEST SOFTWARE                            | 9         |
| <b>5 FACILITIES AND ACCREDITATIONS</b>       | <b>10</b> |
| 5.1 FACILITIES                               | 10        |
| 5.2 LABORATORY ACCREDITATIONS AND LISTINGS   | 10        |
| <b>6 TEST SYSTEM UNCERTAINTY</b>             | <b>11</b> |
| <b>7 SETUP OF EQUIPMENT UNDER TEST</b>       | <b>12</b> |
| 7.1 RADIO FREQUENCY TEST SETUP 1             | 12        |
| 7.2 RADIO FREQUENCY TEST SETUP 2             | 12        |
| 7.3 CONDUCTED EMISSION TEST SETUP            | 14        |
| 7.4 SUPPORT EQUIPMENT                        | 14        |
| <b>8 TEST REQUIREMENTS</b>                   | <b>15</b> |
| 8.1 BANDWIDTH TEST                           | 15        |
| 8.2 RADIATED SPURIOUS EMISSION               | 18        |
| 8.3 CONDUCTED EMISSIONS TEST                 | 42        |
| 8.4 ANTENNA APPLICATION                      | 45        |

## 1 TEST RESULT CERTIFICATION

Applicant : NINGBO GERWIN MECHANIC&ELECTRONICS TECHNOLOGY CO., LTD  
Address : Tianhu Road, Luotuo Street, Ningbo, Zhejiang, China  
Manufacturer : NINGBO GERWIN MECHANIC&ELECTRONICS TECHNOLOGY CO., LTD  
Address : Tianhu Road, Luotuo Street, Ningbo, Zhejiang, China  
EUT : TUBULAR MOTOR  
Model Name : GM25TE-1.1Nm/28rpm, GM25TE-1.5Nm/28rpm, GM25TE-2Nm/25rpm,  
GM25CE-1.1Nm/28rpm, GM25CE-1.5Nm/28rpm, GM25CE-2Nm/25rpm,  
GM25LE/U-1.1Nm/28rpm, GM25LE/U-1.5Nm/28rpm, GM25LE/U-2Nm/25rpm,  
GM25LE/J-1.1Nm/28rpm, GM25LE/J-1.5Nm/28rpm, GM25LE/J-2Nm/25rpm  
Trademark : N/A

Measurement Procedure Used:

| APPLICABLE STANDARDS                                          |             |
|---------------------------------------------------------------|-------------|
| STANDARD                                                      | TEST RESULT |
| FCC 47 CFR Part 2, Subpart J<br>FCC 47 CFR Part 15, Subpart C | PASS        |

The above equipment was tested by EMTEK(NINGBO) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.249

The test results of this report relate only to the tested sample identified in this report.

Date of Test : July 09, 2024 to September 20, 2024

Prepared by :   
June Gao/Engineer

Reviewer :   
Lucas Xu/Supervisor

Approved & Authorized Signer :   
Tony Wei/Manager

## Modified History

| Version | Report No.           | Revision Date | Summary         |
|---------|----------------------|---------------|-----------------|
| Ver.1.0 | ENB2407090145W00101R | /             | Original Report |



## 2 EUT TECHNICAL DESCRIPTION

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product:            | TUBULAR MOTOR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Model Number:       | <p>GM25TE-1.1Nm/28rpm, GM25TE-1.5Nm/28rpm, GM25TE-2Nm/25rpm, GM25CE-1.1Nm/28rpm, GM25CE-1.5Nm/28rpm, GM25CE-2Nm/25rpm, GM25LE/U-1.1Nm/28rpm, GM25LE/U-1.5Nm/28rpm, GM25LE/U-2Nm/25rpm, GM25LE/J-1.1Nm/28rpm, GM25LE/J-1.5Nm/28rpm, GM25LE/J-2Nm/25rpm</p> <p>(Note: The letters TE,CE,LE/U,LE/J for all models represent power plugs of different national specifications. TE is powered by AC 100-240V, CE is DC 12V regulated DC power supply, LE is 8.4V lithium battery power supply (where the end of U is USB charging, the end of J is TYPE C charging). The numbers behind the bars represent motors of different torques. In addition, the function of the product, schematic design, PCB Layout and so on are the same. We selected GM25TE-1.1Nm/28rpm for RF testing. Moreover, GM25TE-1.1Nm/28rpm, GM25CE-1.1Nm/28rpm, GM25LE/U-1.1Nm/28rpm were selected for 30-1000MHz radiation difference test and GM25TE-1.1Nm/28rpm. GM25LE/U-1.1Nm/28rpm 150k-30MHz conduction difference test.)</p> |
| Sample Number:      | ENB2407090145W001-3-3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test Voltage:       | AC 120V/60Hz for Power source, DC 12V for Adapter, DC 8.4V for Battery                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Modulation:         | GFSK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Frequency Range:    | 2405-2480MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Max Transmit Power: | 96.04 dBuV/m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Antenna:            | WIRE antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Antenna Gain:       | 3.26 dBi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Temperature Range:  | -10°C ~ 50°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Date of Received:   | July 09, 2024                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |


Note: for more details, please refer to the user's manual of the EUT.

### 3 SUMMARY OF TEST RESULT

| FCC Part Clause                                                                                                                                                                                                                                                                                  | Test Parameter             | Verdict | Remark |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------|--------|
| 15.207                                                                                                                                                                                                                                                                                           | Conducted Emission         | PASS    |        |
| 15.209                                                                                                                                                                                                                                                                                           | Radiated Emission          | PASS    |        |
| 15.249                                                                                                                                                                                                                                                                                           | Radiated Spurious Emission | PASS    |        |
| 15.249                                                                                                                                                                                                                                                                                           | Band edge test             | PASS    |        |
| 15.249                                                                                                                                                                                                                                                                                           | 20dB Bandwidth             | PASS    |        |
| 15.203                                                                                                                                                                                                                                                                                           | Antenna Requirement        | PASS    |        |
| <p>NOTE1: N/A is an abbreviation for not applicable</p> <p>NOTE2: The report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.</p> |                            |         |        |

#### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2BLA7-GM25 filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

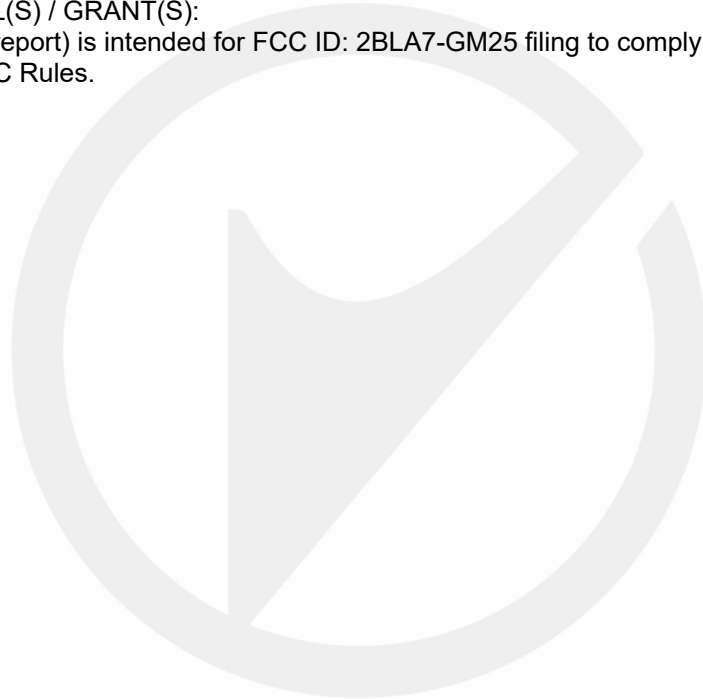

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:  
FCC 47 CFR Part 2, Subpart J  
FCC 47 CFR Part 15, Subpart C

### 4.2 MEASUREMENT EQUIPMENT USED

#### 4.2.1 Conducted Emission Test Equipment

| Equ.No.   | Equipment               | Manufacturer        | Model No. | Serial No.       | Last Cal.     | Cal. Interval |
|-----------|-------------------------|---------------------|-----------|------------------|---------------|---------------|
| ENE-001   | EMI Test Receiver       | R & S               | ESCI      | 101108           | Dec 14, 2023  | 1 Year        |
| ENE-158   | L.I.S.N                 | Schwarzbeck         | NNLK 8129 | 0373             | Nov 17, 2023  | 1 Year        |
| ENE-004   | L.I.S.N                 | Schwarzbeck         | NSLK 8126 | 8126-462         | July 06, 2023 | 1 Year        |
| ENE-006   | Pulse Limiter           | MTS-systemtechnik   | IMP-136   | 2611115-001-0033 | July 06, 2023 | 1 Year        |
| ENE-278   | RF Switching Unit       | HTEC                | HRSU      | 222101           | July 06, 2023 | 1 Year        |
| ENE-083   | RF Cable                | Hubber Suhner/Swiss | CBL-RE-3  | /                | May 30, 2024  | 1 Year        |
| ENE-162-2 | RF Cable                | TIMES               | 2M(N-N)   | 605236-0002      | May 30, 2024  | 1 Year        |
| ENE-149   | Conduction Test Room 1# | SKET                | 11.5*5*4m | /                | Dec 17, 2021  | 3 Year        |

#### 4.2.2 Radiated Emission Test Equipment

| Equ. No.  | Equipment                               | Manufacturer  | Model No.     | Serial No.   | Last Cal.     | Cal. Interval |
|-----------|-----------------------------------------|---------------|---------------|--------------|---------------|---------------|
| ENE-185   | EMI Test Receiver                       | R&S           | ESR7          | 102480       | Apr 25, 2024  | ENE-185       |
| ENE-190   | Antenna Multiple                        | Schwarzbeck   | VULB 9163     | 01499        | May 18, 2024  | ENE-190       |
| ENE-195   | Pre-Amplifier                           | JS Denki      | PA09K03-40    | JSPA21019    | Apr 25, 2024  | ENE-195       |
| ENE-204   | Low Frequency Notch Filter RF Switching | JS Denki      | JSDSW-F       | JSDSW2211D02 | Apr 25, 2024  | ENE-204       |
| ENE-251   | 6dB Attenuator                          | Mini-Circuits | UNAT-6+       | 11542        | July 02, 2024 | ENE-251       |
| ENE-279-1 | RF Cable                                | Rosenberger   | L17-C001-7000 | /            | May 30, 2024  | ENE-279-1     |
| ENE-279-2 | RF Cable                                | Rosenberger   | L17-C001-3500 | /            | May 30, 2024  | ENE-279-2     |
| ENE-279-3 | RF Cable                                | Rosenberger   | L17-C001-1500 | /            | May 30, 2024  | ENE-279-3     |
| ENE-279-4 | RF Cable                                | Rosenberger   | /             | /            | May 30, 2024  | ENE-279-4     |
| ENE-279-5 | RF Cable                                | Rosenberger   | /             | /            | May 30, 2024  | ENE-279-5     |

|           |                                         |             |                |            |               |           |
|-----------|-----------------------------------------|-------------|----------------|------------|---------------|-----------|
| ENE-279-6 | RF Cable                                | Rosenberger | L08-C446-1500  | /          | May 30, 2024  | ENE-279-6 |
| ENE-171   | EXA Signal Analyzer                     | KEYSIGHT    | N9010B         | MY60242467 | Dec 14, 2023  | 1 Year    |
| ENE-191   | Horn Antenna                            | Schwarzbeck | BBHA 9120 D    | 02588      | May 18, 2024  | 2 Year    |
| ENE-198   | Pre-Amplifier                           | JS Denki    | PA0118-50      | JSPA21022  | Apr 25, 2024  | 1 Year    |
| ENE-281-1 | RF Cable                                | Rosenberger | LA2-C125-3500  | /          | May 30, 2024  | 1 Year    |
| ENE-281-2 | RF Cable                                | Rosenberger | LA2-C125-1500  | /          | May 30, 2024  | 1 Year    |
| ENE-281-3 | RF Cable                                | Rosenberger | LU7-C1511-1200 | /          | May 30, 2024  | 1 Year    |
| ENE-285-1 | RF Cable                                | Rosenberger | LA2-C199-6500  | /          | May 30, 2024  | 1 Year    |
| ENE-206   | High Frequency Notch FilterRf Switching | JS Denki    | JSDSW-F        | 202083582  | Apr 25, 2024  | 1 Year    |
| ENE-144   | 3-Meter Anechoic Chamber 2#             | SKET        | 9*6*6m         | /          | June 19, 2022 | 3 Year    |

#### 4.2.3 Radio Frequency Test Equipment

| Equ. No. | Equipment            | Manufacturer | Model No.       | Serial No. | Last Cal.     | Cal. Interval |
|----------|----------------------|--------------|-----------------|------------|---------------|---------------|
| ENE-256  | EXA Signal Anaalyzer | Keysight     | N9010B          | MY62060219 | July 02, 2024 | 1 Year        |
| ENE-172  | RF Control Unit      | Tonscend     | JS0806-2(V.6E ) | 21L8060521 | Feb. 27, 2024 | 1 Year        |

#### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

The EUT has been tested under its typical operating condition so those modulation and channel were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 1       | 2405            | 7       | 2435            | 13      | 2465            |
| 2       | 2410            | 8       | 2440            | 14      | 2470            |
| 3       | 2415            | 9       | 2445            | 15      | 2475            |
| 4       | 2420            | 10      | 2450            | 16      | 2480            |
| 5       | 2425            | 11      | 2455            |         |                 |
| 6       | 2430            | 12      | 2460            |         |                 |



Note: N/A

Test Frequency and Channel list:

| Channel   | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|-----------|-----------------|---------|-----------------|---------|-----------------|
| 1         | 2405            | 8       | 2440            | 16      | 2480            |
| Note: N/A |                 |         |                 |         |                 |

#### 4.4 TEST SOFTWARE

| Item                | Software         |
|---------------------|------------------|
| Conducted Emission: | JSDEMC-CE(V 3.3) |
| Radiated Emission:  | JSDEMC-RE(V 3.3) |



## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 8, Building 8, Lane 216, Qingyi Road, Ningbo Hi-Tech Zone, Ningbo, Zhejiang, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 32.

### 5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: **Accredited by CNAS**

The Certificate Registration Number is L6666.

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2018 (identical to ISO/IEC 17025:2017)

**Designation by FCC**

Designation Number: CN1354

Test Firm Registration Number: 427606

**Accredited by A2LA**

The Certificate Number is 4321.03.

The certificate is valid until May 31, 2025

**Designation by Industry Canada**

The Conformity Assessment Body Identifier is CN0114

Name of Firm

: EMTEK (NINGBO) CO., LTD.

Site Location

: No. 8, Building 8, Lane 216, Qingyi Road, Hi-Tech Zone, Ningbo, Zhejiang, China

## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter                      | Uncertainty               |
|--------------------------------|---------------------------|
| Radio Frequency                | $\pm 1 \times 10^{-5}$    |
| Maximum Peak Output Power Test | $\pm 1.0\text{dB}$        |
| Conducted Emissions Test       | $\pm 2.0\text{dB}$        |
| Radiated Emission Test         | $\pm 2.0\text{dB}$        |
| Occupied Bandwidth Test        | $\pm 1.0\text{dB}$        |
| Band Edge Test                 | $\pm 3\text{dB}$          |
| All emission, radiated         | $\pm 3\text{dB}$          |
| Antenna Port Emission          | $\pm 3\text{dB}$          |
| Temperature                    | $\pm 0.5^{\circ}\text{C}$ |
| Humidity                       | $\pm 3\%$                 |


Measurement Uncertainty for a level of Confidence of 95%



## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP 1

The EUT wireless component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



### 7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

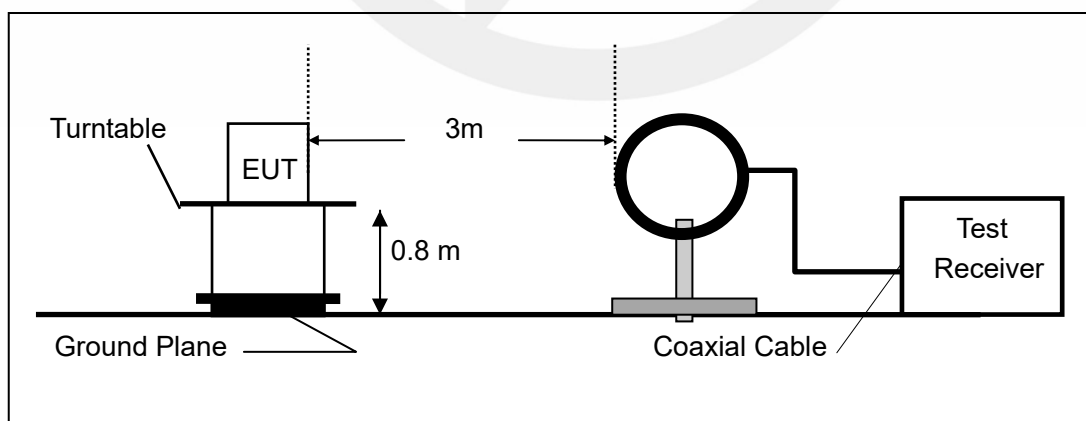

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

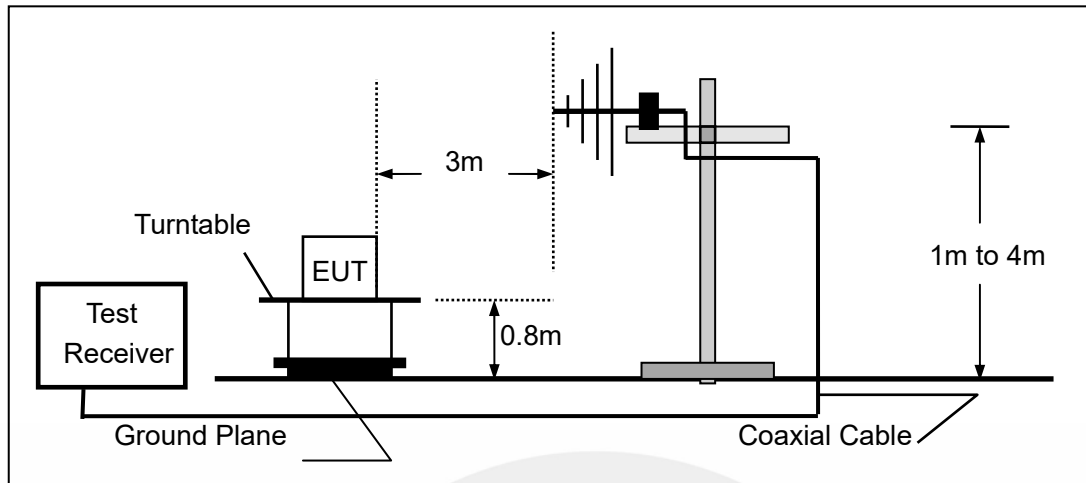

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

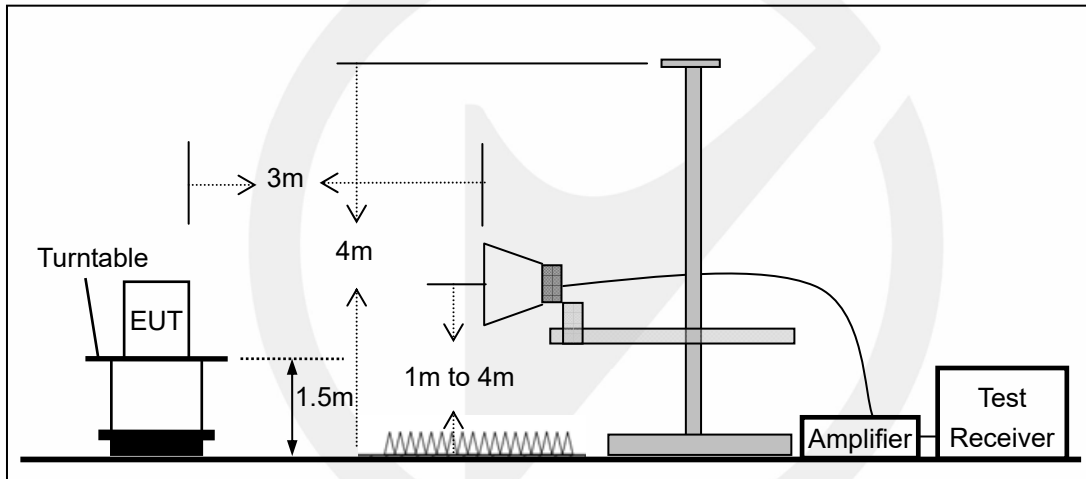


### 7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

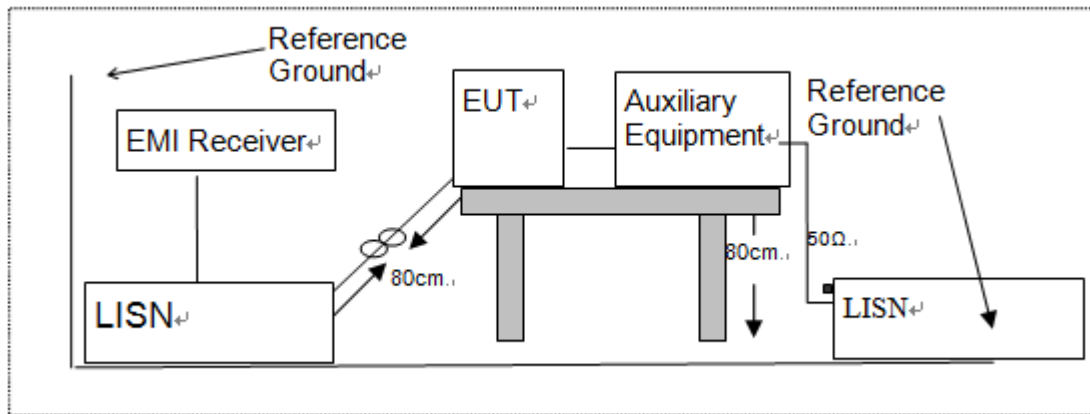

### 7.4 SUPPORT EQUIPMENT

| EUT Cable List and Details |            |                     |                        |
|----------------------------|------------|---------------------|------------------------|
| Cable Description          | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| /                          | /          | /                   | /                      |

| Auxiliary Cable List and Details |            |                     |                        |
|----------------------------------|------------|---------------------|------------------------|
| Cable Description                | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| /                                | /          | /                   | /                      |

| Auxiliary Equipment List and Details |              |       |               |
|--------------------------------------|--------------|-------|---------------|
| Description                          | Manufacturer | Model | Serial Number |
| /                                    | /            | /     | /             |

#### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8 TEST REQUIREMENTS

### 8.1 BANDWIDTH TEST

#### 8.1.1 Applicable Standard

According to FCC Part 15.249

#### 8.1.2 Conformance Limit

N/A

#### 8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 8.1.4 Test Procedure

The EUT was operating in controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW  $\geq 1\%$  of the 20 dB bandwidth (100KHz)

Set the video bandwidth (VBW)  $\geq$  RBW (300KHz).

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.



Measure and record the results in the test report.

#### Test Results


|                    |           |
|--------------------|-----------|
| Temperature:       | 26° C     |
| Relative Humidity: | 61%       |
| ATM Pressure:      | 1011 mbar |

| Operation Mode | Channel Frequency (MHz) | 20db Measurement Bandwidth (MHz) | 99% Measurement Bandwidth (MHz) | Limit (kHz) | Verdict |
|----------------|-------------------------|----------------------------------|---------------------------------|-------------|---------|
| GFSK           | 2405                    | 2.590                            | 2.350                           | N/A         | PASS    |
|                | 2440                    | 2.590                            | 2.330                           | N/A         | PASS    |
|                | 2480                    | 2.400                            | 2.042                           | N/A         | PASS    |

Note: N/A (Not Applicable).

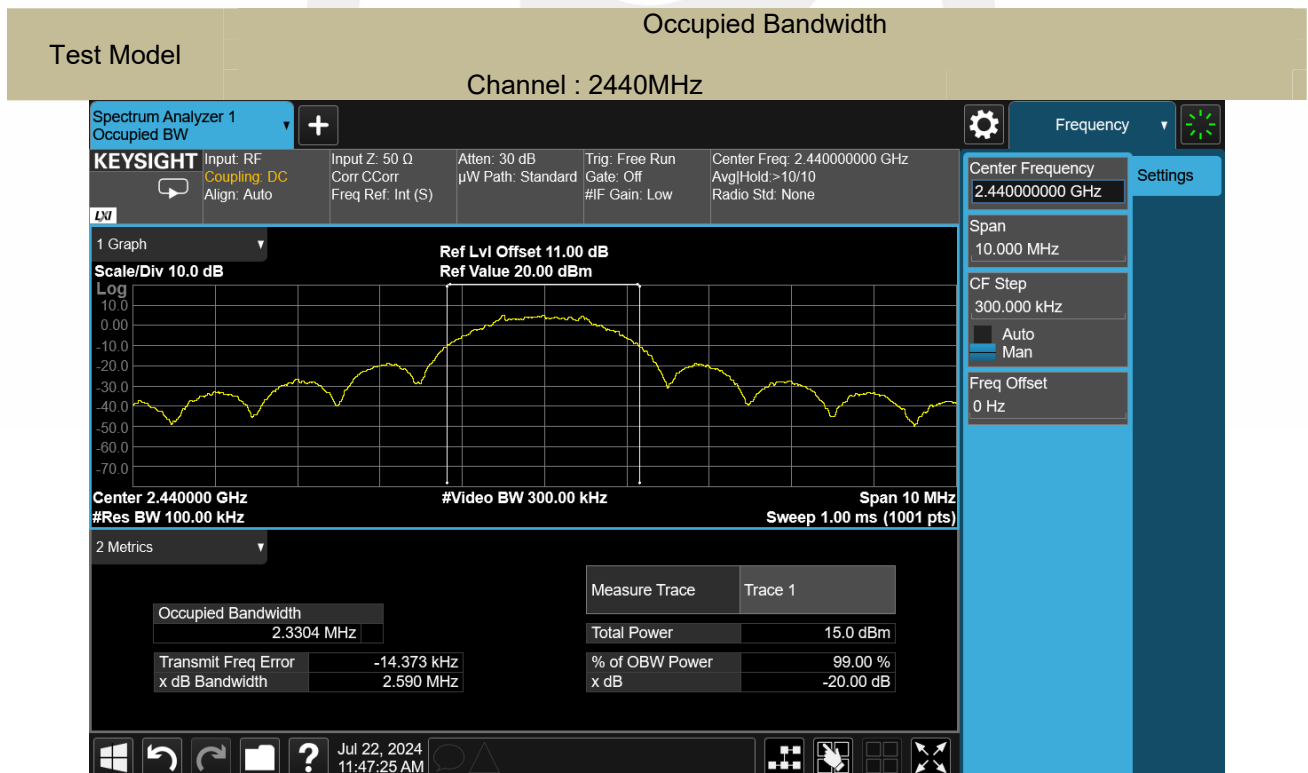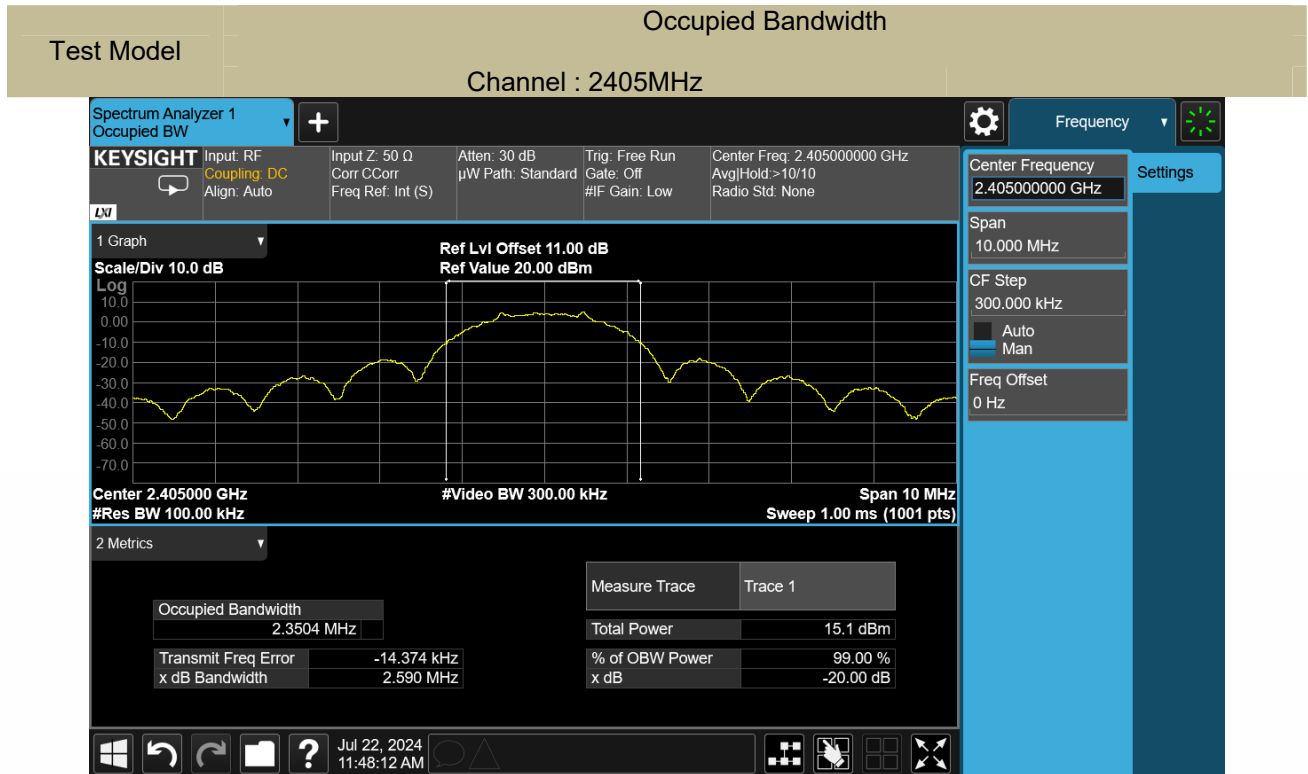



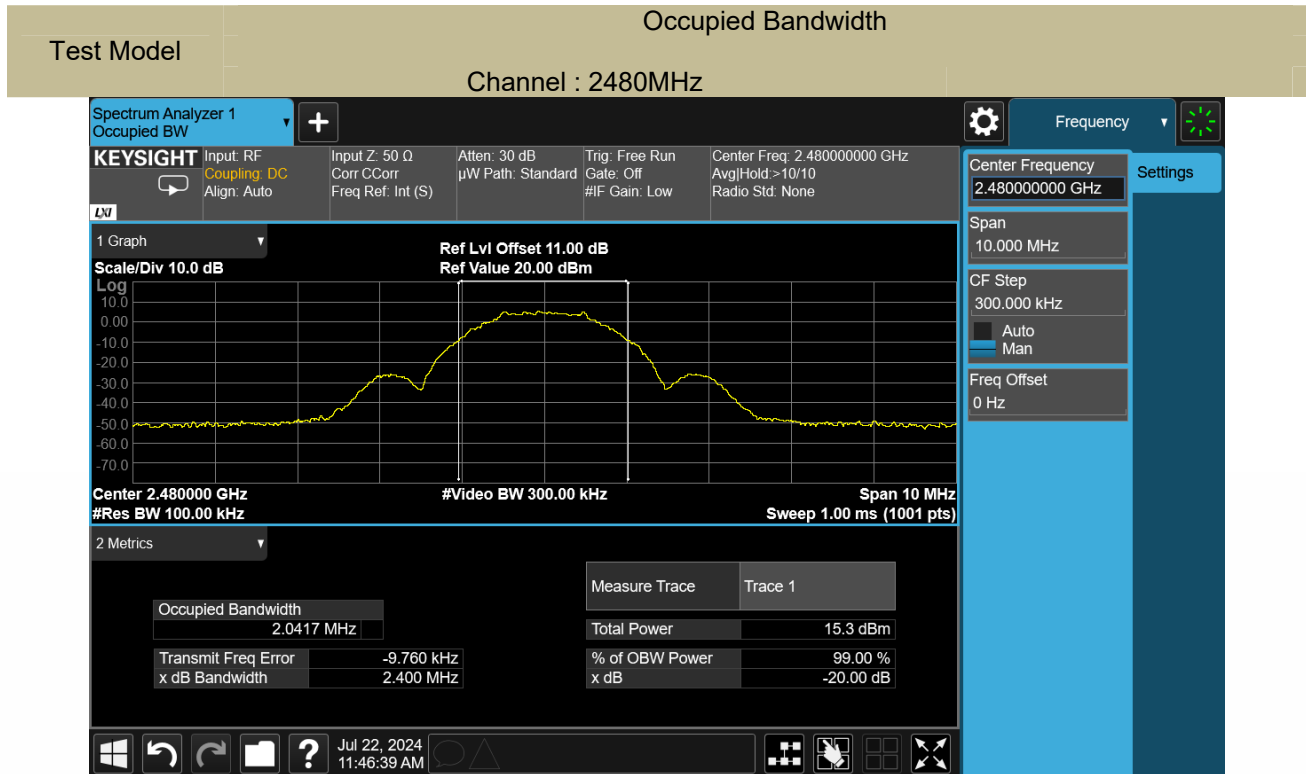

## 8.2 RADIATED SPURIOUS EMISSION

### 8.2.1 Applicable Standard

According to FCC Part 15.249 and 15.209

### 8.2.2 Conformance Limit

According to FCC Part 15.249: radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 10.495-0.505      | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (2)         |
| 13.36-13.41       |                     |               |             |

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

| Restricted Frequency(MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Measurement Distance |
|---------------------------|-----------------------|-------------------------|----------------------|
| 0.009-0.490               | 2400/F(KHz)           | 20 log (uV/m)           | 300                  |
| 0.490-1.705               | 24000/F(KHz)          | 20 log (uV/m)           | 30                   |
| 1.705-30                  | 30                    | 29.5                    | 30                   |
| 30-88                     | 100                   | 40                      | 3                    |
| 88-216                    | 150                   | 43.5                    | 3                    |
| 216-960                   | 200                   | 46                      | 3                    |
| Above 960                 | 500                   | 54                      | 3                    |

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10\*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

Field strength of fundamental and Field strength of harmonics Limit:

| Fundamental frequency | Field strength of fundamental<br>(millivolts/meter) | Field strength of harmonics<br>(microvolts/meter) |
|-----------------------|-----------------------------------------------------|---------------------------------------------------|
| 902-928 MHz           | 50(94 dBV/m)                                        | 500(54 dBV/m)                                     |
| 2400-2483.5 MHz       | 50(94 dBV/m)                                        | 500(54 dBV/m)                                     |
| 5725-5875 MHz         | 50(94 dBV/m)                                        | 500(54 dBV/m)                                     |
| 24.0-24.25 GHz        | 250(108 dBV/m)                                      | 2500(68 dBV/m)                                    |

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation

For this report

| Fundamental Frequency | Field Strength<br>Of Fundamental | Field Strength of Spurious<br>Emissions |
|-----------------------|----------------------------------|-----------------------------------------|
| 2400-2483.5 MHz       | AV:94 dBuV/m at 3m distance      | AV:54 dBuV/m at 3m<br>distance          |
|                       | PK:114 dBuV/m at 3m<br>distance  | PK:74 dBuV/m at 3m<br>distance          |

### 8.2.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 8.2.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz(1GHz to 25GHz), 100 kHz for  $f < 1$  GHz(30MHz to 1GHz)

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

### 8.2.5 Test Results

|                    |           |
|--------------------|-----------|
| Temperature:       | 20° C     |
| Relative Humidity: | 65%       |
| ATM Pressure:      | 1011 mbar |

■ Spurious Emission below 30MHz (9KHz to 30MHz)

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |    | Limit 3m(dBuV/m) |    | Over(dB) |    |
|----------------|-----------------|---------------------------|----|------------------|----|----------|----|
|                |                 | PK                        | AV | PK               | AV | PK       | AV |
| --             | --              | --                        | -- | --               | -- | --       | -- |

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{Specific distance} / \text{test distance})$  (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Field Strength of the fundamental signal

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|----------------|-----------------|---------------------------|-------|------------------|----|----------|--------|
|                |                 | PK                        | AV    | PK               | AV | PK       | AV     |
| 2405           | V               | 90.72                     | 75.14 | 114              | 94 | -23.28   | -18.86 |
| 2405           | H               | 96.04                     | 81.23 | 114              | 94 | -17.96   | -12.77 |
| 2440           | V               | 95.83                     | 80.37 | 114              | 94 | -18.17   | -13.63 |
| 2440           | H               | 90.54                     | 76.24 | 114              | 94 | -23.46   | -17.76 |
| 2480           | V               | 89.24                     | 74.21 | 114              | 94 | -24.76   | -19.79 |
| 2480           | H               | 91.84                     | 76.32 | 114              | 94 | -22.16   | -17.68 |

Note: (1) Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain

(2) Emission Level = Reading Level + Probe Factor + Cable Loss

■ Out of Band Emissions

Test mode: GFSK Frequency: Channel : 2405MHz

| Frequency<br>(MHz) | Polarity | PK(dBuV/m)<br>(VBW=3MHz) | Limit 3m<br>(dBuV/m) | AV(dBuV/m)<br>(VBW=10Hz) | Limit 3m<br>(dBuV/m) |
|--------------------|----------|--------------------------|----------------------|--------------------------|----------------------|
| 2376.000           | H        | 57.96                    | 74                   | 43.25                    | 54                   |
| 2363.440           | V        | 57.28                    | 74                   | 42.64                    | 54                   |

Test mode: GFSK Frequency: Channel : 2480MHz

| Frequency<br>(MHz) | Polarity | PK(dBuV/m)<br>(VBW=3MHz) | Limit 3m<br>(dBuV/m) | AV(dBuV/m)<br>(VBW=10Hz) | Limit 3m<br>(dBuV/m) |
|--------------------|----------|--------------------------|----------------------|--------------------------|----------------------|
| 2483.525           | H        | 58.81                    | 74                   | 43.91                    | 54                   |
| 2486.115           | V        | 58.41                    | 74                   | 44.74                    | 54                   |


**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).

(2) Emission Level = Reading Level + Correct Factor + Cable Loss.


(3) Correct Factor = Ant\_F + Cab\_L - Preamp

(4) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


|                                                   |        |   |
|---------------------------------------------------|--------|---|
| Spurious Emission in Restricted Band 2310-2390MHz |        |   |
| Test Model                                        | Zigbee |   |
| Channel: 2402MHz                                  |        | H |

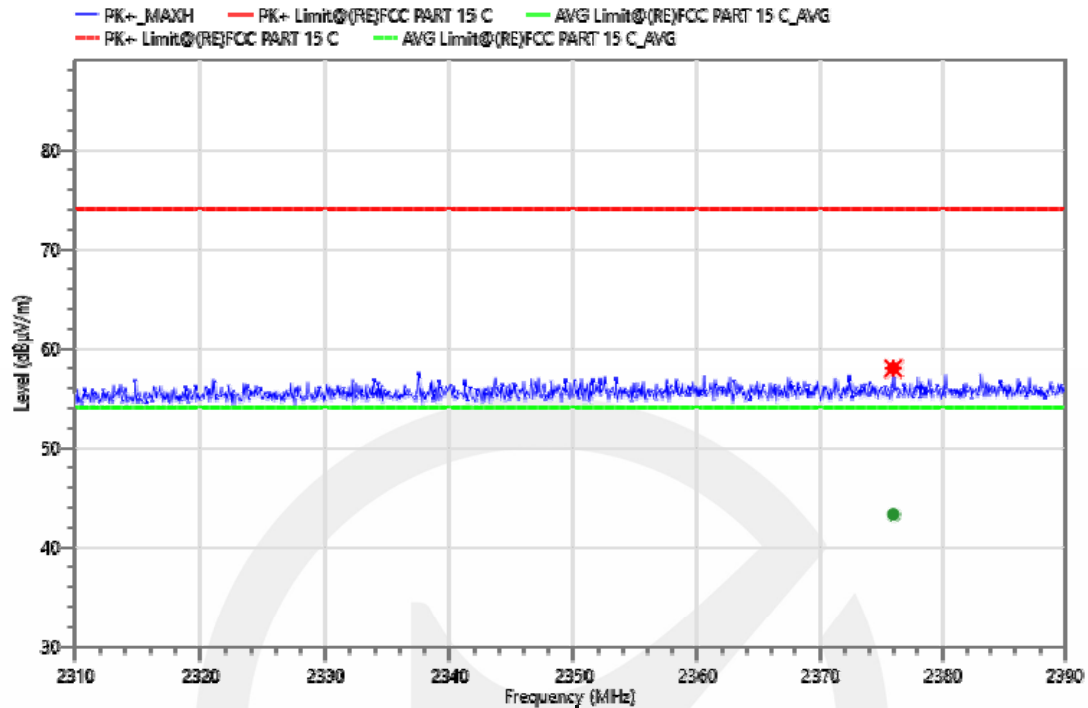


|                                                   |        |   |
|---------------------------------------------------|--------|---|
| Spurious Emission in Restricted Band 2310-2390MHz |        |   |
| Test Model                                        | Zigbee |   |
| Channel: 2402MHz                                  |        | V |

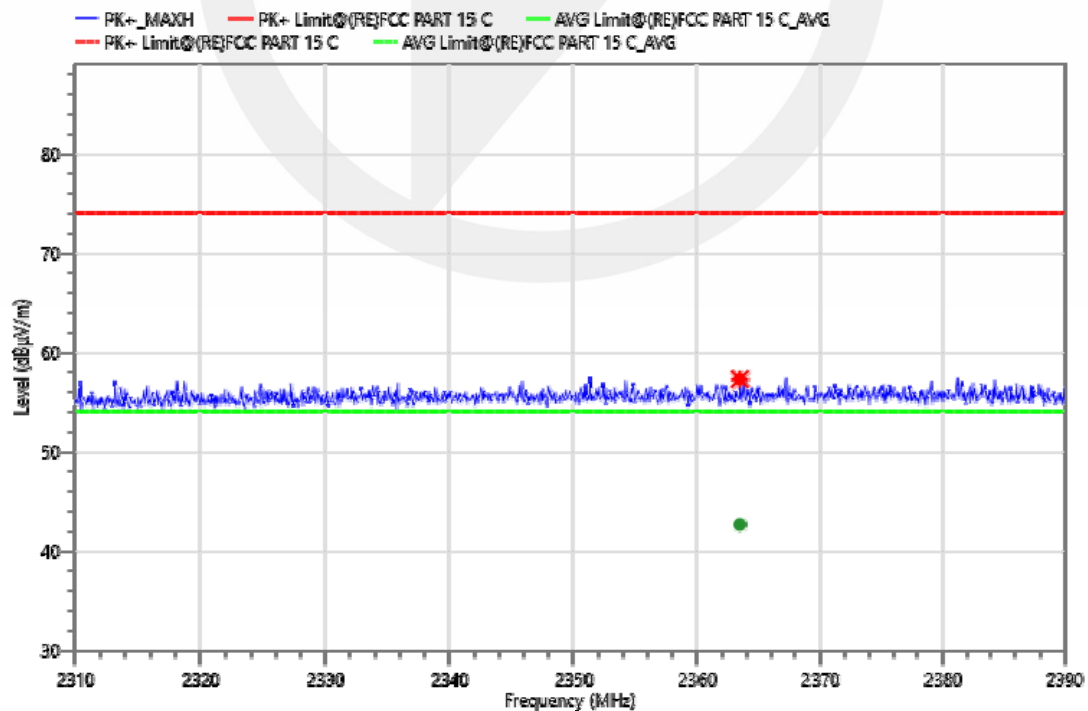

|                                                     |                  |        |   |
|-----------------------------------------------------|------------------|--------|---|
| Spurious Emission in Restricted Band 2483.5-2500MHz |                  |        |   |
| Test Model                                          |                  | Zigbee |   |
|                                                     | Channel: 2480MHz |        | H |

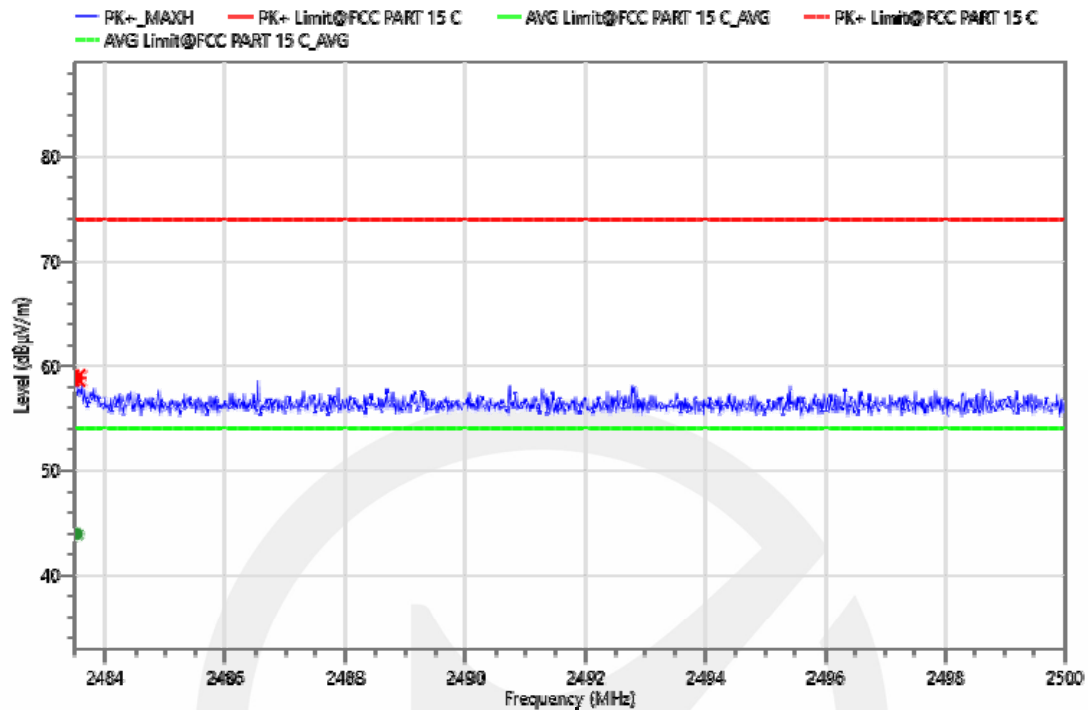


|                                                     |                  |        |   |
|-----------------------------------------------------|------------------|--------|---|
| Spurious Emission in Restricted Band 2483.5-2500MHz |                  |        |   |
| Test Model                                          |                  | Zigbee |   |
|                                                     | Channel: 2480MHz |        | V |

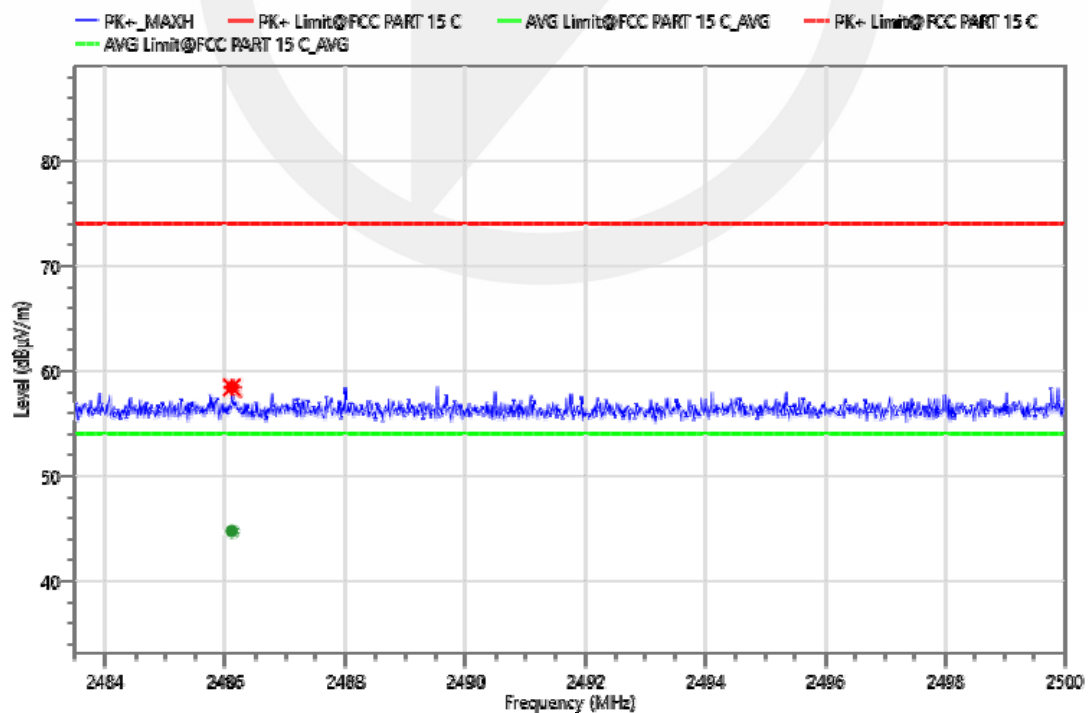

## ■ Spurious Emission below 1GHz (30MHz to 1GHz)

GM25CE-TYZ-1.1Nm/28rpm

| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2405                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

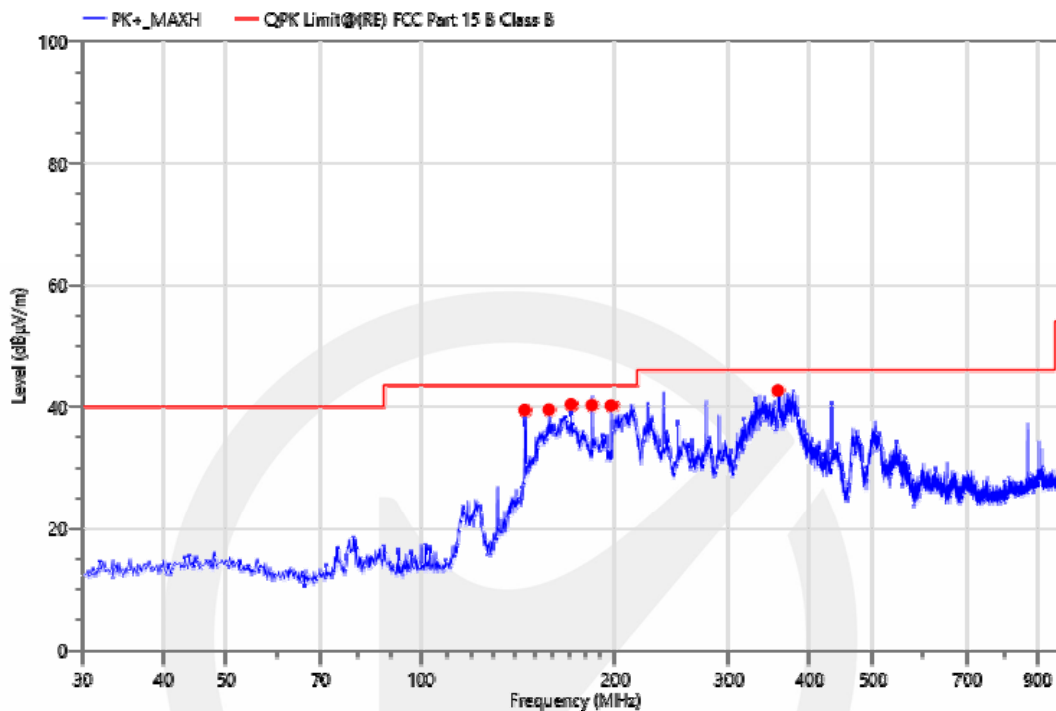

| No. | Freq. (MHz) | Reading (dBμV) | Corr. (dB) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 144.751     | 66.93          | -27.53     | 39.40          | 43.50          | 4.10        | QPK  | 200         | H    | 266.9         | PASS    |
| 2   | 157.943     | 66.44          | -26.97     | 39.47          | 43.50          | 4.03        | QPK  | 200         | H    | 81.4          | PASS    |
| 3   | 171.135     | 66.92          | -26.58     | 40.34          | 43.50          | 3.16        | QPK  | 200         | H    | 256.4         | PASS    |
| 4   | 184.424     | 65.91          | -25.7      | 40.21          | 43.50          | 3.29        | QPK  | 100         | H    | 252.6         | PASS    |
| 5   | 197.616     | 65.01          | -24.86     | 40.15          | 43.50          | 3.35        | QPK  | 100         | H    | 251.6         | PASS    |
| 6   | 357.084     | 63.18          | -20.57     | 42.61          | 46.00          | 3.39        | QPK  | 100         | H    | 94.6          | PASS    |

## Project Information


|              |                       |           |               |
|--------------|-----------------------|-----------|---------------|
| Mode:        | TX2405                | Voltage:  | AC 120V/60Hz  |
| Environment: | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |



| No. | Freq. (MHz) | Reading (dBμV) | Corr. (dB) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 158.428     | 66.68          | -26.98     | 39.70          | 43.50          | 3.80        | QPK  | 100         | V    | 13.4          | PASS    |
| 2   | 171.620     | 66.65          | -26.54     | 40.11          | 43.50          | 3.39        | QPK  | 200         | V    | 10.9          | PASS    |
| 3   | 184.521     | 65.73          | -25.69     | 40.04          | 43.50          | 3.46        | QPK  | 100         | V    | 342.4         | PASS    |
| 4   | 197.713     | 64.86          | -24.85     | 40.01          | 43.50          | 3.49        | QPK  | 100         | V    | 346.9         | PASS    |
| 5   | 224.485     | 66.39          | -23.98     | 42.41          | 46.00          | 3.59        | QPK  | 100         | V    | 0.6           | PASS    |
| 6   | 237.289     | 64.25          | -23.4      | 40.85          | 46.00          | 5.15        | QPK  | 100         | V    | 317.9         | PASS    |




| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2440                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

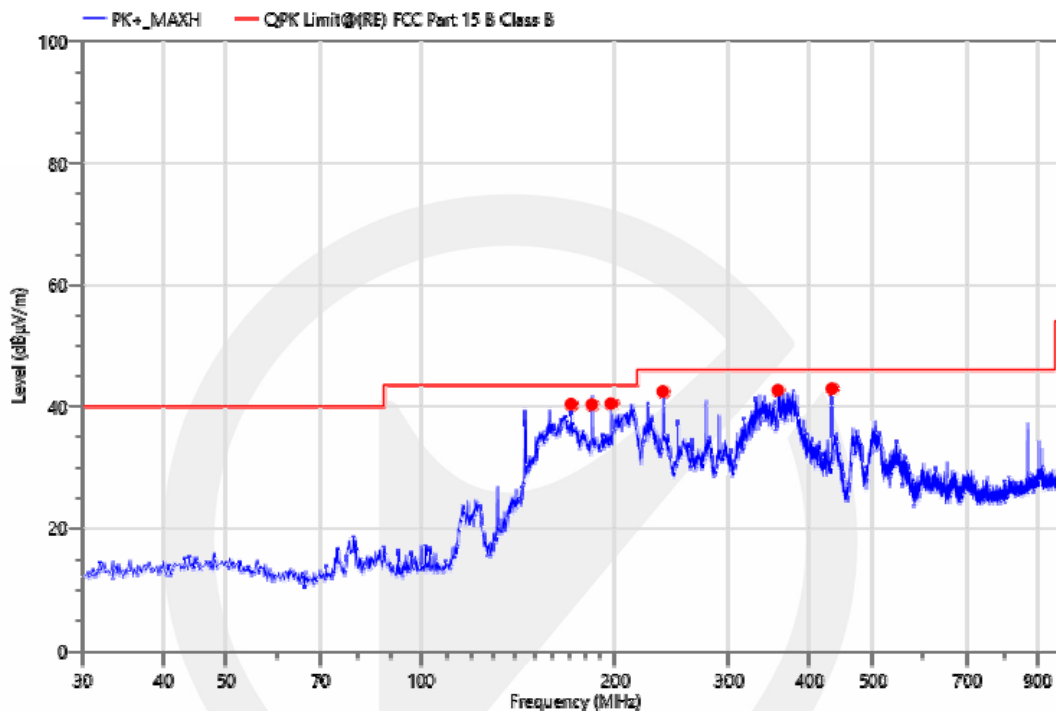

| No. | Freq. (MHz) | Reading (dBµV) | Corr. (dB) | Meas. (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 171.135     | 66.92          | -26.58     | 40.34          | 43.50          | 3.16        | QPK  | 200         | H    | 241.4         | PASS    |
| 2   | 184.424     | 65.97          | -25.7      | 40.27          | 43.50          | 3.23        | QPK  | 100         | H    | 254.7         | PASS    |
| 3   | 197.519     | 65.30          | -24.87     | 40.43          | 43.50          | 3.07        | QPK  | 100         | H    | 255.1         | PASS    |
| 4   | 236.998     | 65.83          | -23.41     | 42.42          | 46.00          | 3.58        | QPK  | 100         | H    | 103.1         | PASS    |
| 5   | 357.084     | 63.19          | -20.57     | 42.62          | 46.00          | 3.38        | QPK  | 100         | H    | 294.1         | PASS    |
| 6   | 433.908     | 61.93          | -19.05     | 42.88          | 46.00          | 3.12        | QPK  | 200         | H    | 235.8         | PASS    |


## Project Information

|              |                       |           |               |
|--------------|-----------------------|-----------|---------------|
| Mode:        | TX2440                | Voltage:  | AC 120V/60Hz  |
| Environment: | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

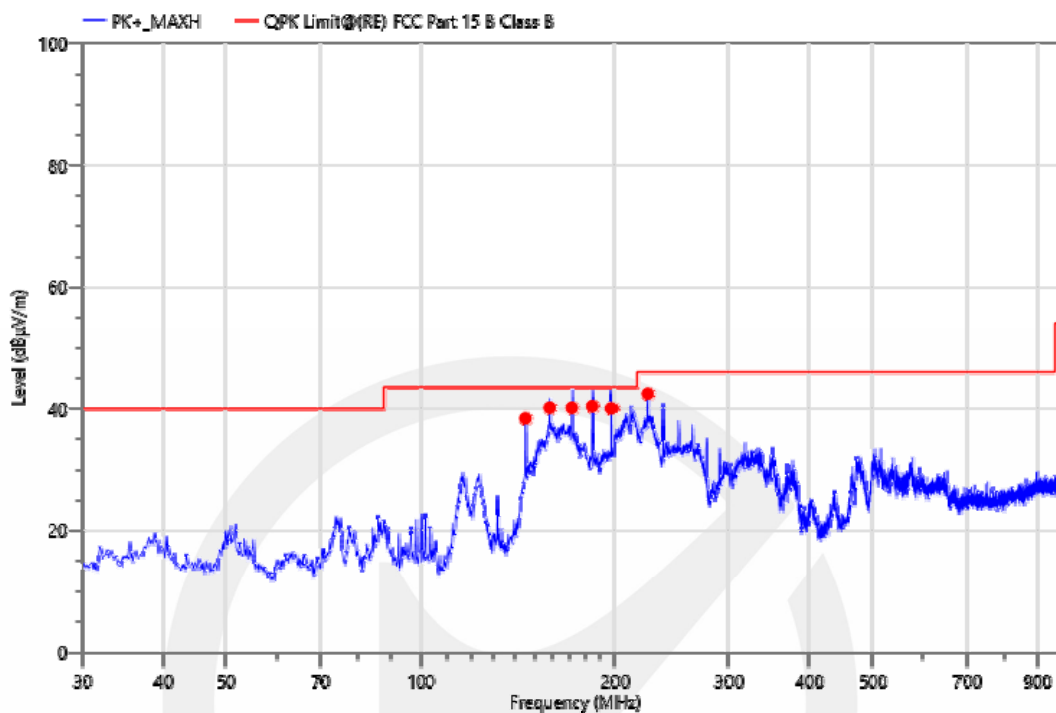

| No. | Freq. (MHz) | Reading (dBμV) | Corr. (dB) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 145.139     | 65.86          | -27.48     | 38.38          | 43.50          | 5.12        | QPK  | 100         | V    | 151.4         | PASS    |
| 2   | 158.428     | 67.10          | -26.98     | 40.12          | 43.50          | 3.38        | QPK  | 100         | V    | 113.4         | PASS    |
| 3   | 171.620     | 66.65          | -26.54     | 40.11          | 43.50          | 3.39        | QPK  | 100         | V    | 210.9         | PASS    |
| 4   | 184.715     | 66.05          | -25.69     | 40.36          | 43.50          | 3.14        | QPK  | 100         | V    | 281.4         | PASS    |
| 5   | 197.713     | 64.86          | -24.85     | 40.01          | 43.50          | 3.49        | QPK  | 100         | V    | 326.9         | PASS    |
| 6   | 224.485     | 66.39          | -23.98     | 42.41          | 46.00          | 3.59        | QPK  | 100         | V    | 30.6          | PASS    |


| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2480                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

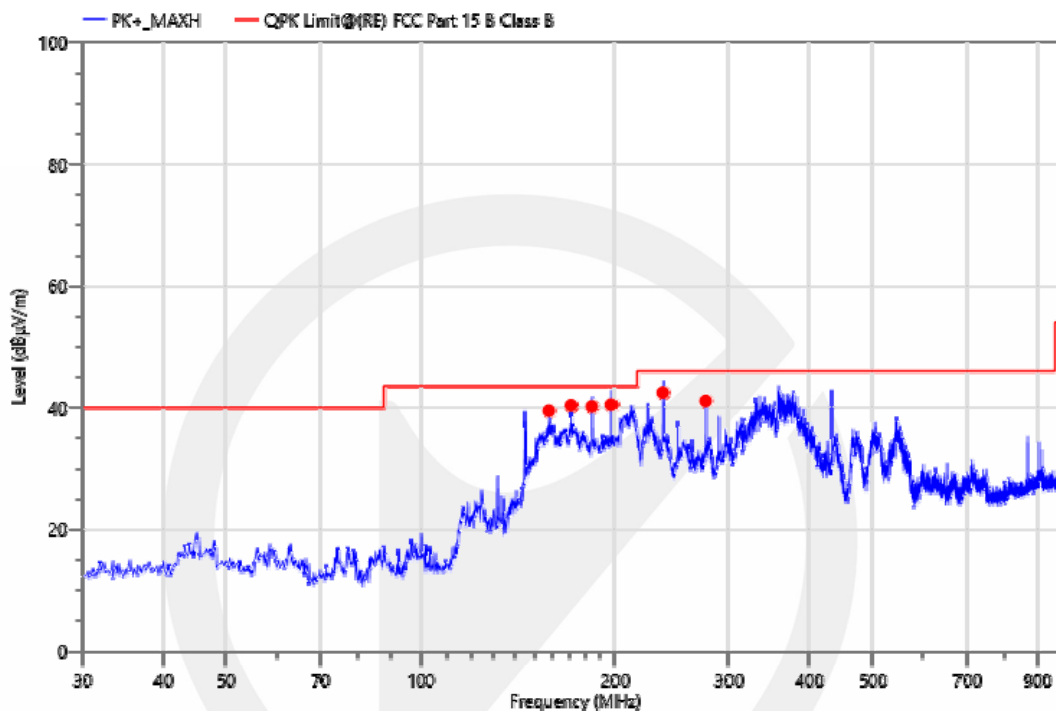

| No. | Freq. (MHz) | Reading (dBµV) | Corr. (dB) | Meas. (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 157.943     | 66.44          | -26.97     | 39.47          | 43.50          | 4.03        | QPK  | 200         | H    | 181.4         | PASS    |
| 2   | 171.135     | 66.92          | -26.58     | 40.34          | 43.50          | 3.16        | QPK  | 200         | H    | 254.4         | PASS    |
| 3   | 184.424     | 65.87          | -25.7      | 40.17          | 43.50          | 3.33        | QPK  | 100         | H    | 252.6         | PASS    |
| 4   | 197.616     | 65.31          | -24.86     | 40.45          | 43.50          | 3.05        | QPK  | 100         | H    | 251.6         | PASS    |
| 5   | 236.998     | 65.83          | -23.41     | 42.42          | 46.00          | 3.58        | QPK  | 100         | H    | 85.6          | PASS    |
| 6   | 276.574     | 63.87          | -22.81     | 41.06          | 46.00          | 4.94        | QPK  | 100         | H    | 125.1         | PASS    |

## Project Information


|              |                       |           |               |
|--------------|-----------------------|-----------|---------------|
| Mode:        | TX2480                | Voltage:  | AC 120V/60Hz  |
| Environment: | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

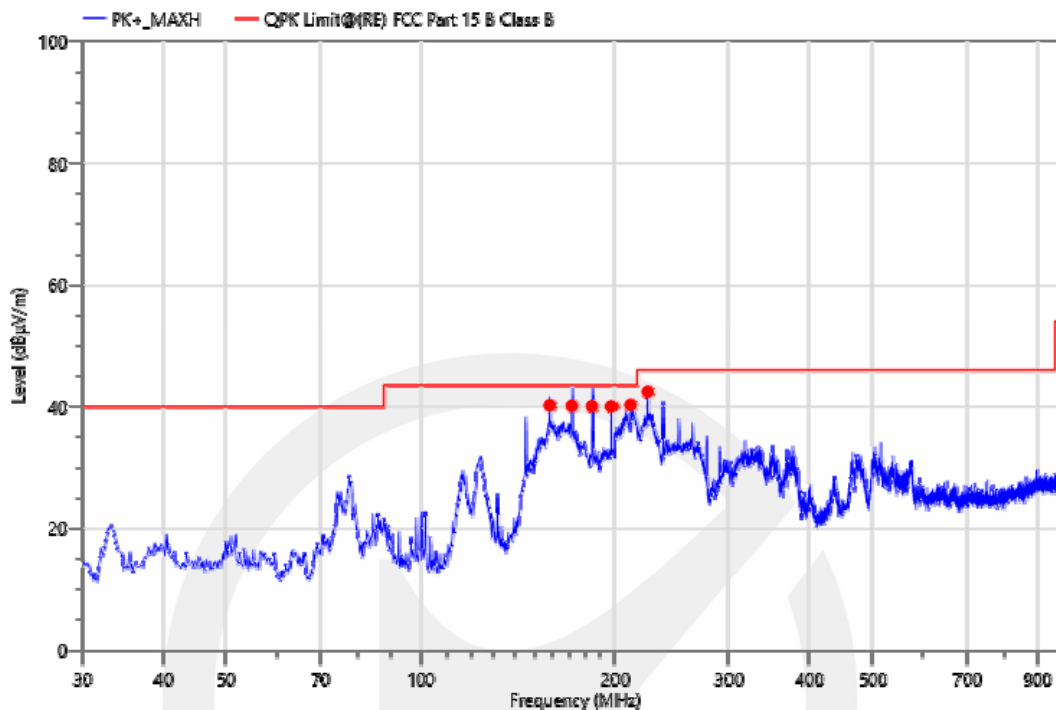

| No. | Freq. (MHz) | Reading (dBμV) | Corr. (dB) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 158.428     | 67.18          | -26.98     | 40.20          | 43.50          | 3.30        | QPK  | 100         | V    | 313.7         | PASS    |
| 2   | 171.620     | 66.65          | -26.54     | 40.11          | 43.50          | 3.39        | QPK  | 100         | V    | 310.8         | PASS    |
| 3   | 184.521     | 65.73          | -25.69     | 40.04          | 43.50          | 3.46        | QPK  | 100         | V    | 43.6          | PASS    |
| 4   | 197.713     | 64.86          | -24.85     | 40.01          | 43.50          | 3.49        | QPK  | 100         | V    | 12.1          | PASS    |
| 5   | 211.002     | 64.64          | -24.38     | 40.26          | 43.50          | 3.24        | QPK  | 100         | V    | 316.4         | PASS    |
| 6   | 224.485     | 66.39          | -23.98     | 42.41          | 46.00          | 3.59        | QPK  | 100         | V    | 1.2           | PASS    |

GM25LE/U-TYZ-1.1Nm/28rpm


| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2405                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

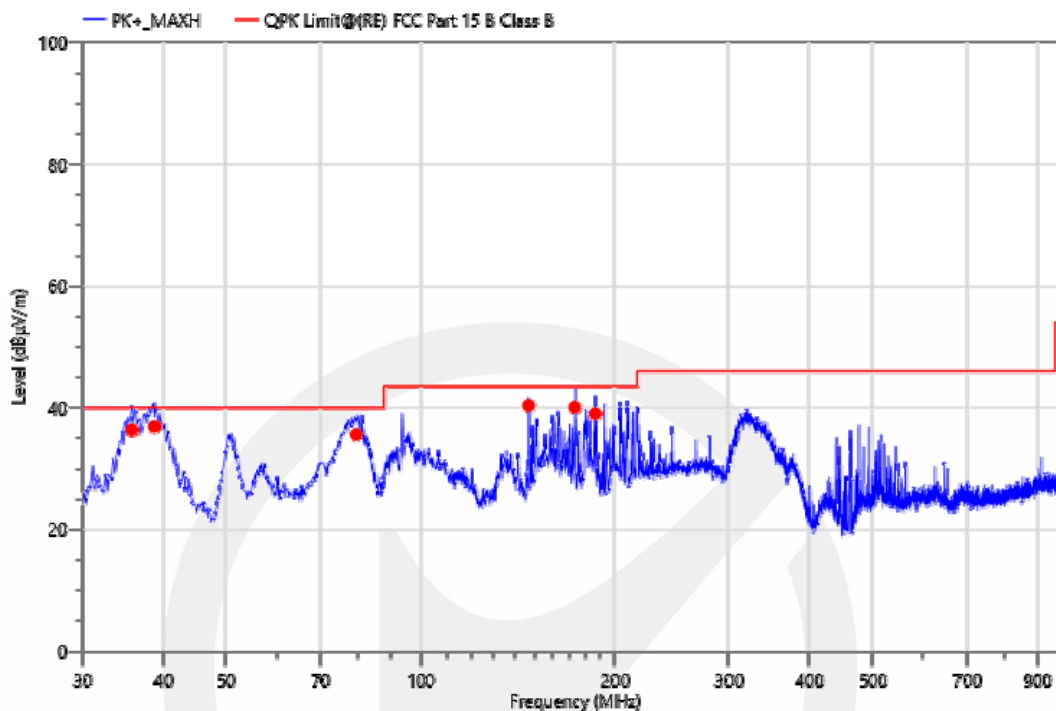

| No. | Freq. (MHz) | Reading (dBμV) | Corr. (dB) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 35.820      | 61.23          | -24.9      | 36.33          | 40.00          | 3.67        | QPK  | 100         | V    | 84.5          | PASS    |
| 2   | 38.827      | 61.54          | -24.65     | 36.89          | 40.00          | 3.11        | QPK  | 100         | V    | 184.0         | PASS    |
| 3   | 79.664      | 62.49          | -26.93     | 35.56          | 40.00          | 4.44        | QPK  | 100         | V    | 230.5         | PASS    |
| 4   | 146.788     | 67.61          | -27.29     | 40.32          | 43.50          | 3.18        | QPK  | 100         | V    | 346.0         | PASS    |
| 5   | 173.366     | 66.43          | -26.4      | 40.03          | 43.50          | 3.47        | QPK  | 200         | V    | 242.0         | PASS    |
| 6   | 186.752     | 64.59          | -25.62     | 38.97          | 43.50          | 4.53        | QPK  | 100         | V    | 254.5         | PASS    |


## Project Information

|              |                       |           |               |
|--------------|-----------------------|-----------|---------------|
| Mode:        | TX2405                | Voltage:  | AC 120V/60Hz  |
| Environment: | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

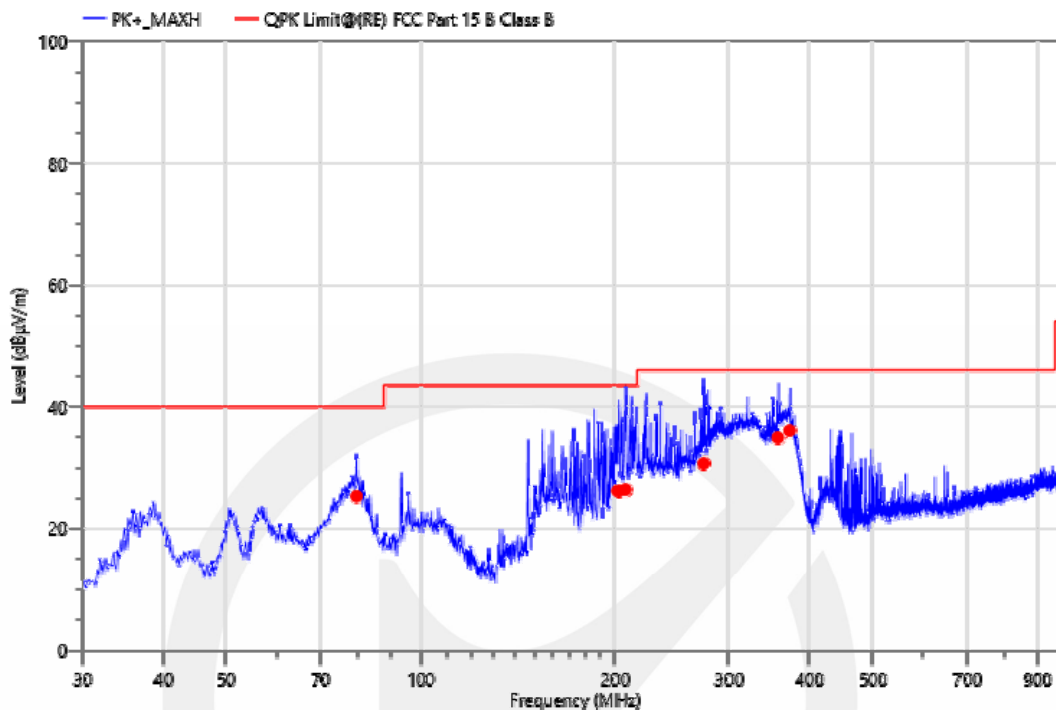


| No. | Freq. (MHz) | Reading (dBμV) | Corr. (dB) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 79.761      | 52.19          | -26.93     | 25.26          | 40.00          | 14.74       | QPK  | 100         | H    | 184.4         | PASS    |
| 2   | 202.272     | 50.74          | -24.61     | 26.13          | 43.50          | 17.37       | QPK  | 100         | H    | 356.4         | PASS    |
| 3   | 207.099     | 50.84          | -24.49     | 26.35          | 43.50          | 17.15       | QPK  | 100         | H    | 337.4         | PASS    |
| 4   | 274.537     | 53.45          | -22.82     | 30.63          | 46.00          | 15.37       | QPK  | 100         | H    | 360           | PASS    |
| 5   | 356.987     | 55.46          | -20.57     | 34.89          | 46.00          | 11.11       | QPK  | 100         | H    | 360.0         | PASS    |
| 6   | 372.507     | 56.30          | -20.25     | 36.05          | 46.00          | 9.95        | QPK  | 100         | H    | 357.4         | PASS    |

| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2440                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

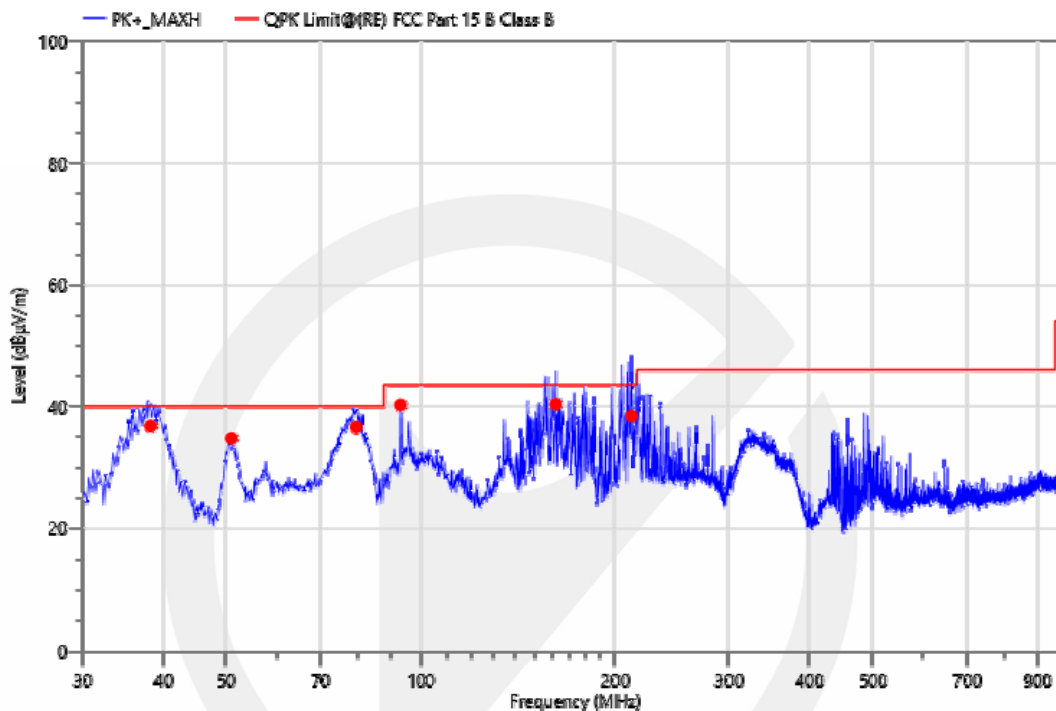

| No. | Freq. (MHz) | Reading (dBμV) | Corr. (dB) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 38.342      | 61.44          | -24.69     | 36.75          | 40.00          | 3.25        | QPK  | 100         | V    | 59.8          | PASS    |
| 2   | 51.049      | 59.05          | -24.34     | 34.71          | 40.00          | 5.29        | QPK  | 200         | V    | 124.3         | PASS    |
| 3   | 79.664      | 63.50          | -26.93     | 36.57          | 40.00          | 3.43        | QPK  | 200         | V    | 330.3         | PASS    |
| 4   | 92.953      | 66.04          | -25.84     | 40.20          | 43.50          | 3.30        | QPK  | 100         | V    | 185.8         | PASS    |
| 5   | 161.823     | 67.24          | -26.93     | 40.31          | 43.50          | 3.19        | QPK  | 100         | V    | 71.8          | PASS    |
| 6   | 211.778     | 62.75          | -24.36     | 38.39          | 43.50          | 5.11        | QPK  | 100         | V    | 41.8          | PASS    |


| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2440                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

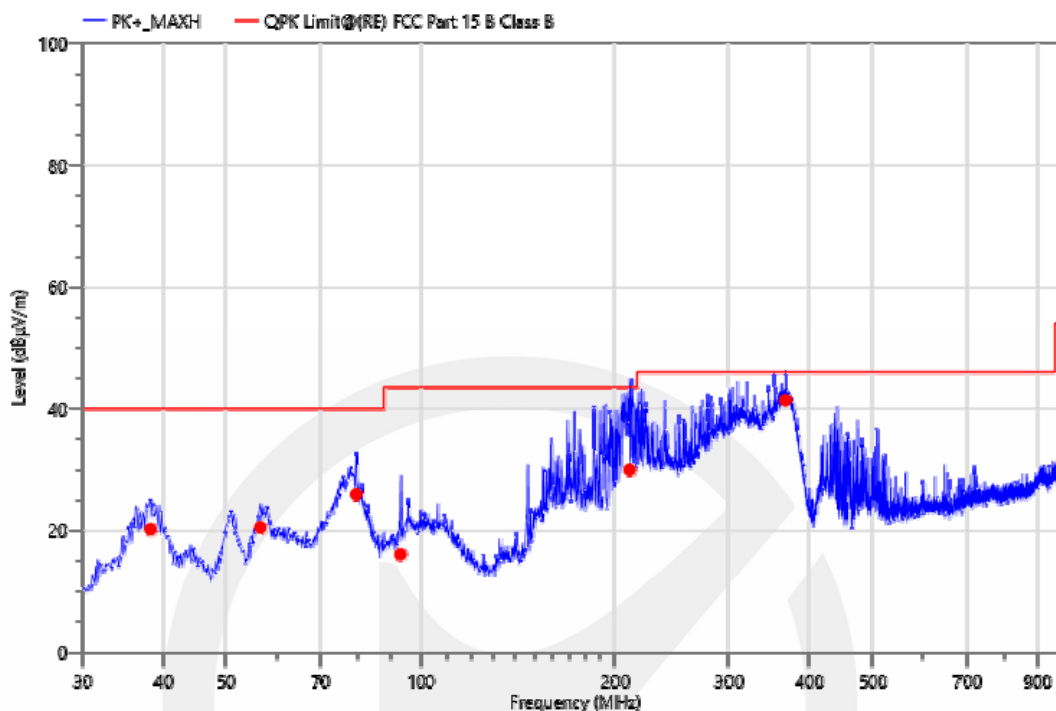

| No. | Freq. (MHz) | Reading (dBµV) | Corr. (dB) | Meas. (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 38.342      | 44.85          | -24.69     | 20.16          | 40.00          | 19.84       | QPK  | 100         | H    | 240.9         | PASS    |
| 2   | 56.675      | 45.75          | -25.3      | 20.45          | 40.00          | 19.55       | QPK  | 100         | H    | 153.4         | PASS    |
| 3   | 79.664      | 52.83          | -26.93     | 25.90          | 40.00          | 14.10       | QPK  | 100         | H    | 207.4         | PASS    |
| 4   | 92.953      | 41.89          | -25.84     | 16.05          | 43.50          | 27.45       | QPK  | 100         | H    | 352.4         | PASS    |
| 5   | 210.226     | 54.34          | -24.41     | 29.93          | 43.50          | 13.57       | QPK  | 100         | H    | 0.0           | PASS    |
| 6   | 366.881     | 61.69          | -20.36     | 41.33          | 46.00          | 4.67        | QPK  | 100         | H    | 144.9         | PASS    |




| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2480                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

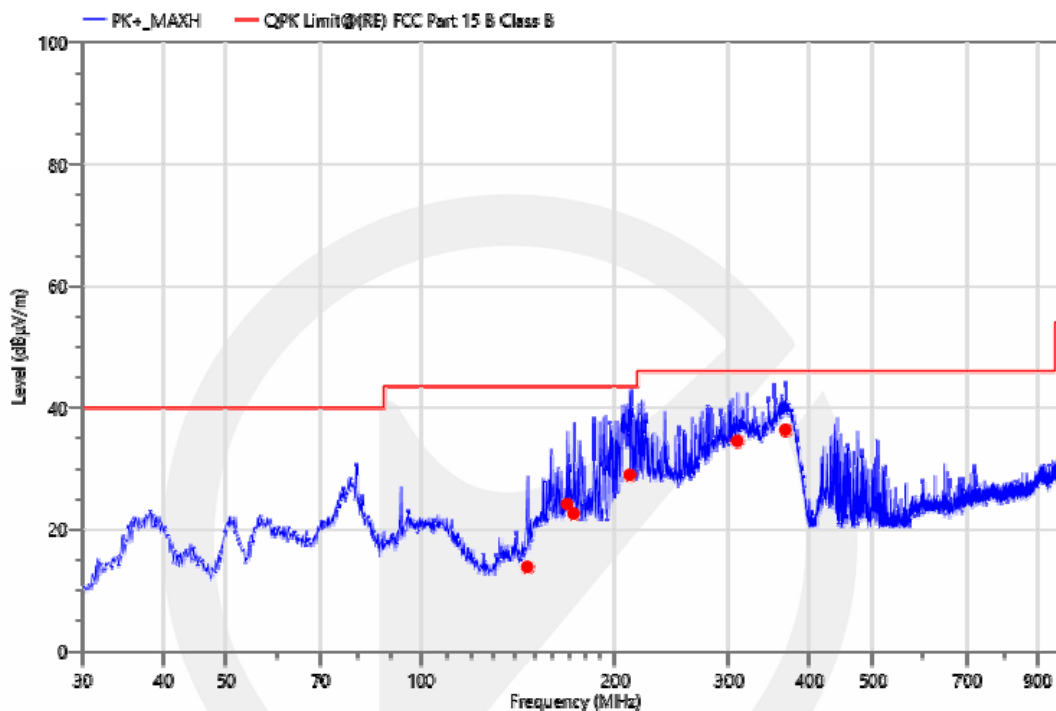

| No. | Freq. (MHz) | Reading (dBμV) | Corr. (dB) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 146.109     | 41.18          | -27.37     | 13.81          | 43.50          | 29.69       | QPK  | 100         | H    | 42.4          | PASS    |
| 2   | 168.710     | 50.84          | -26.72     | 24.12          | 43.50          | 19.38       | QPK  | 100         | H    | 17.4          | PASS    |
| 3   | 172.687     | 49.02          | -26.45     | 22.57          | 43.50          | 20.93       | QPK  | 100         | H    | 29.9          | PASS    |
| 4   | 210.226     | 53.34          | -24.41     | 28.93          | 43.50          | 14.57       | QPK  | 100         | H    | 0.0           | PASS    |
| 5   | 308.390     | 56.39          | -21.9      | 34.49          | 46.00          | 11.51       | QPK  | 100         | H    | 166.4         | PASS    |
| 6   | 366.881     | 56.69          | -20.36     | 36.33          | 46.00          | 9.67        | QPK  | 100         | H    | 144.9         | PASS    |


| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2480                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

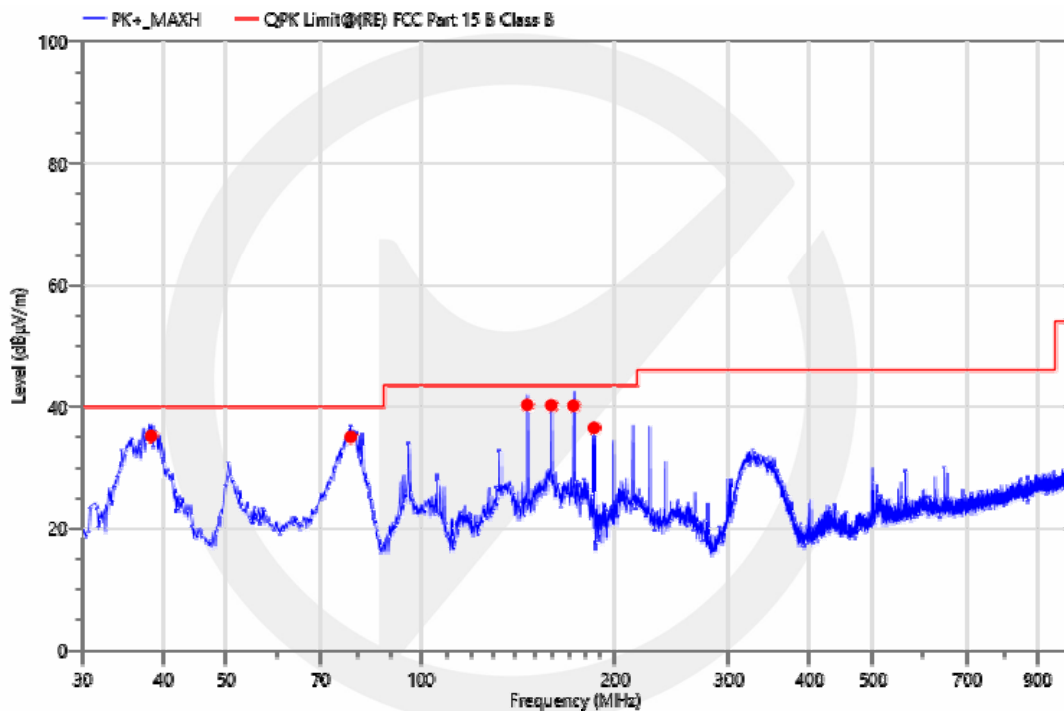

| No. | Freq. (MHz) | Reading (dBμV) | Corr. (dB) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 38.439      | 59.84          | -24.69     | 35.15          | 40.00          | 4.85        | QPK  | 100         | V    | 0.0           | PASS    |
| 2   | 78.112      | 61.95          | -26.95     | 35.00          | 40.00          | 5.00        | QPK  | 100         | V    | 0.0           | PASS    |
| 3   | 146.089     | 67.62          | -27.37     | 40.25          | 43.50          | 3.25        | QPK  | 100         | V    | 0.0           | PASS    |
| 4   | 159.301     | 67.17          | -26.98     | 40.19          | 43.50          | 3.31        | QPK  | 100         | V    | 56.3          | PASS    |
| 5   | 172.590     | 66.58          | -26.46     | 40.12          | 43.50          | 3.38        | QPK  | 100         | V    | 133.3         | PASS    |
| 6   | 185.879     | 62.13          | -25.65     | 36.48          | 43.50          | 7.02        | QPK  | 100         | V    | 317.8         | PASS    |

GM25TEQ-TYZ-1.1Nm/28rpm


| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2405                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

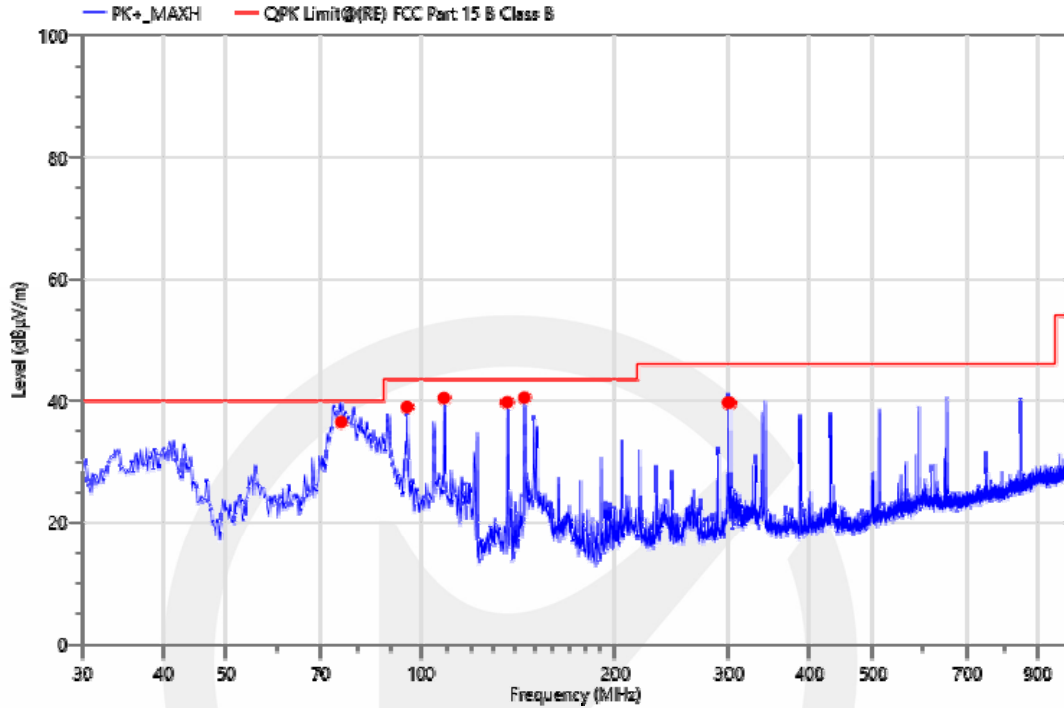

| No. | Freq. (MHz) | Reading (dBµV) | Corr. (dB) | Meas. (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 75.493      | 63.44          | -26.98     | 36.46          | 40.00          | 3.54        | QPK  | 100         | V    | 119.0         | PASS    |
| 2   | 95.184      | 64.60          | -25.67     | 38.93          | 43.50          | 4.57        | QPK  | 100         | V    | 23.5          | PASS    |
| 3   | 108.764     | 66.34          | -25.94     | 40.40          | 43.50          | 3.10        | QPK  | 100         | V    | 309.0         | PASS    |
| 4   | 135.924     | 67.62          | -27.91     | 39.71          | 43.50          | 3.79        | QPK  | 100         | V    | 310.5         | PASS    |
| 5   | 144.557     | 68.01          | -27.55     | 40.46          | 43.50          | 3.04        | QPK  | 100         | V    | 55.0          | PASS    |
| 6   | 299.951     | 61.95          | -22.3      | 39.65          | 46.00          | 6.35        | QPK  | 100         | V    | 55.0          | PASS    |


## Project Information

|              |                       |           |               |
|--------------|-----------------------|-----------|---------------|
| Mode:        | TX2405                | Voltage:  | AC 120V/60Hz  |
| Environment: | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

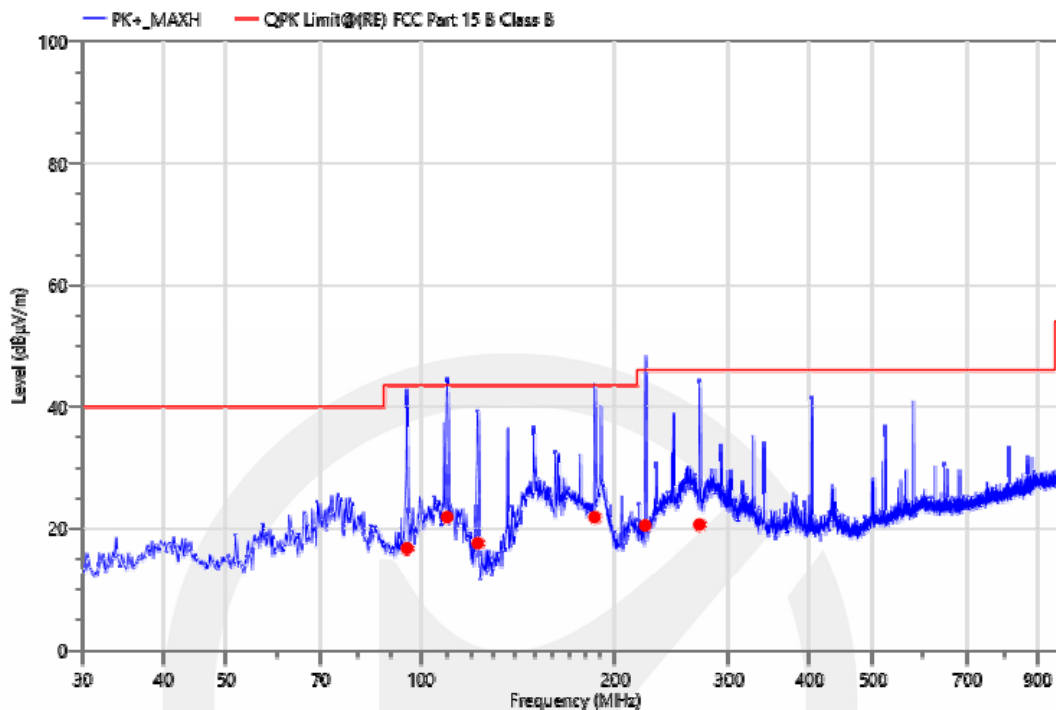


| No. | Freq. (MHz) | Reading (dBµV) | Corr. (dB) | Meas. (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 95.183      | 42.38          | -25.67     | 16.71          | 43.50          | 26.79       | QPK  | 200         | H    | 155.2         | PASS    |
| 2   | 110.025     | 47.87          | -26.04     | 21.83          | 43.50          | 21.67       | QPK  | 200         | H    | 140.2         | PASS    |
| 3   | 122.829     | 44.79          | -27.26     | 17.53          | 43.50          | 25.97       | QPK  | 200         | H    | 138.7         | PASS    |
| 4   | 186.267     | 47.46          | -25.64     | 21.82          | 43.50          | 21.68       | QPK  | 200         | H    | 137.2         | PASS    |
| 5   | 222.448     | 44.48          | -24.03     | 20.45          | 46.00          | 25.55       | QPK  | 200         | H    | 140.7         | PASS    |
| 6   | 270.463     | 43.38          | -22.78     | 20.60          | 46.00          | 25.40       | QPK  | 200         | H    | 140.2         | PASS    |

| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2440                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

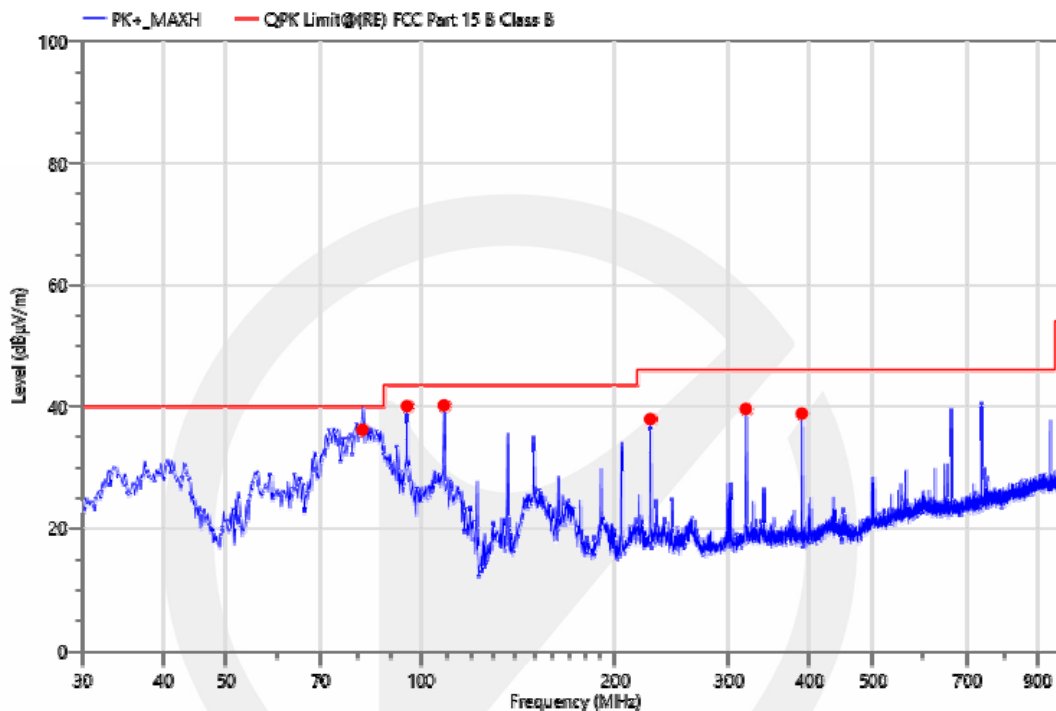


| No. | Freq. (MHz) | Reading (dBμV) | Corr. (dB) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 81.507      | 62.93          | -26.8      | 36.13          | 40.00          | 3.87        | QPK  | 100         | V    | 110.2         | PASS    |
| 2   | 95.184      | 65.68          | -25.67     | 40.01          | 43.50          | 3.49        | QPK  | 200         | V    | 1.4           | PASS    |
| 3   | 108.764     | 66.07          | -25.94     | 40.13          | 43.50          | 3.37        | QPK  | 200         | V    | 219.2         | PASS    |
| 4   | 226.522     | 61.77          | -23.9      | 37.87          | 46.00          | 8.13        | QPK  | 100         | V    | 9.2           | PASS    |
| 5   | 318.090     | 60.85          | -21.31     | 39.54          | 46.00          | 6.46        | QPK  | 100         | V    | 8.7           | PASS    |
| 6   | 389.385     | 59.25          | -20.46     | 38.79          | 46.00          | 7.21        | QPK  | 100         | V    | 10.2          | PASS    |

| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2440                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

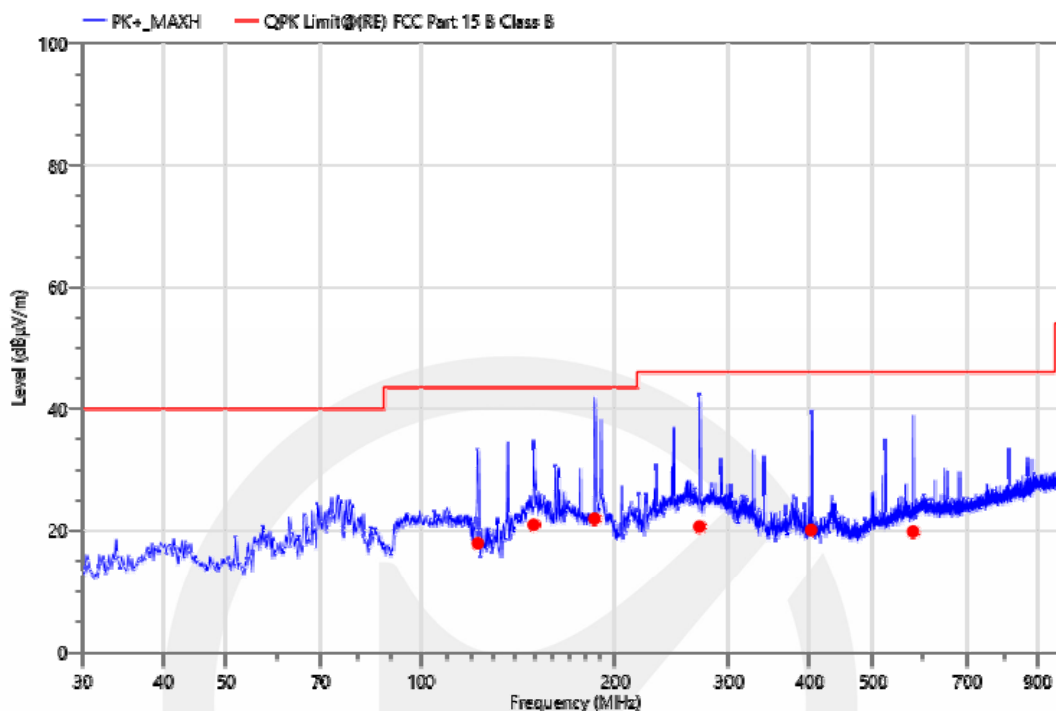


| No. | Freq. (MHz) | Reading (dBµV) | Corr. (dB) | Meas. (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 122.926     | 45.12          | -27.27     | 17.85          | 43.50          | 25.65       | QPK  | 200         | H    | 138.7         | PASS    |
| 2   | 149.504     | 47.86          | -26.97     | 20.89          | 43.50          | 22.61       | QPK  | 200         | H    | 116.2         | PASS    |
| 3   | 186.170     | 47.54          | -25.64     | 21.90          | 43.50          | 21.60       | QPK  | 200         | H    | 137.2         | PASS    |
| 4   | 270.463     | 43.38          | -22.78     | 20.60          | 46.00          | 25.40       | QPK  | 200         | H    | 140.2         | PASS    |
| 5   | 402.674     | 40.34          | -20.31     | 20.03          | 46.00          | 25.97       | QPK  | 200         | H    | 135.7         | PASS    |
| 6   | 578.244     | 35.46          | -15.67     | 19.79          | 46.00          | 26.21       | QPK  | 200         | H    | 140.7         | PASS    |

| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2480                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

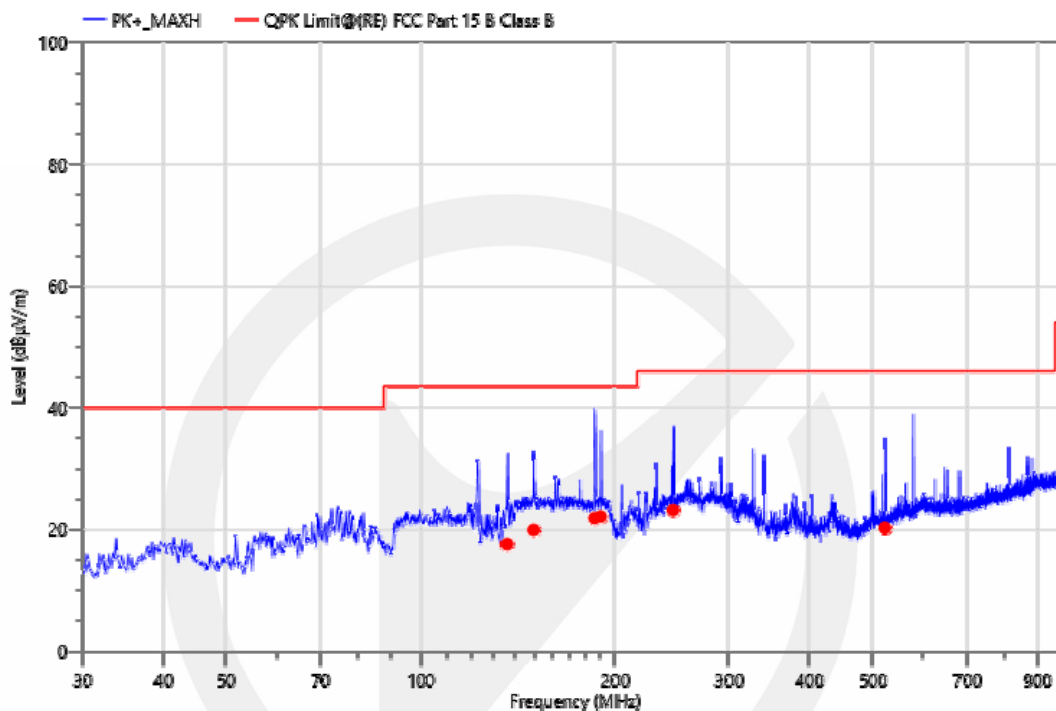

| No. | Freq. (MHz) | Reading (dBµV) | Corr. (dB) | Meas. (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 135.924     | 45.46          | -27.91     | 17.55          | 43.50          | 25.95       | QPK  | 200         | H    | 137.2         | PASS    |
| 2   | 149.504     | 46.86          | -26.97     | 19.89          | 43.50          | 23.61       | QPK  | 200         | H    | 116.2         | PASS    |
| 3   | 186.267     | 47.46          | -25.64     | 21.82          | 43.50          | 21.68       | QPK  | 200         | H    | 137.2         | PASS    |
| 4   | 190.341     | 47.55          | -25.48     | 22.07          | 43.50          | 21.43       | QPK  | 100         | H    | 185.8         | PASS    |
| 5   | 245.922     | 46.07          | -22.93     | 23.14          | 46.00          | 22.86       | QPK  | 200         | H    | 140.2         | PASS    |
| 6   | 522.372     | 37.46          | -17.24     | 20.22          | 46.00          | 25.78       | QPK  | 200         | H    | 136.2         | PASS    |

| Project Information |                       |           |               |
|---------------------|-----------------------|-----------|---------------|
| Mode:               | TX2480                | Voltage:  | AC 120V/60Hz  |
| Environment:        | Temp: 20 °C; Humi:64% | Engineer: | matteus zhang |

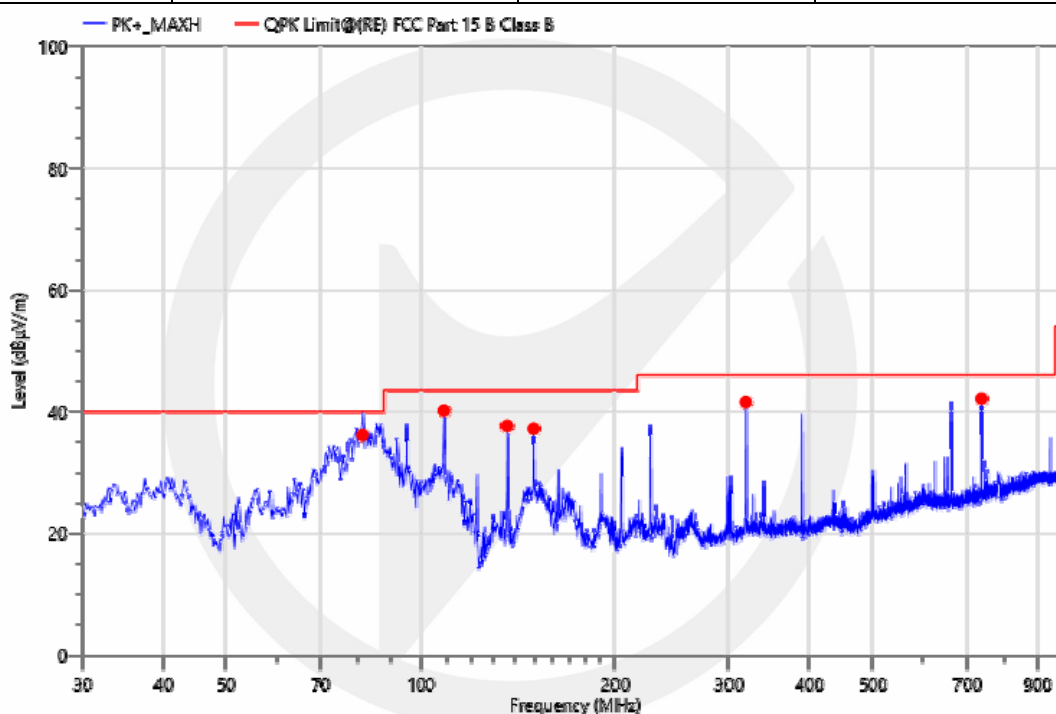

| No. | Freq. (MHz) | Reading (dBµV) | Corr. (dB) | Meas. (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Det. | Height (cm) | Pol. | Azimuth (deg) | Verdict |
|-----|-------------|----------------|------------|----------------|----------------|-------------|------|-------------|------|---------------|---------|
| 1   | 81.507      | 62.93          | -26.8      | 36.13          | 40.00          | 3.87        | QPK  | 100         | V    | 110.2         | PASS    |
| 2   | 108.764     | 66.07          | -25.94     | 40.13          | 43.50          | 3.37        | QPK  | 100         | V    | 219.2         | PASS    |
| 3   | 135.924     | 65.54          | -27.91     | 37.63          | 43.50          | 5.87        | QPK  | 100         | V    | 157.2         | PASS    |
| 4   | 149.504     | 64.13          | -26.97     | 37.16          | 43.50          | 6.34        | QPK  | 100         | V    | 139.2         | PASS    |
| 5   | 318.090     | 62.85          | -21.31     | 41.54          | 46.00          | 4.46        | QPK  | 200         | V    | 8.7           | PASS    |
| 6   | 736.451     | 56.56          | -14.47     | 42.09          | 46.00          | 3.91        | QPK  | 100         | V    | 0.1           | PASS    |



# Spurious Emission Above 1GHz (1GHz to 25GHz)

Test mode: GFSK Frequency: Channel : 2405MHz

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|----------------|-----------------|---------------------------|-------|------------------|----|----------|--------|
|                |                 | PK                        | AV    | PK               | AV | PK       | AV     |
| 4810.000       | V               | 42.92                     | 28.69 | 74               | 54 | -31.08   | -25.31 |
| 7215.500       | V               | 49.15                     | 34.61 | 74               | 54 | -24.85   | -19.39 |
| 17917.50       | V               | 53.76                     | 38.74 | 74               | 54 | -20.24   | -15.26 |
| 4809.000       | H               | 50.74                     | 36.78 | 74               | 54 | -23.26   | -17.22 |
| 7214.500       | H               | 51.29                     | 35.46 | 74               | 54 | -22.71   | -18.54 |
| 17984.00       | H               | 54.28                     | 40.33 | 74               | 54 | -19.72   | -13.67 |

Test mode: GFSK Frequency: Channel : 2440MHz

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|----------------|-----------------|---------------------------|-------|------------------|----|----------|--------|
|                |                 | PK                        | AV    | PK               | AV | PK       | AV     |
| 4879.000       | V               | 45.32                     | 30.24 | 74               | 54 | -28.68   | -23.76 |
| 7320.000       | V               | 47.75                     | 33.71 | 74               | 54 | -26.25   | -20.29 |
| 9760.000       | V               | 50.04                     | 35.67 | 74               | 54 | -23.96   | -18.33 |
| 4880.000       | H               | 46.03                     | 31.36 | 74               | 54 | -27.97   | -22.64 |
| 7320.500       | H               | 49.11                     | 34.85 | 74               | 54 | -24.89   | -19.15 |
| 9759.500       | H               | 50.12                     | 36.47 | 74               | 54 | -23.88   | -17.53 |

Test mode: GFSK Frequency: Channel : 2480MHz

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|----------------|-----------------|---------------------------|-------|------------------|----|----------|--------|
|                |                 | PK                        | AV    | PK               | AV | PK       | AV     |
| 4960.500       | V               | 46.06                     | 31.52 | 74               | 54 | -27.94   | -22.48 |
| 7440.500       | V               | 47.97                     | 32.47 | 74               | 54 | -26.03   | -21.53 |
| 9920.500       | V               | 52.23                     | 37.68 | 74               | 54 | -21.77   | -16.32 |
| 4960.000       | H               | 48.93                     | 33.64 | 74               | 54 | -25.07   | -20.36 |
| 7440.500       | H               | 48.85                     | 35.78 | 74               | 54 | -25.15   | -18.22 |
| 9920.000       | H               | 51.41                     | 37.41 | 74               | 54 | -22.59   | -16.59 |

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

### 8.3 CONDUCTED EMISSIONS TEST

#### 8.3.1 Applicable Standard

According to FCC Part 15.207(a)

#### 8.3.2 Conformance Limit

| Frequency(MHz) | Conducted Emission Limit |         |
|----------------|--------------------------|---------|
|                | Quasi-peak               | Average |
| 0.15-0.5       | 66-56                    | 56-46   |
| 0.5-5.0        | 56                       | 46      |
| 5.0-30.0       | 60                       | 50      |

Note: 1. The lower limit shall apply at the transition frequencies  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 8.3.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

#### 8.3.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.


#### 8.3.5 Test Results

Pass.

All of the modes have been tested, and the worst result recorded was report as below:


## GM25LE/U-TYZ-1.1Nm/28rpm

| Project Information |                       |           |              |
|---------------------|-----------------------|-----------|--------------|
| Mode:               | TX2405                | Voltage:  | AC 120V/60Hz |
| Environment:        | Temp: 23 °C; Humi:67% | Engineer: | WK Luo       |

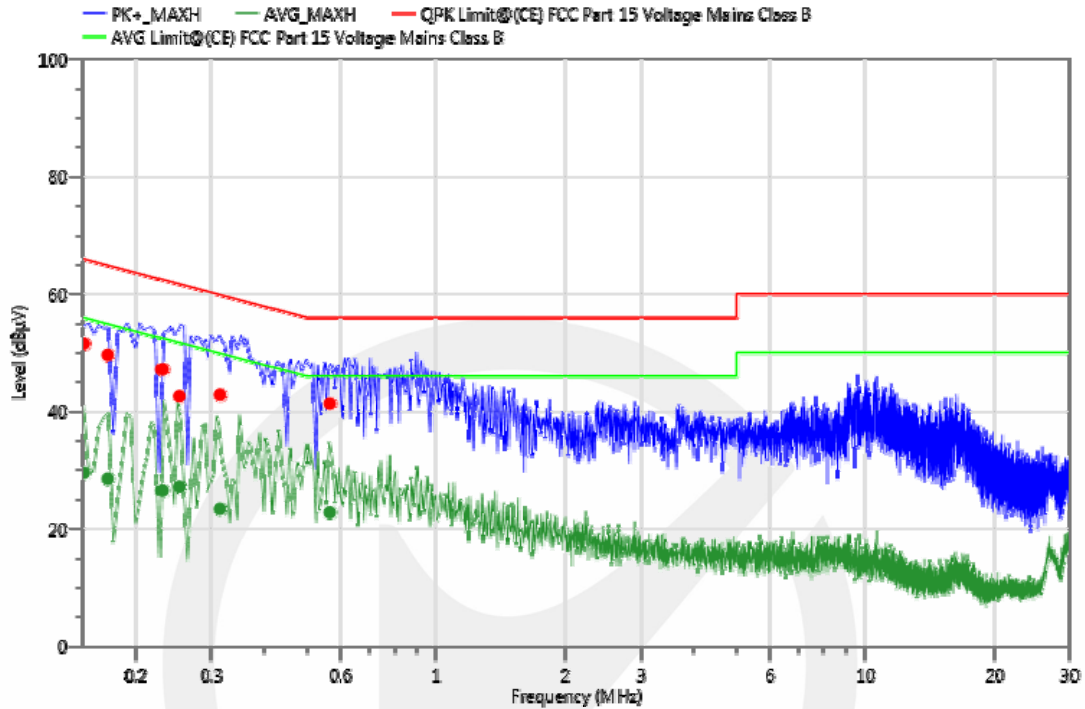

| No. | Freq. (MHz) | Reading (dBµV) | Corr. (dB) | Meas. (dBµV) | Limit (dBµV) | Margin (dB) | Det. | Line | PE  | Verdict |
|-----|-------------|----------------|------------|--------------|--------------|-------------|------|------|-----|---------|
| 1   | 0.151       | 41.23          | 10.28      | 51.51        | 65.94        | 14.43       | QPK  | L1   | GND | PASS    |
| 2   | 0.151       | 19.22          | 10.28      | 29.50        | 55.94        | 26.44       | AVG  | L1   | GND | PASS    |
| 3   | 0.172       | 39.27          | 10.32      | 49.59        | 64.86        | 15.27       | QPK  | L1   | GND | PASS    |
| 4   | 0.172       | 18.18          | 10.32      | 28.50        | 54.86        | 26.36       | AVG  | L1   | GND | PASS    |
| 5   | 0.230       | 36.74          | 10.4       | 47.14        | 62.45        | 15.31       | QPK  | L1   | GND | PASS    |
| 6   | 0.230       | 16.08          | 10.4       | 26.48        | 52.45        | 25.97       | AVG  | L1   | GND | PASS    |
| 7   | 0.252       | 32.15          | 10.42      | 42.57        | 61.69        | 19.12       | QPK  | L1   | GND | PASS    |
| 8   | 0.252       | 16.70          | 10.42      | 27.12        | 51.69        | 24.57       | AVG  | L1   | GND | PASS    |
| 9   | 0.314       | 32.37          | 10.45      | 42.82        | 59.86        | 17.04       | QPK  | L1   | GND | PASS    |
| 10  | 0.314       | 12.92          | 10.45      | 23.37        | 49.86        | 26.49       | AVG  | L1   | GND | PASS    |
| 11  | 0.566       | 30.89          | 10.41      | 41.30        | 56.00        | 14.70       | QPK  | L1   | GND | PASS    |
| 12  | 0.566       | 12.36          | 10.41      | 22.77        | 46.00        | 23.23       | AVG  | L1   | GND | PASS    |

| Project Information |                       |           |              |
|---------------------|-----------------------|-----------|--------------|
| Mode:               | TX2405                | Voltage:  | AC 120V/60Hz |
| Environment:        | Temp: 23 °C; Humi:67% | Engineer: | WK Luo       |

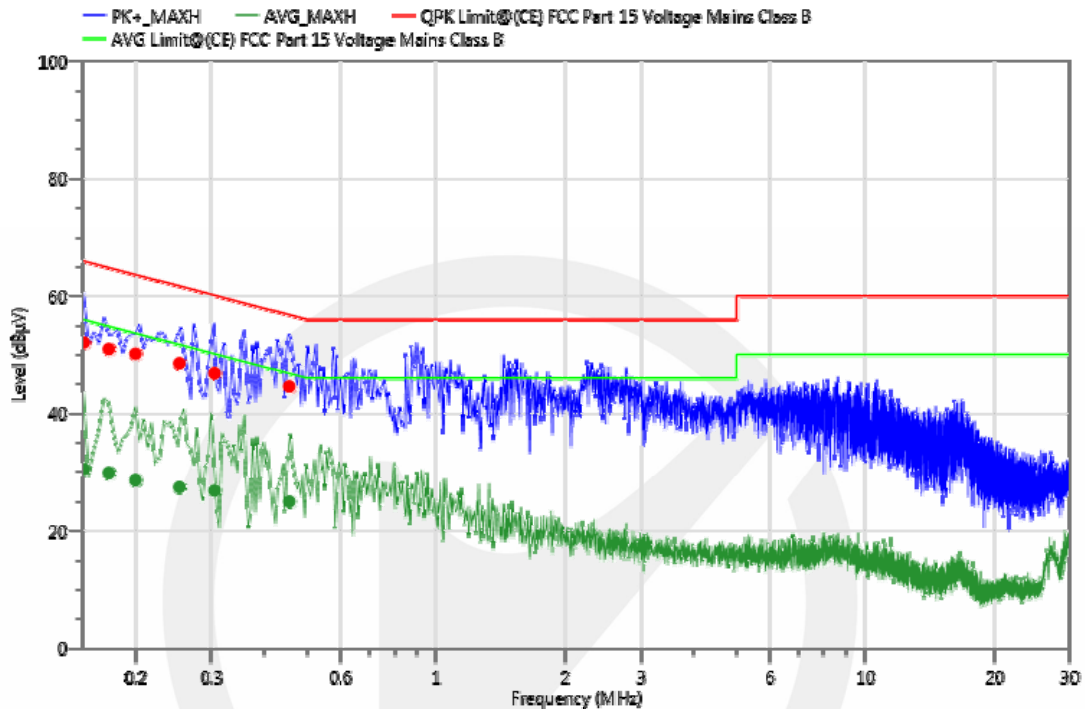

| No. | Freq. (MHz) | Reading (dBµV) | Corr. (dB) | Meas. (dBµV) | Limit (dBµV) | Margin (dB) | Det. | Line | PE  | Verdict |
|-----|-------------|----------------|------------|--------------|--------------|-------------|------|------|-----|---------|
| 1   | 0.151       | 41.71          | 10.33      | 52.04        | 65.94        | 13.90       | QPK  | N    | GND | PASS    |
| 2   | 0.151       | 20.09          | 10.33      | 30.42        | 55.94        | 25.52       | AVG  | N    | GND | PASS    |
| 3   | 0.173       | 40.58          | 10.35      | 50.93        | 64.82        | 13.89       | QPK  | N    | GND | PASS    |
| 4   | 0.173       | 19.48          | 10.35      | 29.83        | 54.82        | 24.99       | AVG  | N    | GND | PASS    |
| 5   | 0.200       | 39.74          | 10.38      | 50.12        | 63.61        | 13.49       | QPK  | N    | GND | PASS    |
| 6   | 0.200       | 18.23          | 10.38      | 28.61        | 53.61        | 25.00       | AVG  | N    | GND | PASS    |
| 7   | 0.252       | 38.11          | 10.39      | 48.50        | 61.69        | 13.19       | QPK  | N    | GND | PASS    |
| 8   | 0.252       | 17.04          | 10.39      | 27.43        | 51.69        | 24.26       | AVG  | N    | GND | PASS    |
| 9   | 0.305       | 36.42          | 10.39      | 46.81        | 60.11        | 13.30       | QPK  | N    | GND | PASS    |
| 10  | 0.305       | 16.45          | 10.39      | 26.84        | 50.11        | 23.27       | AVG  | N    | GND | PASS    |
| 11  | 0.454       | 34.16          | 10.4       | 44.56        | 56.80        | 12.24       | QPK  | N    | GND | PASS    |
| 12  | 0.454       | 14.56          | 10.4       | 24.96        | 46.80        | 21.84       | AVG  | N    | GND | PASS    |

## 8.4 ANTENNA APPLICATION

### 8.4.1 Antenna Requirement

| Standard            | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC CRF Part 15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. |

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 8.4.2 Result

PASS.

Note: The EUT has 1 antenna: The PCB antenna gain is 3.26 dBi.

- Note:
- ☒ Antenna use a permanently attached antenna which is not replaceable.
  - ☐ Not using a standard antenna jack or electrical connector for antenna replacement
  - ☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

\*\*\* End of Report \*\*\*

## 声明 Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效；

This report will be void without authorized signature or special seal for testing report.

2. 未经许可本报告不得部分复制；

This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责；

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用；

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外；

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检测报告若有异议，请于收到报告之日起 20 日内提出；

Objections shall be raised within 20 days from the date receiving the report.