

RIPPLEON LTD.

RF TEST REPORT

REPORT TYPE:

FCC Part 15.225 RF Report

MODEL:

Please see details in page 6 of this report

REPORT NUMBER:

2409B1594SHA-001

ISSUE DATE:

November 11, 2024

DOCUMENT CONTROL NUMBER:

TTRF15.225_V1 © 2018 Intertek





Total Quality. Assured.

TEST REPORT

Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Building No.86, 1198 Qinzhou Road (North)
Caohejing Development Zone
Shanghai 200233, China

Telephone: 86 21 6127 8200
www.intertek.com

Report no.: 2409B1594SHA-001

Applicant: RIPPLEON LTD.
110 16th St Ste 1400, Denver, Colorado, USA, 80202

Manufacturer: Nightend Smart Tech. Co., Ltd.
No.528, Daluzhou, Meilin Street, Ninghai county, Ningbo, China

Factory: Nightend Smart Tech. Co., Ltd.
No.528, Daluzhou, Meilin Street, Ninghai county, Ningbo, China

FCC ID: 2BLBS-ROCHL2US

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2023): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

PREPARED BY:

Project Engineer
Scout Gong

REVIEWED BY:

Reviewer
Eric Li

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Content**

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION.....	9
1.3 DESCRIPTION OF TEST FACILITY.....	10
2 TEST SPECIFICATIONS.....	11
2.1 STANDARDS OR SPECIFICATION	11
2.2 MODE OF OPERATION DURING THE TEST.....	11
2.3 TEST SOFTWARE LIST	11
2.4 TEST PERIPHERALS LIST.....	11
2.5 TEST ENVIRONMENT CONDITION:.....	11
2.6 INSTRUMENT LIST	12
2.7 MEASUREMENT UNCERTAINTY.....	13
3 FUNDAMENTAL EMISSION	14
3.1 LIMIT	14
3.2 MEASUREMENT PROCEDURE	14
3.3 TEST CONFIGURATION	15
3.4 TEST RESULTS OF FUNDAMENTAL EMISSIONS	16
4 SPURIOUS EMISSION	18
4.1 LIMIT	18
4.2 MEASUREMENT PROCEDURE	18
4.3 TEST RESULTS OF RADIATED EMISSIONS	20
5 FREQUENCY STABILITY (TEMPERATURE VARIATION).....	24
5.1 TEST LIMIT	24
5.2 TEST CONFIGURATION	24
5.3 TEST PROCEDURE AND TEST SETUP	25
5.4 TEST PROTOCOL.....	25
6 FREQUENCY STABILITY (VOLTAGE VARIATION)	26
6.1 TEST LIMIT	26
6.2 TEST CONFIGURATION	26
6.3 TEST PROCEDURE AND TEST SETUP	26
6.4 TEST PROTOCOL.....	27
7 CONDUCTED EMISSIONS	28
7.1 LIMIT	28
7.2 TEST CONFIGURATION	28
7.3 MEASUREMENT PROCEDURE	29
7.4 TEST RESULTS OF CONDUCTED EMISSIONS.....	30
8 20DB BANDWIDTH	32
8.1 LIMIT	32
8.2 TEST CONFIGURATION.....	32
8.3 TEST PROCEDURE AND TEST SET UP.....	33
8.4 TEST PROTOCOL.....	34
9 ANTENNA REQUIREMENT.....	35

TEST REPORT**Revision History**

Report No.	Version	Description	Issued Date
2409B1594SHA-001	Rev. 01	Initial issue of report	November 11, 2024

TEST REPORT**Measurement Result Summary**

TEST ITEM	FCC REFERENCE	RESULT
Fundamental emission	15.225(a) (b) (c)	Pass
Spurious emission	15.225(d)	Pass
Frequency stability	15.225(e)	Pass
Conducted emissions	15.207	Pass
99% and 20dB Bandwidth	15.215(c)	Pass
Antenna requirement	15.203	Pass

Notes:

1. NA =Not Applicable
2. The determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.
3. Additions, Deviations and Exclusions from Standards: None.

TEST REPORT

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	EV Charger
Type/Model:	ROC001W, ROC001B, ROC001G, ROC001L, ROC003W, ROC003B, ROC003G, ROC003L, ROC005W, ROC005B, ROC005G, ROC005L, ROC007W, ROC007B, ROC007G, ROC007L, ROC004W, ROC004B, ROC004G, ROC004L, ROC002W, ROC002B, ROC002G, ROC002L, ROC006W, ROC006B, ROC006G, ROC006L, ROC008W, ROC008B, ROC008G, ROC008L, ROC009W, ROC009B, ROC009G, ROC009L, ROC010W, ROC010B, ROC010G, ROC010L, NECS-ACW-7-1-US-3010, NECS-ACW-7-1-US-3018, NECS-ACW-7-1-US-3020, NECS-ACW-7-1-US-3027, NECS-ACW-7-1-US-3028, NECS-ACW-7-1-US-3110, NECS-ACW-7-1-US-3111, NECS-ACW-7-1-US-3112, NECS-ACW-7-1-US-3113, NECS-ACW-7-1-US-3114, NECS-ACW-7-1-US-3115, NECS-ACW-9.6-1-US-3010, NECS-ACW-9.6-1-US-3018, NECS-ACW-9.6-1-US-3020, NECS-ACW-9.6-1-US-3027, NECS-ACW-9.6-1-US-3028, NECS-ACW-9.6-1-US-3110, NECS-ACW-9.6-1-US-3111, NECS-ACW-9.6-1-US-3112, NECS-ACW-9.6-1-US-3113, NECS-ACW-9.6-1-US-3114, NECS-ACW-9.6-1-US-3115, NECS-ACW-11.5-1-US-3010, NECS-ACW-11.5-1-US-3018, NECS-ACW-11.5-1-US-3020, NECS-ACW-11.5-1-US-3027, NECS-ACW-11.5-1-US-3028, NECS-ACW-11.5-1-US-3110, NECS-ACW-11.5-1-US-3111, NECS-ACW-11.5-1-US-3112, NECS-ACW-11.5-1-US-3113, NECS-ACW-11.5-1-US-3114, NECS-ACW-11.5-1-US-3115
Description of EUT:	The EUT is an electric vehicle AC charger with RFID function, it supports Wi-Fi/BLE and LTE function. There are 73 models. Model "ROC00**L" differs in color. The model "NECS-ACW-**-1-US-3***" differs in the product appearance. Except for differences in specifications, appearance, and color, the key components and electrical schematics of the product are the same. Model ROC001W was tested as a representative. Here is the certificate information about the wireless modules which EUT equipped.

TEST REPORT

	For the Wi-Fi/BLE modular, FCC ID is XMR20211108FC41D. For the LTE modular, FCC ID is XMR201903EG25G.			
Rating:	Input: L1-L2 240V AC, 60Hz			
Order	Model	Rated Power	Input Current	
1	ROC001W	11.5kW	48A MAX	
2	ROC001B	11.5kW	48A MAX	
3	ROC001G	11.5kW	48A MAX	
4	ROC001L	11.5kW	48A MAX	
5	ROC003W	11.5kW	48A MAX	
6	ROC003B	11.5kW	48A MAX	
7	ROC003G	11.5kW	48A MAX	
8	ROC003L	11.5kW	48A MAX	
9	ROC005W	11.5kW	48A MAX	
10	ROC005B	11.5kW	48A MAX	
11	ROC005G	11.5kW	48A MAX	
12	ROC005L	11.5kW	48A MAX	
13	ROC007W	11.5kW	48A MAX	
14	ROC007B	11.5kW	48A MAX	
15	ROC007G	11.5kW	48A MAX	
16	ROC007L	11.5kW	48A MAX	
17	ROC004W	9.6kW	40A MAX	
18	ROC004B	9.6kW	40A MAX	
19	ROC004G	9.6kW	40A MAX	
20	ROC004L	9.6kW	40A MAX	
21	ROC002W	9.6kW	40A MAX	
22	ROC002B	9.6kW	40A MAX	
23	ROC002G	9.6kW	40A MAX	
24	ROC002L	9.6kW	40A MAX	
25	ROC006W	9.6kW	40A MAX	
26	ROC006B	9.6kW	40A MAX	
27	ROC006G	9.6kW	40A MAX	
28	ROC006L	9.6kW	40A MAX	
29	ROC008W	9.6kW	40A MAX	
30	ROC008B	9.6kW	40A MAX	
31	ROC008G	9.6kW	40A MAX	
32	ROC008L	9.6kW	40A MAX	
33	ROC009W	7kW	32A MAX	

TEST REPORT

34	ROC009B	7kW	32A MAX
35	ROC009G	7kW	32A MAX
36	ROC009L	7kW	32A MAX
37	ROC010W	7kW	32A MAX
38	ROC010B	7kW	32A MAX
39	ROC010G	7kW	32A MAX
40	ROC010L	7kW	32A MAX
41	NECS-ACW-7-1-US-3010	7kW	32A MAX
42	NECS-ACW-7-1-US-3018	7kW	32A MAX
43	NECS-ACW-7-1-US-3020	7kW	32A MAX
44	NECS-ACW-7-1-US-3027	7kW	32A MAX
45	NECS-ACW-7-1-US-3028	7kW	32A MAX
46	NECS-ACW-7-1-US-3110	7kW	32A MAX
47	NECS-ACW-7-1-US-3111	7kW	32A MAX
48	NECS-ACW-7-1-US-3112	7kW	32A MAX
49	NECS-ACW-7-1-US-3113	7kW	32A MAX
50	NECS-ACW-7-1-US-3114	7kW	32A MAX
51	NECS-ACW-7-1-US-3115	7kW	32A MAX
52	NECS-ACW-9.6-1-US-3010	9.6kW	40A MAX
53	NECS-ACW-9.6-1-US-3018	9.6kW	40A MAX
54	NECS-ACW-9.6-1-US-3020	9.6kW	40A MAX
55	NECS-ACW-9.6-1-US-3027	9.6kW	40A MAX
56	NECS-ACW-9.6-1-US-3028	9.6kW	40A MAX
57	NECS-ACW-9.6-1-US-3110	9.6kW	40A MAX
58	NECS-ACW-9.6-1-US-3111	9.6kW	40A MAX
59	NECS-ACW-9.6-1-US-3112	9.6kW	40A MAX
60	NECS-ACW-9.6-1-US-3113	9.6kW	40A MAX
61	NECS-ACW-9.6-1-US-3114	9.6kW	40A MAX
62	NECS-ACW-9.6-1-US-3115	9.6kW	40A MAX
63	NECS-ACW-11.5-1-US-3010	11.5kW	48A MAX
64	NECS-ACW-11.5-1-US-3018	11.5kW	48A MAX
65	NECS-ACW-11.5-1-US-3020	11.5kW	48A MAX
66	NECS-ACW-11.5-1-US-3027	11.5kW	48A MAX
67	NECS-ACW-11.5-1-US-3028	11.5kW	48A MAX
68	NECS-ACW-11.5-1-US-3110	11.5kW	48A MAX
69	NECS-ACW-11.5-1-US-3111	11.5kW	48A MAX
70	NECS-ACW-11.5-1-US-3112	11.5kW	48A MAX
71	NECS-ACW-11.5-1-US-3113	11.5kW	48A MAX
72	NECS-ACW-11.5-1-US-3114	11.5kW	48A MAX
73	NECS-ACW-11.5-1-US-3115	11.5kW	48A MAX

TEST REPORT

EUT type:	<input checked="" type="checkbox"/> Tabletop <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Serial numbers:	A240915-24-001
Sample received date:	September 15, 2024
Date of test:	September 15, 2024, to October 15, 2024

1.2 Technical Specification

Frequency Range:	13.56 MHz ~ 13.56 MHz
Modulation:	ASK
Antenna:	PCB antenna

TEST REPORT**1.3 Description of Test Facility**

Name:	Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address:	Building 86, No. 1198 Qinzhou Road (North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L21189
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Member No: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252)
	A2LA Accreditation Lab Certificate Number: 3309.02

TEST REPORT**2 TEST SPECIFICATIONS****2.1 Standards or specification**

47CFR Part 15 (2023)
ANSI C63.10 (2020)

2.2 Mode of operation during the test

While testing, the internal modulation and continuous transmission was applied.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	SKET Auto EMC Test Software	Keleto	V3.0
Radiated emission	SKET Auto EMC Test Software	Keleto	V3.0

2.4 Test peripherals list

Item No	Description	Band and Model	S/No
1	Resistor Load	-	-

2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	26°C	53% RH
Power line conducted emission	27°C	53% RH

TEST REPORT
2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2025-02-27
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2025-05-18
<input checked="" type="checkbox"/>	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2025-06-06
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2025-01-11
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2025-08-18
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2025-09-11
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2025-08-10
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2026-07-11
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	EC 6078	2025-03-18
<input checked="" type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2025-03-07
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6640	2025-08-29
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6643	2025-08-29

TEST REPORT**2.7 Measurement uncertainty**

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Expanded Uncertainty (k=2)
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.06 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB

TEST REPORT**3 Fundamental Emission****Test result:** **PASS****3.1 Limit**

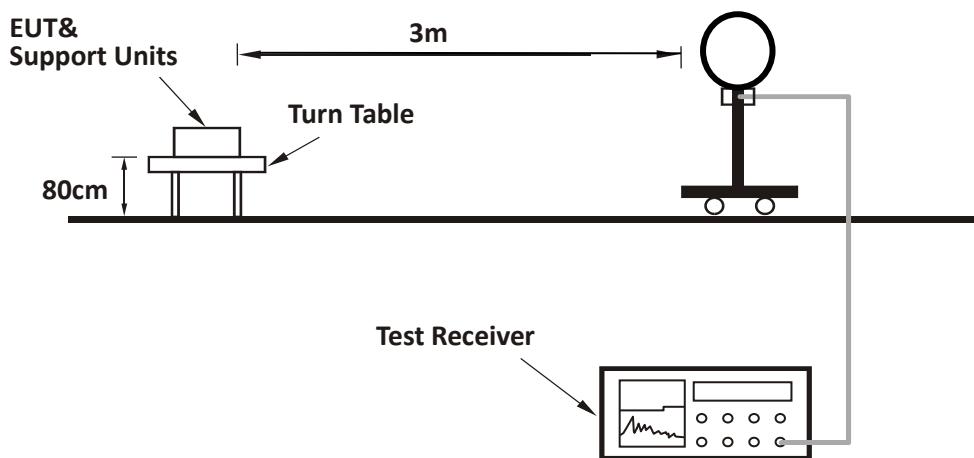
Frequencies (MHz)	Limit at 30m (dBuV/m)	Limit at 3m (dBuV/m)
13.110 – 13.410	40.50	80.50
13.410 – 13.553	50.50	90.50
13.553 – 13.567	84.00	124.00
13.567 – 13.710	50.50	90.50
13.710 – 14.010	40.50	80.50

3.2 Measurement Procedure

- a) The EUT was placed on a 0.8m plank above the ground at a 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to PK Detect Function and Specified Bandwidth with Maximum Hold Mode.

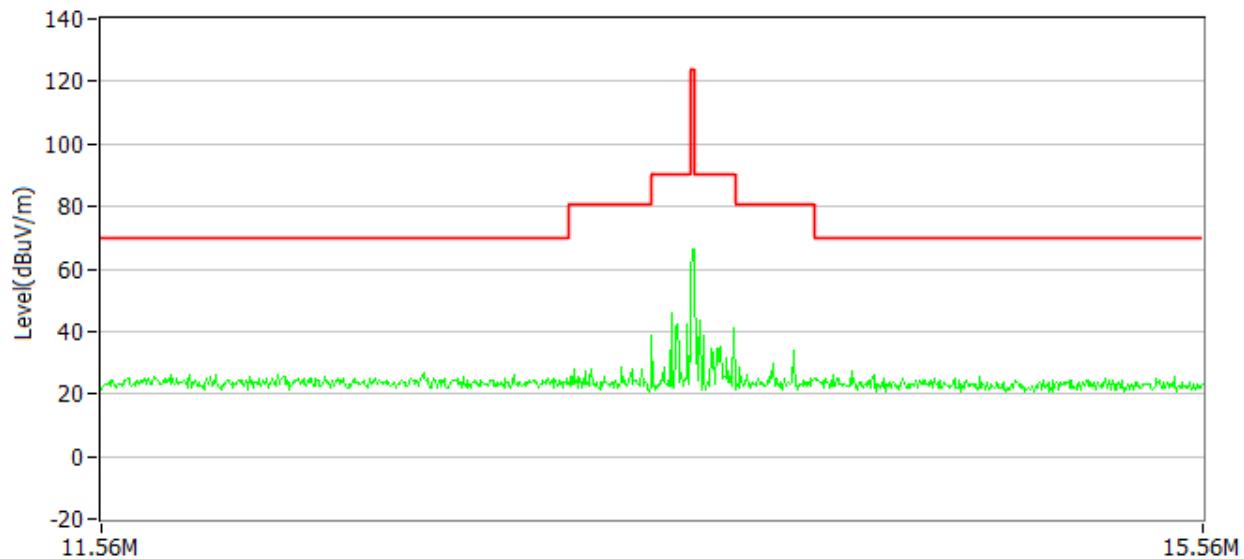
NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

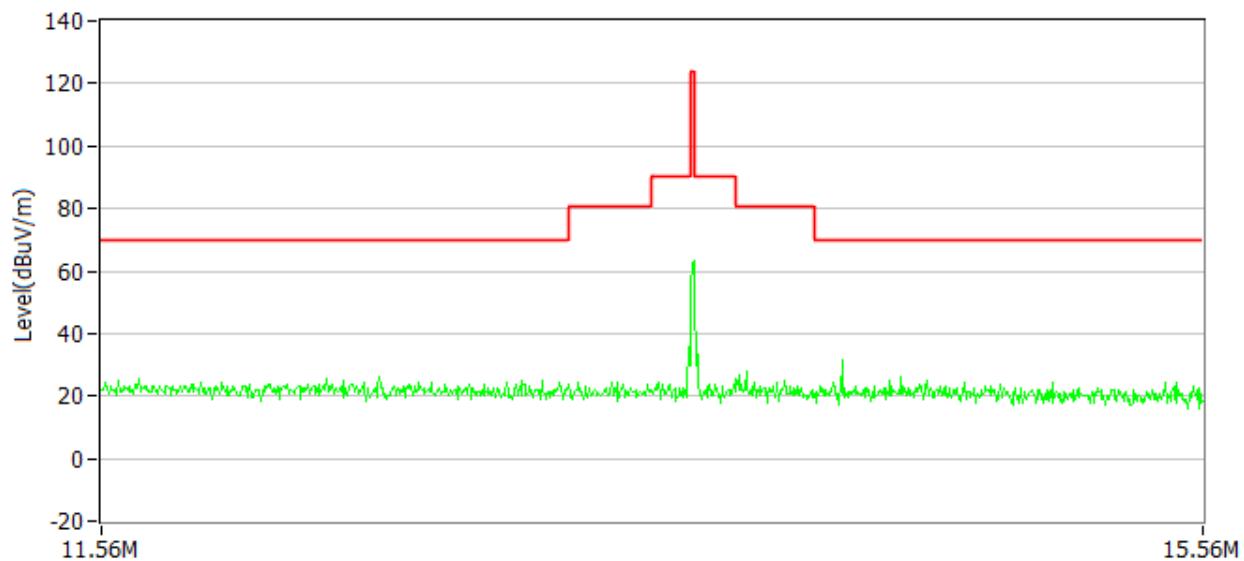
TEST REPORT**3.3 Test Configuration**

TEST REPORT**3.4 Test Results of Fundamental Emissions**

Antenna Polarization: X axis

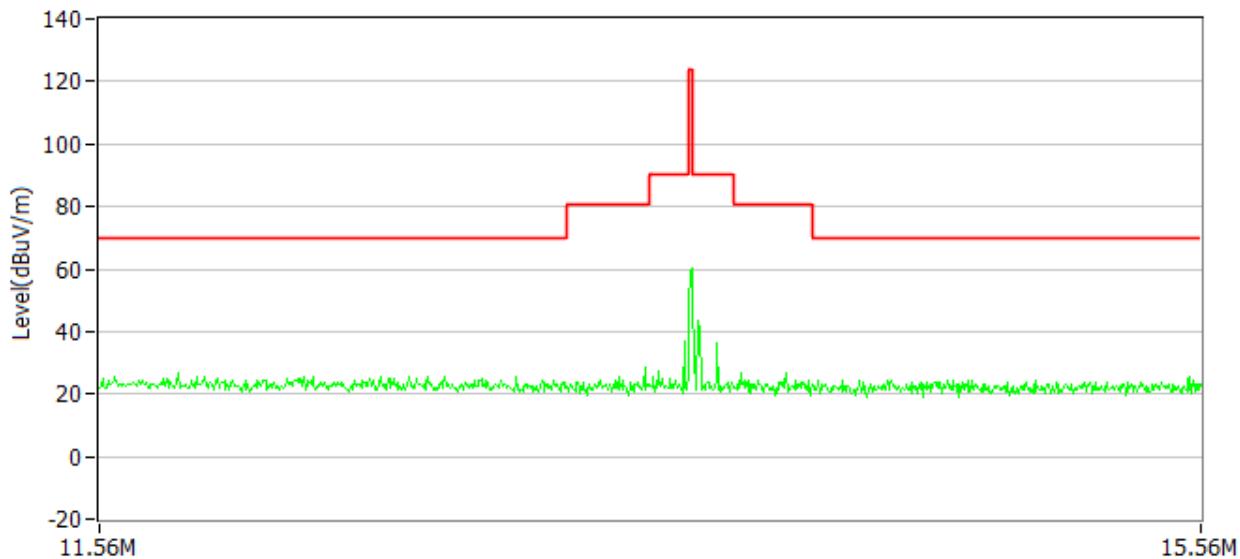


Antenna Polarization: Y axis



TEST REPORT

Antenna Polarization: Z axis



Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
X	13.56	66.50	19.10	124.00	57.50	PK
Y	13.56	63.30	19.10	124.00	60.70	PK
Z	13.56	60.20	19.10	124.00	63.80	PK

Remark:

1. *Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically*
2. *Corrected Reading = Original Receiver Reading + Correct Factor*
3. *Margin = Limit - Corrected Reading*

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV

Limit = 40.00dBuV/m

Then Correct Factor = 30.20 + 2.00 - 32.00 = 0.20dB/m

Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m

Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB

TEST REPORT**4 Spurious Emission****Test result: PASS****4.1 Limit**

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

4.2 Measurement Procedure**For Radiated emission below 30MHz:**

- f) The EUT was placed on a 0.8m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- g) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- h) Both X and Y axes of the antenna are set to make the measurement.
- i) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- j) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**

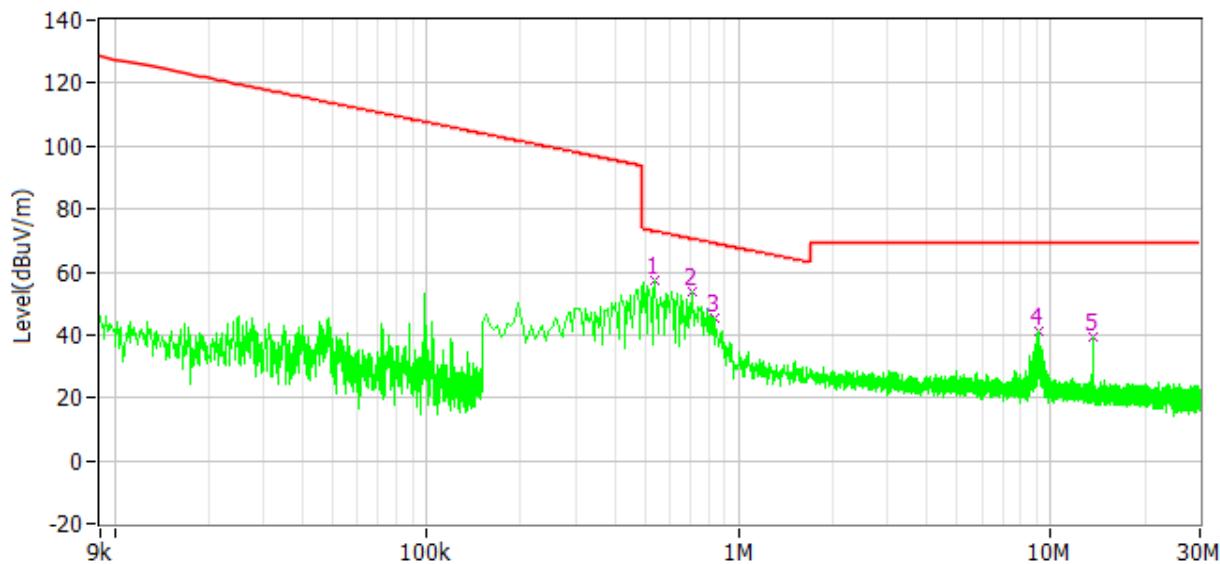
- a) The EUT was placed on a 0.8m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

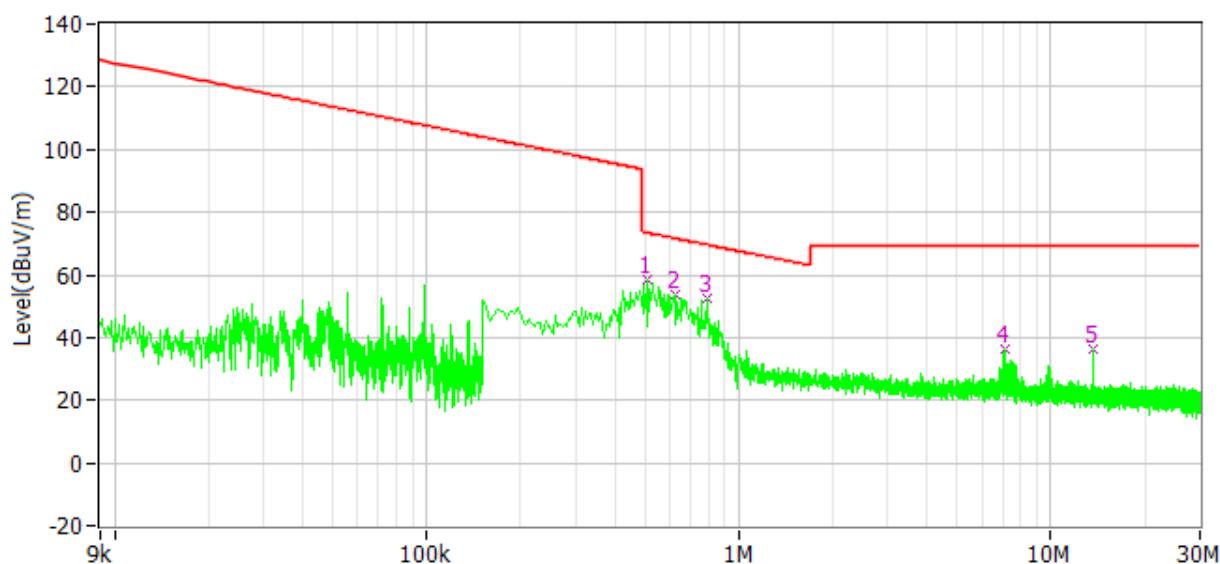
1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. All modes of operation were evaluated and the worst-case emissions were reported

TEST REPORT**4.3 Test Results of Radiated Emissions****Test Curve (below 30MHz):**

Antenna Polarization: X axis

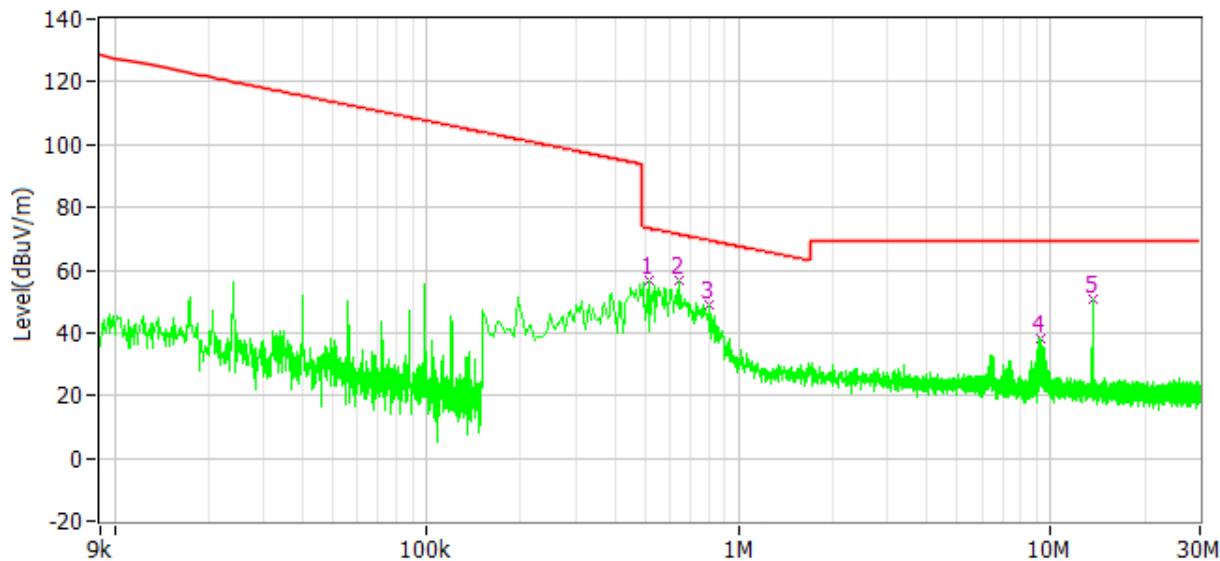


Antenna Polarization: Y axis



TEST REPORT

Antenna Polarization: Z axis

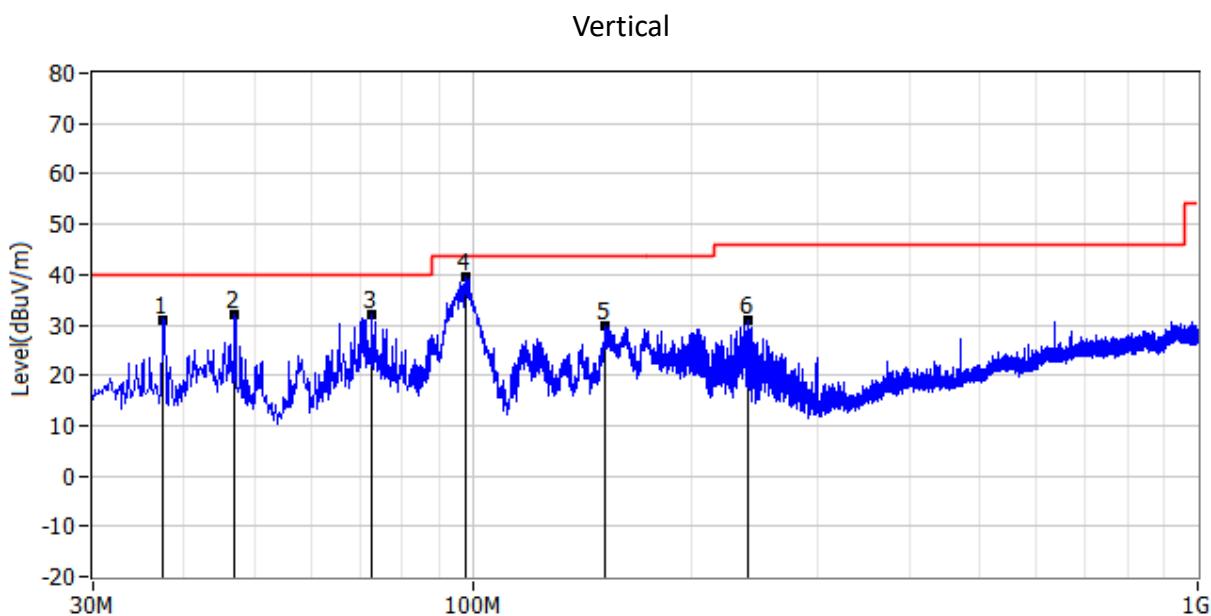
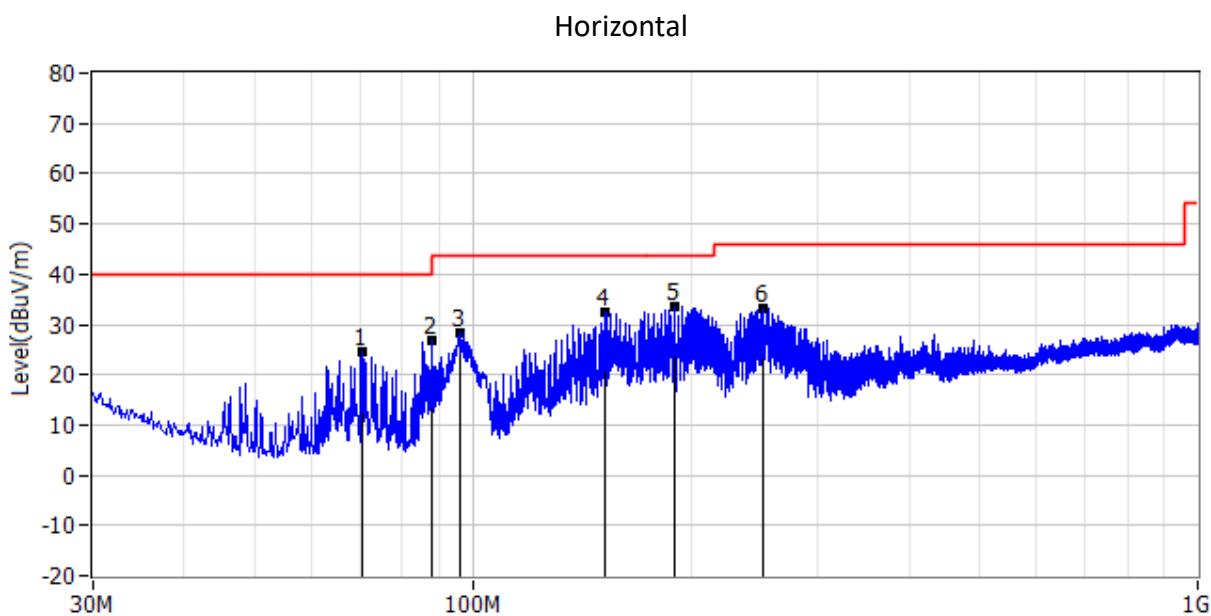


Test data below 30MHz:

Frequency	Limit (dBuV/m)	Corrected Reading (dBuV/m)	Margin (dB)	Reading (dBuV)	Factor (dB/m)	Detector	Polarity
537.000kHz	73.00	57.20	15.80	38.30	18.90	PK	X
712.500kHz	70.60	53.80	16.80	34.90	18.90	PK	X
838.500kHz	69.10	45.20	23.90	26.30	18.90	PK	X
9.110MHz	69.50	40.90	28.60	21.80	19.10	PK	X
505.500kHz	73.50	58.60	14.90	39.70	18.90	PK	Y
622.500kHz	71.70	53.60	18.10	34.70	18.90	PK	Y
793.500kHz	69.60	52.70	16.90	33.80	18.90	PK	Y
7.143MHz	69.50	36.60	32.90	17.50	19.10	PK	Y
514.500kHz	73.40	57.00	16.40	38.10	18.90	PK	Z
645.000kHz	71.40	56.50	14.90	37.60	18.90	PK	Z
807.000kHz	69.50	49.00	20.50	30.10	18.90	PK	Z
9.218MHz	69.50	38.20	31.30	19.10	19.10	PK	Z

Remark:

1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

TEST REPORT**Test Curve (30MHz to 1000MHz):**

TEST REPORT
Test data (30MHz to 1000MHz)

Frequency (MHz)	Limit (dBuV/m)	Corrected Reading (dBuV/m)	Margin (dB)	Original Reading (dBuV)	Correct Factor (dB/m)	Detector	Polar
70.376	40.00	24.60	15.40	15.80	8.80	PK	Hor
87.958	40.00	26.80	13.20	18.50	8.30	PK	Hor
96.081	43.50	28.50	15.00	19.10	9.40	PK	Hor
152.705	43.50	32.40	11.10	20.30	12.10	PK	Hor
189.565	43.50	33.60	9.90	21.50	12.10	PK	Hor
252.009	46.00	33.20	12.80	17.80	15.40	PK	Hor
37.518	40.00	31.10	8.90	18.10	13.00	PK	Ver
47.096	40.00	31.90	8.10	23.10	8.80	PK	Ver
72.801	40.00	32.20	7.80	23.40	8.80	PK	Ver
98.021	43.50	39.40	4.10	29.70	9.70	PK	Ver
152.705	43.50	29.80	13.70	17.70	12.10	PK	Ver
239.156	46.00	31.10	14.90	16.20	14.90	PK	Ver

Remark:

1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example:

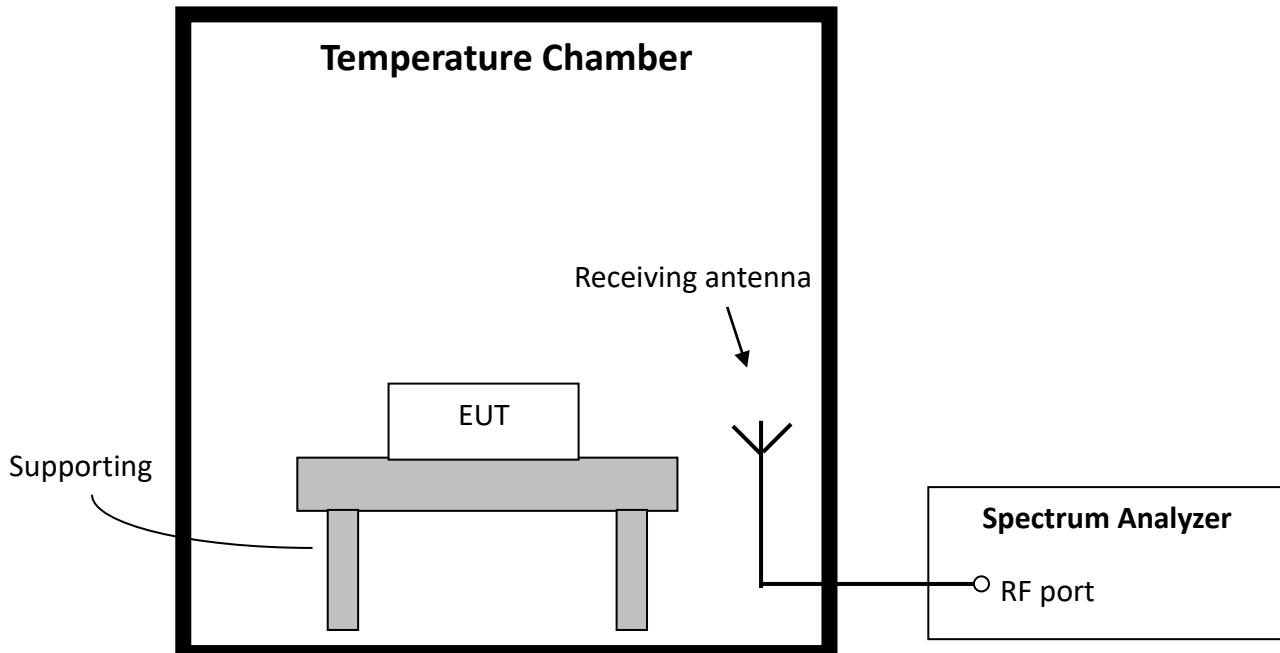
Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
 Limit = 40.00dBuV/m.
 Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20$ dB/m;
 Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;
 Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

TEST REPORT**5 Frequency Stability (Temperature Variation)**

Test result: **PASS**

5.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage.

5.2 Test Configuration

TEST REPORT**5.3 Test procedure and test setup**

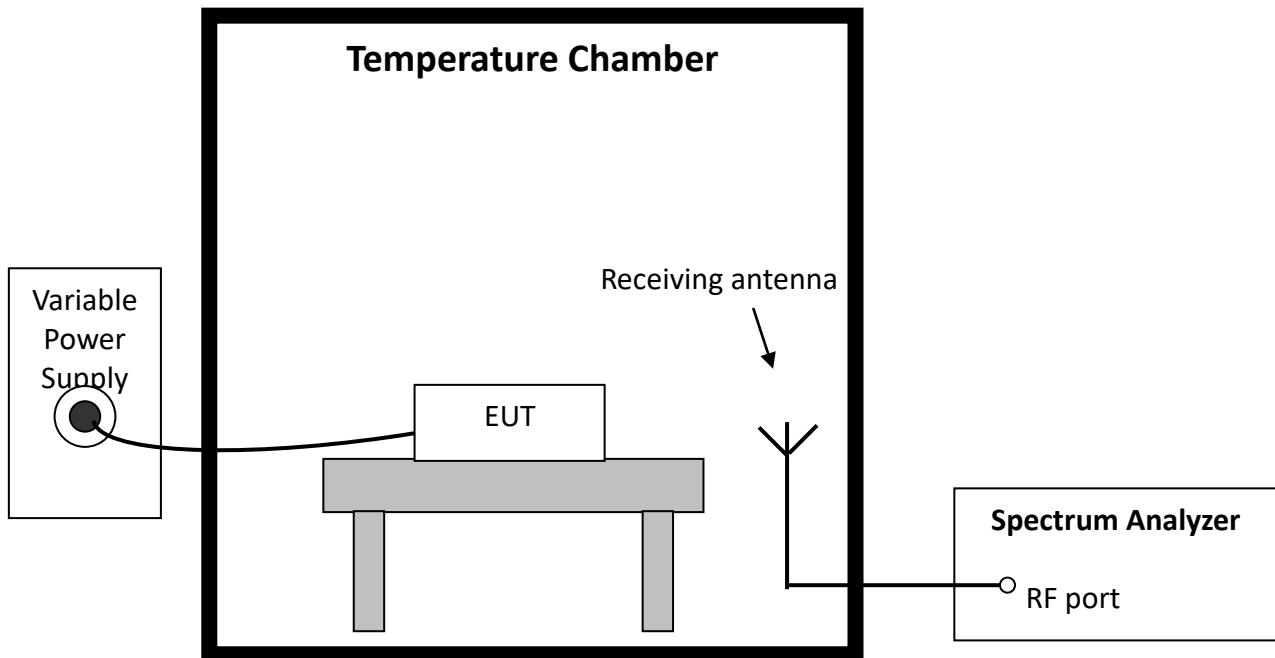
Test Procedure as per ANSI 63.10 clause 6.8.1.

5.4 Test protocol

Voltage (V)	Temp (°C)	Freq Measured (MHz)	Freq Nominal (MHz)	Tolerance (%)	Limit (%)
240	-20	13.5609	13.5600	0.0066	± 0.0100
	-10	13.5608		0.0058	
	0	13.5609		0.0066	
	10	13.5612		0.0088	
	20	13.5612		0.0088	
	30	13.5612		0.0088	
	40	13.5611		0.0081	
	50	13.5609		0.0066	

TEST REPORT**6 Frequency Stability (Voltage Variation)****Test result:** **PASS****6.1 Test limit**

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

6.2 Test Configuration**6.3 Test procedure and test setup**

Test Procedure as per ANSI 63.10 clause 6.8.2.

TEST REPORT**6.4 Test protocol**

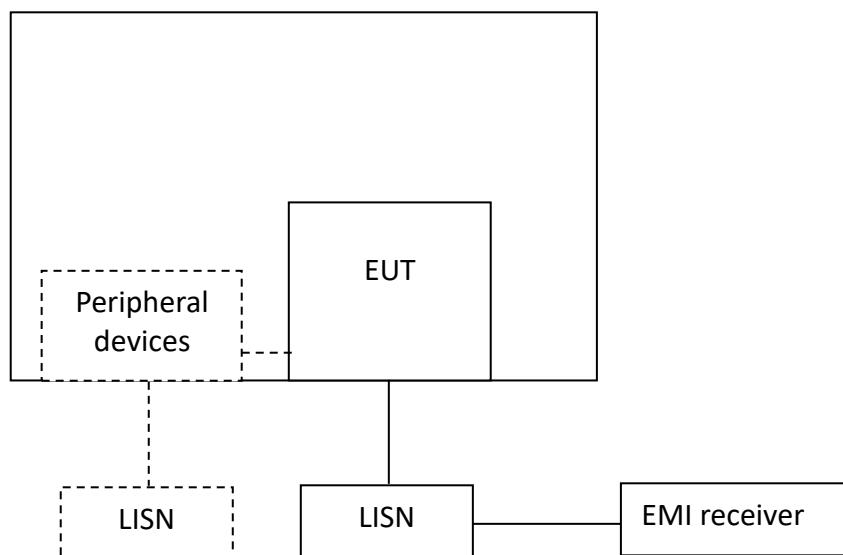
Temp (°C)	Voltage (V)	Freq Measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
20	204	13.5609	13.5600	0.0066	± 0.0100
	240	13.5610		0.0074	
	276	13.5610		0.0074	

TEST REPORT**7 Conducted emissions****Test result:** **PASS****7.1 Limit**

Frequency of Emission (MHz)	Conducted Emissions Limit (dB _u V)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

Note:

1. * Means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz
2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

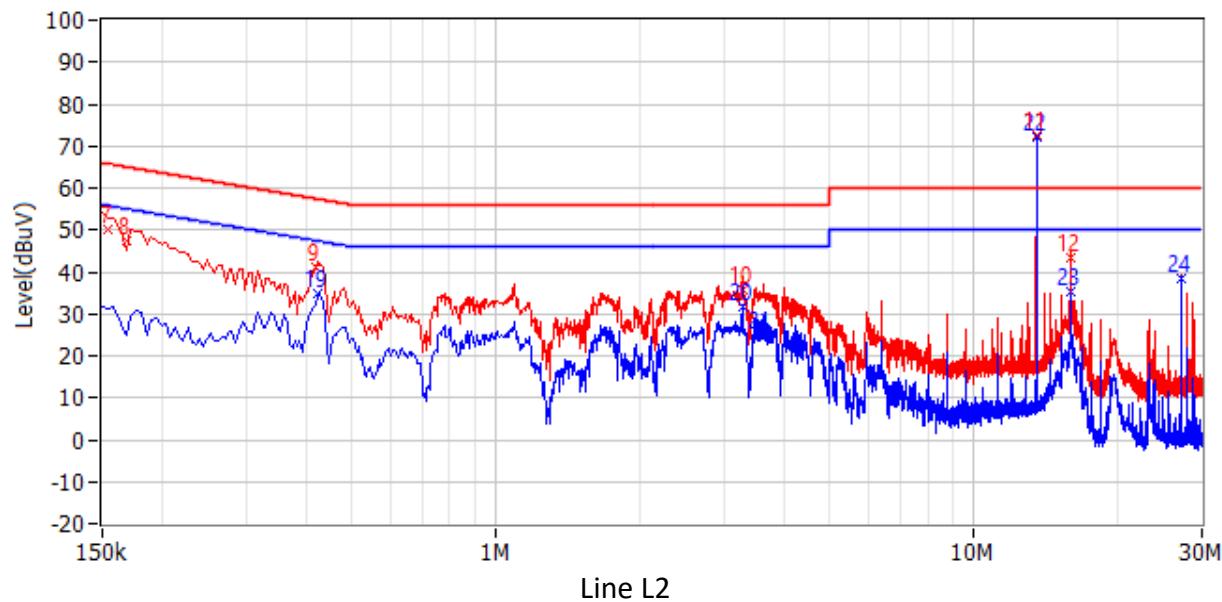
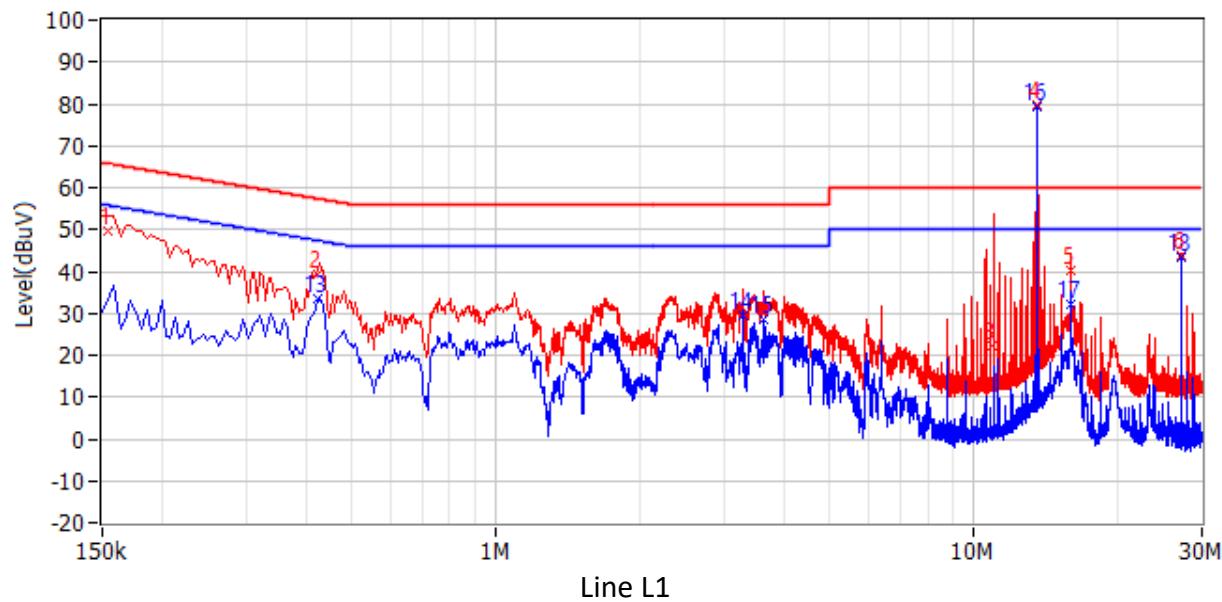
7.2 Test Configuration

TEST REPORT**7.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT**7.4 Test Results of Conducted Emissions****Test Curve:**

TEST REPORT

Frequency	Limit (dBuV)	Level (dBuV)	Delta (dB)	Original Receiver Reading (dBuV)	Correct Factor (dB)	Detector	Phase
154.500kHz	65.75	49.68	-16.07	43.48	6.20	QP	L1
424.500kHz	57.36	39.50	-17.86	33.30	6.20	QP	L1
10.964MHz	60.00	22.29	-37.71	15.59	6.70	QP	L1
13.560MHz	-	79.71	-	72.91	6.80	QP	L1
15.999MHz	60.00	40.37	-19.63	33.37	7.00	QP	L1
27.123MHz	60.00	43.76	-16.24	36.06	7.70	QP	L1
154.500kHz	65.75	50.18	-15.57	43.98	6.20	QP	L2
168.000kHz	65.06	47.32	-17.74	41.22	6.10	QP	L2
420.000kHz	57.45	41.18	-16.27	34.98	6.20	QP	L2
3.273MHz	56.00	35.77	-20.23	29.47	6.30	QP	L2
13.560MHz	-	72.48	-	65.68	6.80	QP	L2
15.999MHz	60.00	43.55	-16.45	36.55	7.00	QP	L2
424.500kHz	47.36	33.40	-13.96	27.20	6.20	CAV	L1
3.273MHz	46.00	29.46	-16.54	23.16	6.30	CAV	L1
3.633MHz	46.00	28.38	-17.62	22.08	6.30	CAV	L1
13.560MHz	-	79.35	-	72.55	6.80	CAV	L1
15.999MHz	50.00	32.01	-17.99	25.01	7.00	CAV	L1
27.123MHz	50.00	43.49	-6.51	35.79	7.70	CAV	L1
424.500kHz	47.36	34.82	-12.54	28.62	6.20	CAV	L2
3.273MHz	46.00	31.50	-14.50	25.20	6.30	CAV	L2
3.606MHz	46.00	24.80	-21.20	18.50	6.30	CAV	L2
13.560MHz	-	72.16	-	65.36	6.80	CAV	L2
15.999MHz	50.00	35.08	-14.92	28.08	7.00	CAV	L2
27.123MHz	50.00	38.56	-11.44	30.96	7.60	CAV	L2

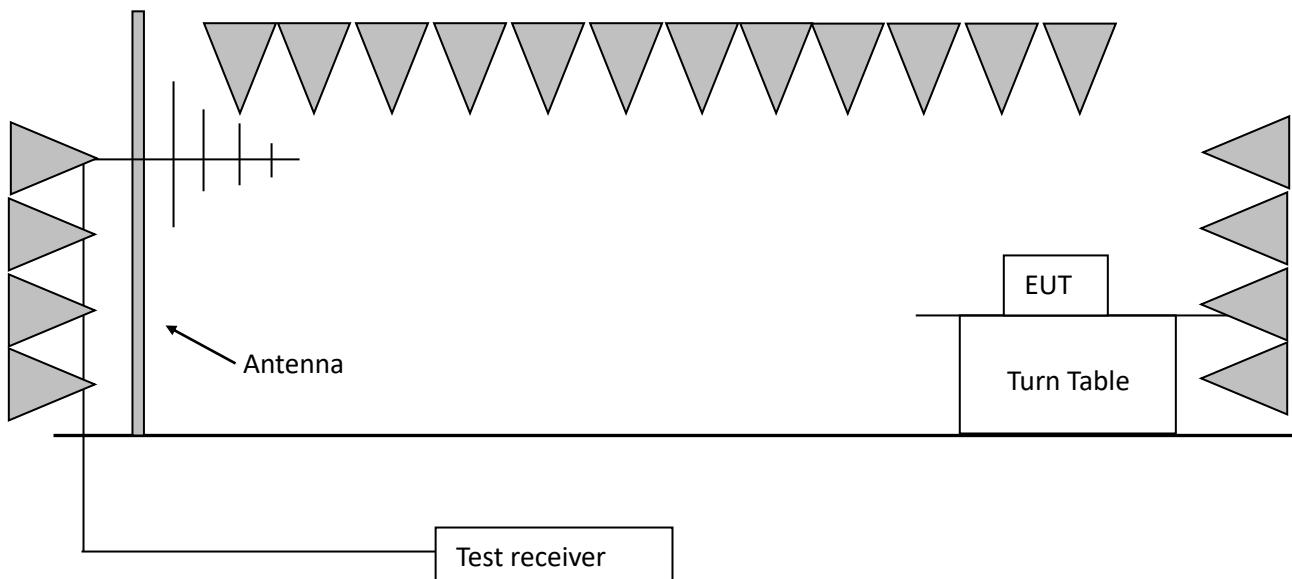
Note: The signal of 13.56MHz was caused by the RFID module. It is a wanted signal.

Remark:

1. *Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.*
2. *Level = Original Receiver Reading + Correct Factor*
3. *Delta = Level – Limit*
4. *If the PK Level is lower than AV limit, the AV test can be elided.*
5. *the emissions of 13.56MHz are the product's RF signal.*

TEST REPORT**8 20dB Bandwidth****Test result:** **PASS****8.1 Limit**

The 20dB bandwidth should be fallen in the allocated operating frequency range.
No limit for 99% bandwidth.

8.2 Test configuration

TEST REPORT**8.3 Test procedure and test set up**

The measurement was applied in a 3m semi-anechoic chamber.

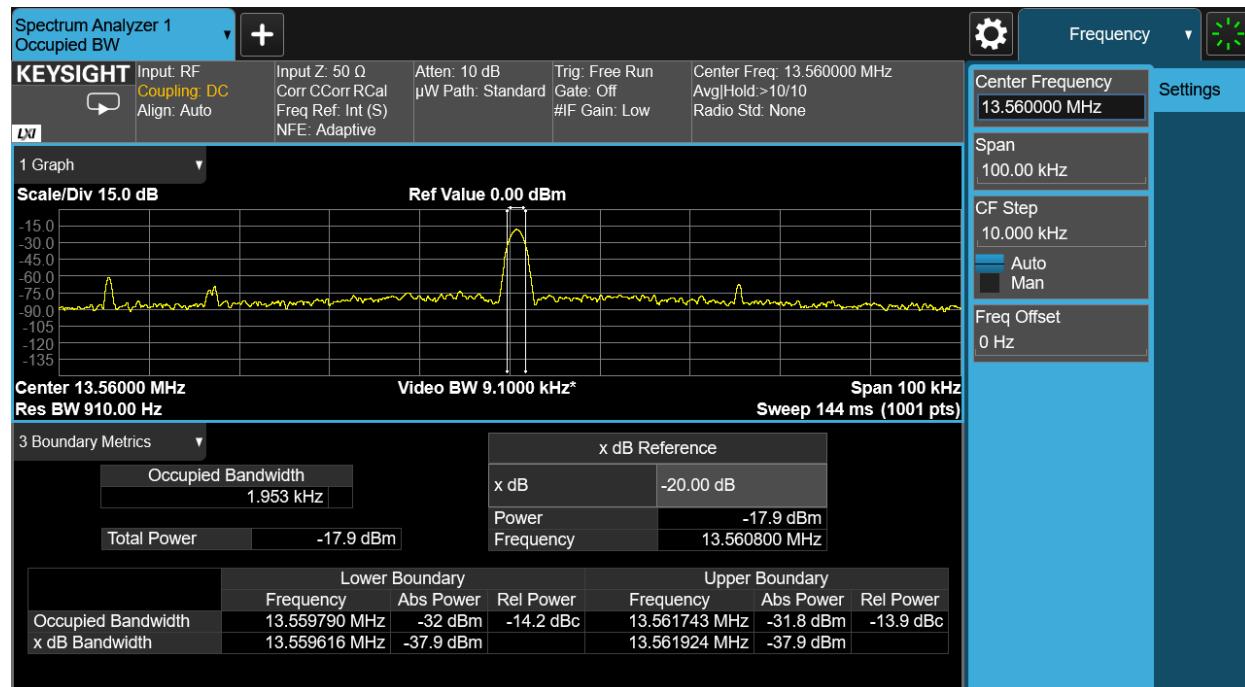
The center of the loop antenna shall be 1 m above the horizontal metal ground plane.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set RBW = 1 % to 5 % of the OBW
3. Set VBW $\geq 3 \cdot$ RBW
4. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
5. Use the 99 % power bandwidth function of the instrument (if available).
6. the 20dB bandwidth is also measured with the same setting.

TEST REPORT
8.4 Test protocol

	Lower point (MHz)	Higher point (MHz)	Bandwidth (kHz)	Allocated bandwidth (MHz)
20dB Bandwidth	13.559616	13.561924	2.308	13.553 ~ 13.567
Occupied bandwidth	13.559790	13.561743	1.953	13.553 ~ 13.567



TEST REPORT

9 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****