

产品规格承认书

SPECIFICATIONS

客户:

CUSTOMER: _____

产品名称:

DESCRIPTION: _____ Bipolar antenna

客户型号:

CUSTOMER PART No: _____

产品型号:

OUR MODEL NO: _____ PBX2012MA07

日期:

DATE: _____

确认签字, 盖章后请返回承认书一份

PLEASE RETRUV TO US ONE COPY OF "SPECIFICATION FOR APPROVAL"

WITY YOUR APPROVED SIGNATURES

核准		审核	刘飞	制作	刘小美

客户确认签章(APPROVED SIGNATURE)			

PBX2012MA07 Specification


Operating Temp. : -40°C~+85°C

1. FEATURES:


- Light weight, compact
- Wide bandwidth, low cost
- Built-in antenna with high gain

2. APPLICATIONS:

- Bluetooth, Wireless LAN, Mobile TV
- Home RF system, etc

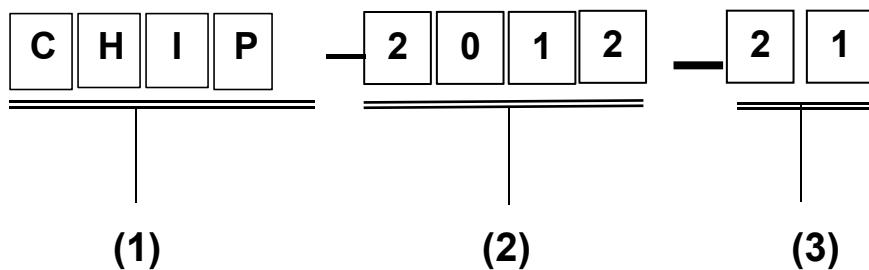3. PRODUCT IDENTIFICATION


(1) Product type: Multilayer chip Antenna
 (2) External Dimensions (L×W) (mm): 2.0*1.2

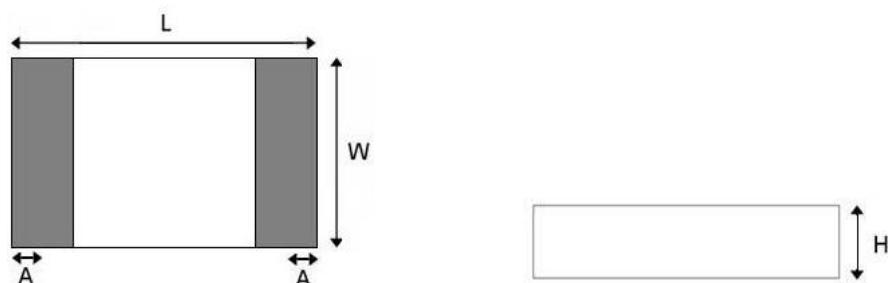4. SHAPE AND DIMENSIONS:**SHAPE AND DIMENSIONS**


L	W	H	A
2.0±0.3	1.2±0.3	0.55±0.2	0.4±0.25

UNLESS OTHER SPECIFIED TOLERANCES ON: X=± X.X=± X.XX=± ANGLES =± HOLES DIA =±		 深圳市朋伴兴业科技有限公司 <small>PENG BAN XING</small>		
SCALE: N/A	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION		
DRAWN BY : Sera	CHECKED BY: XD			
DESIGNED BY: Sera	APPROVED BY: XD			
TITLE: CHIP2450-21 Specification		DOCUMENT NO.	2012	SPEC REV.
				P1


TERINAL-CONFIGURATION



EVALUATION BOARD

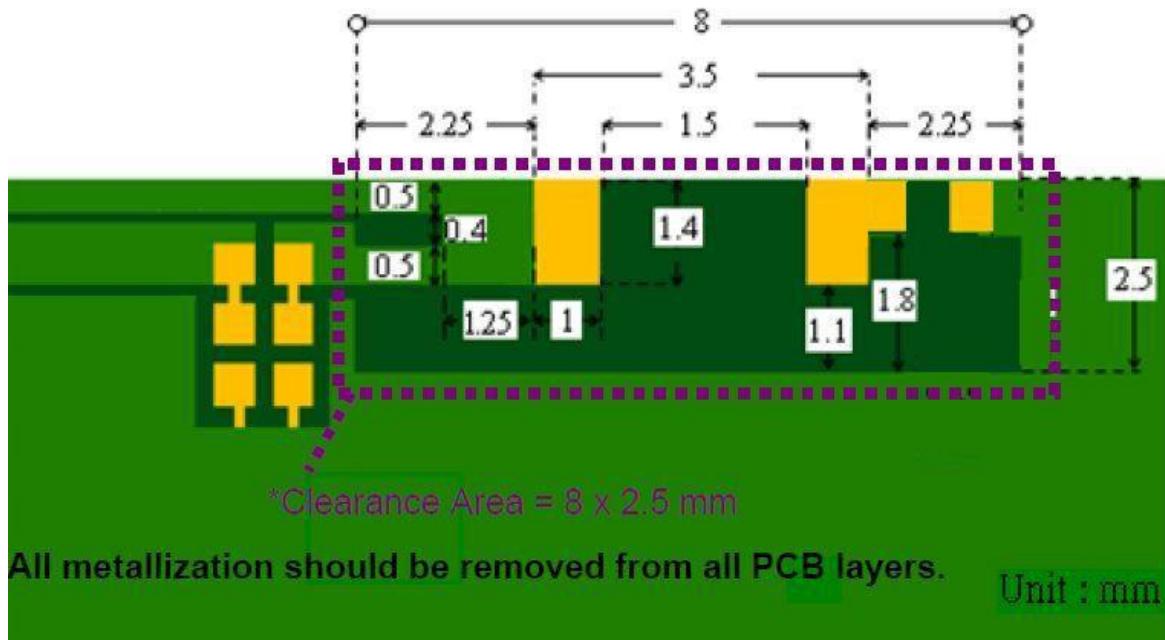

APPLICATION GUIDE

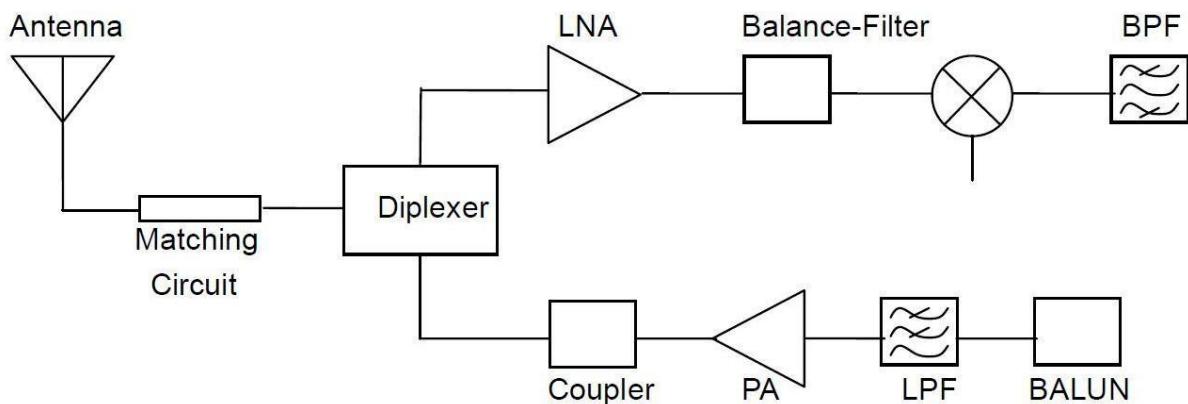

UNLESS OTHER SPECIFIED TOLERANCES ON:
 $X = \pm$ $X.X = \pm$ $X.XX = \pm$
ANGLES = \pm **HOLE DIA** = \pm



深圳市朋伴兴业科技有限公司

SCALE: N/A	UNIT: mm
DRAWN BY: Sera	CHECKED BY: XD
DESIGNED BY: Sera	APPROVED BY: XD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: CHIP2450-21 Specification

DOCUMENT NO.

2012

SPEC REV.

P1

5. SPECIFICATIONS:


ITEM	SPECIFICATION
Frequency Band	2400MHz~2483MHz
VSWR	Less than 3
Polarization	Linear
*Peak Gain	2.48 dBi Typ.
*Peak Efficiency	72.6% Typ.
Impedance	50 Ω Typ.

* Test condition: Test board size 98*65 mm

Matching circuit: Pi matching circuit will be required

6. Electrical Characteristics :

VSWR

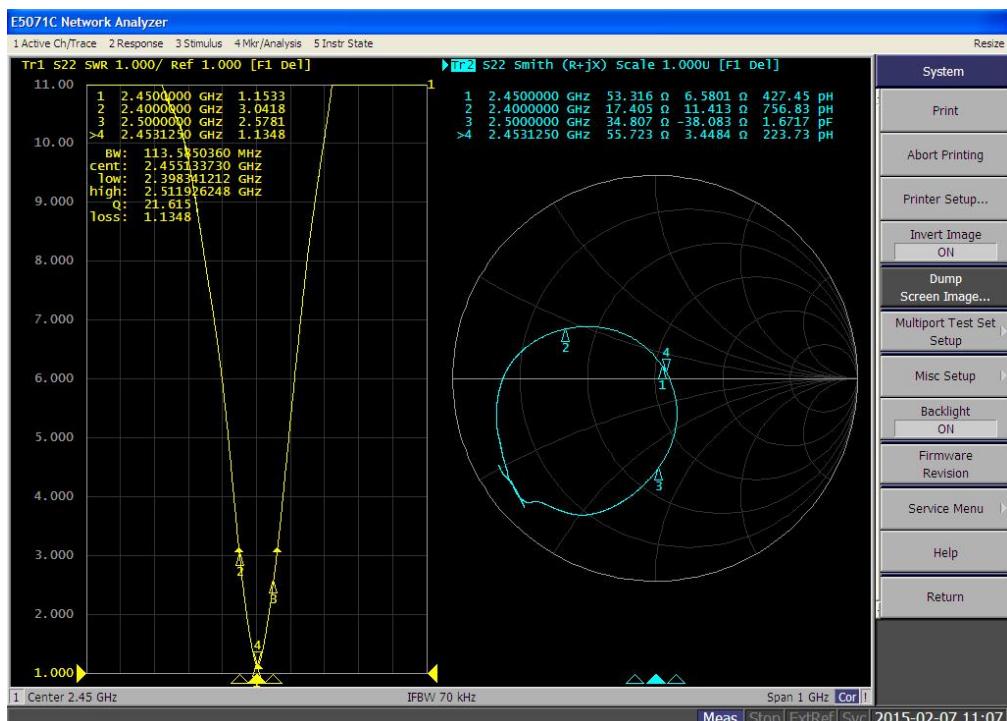

Mark	Frequency	Antenna gain
1	2400 MHz	-1.04
2	2450 MHz	-1.58
3	2500 MHz	-2.06

UNLESS OTHER SPECIFIED TOLERANCES ON:

$X = \pm$ $X.X = \pm$ $X.XX = \pm$

$\text{ANGLES} = \pm$ $\text{HOLES} = \pm$ $\text{DIA} = \pm$

SCALE: N/A

DRAWN BY: Sera

DESIGNED BY: Sera



深圳市朋伴兴业科技有限公司

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: CHIP2450-21 Specification


DOCUMENT NO.

2012


SPEC REV.
P1

Radiation Pattern


The Gain pattern is measured in INPAQ's FAR-field chamber. DUT is placed on the table of rotator, a standard horn antenna and Vector Network Analyzer is used to collect data.

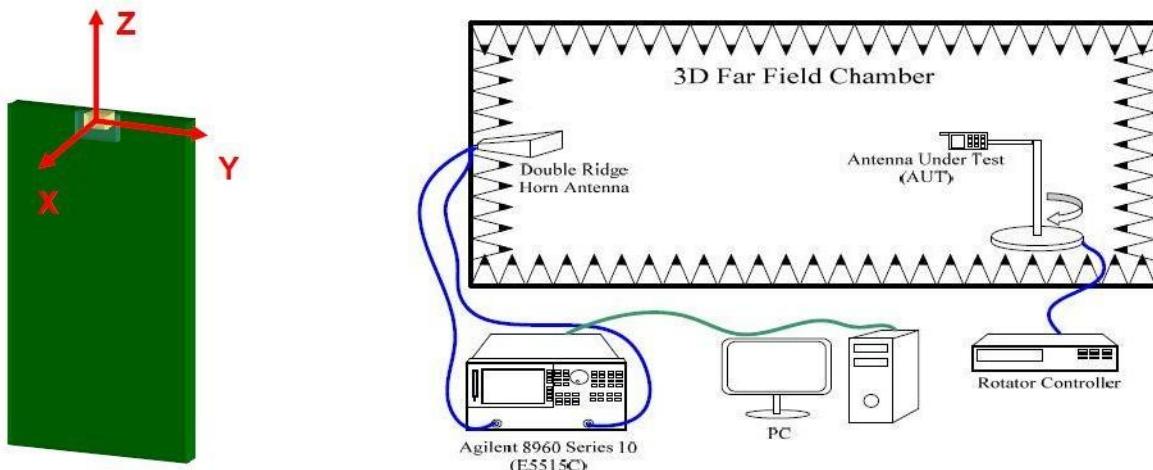

◎ 3D Gain Pattern (2400 MHz)

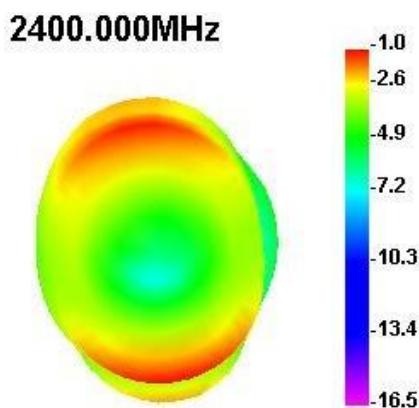

◎ 2D Gain Pattern (2400 MHz)

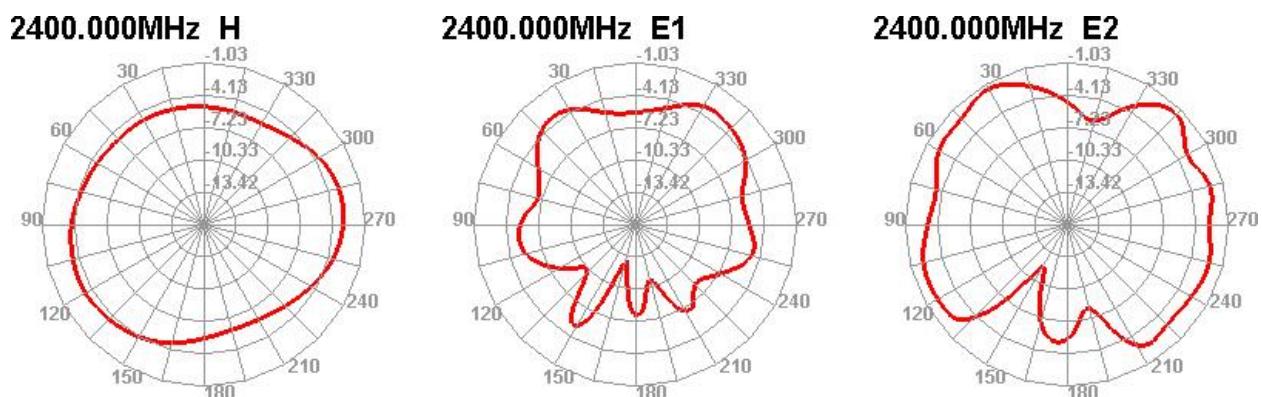

UNLESS OTHER SPECIFIED TOLERANCES ON:

$X = \pm$ $X.X = \pm$ $X.XX = \pm$
ANGLES $= \pm$ **HOLE DIA** $= \pm$



深圳市朋伴兴业科技有限公司

SCALE: N/A

UNIT: mm

DRAWN BY: Sera

CHECKED BY: XD

DESIGNED BY: Sera

APPROVED BY: XD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: CHIP2450-21 Specification

DOCUMENT NO.

2012

SPEC REV.

P1