

东莞市高畅电子科技有限公司

Guangzhou Gaochang Electronic Technology
Co., Ltd.

产品规格书 Product

客 户: specification

CUSTOMER:

客户案号: _____

CUSTOMER P/N:

本厂编号: _____

GC2.4GD3W-L350MM

OUR MODEL NO:

品名 / 规格: _____

2.4G External small blade antenna

SPECIFICATIONS:

样 品 数: _____

0

Q' TY:

日 期: _____


2025-4-21

Room 2002, Unit 8, 20th Floor, China Travel Commercial City, No. 219, Zhongshan 5th Road, Yuexiu District, Guangzhou

1. Technical Specification 技术规格

| A. Electrical Characteristics | |
|-------------------------------|-----------------------|
| Working Frequency Range | 2400~2500MHz |
| S.W.R. | 2400~2500MHz:<2.0 |
| Antenna Gain(avg.) | 2400~2500MHz: 2.35dBi |
| Impedance | 50ohm |
| B. Material | |
| brass | |
| C. Environmental | |
| Operation Temperature | -45°C~+85°C |
| Storage Temperature | -45°C~+85°C |

2. Matching Circuits 匹配电路

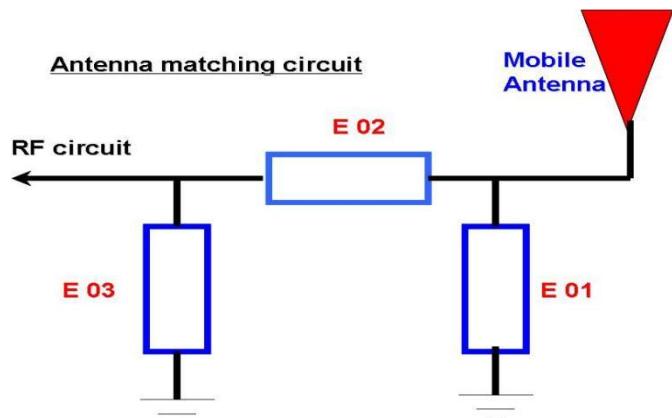

| Element | Value | Vender |
|----------|-------|--------|
| E1(0402) | OPEN | / |
| E2(0402) | SHORT | 50 Ω |
| E3(0402) | OPEN | / |

Note: Matching has not changed.

3. Curing antenna S11 Testing Result. 无源测试

The S11 parameter was performed using a Agilent 8753D Network Analyzer and BEST'S test fixture that was using customer-providing device.

VSWR (Voltage standing wave ratio)

The Voltage Standing Wave Ratio (VSWR) is an indication of how good the impedance match is. VSWR is often abbreviated as SWR. If the transmission line and the antenna are not matched, the antenna will not accept all the power from the transmission line. The part it does not accept is reflected back and forth between the transmitter and the antenna. This sets up a fixed wave pattern along the line which we can measure and which is called the voltage standing wave ratio(VSWR).The VSWR (ratio of maximum voltage to the minimum voltage along the line)expresses the degree of match between the transmission line and the antenna. When the VSWR is 1 to 1(1:1) the match is perfect and all the energy is transferred to the antenna prior to be radiated. When the VSWR is 1.5:1, 96% of the power reaches the antenna. By definition VSWR can never be less than 1.VSWR and reflected power are different ways of measuring and expressing the same thing. A high VSWR is indication that the signal is reflected prior to being radiated by the antenna.


驻波 VSWR




| Marker | 2400MHz | 2450MHz | 2500MHz |
|--------|---------|---------|---------|
| S.W.R | <2.0 | | |

4.测试 3D 报告


Frequency: 2400MHZ Gain: 2.01dbi

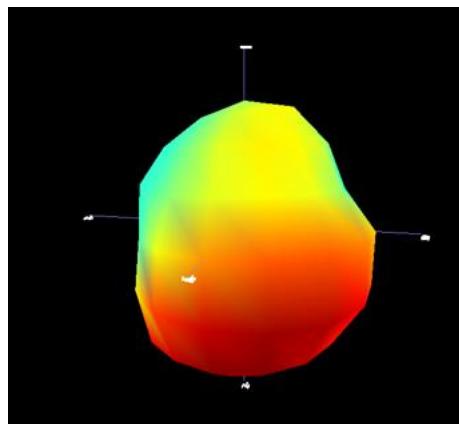


Frequency: 2450MHZ Gain:1.89dbi

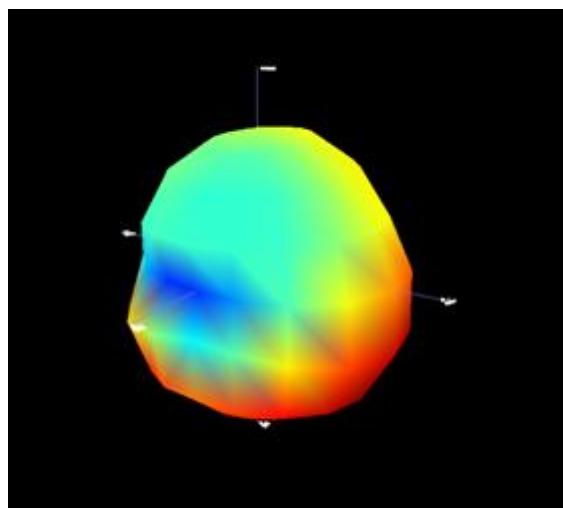

Frequency: 2500MHZ Gain:2.35dbi

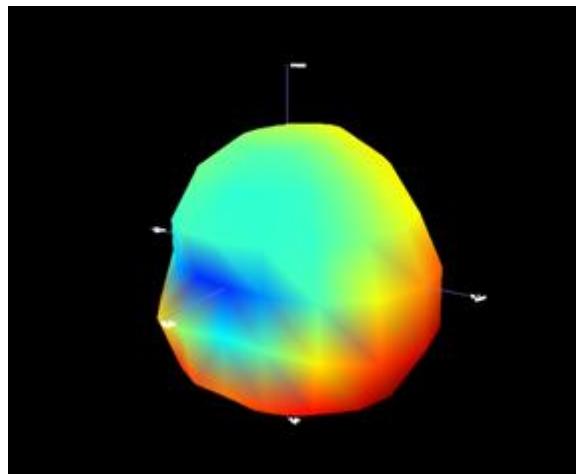

5. 产品外观图

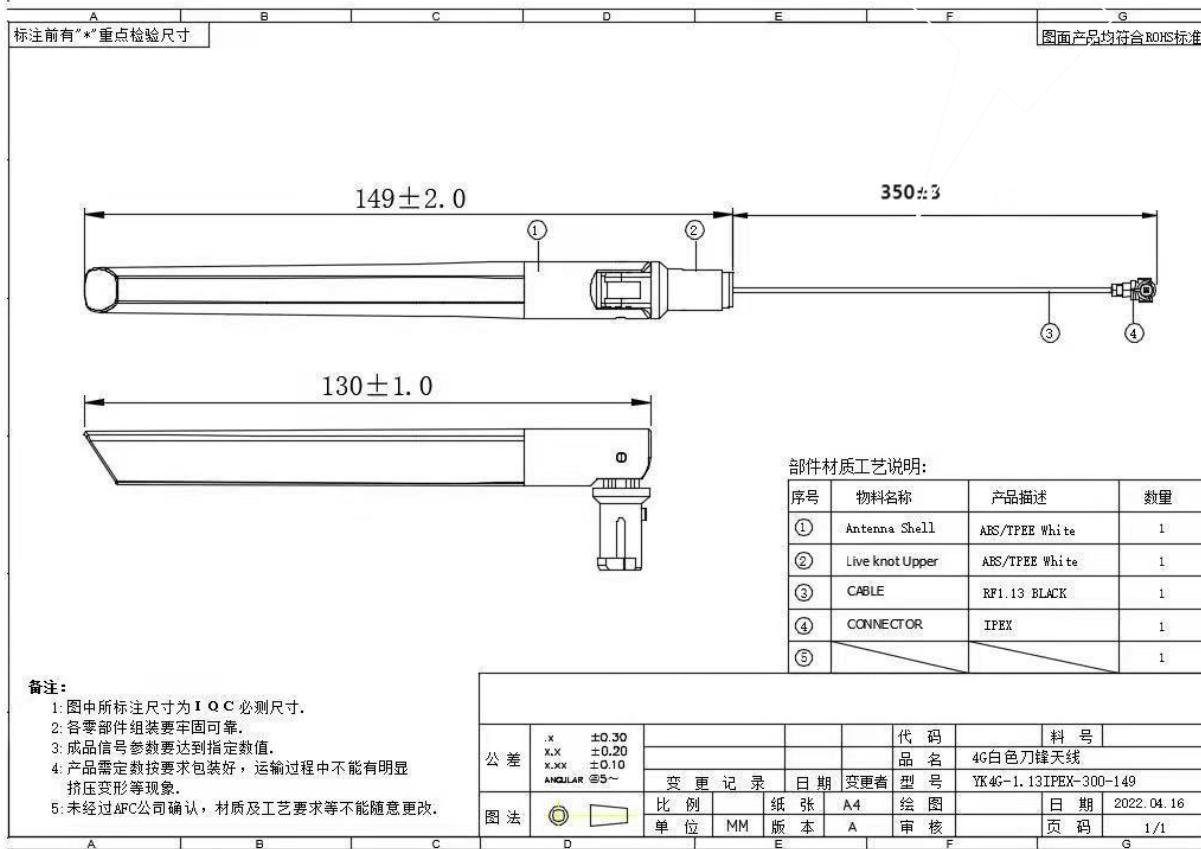

产品实物出线长 350MM

一盐雾测试

测试目的: 测试天线抗盐雾腐蚀能力

试验方法:

溶液含量: 5%氯化钠溶液 (用蒸馏水配制, 95毫升蒸馏水+5克氯化钠)

将天线放入盐雾试验箱内, 用绳子悬挂起来, 以免溶液喷洒不均或有得表面喷不到。

天线需立即放入测试箱。实验周期为 48 个小时。实验过程中, 不得中途取出。

实验结束后, 取出天线, 用棉布和离子风枪清洁, 放置 49 小时进行常温干燥后, 对天线外观, 机械性能, 及电性能检查。

| | | | | | | | |
|---|--|------|----------|-----------|--|--|--|
| 试 验 报 告 | | 承认 | 确认 代工 | 试验人 杨工 | | | |
| 试验内容及天线型号:2.4G 外置天线 | | | | | | | |
| 试验目的:测试天线在盐雾环境下, 天线的天线外观, 机械性能, 及电性能变化。 | | | | | | | |
| 测试数量: 5pcs | | | | | | | |
| 试验前 | | | | | | | |
| 项目 NO. | | 外观 | 机械性能及电性能 | | | | |
| 1# | | 符合要求 | 符合要求 | | | | |
| 2# | | 符合要求 | 符合要求 | | | | |
| 3# | | 符合要求 | 符合要求 | | | | |
| 4# | | 符合要求 | 符合要求 | | | | |
| 5# | | 符合要求 | 符合要求 | | | | |
| 试验后 | | | | | | | |
| 项目 NO. | | | | | | | |
| 1# | | 符合要求 | 符合要求 | | | | |
| 2# | | 符合要求 | 符合要求 | | | | |
| 3# | | 符合要求 | 符合要求 | | | | |
| 4# | | 符合要求 | 符合要求 | | | | |
| 5# | | 符合要求 | 符合要求 | | | | |
| 结果判定:盐雾测试结束, 外观 ok, 天线与主板接触良好, (万用表测试导通), 机械性能没有改变。信号测试, 驻波在±0.3 范围变化, 符合测试允许要求范围。。综上所述, 2.4G 外置天线符合盐雾测试要求。 | | | | | | | |