



ZHONGHAN

Project No.: ZHT-250530133W01

Page 1 of 86

FCC TEST REPORT

FCC ID:2BLGG-EMCG-2401

Report No..... : ZHT-250530133W01

Product..... : MASSAGE CHAIR

Trademark..... : /

Model(s)..... : CGM EMCG-2401
CGM EMCG-2402, CGM EMCG-2503, CGM EMCG-2504,
CGM EMCG-2505

Model Difference..... : For detailed information, please refer to Chapter 3.1

Applicant..... : Shandong Kangtai Intelligent Technology Co., Ltd.

Address..... : No.98, East Chushan Road, Zhaoyuan City, Shandong, China 265400

Manufacturer..... : Shandong Kangtai Intelligent Technology Co., Ltd.

Address..... : No.98, East Chushan Road, Zhaoyuan City, Shandong, China 265400

Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou,
Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt..... : June 1, 2025

Date of Test(s)..... : June 1, 2025 to June 6, 2025

Date of Issue..... : June 6, 2025

Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Test procedure..... : KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2013

In the configuration tested, the EUT complied with the standards specified above.

Prepared by

Leon Li

Leon Li/ Engineer

Reviewed by:

Baret Wu

Baret Wu/ Director

Approved by:

Levi Lee

Levi Lee/ Manager

Note: This device described above has been tested by ZHT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.

Table of Contents

	Page
1. VERSION	4
2. TEST SUMMARY	5
3. GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 Test Setup Configuration	7
3.3 Support Equipment	8
3.4 Test Mode	8
4. TEST FACILITY AND TEST INSTRUMENT USED	9
4.1 TEST FACILITY	9
4.2 INSTRUMENT LIST FOR ALL TEST ITEMS	9
4.3 Testing software	11
4.4 MEASUREMENT UNCERTAINTY	11
5. EMC EMISSION TEST	12
5.1 Conducted emissions	12
5.2 Radiated emissions	24
6. RADIATED BAND EMISSION MEASUREMENT	39
6.1 Test Requirement:	39
6.2 TEST PROCEDURE	39
6.3 DEVIATION FROM TEST STANDARD	40
6.4 TEST SETUP	40
6.5 EUT OPERATING CONDITIONS	40
6.6 TEST RESULT	41
7. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	42
7.1 Limit	42
7.2 Test Setup	42
7.3 Test procedure	42
7.4 DEVIATION FROM STANDARD	42
7.5 Test Result	43
8. 20DB&99% BANDWIDTH	60
8.1 Test Setup	60
8.2 Limit	60
8.3 Test procedure	60
8.4 DEVIATION FROM STANDARD	60
8.5 Test Result	60
9. MAXIMUM PEAK OUTPUT POWER	67
9.1 Block Diagram Of Test Setup	67
9.2 Limit	67
9.3 Test procedure	67
9.4 DEVIATION FROM STANDARD	67
9.5 Test Result	67
10. HOPPING CHANNEL SEPARATION	71
10.1 Test Setup	71
10.2 Test procedure	71
10.3 DEVIATION FROM STANDARD	71
10.4 Test Result	71
11. NUMBER OF HOPPING FREQUENCY	75
11.1 Test Setup	75
11.2 Test procedure	75
11.3 DEVIATION FROM STANDARD	75
11.4 Test Result	75



ZHONGHAN

Project No.: ZHT-250530133W01

Page 3 of 86

12. DWELL TIME	77
12.1 Test Setup	77
12.2 Test procedure	77
12.3 DEVIATION FROM STANDARD	77
12.4 Test Result	78
13. ANTENNA REQUIREMENT	85
14. TEST SETUP PHOTO	86
15. EUT CONSTRUCTIONAL DETAILS	86



ZHONGHAN

Project No.: ZHT-250530133W01

Page 4 of 86

1. VERSION

Report No.	Version	Description	Approved
ZHT-250530133W01	Rev.01	Initial issue of report	June 6, 2025



ZHONGHAN

2. TEST SUMMARY

Project No.: ZHT-250530133W01

Page 5 of 86

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (b)(4)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth 99% OCB	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission and Restricted Band	PASS	
15.247(d)	Conducted Unwanted emissions and Band Edge	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	MASSAGE CHAIR
Test Model No.:	CGM EMCG-2401 CGM EMCG-2402, CGM EMCG-2503, CGM EMCG-2504, CGM EMCG-2505
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	79
Channel separation:	2402MHz-2480MHz
Modulation technology:	GFSK, π/4DQPSK
Antenna Type:	PCB Antenna
Antenna gain:	-1.39dBi
Power supply:	Input: AC100-240V, 50/60Hz
Model Difference:	CGM EMCG-2401 and CGM EMCG-2402 Standard electrical hardware differences CGM EMCG-2402 Standard massage chair has some Electronic control hardware reduce on the basis of CGM EMCG-2401 massage chair, the details as below: 1. Remove the Leg Massager Device, so need to remove an Air pump and Two groups of Electric Valves and the Leg Massager Detection Board, and also need to remove the related Electronic Components on Main PCB and the related Wiring harness 2. Remove the Abdomen Massager, so need to remove related Electronic Components on Main PCB and the related Wiring harness 3. Remove the USB Charging function, so need to remove the Charging board and TYPE_C charging board, and remove the related Electronic Components on Main PCB and the related Wiring harness 4. Model CGM EMCG-2503 was the same as model CGM EMCG-2401 except for vibration motor of abdominal vibration projector 5. Model CGM EMCG-2504 was the same as model CGM EMCG-2401 except for thermal cut-out and vibration motor of abdominal vibration projector 6. Model CGM EMCG-2505 was the same as model CGM EMCG-2402 except for thermal cut-out.
Remark:	The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Guangdong Zhonghan Testing Technology Co., Ltd. does not assume any responsibility.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

3.2 Test Setup Configuration

Conducted Emission



Radiated Emission





ZHONGHAN

3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) The test software is the EngineerMode-Connectivity-Bluetooth which can set the EUT into the individual test modes.TX Power:17

3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	



ZHONGHAN

Project No.: ZHT-250530133W01

Page 9 of 86

4. TEST FACILITY AND TEST INSTRUMENT USED

4.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.

Add.: Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number:255941

Designation Number: CN0325

IC Registered No.: 29832

CAB identifier: CN0143

4.2 INSTRUMENT LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
2	Loop Antenna	TESEQ	HLA6121	58357	Oct. 11, 2024	Oct. 10, 2025
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	May 6, 2025	May 5, 2026
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	May 7, 2025	May 6, 2026
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	May 15, 2025	May 14, 2026
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	May 15, 2025	May 14, 2026
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	Oct. 21, 2024	Oct. 20, 2025
8	Amplifier	AEROFLEX	100KHz-40GHz	097	Oct. 21, 2024	Oct. 20, 2025
9	Spectrum Analyzer	R&S	FSV40	101413	Oct. 21, 2024	Oct. 20, 2025
10	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
11	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	May 7, 2025	May 6, 2026
12	Single Generator	Agilent	N5182A	MY48180575	May 7, 2025	May 6, 2026
13	Power Sensor	MWRFtest	MW100-RFCB	/	May 7, 2025	May 6, 2026
14	Power Amplifier Shielding Room	EMToni	2m3m3m	/	Nov. 25, 2021	Nov. 24, 2026
15	CABLE	EMToni	DA800-NM-NM-11000MM	/	May 6, 2025	May 5, 2026



ZHONGHAN

Project No.: ZHT-250530133W01

Page 10 of 86

Conduction Test equipment

Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
LISN	R&S	ENV216	102794	May 6, 2025	May 5, 2026
ISN CAT 6	Schwarzbeck	NTFM 8158	00318	May 7, 2025	May 6, 2026
ISN CAT 5	Schwarzbeck	CAT5 8158	00343	May 7, 2025	May 6, 2026
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	00101	May 8, 2025	May 7, 2026
Current Transformer Clamp	Schwarzbeck	SW 9605	SW9605 #209	May 8, 2025	May 7, 2026
CABLE	EMToni	G223-NM-BNCM -2000MM	/	May 7, 2025	May 6, 2026

Conducted Test Instrument

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	R&S	FSV40	101413	Oct. 21, 2024	Oct. 20, 2025
2	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
3	Power Sensor	MWRFtest	MW100-RFCB	/	May 7, 2025	May 6, 2026



ZHONGHAN

4.3 Testing software

Project No.: ZHT-250530133W01

Page 11 of 86

Project	Software name	Edition
RF Conducted	MTS 8310	2.0.0.0
Conducted Emission	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission	EZ-EMC	FA-03A2 RE+

4.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF conducted power	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All radiated emissions (9k-30MHz)	$\pm 4.68\text{dB}$
5	All radiated emissions (<1G)	$\pm 4.68\text{dB}$
6	All radiated emissions (>1G)	$\pm 4.89\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$
9	Occupied Bandwidth	$\pm 4.96\%$

Decision Rule

- Uncertainty is not included
- Uncertainty is included



ZHONGHAN

Project No.: ZHT-250530133W01

Page 12 of 86

5. EMC EMISSION TEST

5.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

5.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


5.1.2 TEST PROCEDURE

- a. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.1.3 DEVIATION FROM TEST STANDARD

No deviation

5.1.4 TEST SETUP

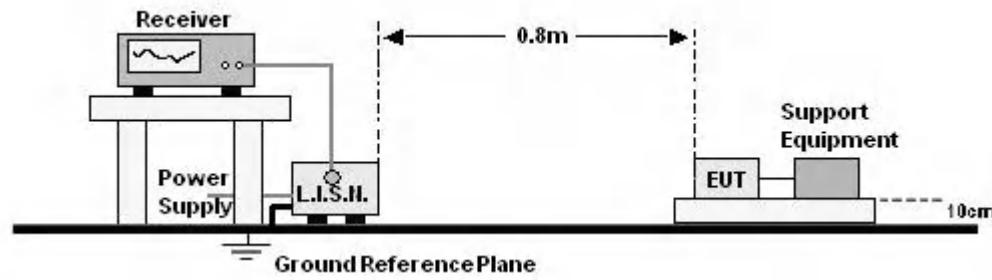


5.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

5.1.6 Test result

Temperature:	24.6°C	Relative Humidity :	52.2%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz	Test Model:	CGM EMCG-2401

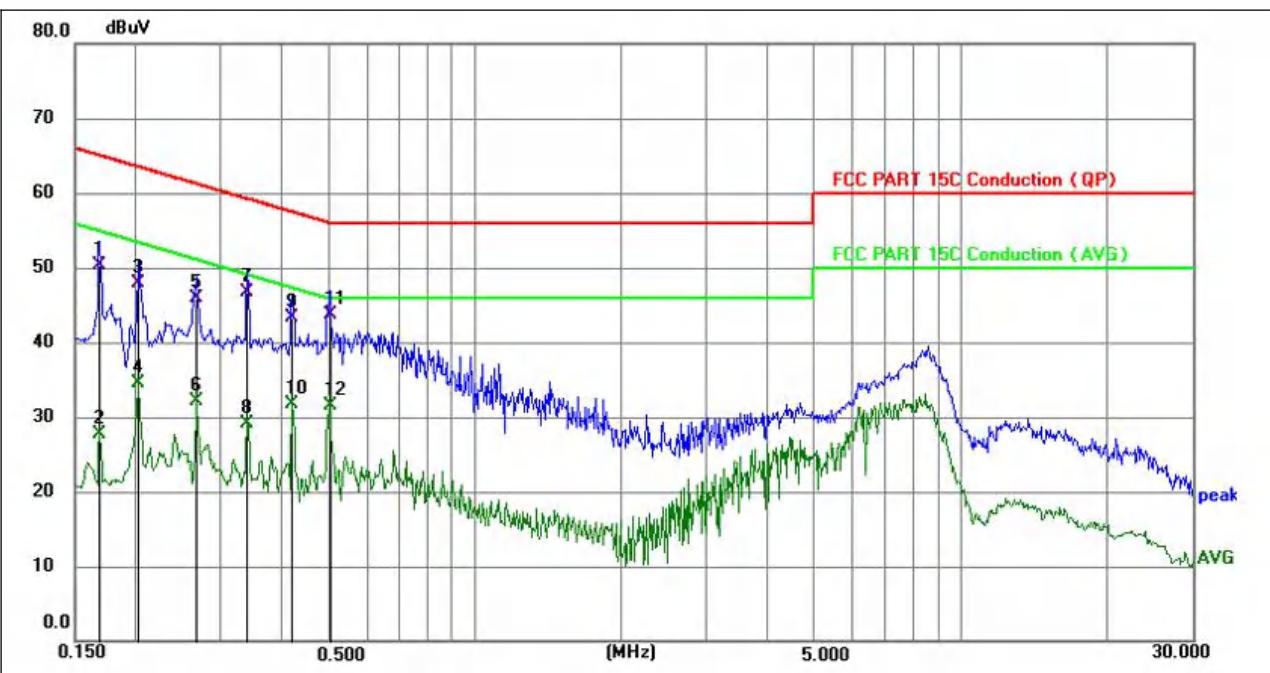


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1680	40.33	9.90	50.23	65.06	-14.83	QP	P	
2	0.1680	17.89	9.90	27.79	55.06	-27.27	AVG	P	
3	0.2028	37.90	9.91	47.81	63.50	-15.69	QP	P	
4	0.2028	24.51	9.91	34.42	53.50	-19.08	AVG	P	
5	0.2670	36.01	9.94	45.95	61.21	-15.26	QP	P	
6	0.2670	22.13	9.94	32.07	51.21	-19.14	AVG	P	
7	0.3390	36.83	9.96	46.79	59.23	-12.44	QP	P	
8	0.3390	19.24	9.96	29.20	49.23	-20.03	AVG	P	
9	0.4192	33.39	9.99	43.38	57.46	-14.08	QP	P	
10	0.4192	21.81	9.99	31.80	47.46	-15.66	AVG	P	
11 *	0.5010	33.74	10.02	43.76	56.00	-12.24	QP	P	
12	0.5010	21.46	10.02	31.48	46.00	-14.52	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case GFSK mode(Middle Channel:2441MHz).

Temperature:	24.6°C	Relative Humidity :	52.2%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz	Test Model:	CGM EMCG-2401

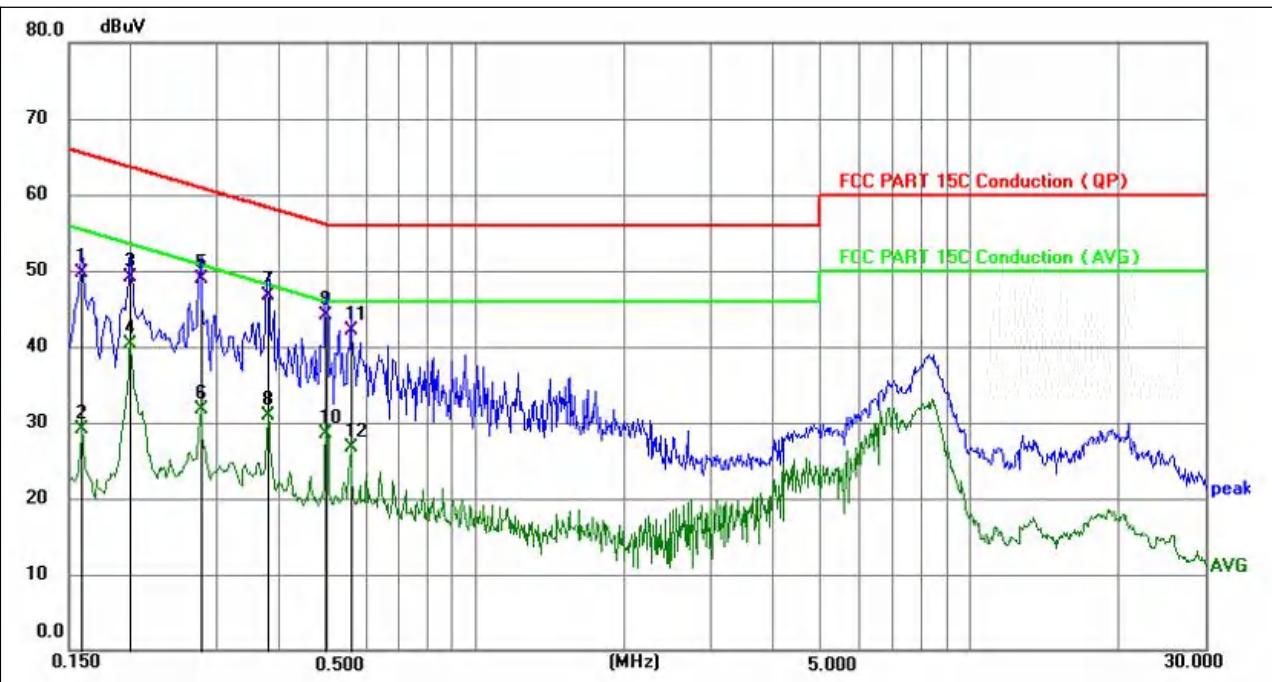


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1590	39.83	9.89	49.72	65.52	-15.80	QP	P	
2	0.1590	19.22	9.89	29.11	55.52	-26.41	AVG	P	
3	0.1995	39.18	9.91	49.09	63.63	-14.54	QP	P	
4	0.1995	30.42	9.91	40.33	53.63	-13.30	AVG	P	
5	0.2760	39.01	9.94	48.95	60.94	-11.99	QP	P	
6	0.2760	21.77	9.94	31.71	50.94	-19.23	AVG	P	
7 *	0.3790	36.67	9.98	46.65	58.30	-11.65	QP	P	
8	0.3790	20.85	9.98	30.83	48.30	-17.47	AVG	P	
9	0.4964	34.15	10.02	44.17	56.06	-11.89	QP	P	
10	0.4964	18.47	10.02	28.49	46.06	-17.57	AVG	P	
11	0.5594	32.17	10.02	42.19	56.00	-13.81	QP	P	
12	0.5594	16.73	10.02	26.75	46.00	-19.25	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case GFSK mode (Middle Channel: 2441MHz).

Temperature:	24.6 °C	Relative Humidity :	52.2%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz	Test Model:	CGM EMCG-2402

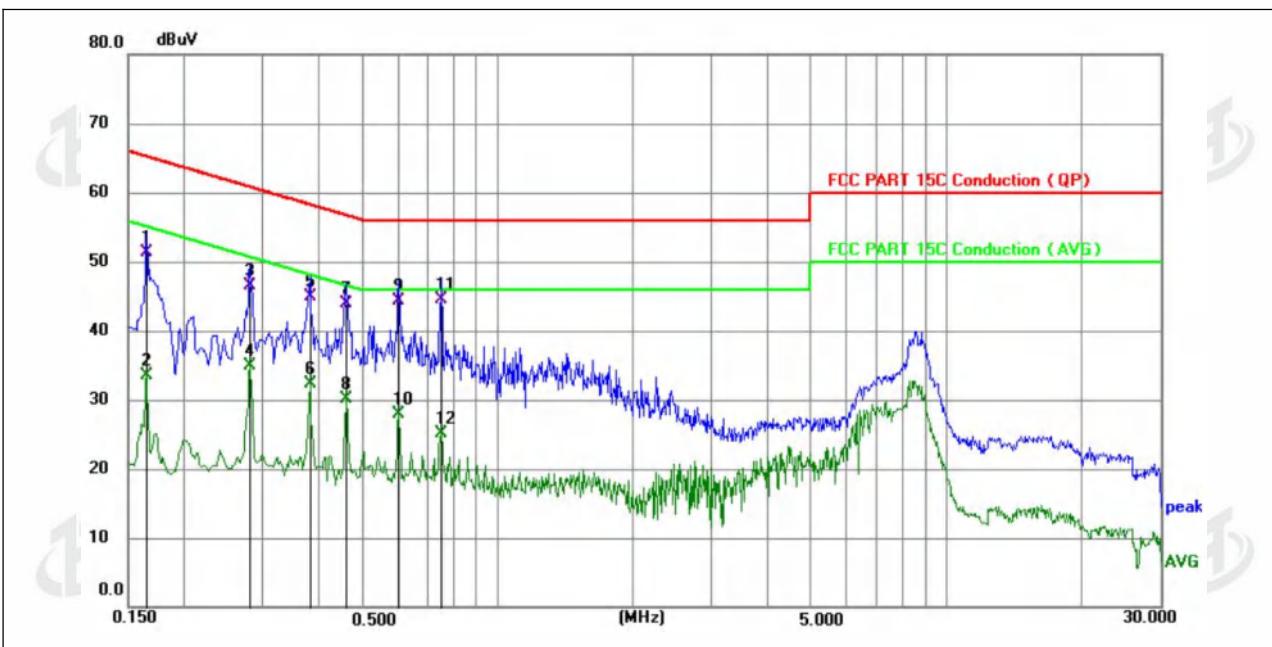


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1650	41.32	9.90	51.22	65.21	-13.99	QP	P
2	0.1650	23.58	9.90	33.48	55.21	-21.73	AVG	P
3	0.2802	36.53	9.94	46.47	60.81	-14.34	QP	P
4	0.2802	24.88	9.94	34.82	50.81	-15.99	AVG	P
5	0.3795	34.95	9.98	44.93	58.29	-13.36	QP	P
6	0.3795	22.38	9.98	32.36	48.29	-15.93	AVG	P
7	0.4586	33.82	10.01	43.83	56.72	-12.89	QP	P
8	0.4586	20.16	10.01	30.17	46.72	-16.55	AVG	P
9	0.6000	34.28	10.03	44.31	56.00	-11.69	QP	P
10	0.6000	17.92	10.03	27.95	46.00	-18.05	AVG	P
11 *	0.7485	34.46	10.04	44.50	56.00	-11.50	QP	P
12	0.7485	15.11	10.04	25.15	46.00	-20.85	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case GFSK mode (Middle Channel: 2441MHz).

Temperature:	24.6°C	Relative Humidity :	52.2%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz	Test Model:	CGM EMCG-2402

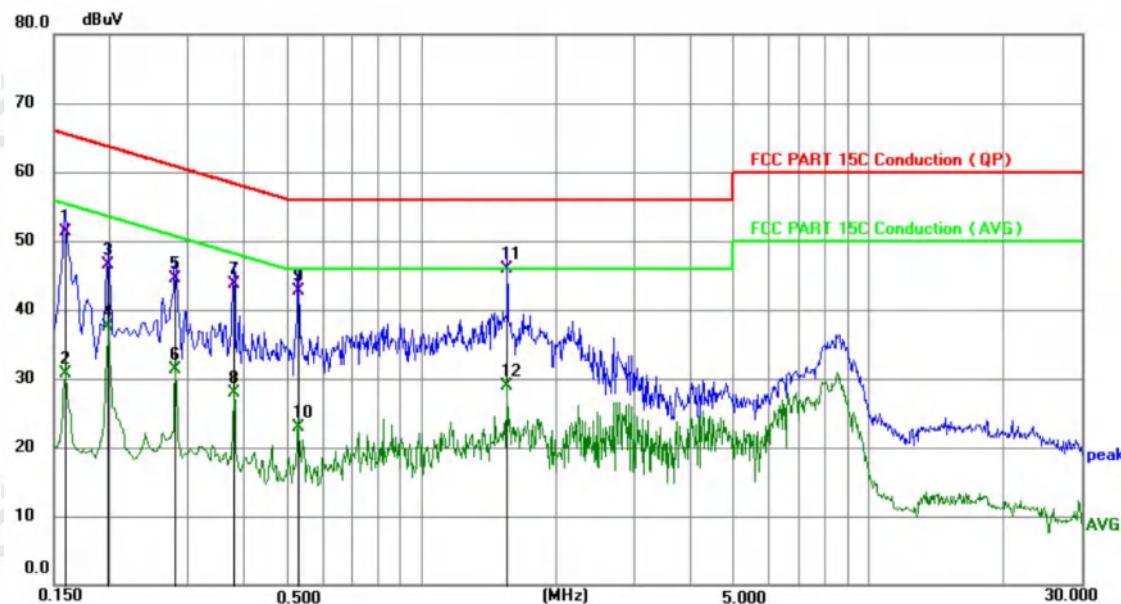


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1590	41.33	9.89	51.22	65.52	-14.30	QP	P
2	0.1590	20.72	9.89	30.61	55.52	-24.91	AVG	P
3	0.1985	36.69	9.91	46.60	63.67	-17.07	QP	P
4	0.1985	27.54	9.91	37.45	53.67	-16.22	AVG	P
5	0.2802	34.65	9.94	44.59	60.81	-16.22	QP	P
6	0.2802	21.32	9.94	31.26	50.81	-19.55	AVG	P
7	0.3790	33.67	9.98	43.65	58.30	-14.65	QP	P
8	0.3790	17.85	9.98	27.83	48.30	-20.47	AVG	P
9	0.5280	32.64	10.02	42.66	56.00	-13.34	QP	P
10	0.5280	12.94	10.02	22.96	46.00	-23.04	AVG	P
11 *	1.5584	35.81	10.06	45.87	56.00	-10.13	QP	P
12	1.5584	18.84	10.06	28.90	46.00	-17.10	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case GFSK mode (Middle Channel: 2441MHz).

Temperature:	24.6 °C	Relative Humidity :	52.2%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz	Test Model:	CGM EMCG-2503

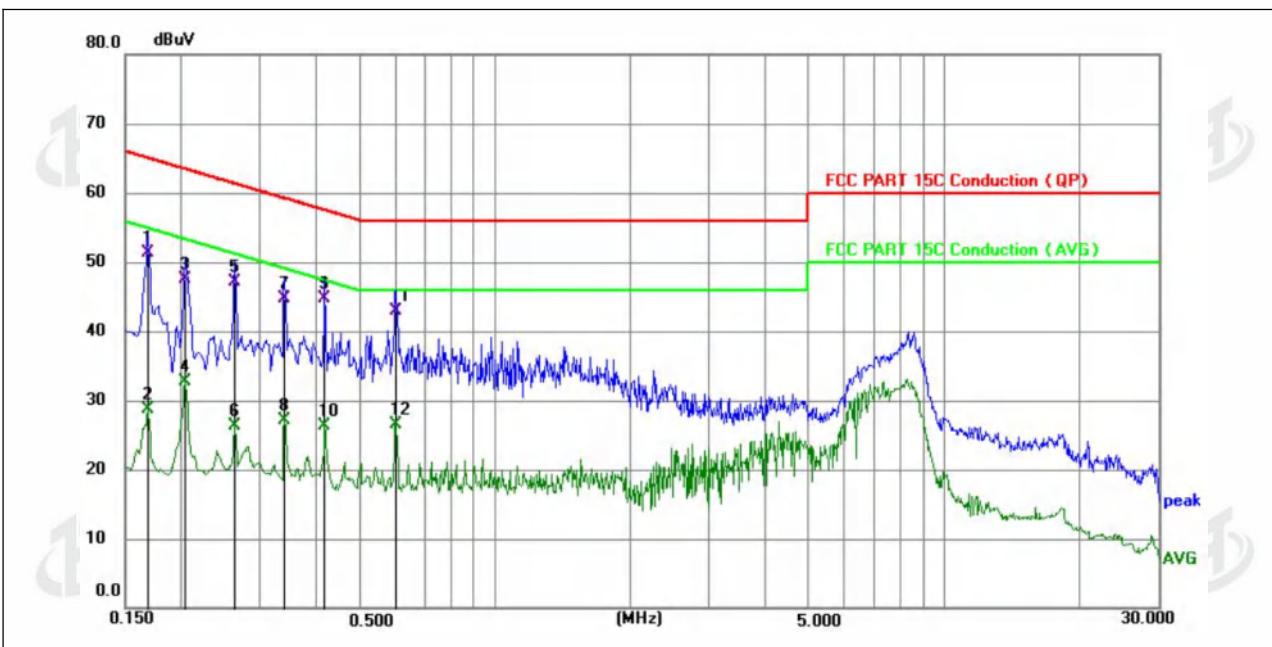


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1680	41.33	9.90	51.23	65.06	-13.83	QP	P
2	0.1680	18.89	9.90	28.79	55.06	-26.27	AVG	P
3	0.2040	37.63	9.91	47.54	63.45	-15.91	QP	P
4	0.2040	22.88	9.91	32.79	53.45	-20.66	AVG	P
5	0.2625	37.08	9.94	47.02	61.35	-14.33	QP	P
6	0.2625	16.35	9.94	26.29	51.35	-25.06	AVG	P
7	0.3390	34.83	9.96	44.79	59.23	-14.44	QP	P
8	0.3390	17.24	9.96	27.20	49.23	-22.03	AVG	P
9 *	0.4153	34.78	9.99	44.77	57.54	-12.77	QP	P
10	0.4153	16.29	9.99	26.28	47.54	-21.26	AVG	P
11	0.6000	32.78	10.03	42.81	56.00	-13.19	QP	P
12	0.6000	16.42	10.03	26.45	46.00	-19.55	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case GFSK mode(Middle Channel:2441MHz).

Temperature:	24.6°C	Relative Humidity :	52.2%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz	Test Model:	CGM EMCG-2503

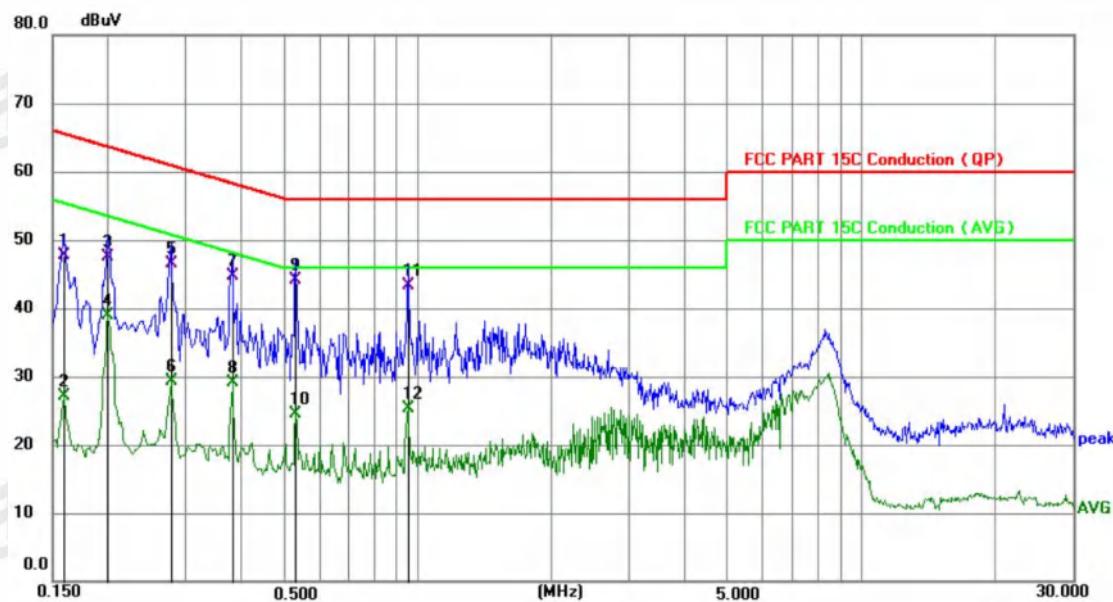


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1590	37.83	9.89	47.72	65.52	-17.80	QP	P
2	0.1590	17.22	9.89	27.11	55.52	-28.41	AVG	P
3	0.1995	37.68	9.91	47.59	63.63	-16.04	QP	P
4	0.1995	28.92	9.91	38.83	53.63	-14.80	AVG	P
5	0.2760	36.51	9.94	46.45	60.94	-14.49	QP	P
6	0.2760	19.27	9.94	29.21	50.94	-21.73	AVG	P
7	0.3795	34.80	9.98	44.78	58.29	-13.51	QP	P
8	0.3795	19.17	9.98	29.15	48.29	-19.14	AVG	P
9 *	0.5280	34.14	10.02	44.16	56.00	-11.84	QP	P
10	0.5280	14.44	10.02	24.46	46.00	-21.54	AVG	P
11	0.9510	33.30	10.06	43.36	56.00	-12.64	QP	P
12	0.9510	15.23	10.06	25.29	46.00	-20.71	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case GFSK mode (Middle Channel: 2441MHz).

Temperature:	24.6 °C	Relative Humidity :	52.2%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz	Test Model:	CGM EMCG-2504

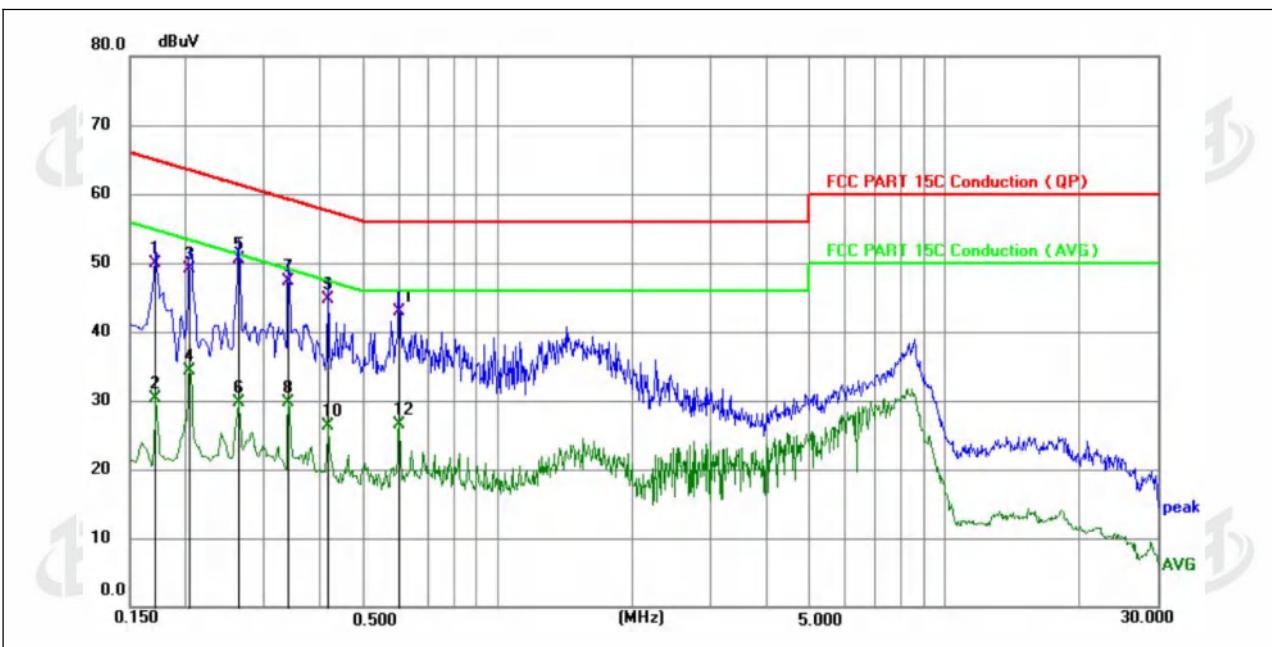


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1711	39.91	9.90	49.81	64.91	-15.10	QP	P
2	0.1711	20.35	9.90	30.25	54.91	-24.66	AVG	P
3	0.2040	39.13	9.91	49.04	63.45	-14.41	QP	P
4	0.2040	24.38	9.91	34.29	53.45	-19.16	AVG	P
5 *	0.2625	40.58	9.94	50.52	61.35	-10.83	QP	P
6	0.2625	19.85	9.94	29.79	51.35	-21.56	AVG	P
7	0.3390	37.33	9.96	47.29	59.23	-11.94	QP	P
8	0.3390	19.74	9.96	29.70	49.23	-19.53	AVG	P
9	0.4153	34.78	9.99	44.77	57.54	-12.77	QP	P
10	0.4153	16.29	9.99	26.28	47.54	-21.26	AVG	P
11	0.6000	32.78	10.03	42.81	56.00	-13.19	QP	P
12	0.6000	16.42	10.03	26.45	46.00	-19.55	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case GFSK mode (Middle Channel: 2441MHz).

Temperature:	24.6°C	Relative Humidity :	52.2%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz	Test Model:	CGM EMCG-2504

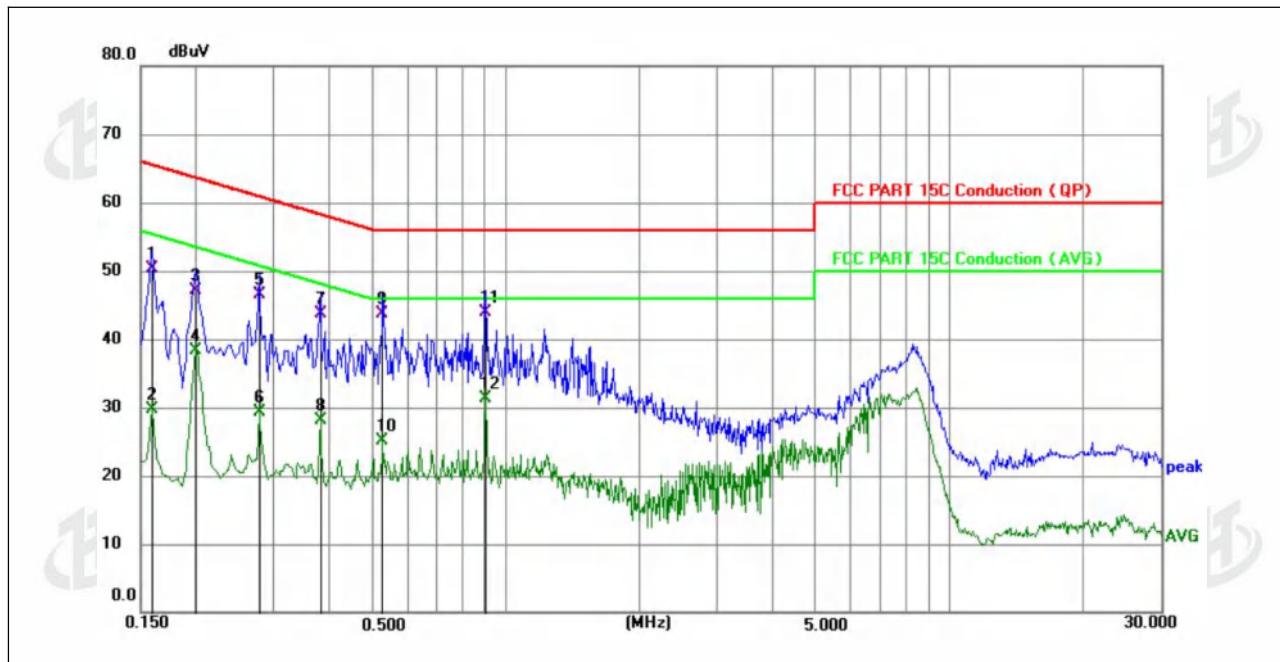


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1590	40.33	9.89	50.22	65.52	-15.30	QP	P
2	0.1590	19.72	9.89	29.61	55.52	-25.91	AVG	P
3	0.1995	37.18	9.91	47.09	63.63	-16.54	QP	P
4	0.1995	28.42	9.91	38.33	53.63	-15.30	AVG	P
5	0.2760	36.51	9.94	46.45	60.94	-14.49	QP	P
6	0.2760	19.27	9.94	29.21	50.94	-21.73	AVG	P
7	0.3795	33.80	9.98	43.78	58.29	-14.51	QP	P
8	0.3795	18.17	9.98	28.15	48.29	-20.14	AVG	P
9	0.5262	33.62	10.02	43.64	56.00	-12.36	QP	P
10	0.5262	15.15	10.02	25.17	46.00	-20.83	AVG	P
11 *	0.9012	33.94	10.05	43.99	56.00	-12.01	QP	P
12	0.9012	21.24	10.05	31.29	46.00	-14.71	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case GFSK mode (Middle Channel: 2441MHz).

Temperature:	24.6 °C	Relative Humidity :	52.2%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz	Test Model:	CGM EMCG-2505

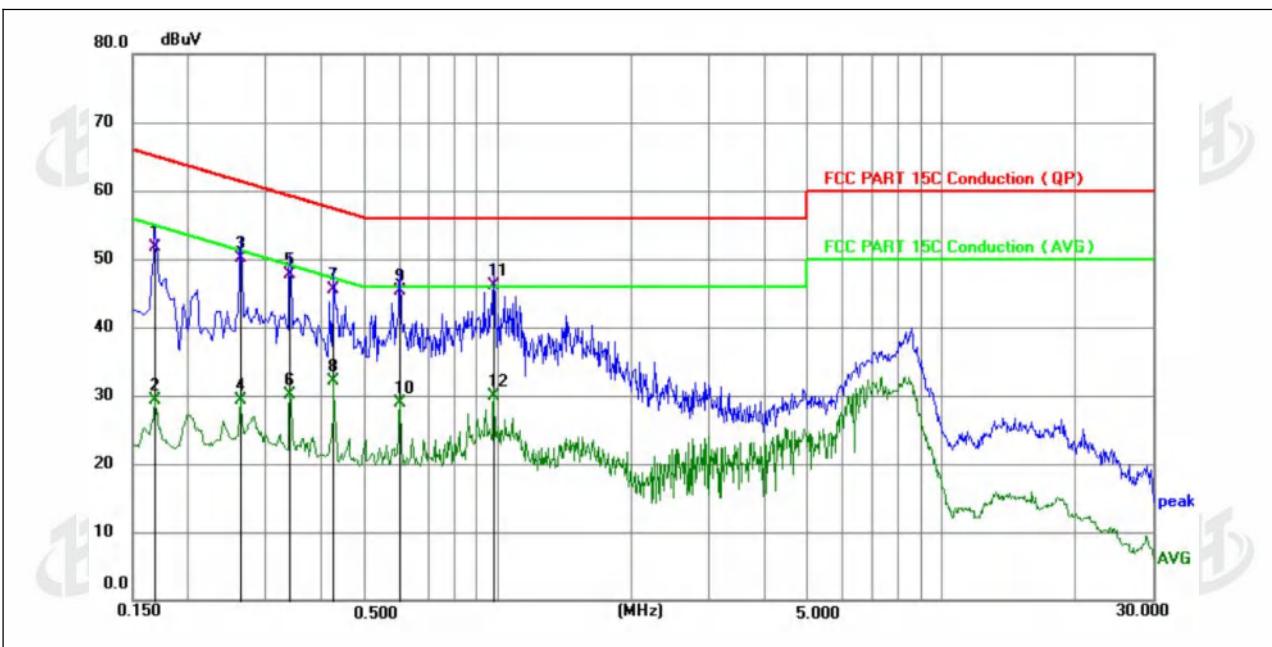


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1680	41.83	9.90	51.73	65.06	-13.33	QP	P
2	0.1680	19.39	9.90	29.29	55.06	-25.77	AVG	P
3	0.2625	40.08	9.94	50.02	61.35	-11.33	QP	P
4	0.2625	19.35	9.94	29.29	51.35	-22.06	AVG	P
5	0.3390	37.83	9.96	47.79	59.23	-11.44	QP	P
6	0.3390	20.24	9.96	30.20	49.23	-19.03	AVG	P
7	0.4243	35.47	9.99	45.46	57.36	-11.90	QP	P
8	0.4243	22.04	9.99	32.03	47.36	-15.33	AVG	P
9	0.6000	35.28	10.03	45.31	56.00	-10.69	QP	P
10	0.6000	18.92	10.03	28.95	46.00	-17.05	AVG	P
11 *	0.9825	36.10	10.06	46.16	56.00	-9.84	QP	P
12	0.9825	19.88	10.06	29.94	46.00	-16.06	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case GFSK mode (Middle Channel: 2441MHz).

Temperature:	24.6°C	Relative Humidity :	52.2%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz	Test Model:	CGM EMCG-2505

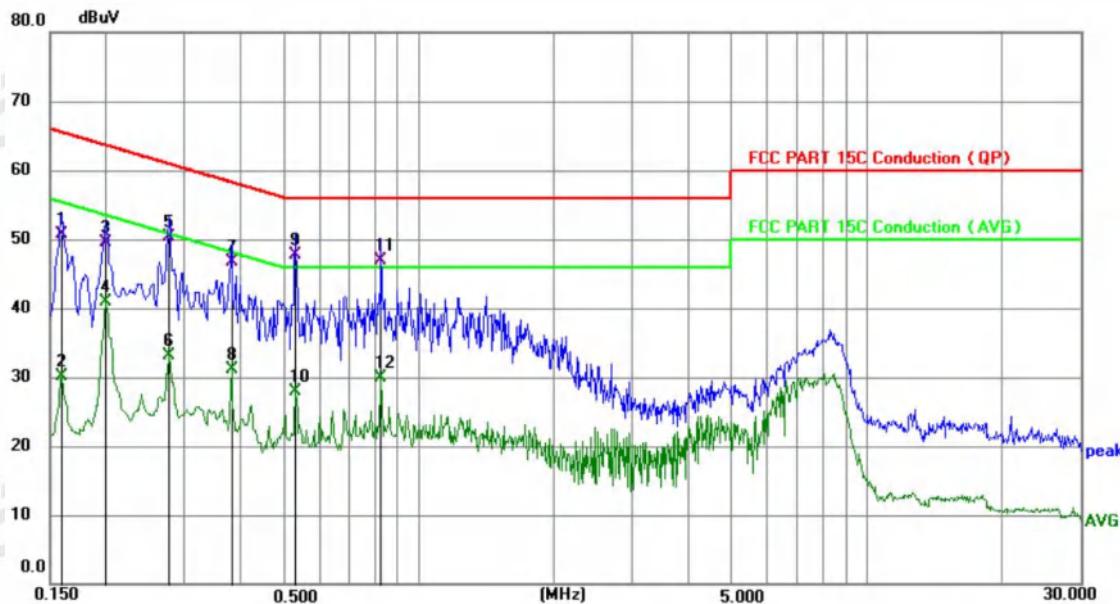

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1590	40.83	9.89	50.72	65.52	-14.80	QP	P
2	0.1590	20.22	9.89	30.11	55.52	-25.41	AVG	P
3	0.1995	39.68	9.91	49.59	63.63	-14.04	QP	P
4	0.1995	30.92	9.91	40.83	53.63	-12.80	AVG	P
5	0.2757	40.42	9.94	50.36	60.94	-10.58	QP	P
6	0.2757	23.26	9.94	33.20	50.94	-17.74	AVG	P
7	0.3795	36.80	9.98	46.78	58.29	-11.51	QP	P
8	0.3795	21.17	9.98	31.15	48.29	-17.14	AVG	P
9 *	0.5280	37.64	10.02	47.66	56.00	-8.34	QP	P
10	0.5280	17.94	10.02	27.96	46.00	-18.04	AVG	P
11	0.8250	36.86	10.05	46.91	56.00	-9.09	QP	P
12	0.8250	19.92	10.05	29.97	46.00	-16.03	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case GFSK mode (Middle Channel: 2441MHz).



ZHONGHAN

Project No.: ZHT-250530133W01

Page 24 of 86

5.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	10Hz	Average

5.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.1 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.2.3 DEVIATION FROM TEST STANDARD


No deviation

5.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

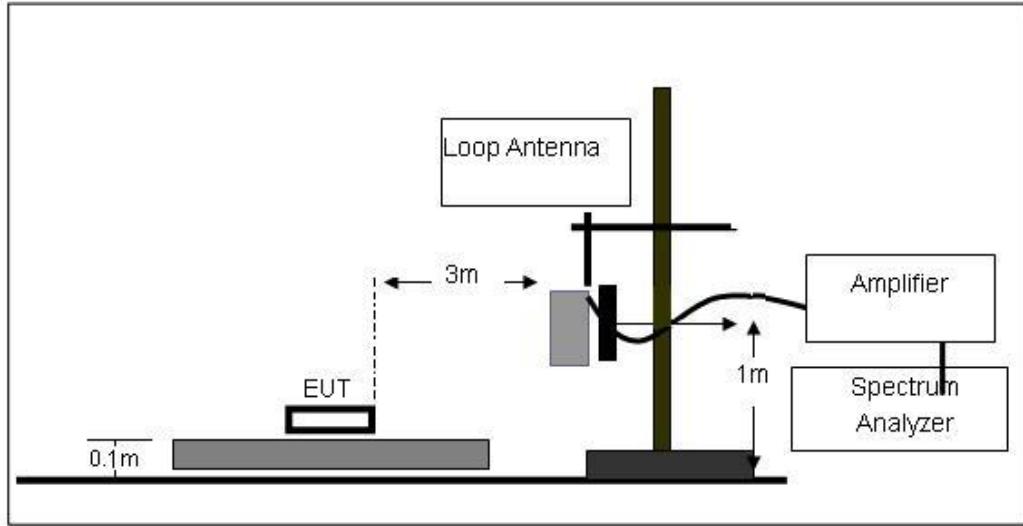

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

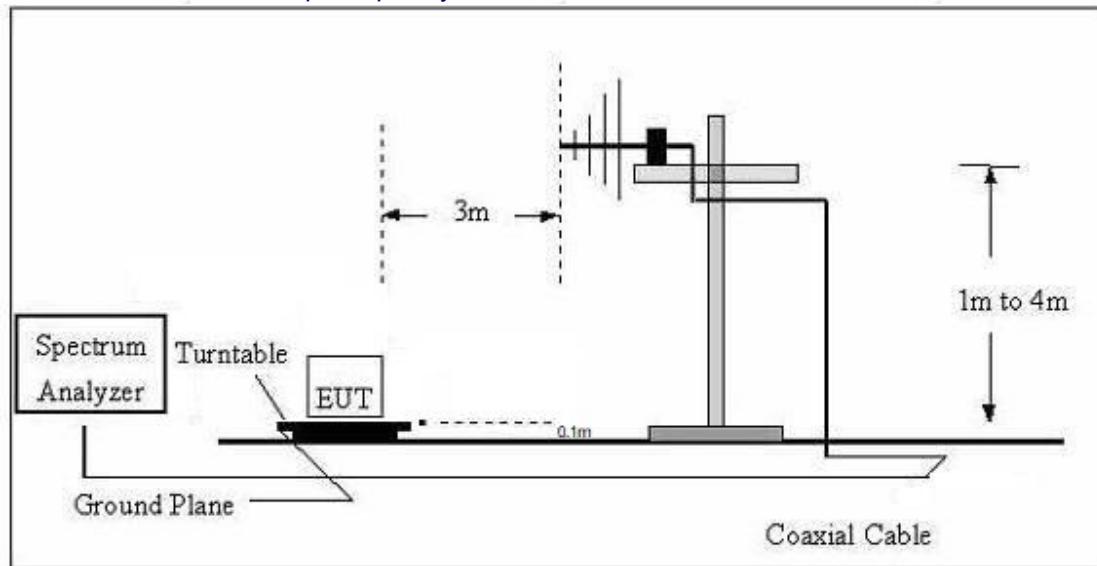

(C) Radiated Emission Test-Up Frequency Above 1GHz

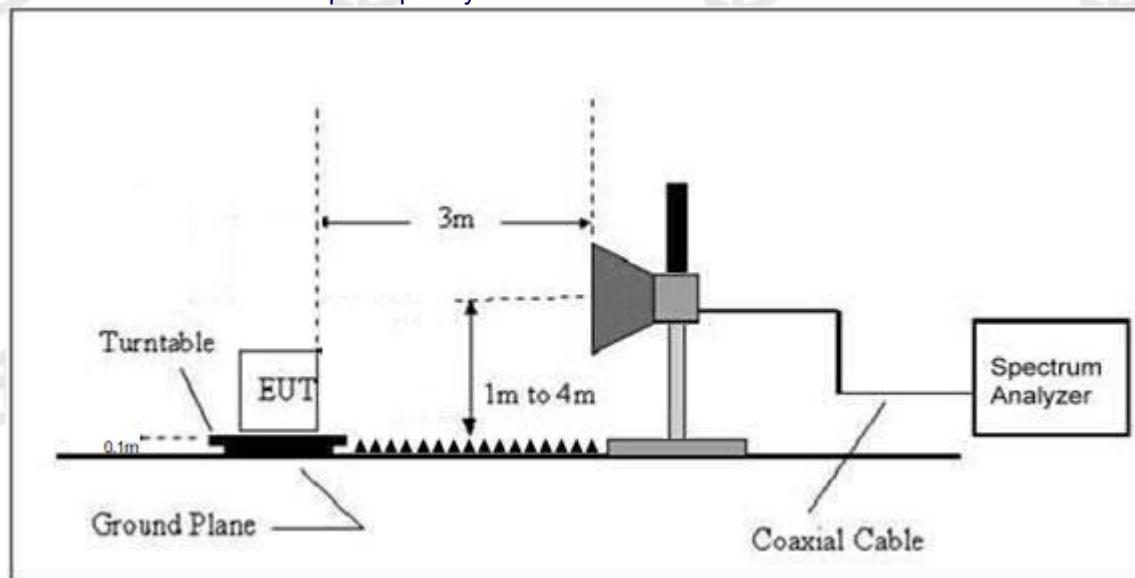

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

Between 30MHz – 1GHz

CGM EMCG-2401			
Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

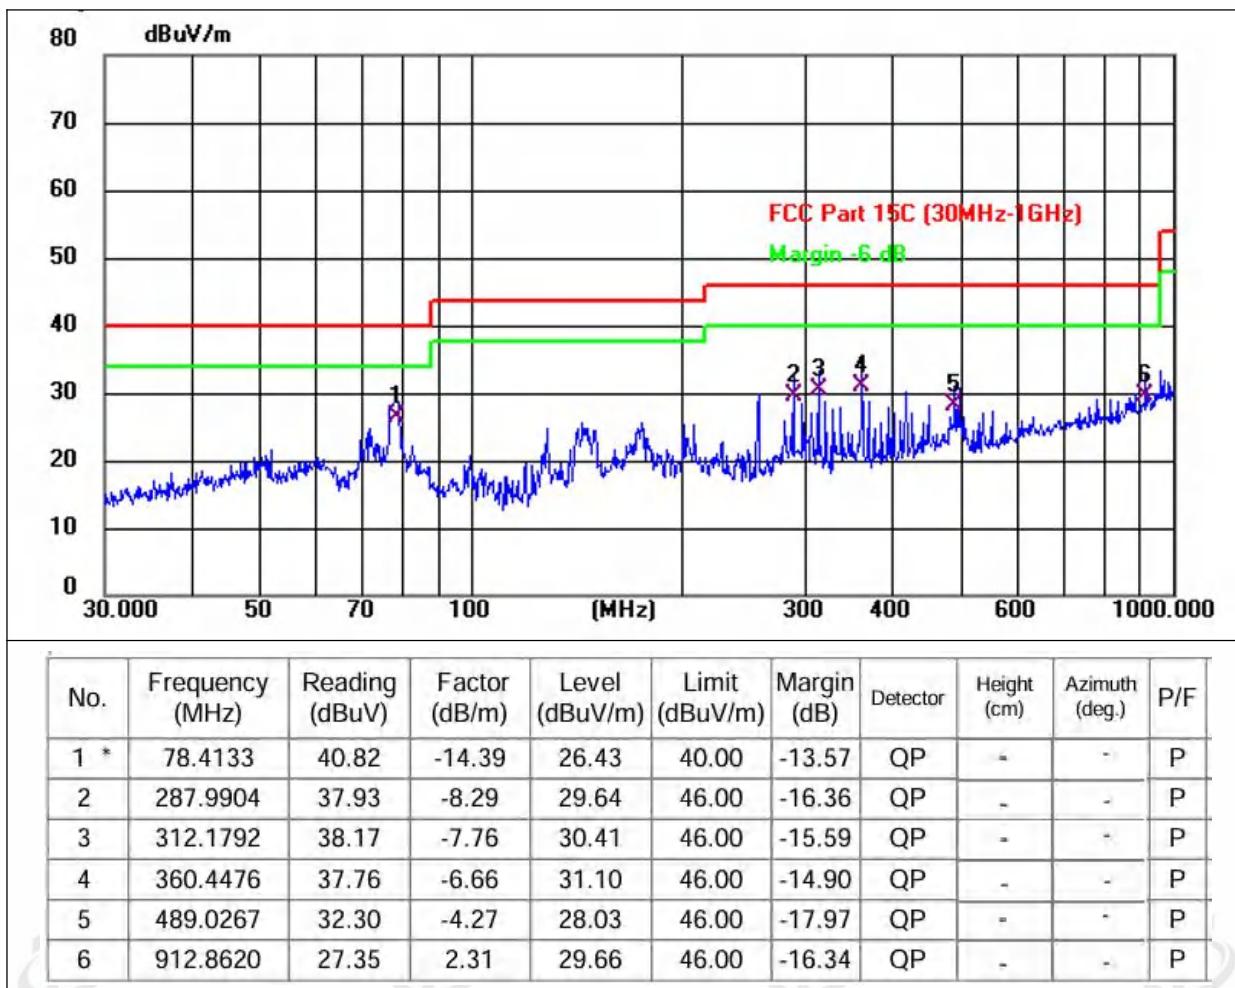


CGM EMCG-2401			
Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

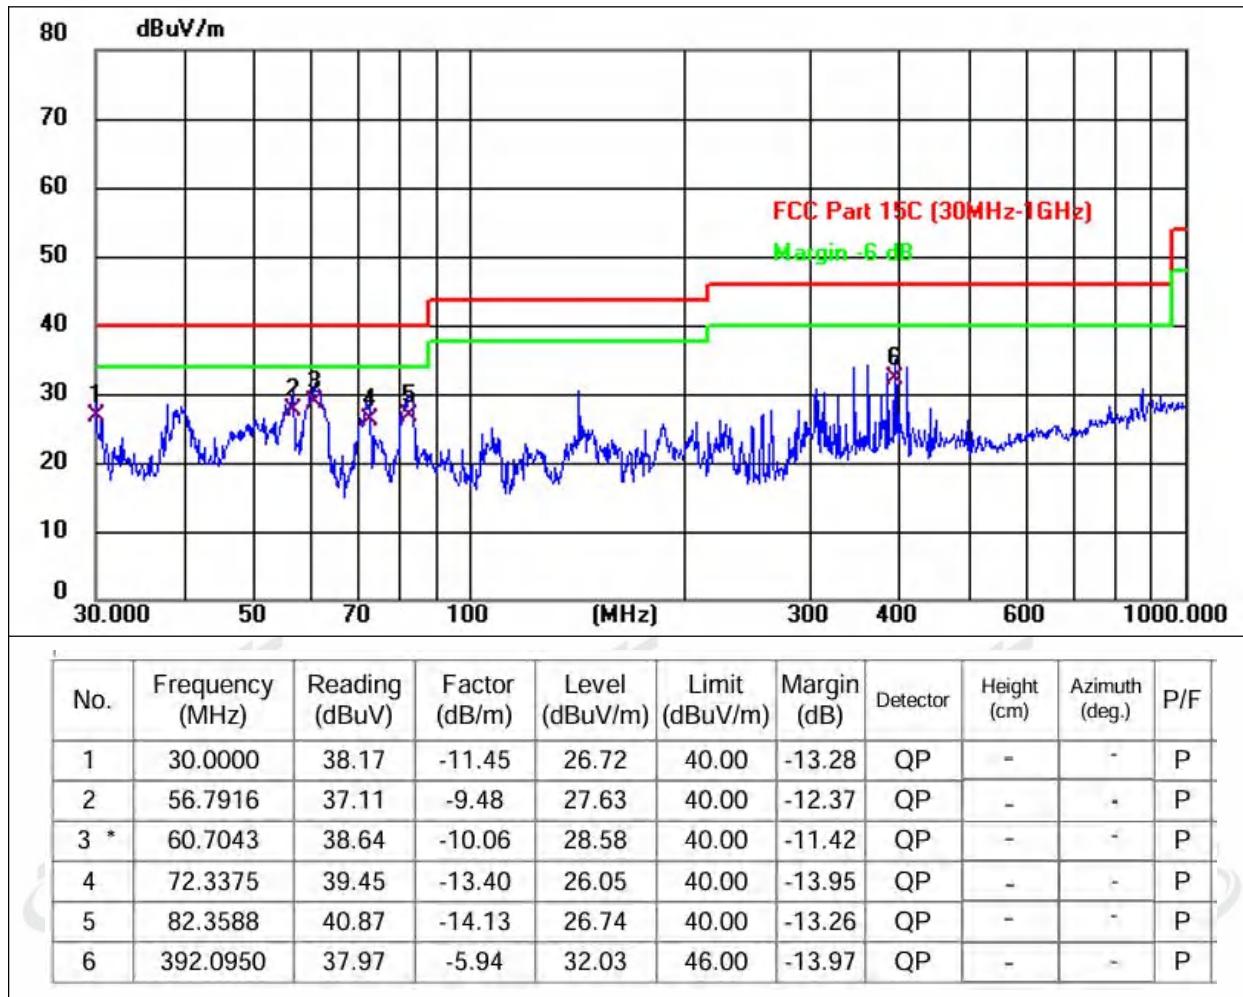
**Remarks:**

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case $\pi/4$ DQPSK mode(Middle Channel:2441MHz).

CGM EMCG-2402			
Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

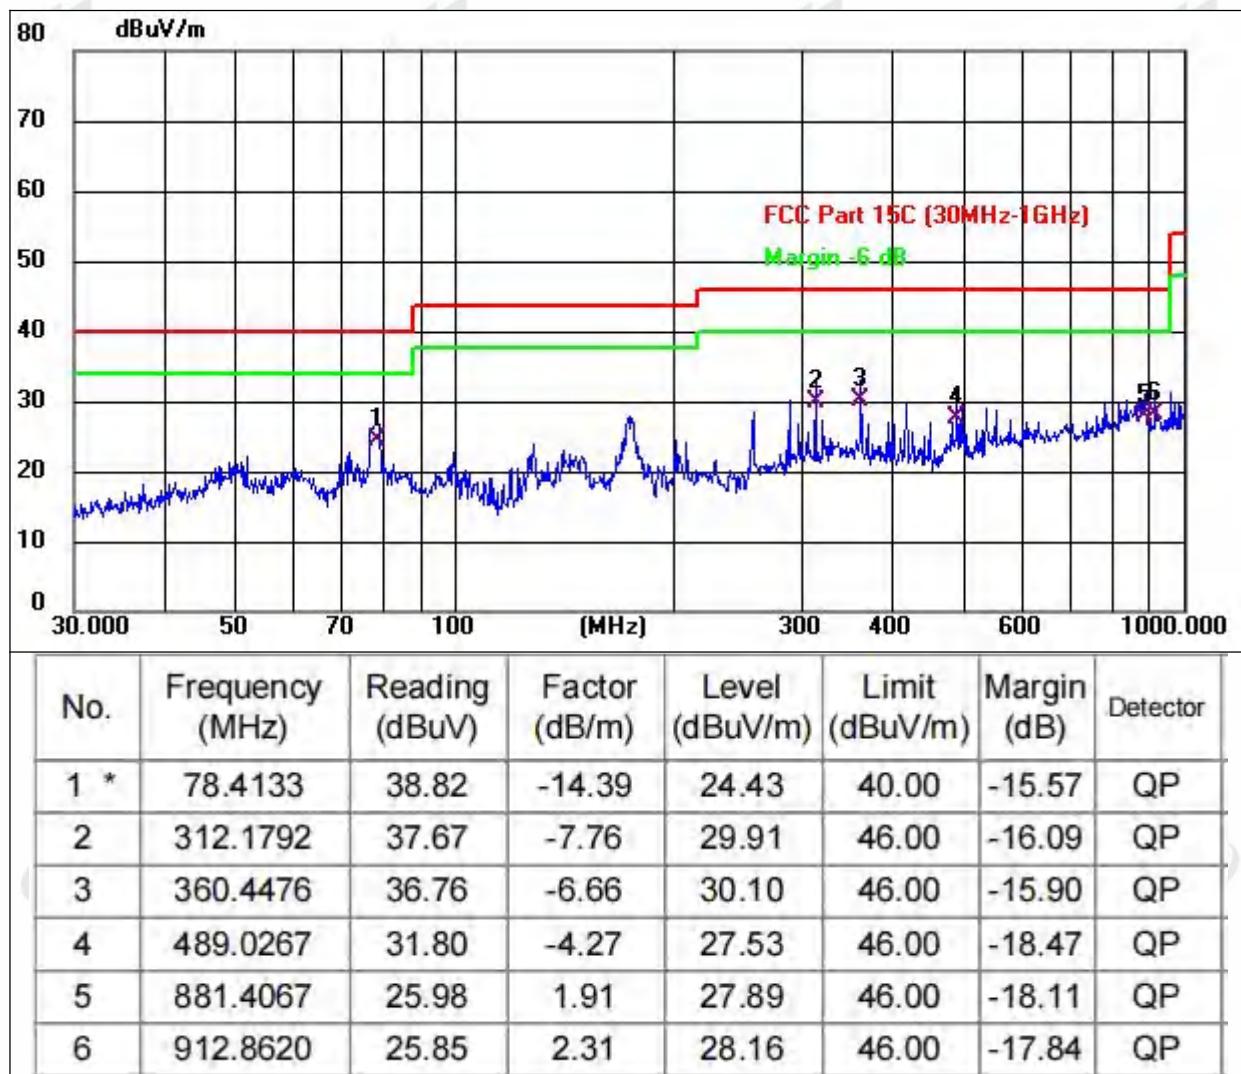


CGM EMCG-2402			
Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

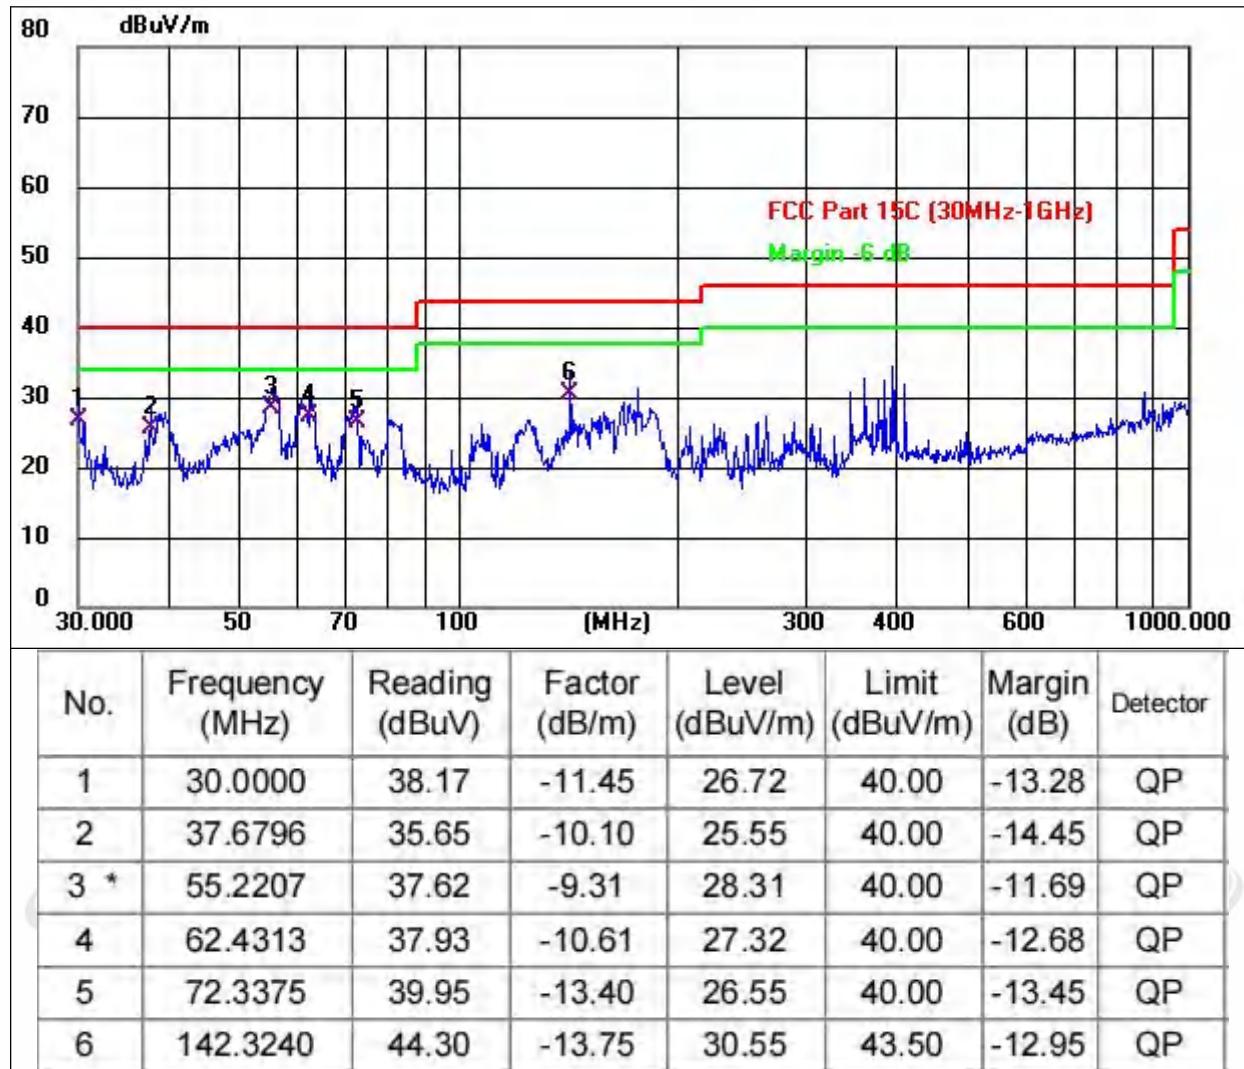


Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case π/4DQPSK mode (Middle Channel: 2441MHz).

CGM EMCG-2503			
Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

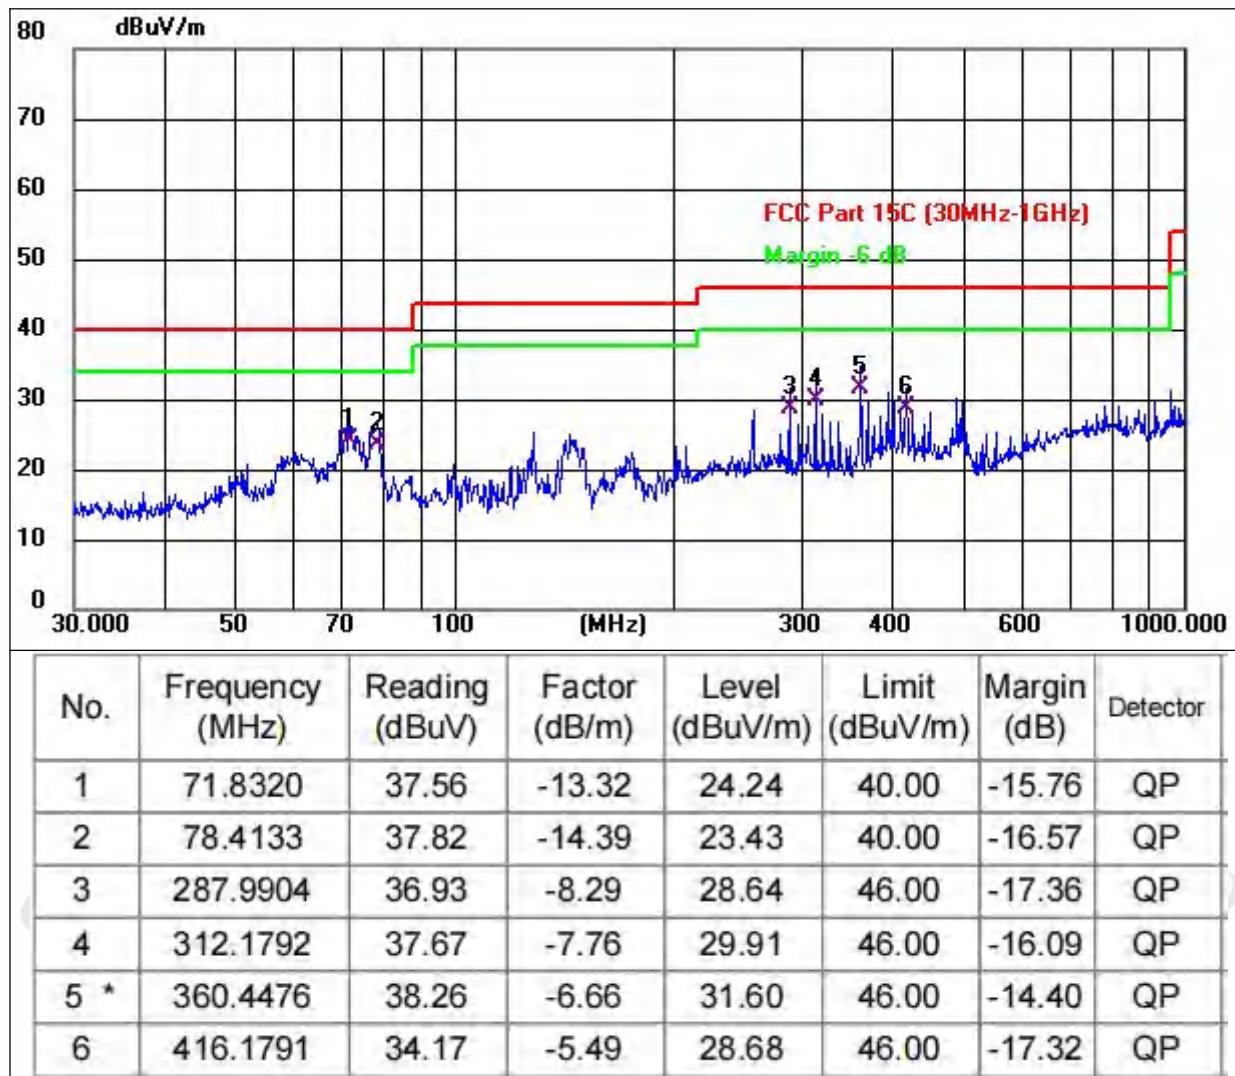


CGM EMCG-2503			
Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

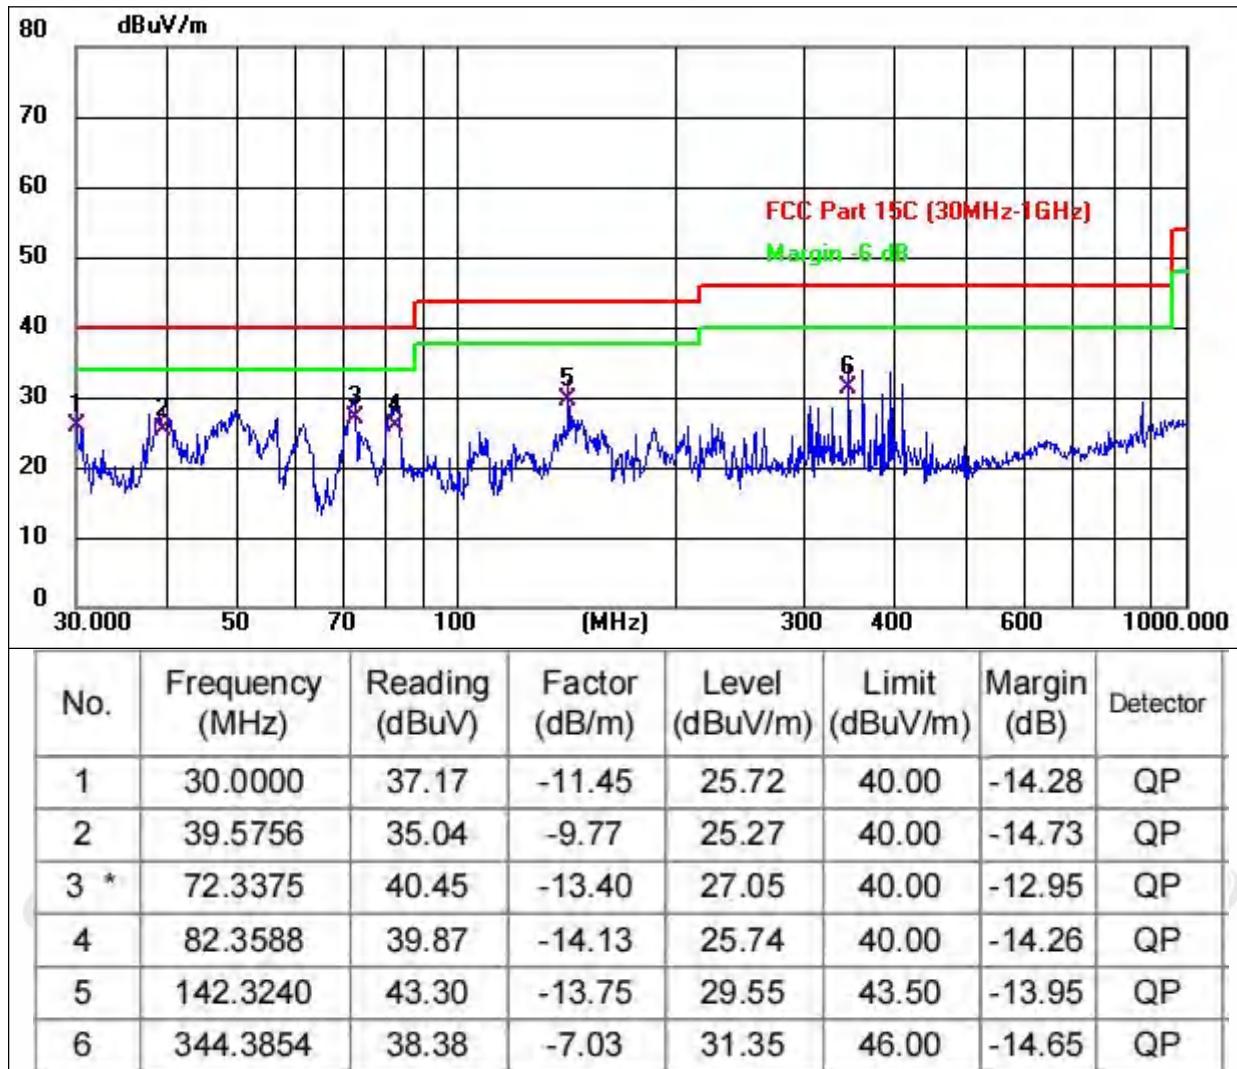


Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case π/4DQPSK mode (Middle Channel: 2441MHz).

CGM EMCG-2504			
Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

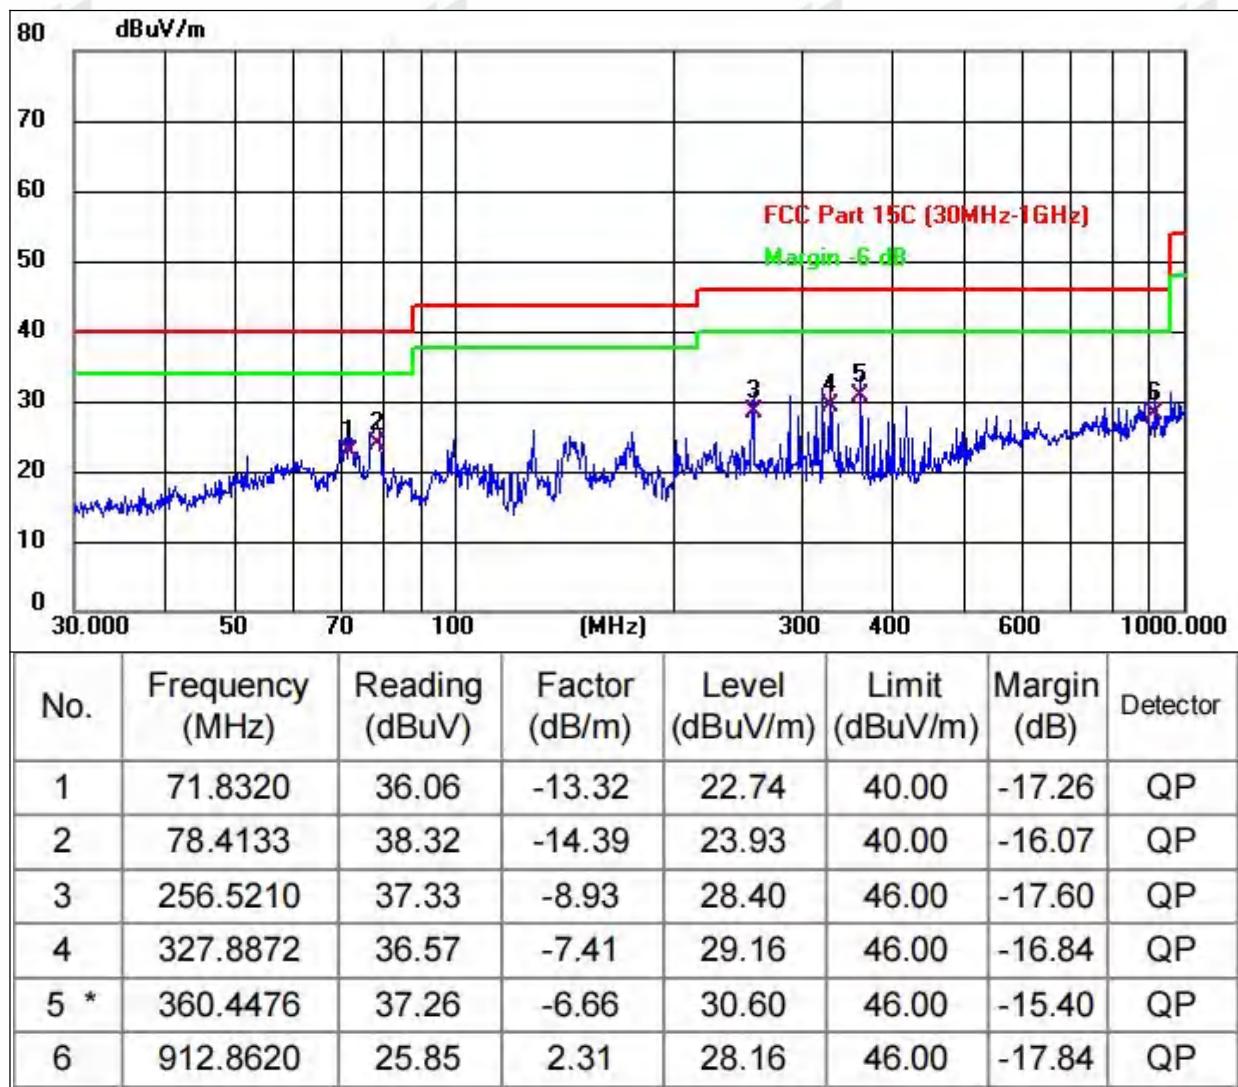


CGM EMCG-2504			
Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

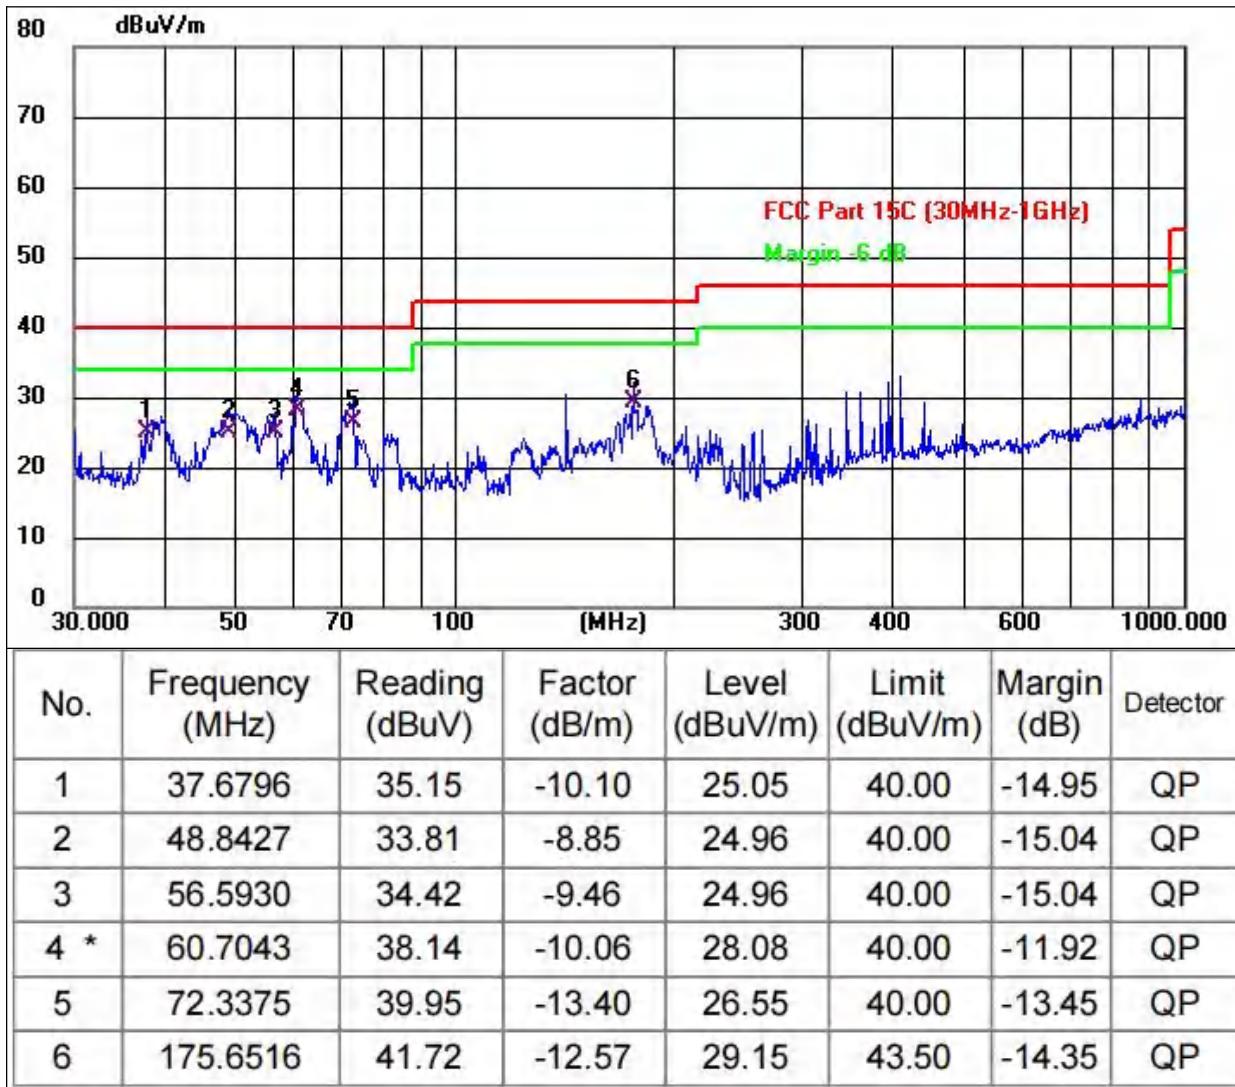**Remarks:**


- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case $\pi/4$ DQPSK mode(Middle Channel:2441MHz).

CGM EMCG-2505			
Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

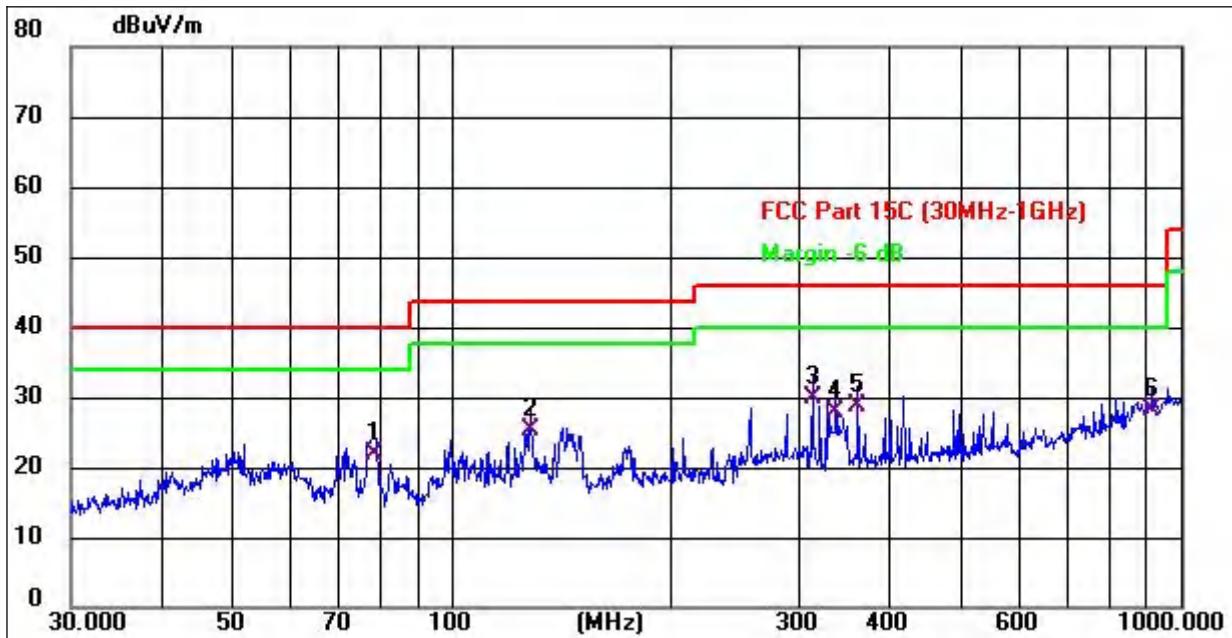

No.	Frequency (MHz)	Reading (dB _{UV})	Factor (dB/m)	Level (dB _{UV} /m)	Limit (dB _{UV} /m)	Margin (dB)	Detector
1	78.4133	36.32	-14.39	21.93	40.00	-18.07	QP
2	128.1130	38.61	-13.26	25.35	43.50	-18.15	QP
3 *	312.1792	37.67	-7.76	29.91	46.00	-16.09	QP
4	336.0350	34.95	-7.22	27.73	46.00	-18.27	QP
5	360.4476	35.26	-6.66	28.60	46.00	-17.40	QP
6	912.8620	25.85	2.31	28.16	46.00	-17.84	QP

CGM EMCG-2505			
Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

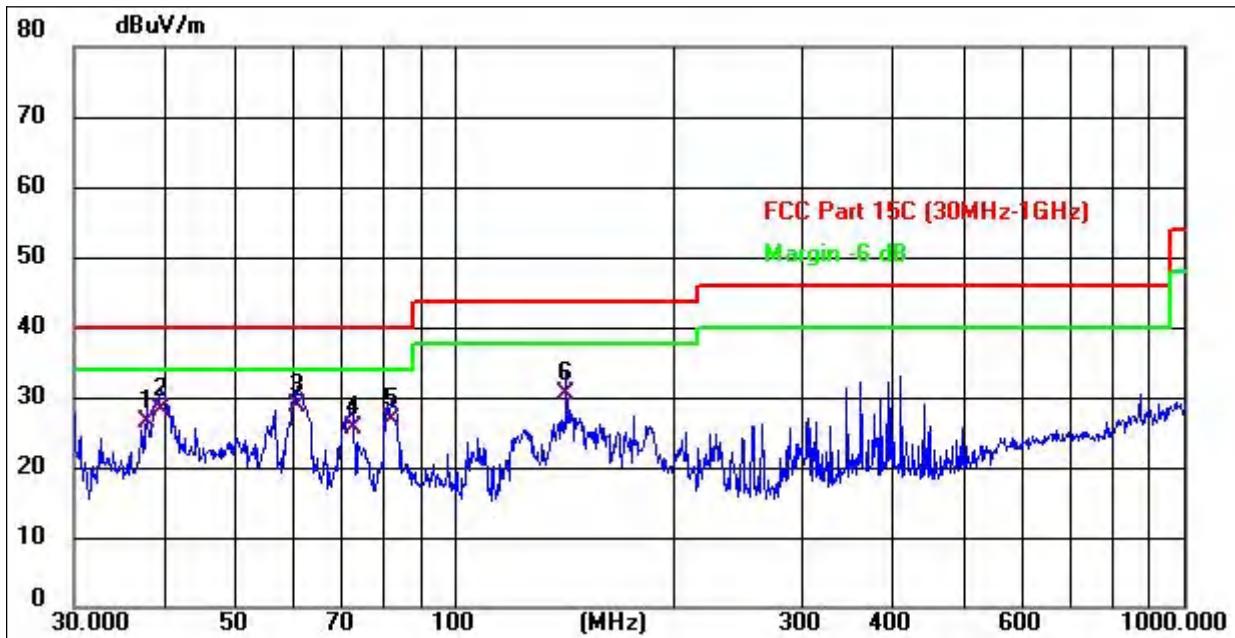

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.6796	36.65	-10.10	26.55	40.00	-13.45	QP
2	39.5756	38.04	-9.77	28.27	40.00	-11.73	QP
3 *	60.7043	38.64	-10.06	28.58	40.00	-11.42	QP
4	72.3375	38.95	-13.40	25.55	40.00	-14.45	QP
5	82.0704	40.90	-14.20	26.70	40.00	-13.30	QP
6	142.3240	44.30	-13.75	30.55	43.50	-12.95	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case π/4DQPSK mode(Middle Channel:2441MHz).



ZHONGHAN

1GHz~25GHz

Project No.: ZHT-250530133W01

Page 37 of 86

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804	56.51	30.55	5.77	24.66	56.39	74	-17.61	Pk
V	4804	41.73	30.55	5.77	24.66	41.61	54	-12.39	AV
V	7206	58.82	30.33	6.32	24.55	59.36	74	-14.64	Pk
V	7206	41.32	30.33	6.32	24.55	41.86	54	-12.14	AV
H	4804	55.78	30.55	5.77	24.66	55.66	74	-18.34	Pk
H	4804	41.71	30.55	5.77	24.66	41.59	54	-12.41	AV
H	7206	55.96	30.33	6.32	24.55	56.5	74	-17.5	Pk
H	7206	42.88	30.33	6.32	24.55	43.42	54	-10.58	AV
Middle Channel:2441MHz									
V	4882	57.28	30.55	5.77	24.66	57.16	74	-16.84	Pk
V	4882	41.82	30.55	5.77	24.66	41.7	54	-12.3	AV
V	7323	55.14	30.33	6.32	24.55	55.68	74	-18.32	Pk
V	7323	43.18	30.33	6.32	24.55	43.72	54	-10.28	AV
H	4882	58.3	30.55	5.77	24.66	58.18	74	-15.82	Pk
H	4882	41.81	30.55	5.77	24.66	41.69	54	-12.31	AV
H	7323	58.04	30.33	6.32	24.55	58.58	74	-15.42	Pk
H	7323	41.74	30.33	6.32	24.55	42.28	54	-11.72	AV
High Channel:2480MHz									
V	4960	57.44	30.55	5.77	24.66	57.32	74	-16.68	Pk
V	4960	41.83	30.55	5.77	24.66	41.71	54	-12.29	AV
V	7440	58.34	30.33	6.32	24.55	58.88	74	-15.12	Pk
V	7440	41.03	30.33	6.32	24.55	41.57	54	-12.43	AV
H	4960	57	30.55	5.77	24.66	56.88	74	-17.12	Pk
H	4960	42.01	30.55	5.77	24.66	41.89	54	-12.11	AV
H	7440	58.3	30.33	6.32	24.55	58.84	74	-15.16	Pk
H	7440	42.25	30.33	6.32	24.55	42.79	54	-11.21	AV



ZHONGHAN

Project No.: ZHT-250530133W01

Page 38 of 86

π/4DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804	58.39	30.55	5.77	24.66	58.27	74	-15.73	Pk
V	4804	42.49	30.55	5.77	24.66	42.37	54	-11.63	AV
V	7206	57.2	30.33	6.32	24.55	57.74	74	-16.26	Pk
V	7206	42.13	30.33	6.32	24.55	42.67	54	-11.33	AV
H	4804	59.13	30.55	5.77	24.66	59.01	74	-14.99	Pk
H	4804	41.03	30.55	5.77	24.66	40.91	54	-13.09	AV
H	7206	57.72	30.33	6.32	24.55	58.26	74	-15.74	Pk
H	7206	44.43	30.33	6.32	24.55	44.97	54	-9.03	AV
Middle Channel:2441MHz									
V	4882	57.38	30.55	5.77	24.66	57.26	74	-16.74	Pk
V	4882	41.94	30.55	5.77	24.66	41.82	54	-12.18	AV
V	7323	57.85	30.33	6.32	24.55	58.39	74	-15.61	Pk
V	7323	42.36	30.33	6.32	24.55	42.9	54	-11.1	AV
H	4882	56	30.55	5.77	24.66	55.88	74	-18.12	Pk
H	4882	41.74	30.55	5.77	24.66	41.62	54	-12.38	AV
H	7323	59.32	30.33	6.32	24.55	59.86	74	-14.14	Pk
H	7323	41.4	30.33	6.32	24.55	41.94	54	-12.06	AV
High Channel:2480MHz									
V	4960	59.84	30.55	5.77	24.66	59.72	74	-14.28	Pk
V	4960	41.84	30.55	5.77	24.66	41.72	54	-12.28	AV
V	7440	56.26	30.33	6.32	24.55	56.8	74	-17.2	Pk
V	7440	43.01	30.33	6.32	24.55	43.55	54	-10.45	AV
H	4960	55.28	30.55	5.77	24.66	55.16	74	-18.84	Pk
H	4960	42.78	30.55	5.77	24.66	42.66	54	-11.34	AV
H	7440	55.97	30.33	6.32	24.55	56.51	74	-17.49	Pk
H	7440	43.99	30.33	6.32	24.55	44.53	54	-9.47	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value
has no need to be reported

6. RADIATED BAND EMISSION MEASUREMENT

6.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

6.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

6.3 DEVIATION FROM TEST STANDARD

No deviation

6.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

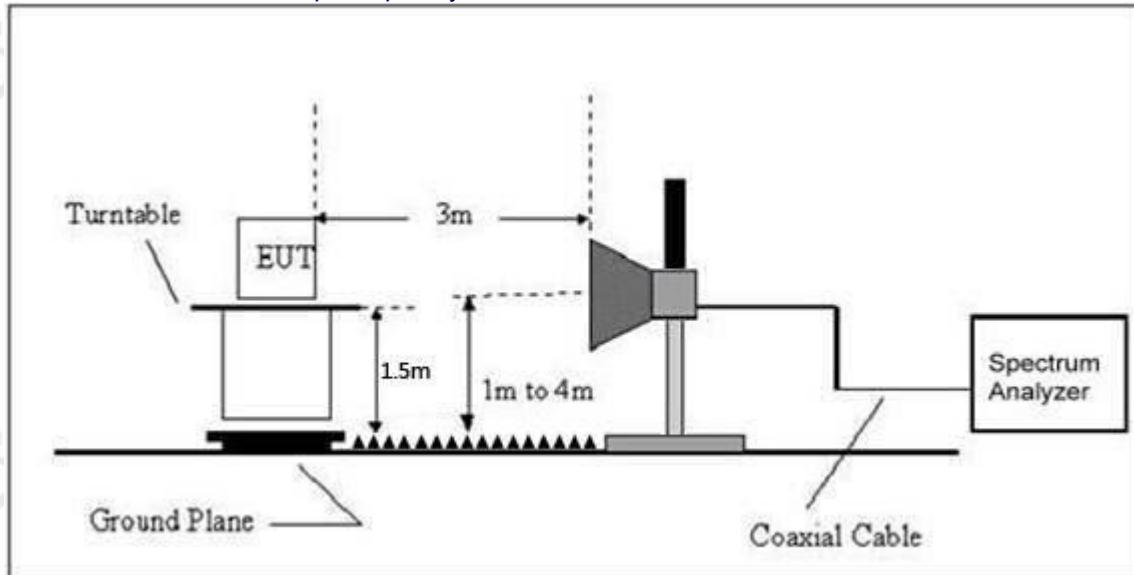

6.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



ZHONGHAN

Project No.: ZHT-250530133W01

Page 41 of 86

6.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type	Result
Low Channel: 2402MHz											
GFSK	H	2390.00	62.63	30.22	4.85	23.98	61.24	74.00	-12.76	PK	PASS
	H	2390.00	48.71	30.22	4.85	23.98	47.32	54.00	-6.68	AV	PASS
	H	2400.00	61.64	30.22	4.85	23.98	60.25	74.00	-13.75	PK	PASS
	H	2400.00	47.10	30.22	4.85	23.98	45.71	54.00	-8.29	AV	PASS
	V	2390.00	59.20	30.22	4.85	23.98	57.81	74.00	-16.19	PK	PASS
	V	2390.00	48.78	30.22	4.85	23.98	47.39	54.00	-6.61	AV	PASS
	V	2400.00	62.47	30.22	4.85	23.98	61.08	74.00	-12.92	PK	PASS
	V	2400.00	47.45	30.22	4.85	23.98	46.06	54.00	-7.94	AV	PASS
High Channel: 2480MHz											
	H	2483.50	59.46	30.22	4.85	23.98	58.07	74.00	-15.93	PK	PASS
	H	2483.50	48.95	30.22	4.85	23.98	47.56	54.00	-6.44	AV	PASS
	H	2500.00	61.71	30.22	4.85	23.98	60.32	74.00	-13.68	PK	PASS
	H	2500.00	47.97	30.22	4.85	23.98	46.58	54.00	-7.42	AV	PASS
	V	2483.50	61.95	30.22	4.85	23.98	60.56	74.00	-13.44	PK	PASS
	V	2483.50	47.82	30.22	4.85	23.98	46.43	54.00	-7.57	AV	PASS
	V	2500.00	61.97	30.22	4.85	23.98	60.58	74.00	-13.42	PK	PASS
	V	2500.00	47.60	30.22	4.85	23.98	46.21	54.00	-7.79	AV	PASS
Low Channel: 2402MHz											
π/4DQPSK	H	2390.00	62.48	30.22	4.85	23.98	61.09	74.00	-12.91	PK	PASS
	H	2390.00	46.35	30.22	4.85	23.98	44.96	54.00	-9.04	AV	PASS
	H	2400.00	61.56	30.22	4.85	23.98	60.17	74.00	-13.83	PK	PASS
	H	2400.00	46.39	30.22	4.85	23.98	45.00	54.00	-9.00	AV	PASS
	V	2390.00	62.26	30.22	4.85	23.98	60.87	74.00	-13.13	PK	PASS
	V	2390.00	48.28	30.22	4.85	23.98	46.89	54.00	-7.11	AV	PASS
	V	2400.00	60.76	30.22	4.85	23.98	59.37	74.00	-14.63	PK	PASS
	V	2400.00	46.84	30.22	4.85	23.98	45.45	54.00	-8.55	AV	PASS
High Channel: 2480MHz											
	H	2483.50	60.24	30.22	4.85	23.98	58.85	74.00	-15.15	PK	PASS
	H	2483.50	48.69	30.22	4.85	23.98	47.30	54.00	-6.70	AV	PASS
	H	2500.00	60.26	30.22	4.85	23.98	58.87	74.00	-15.13	PK	PASS
	H	2500.00	48.11	30.22	4.85	23.98	46.72	54.00	-7.28	AV	PASS
	V	2483.50	61.85	30.22	4.85	23.98	60.46	74.00	-13.54	PK	PASS
	V	2483.50	46.21	30.22	4.85	23.98	44.82	54.00	-9.18	AV	PASS
	V	2500.00	60.68	30.22	4.85	23.98	59.29	74.00	-14.71	PK	PASS
	V	2500.00	46.80	30.22	4.85	23.98	45.41	54.00	-8.59	AV	PASS
Remark:											
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											

7. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10

7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

7.2 Test Setup



7.3 Test procedure

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

7.4 DEVIATION FROM STANDARD

No deviation.





ZHONGHAN


7.5 Test Result


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-47.53	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-54	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-47.89	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-54.04	-20	Pass

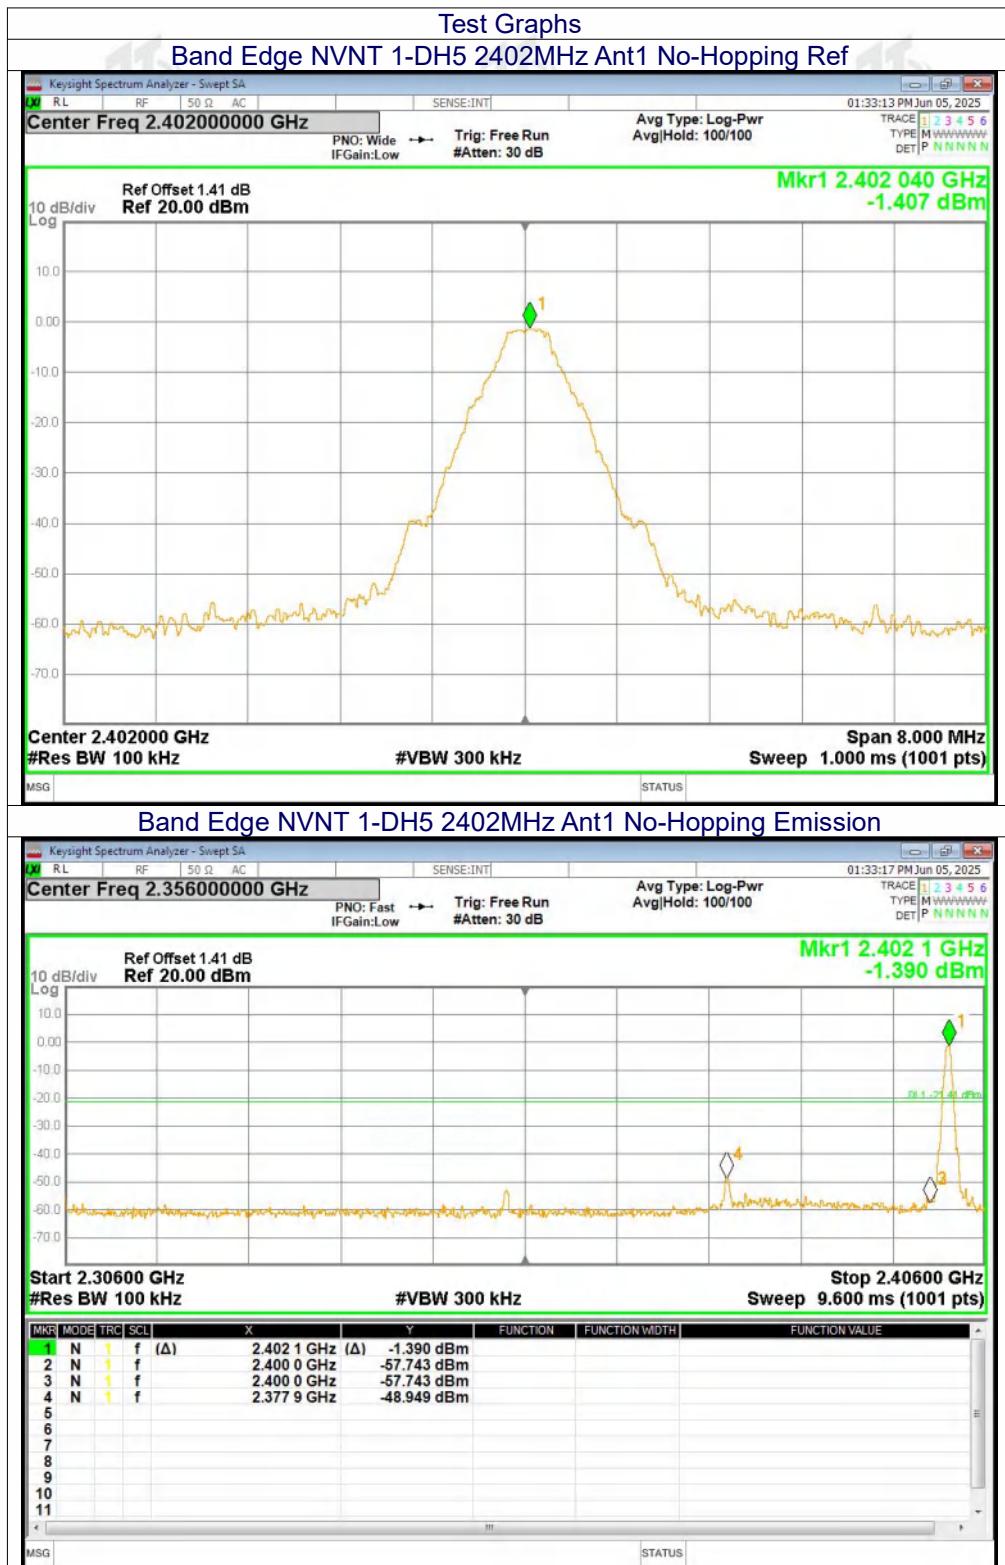

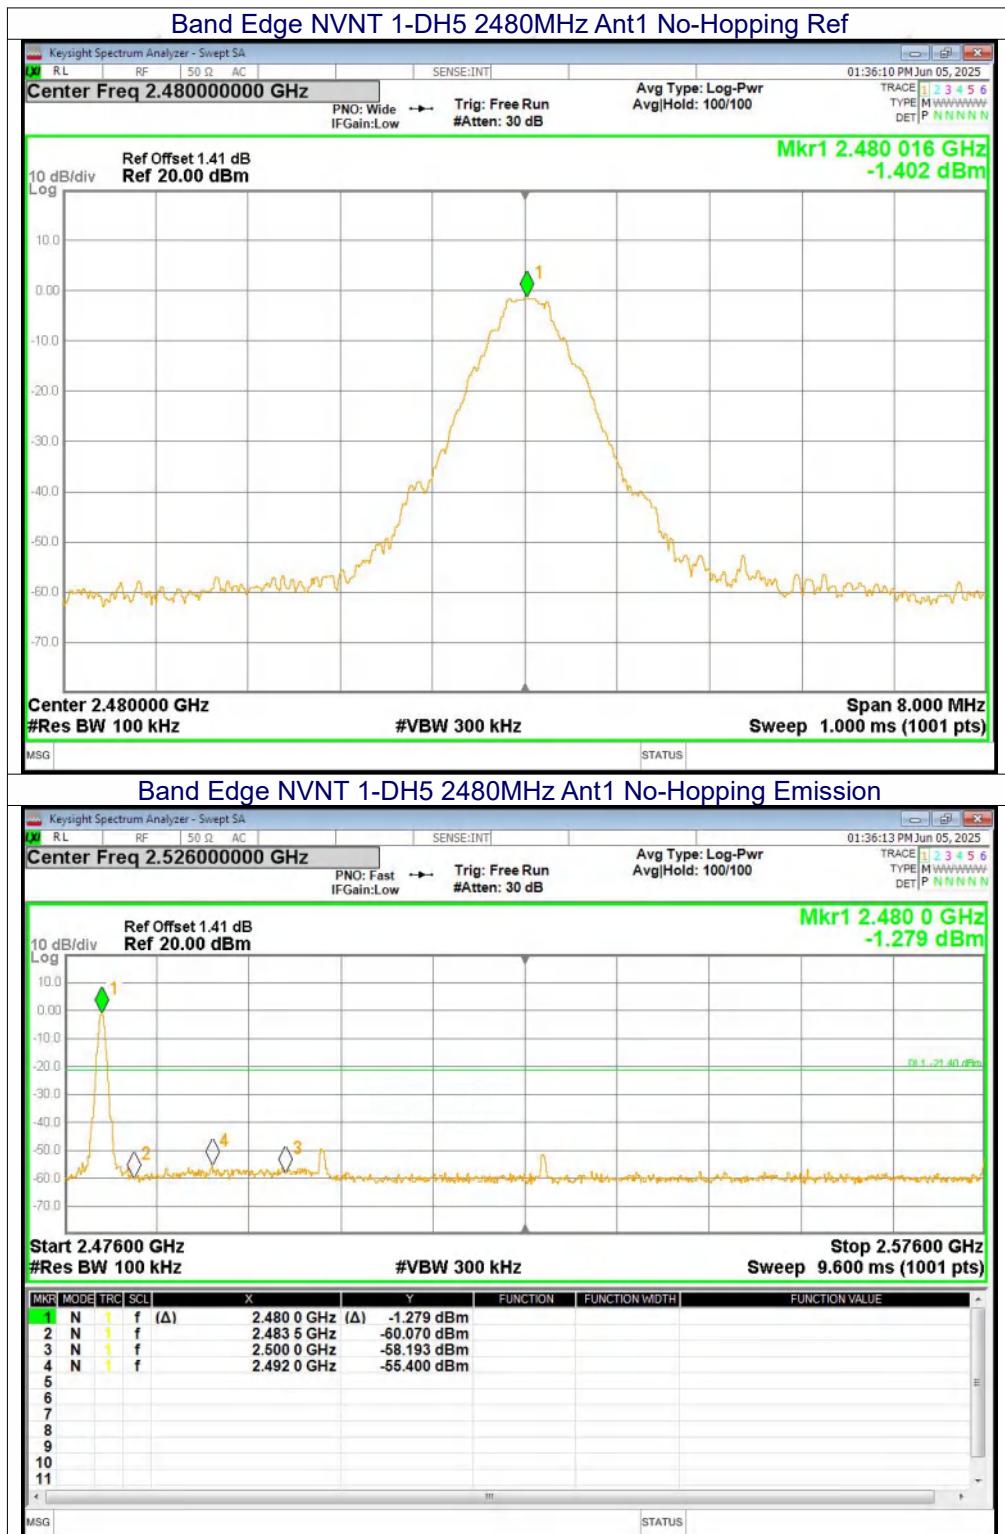

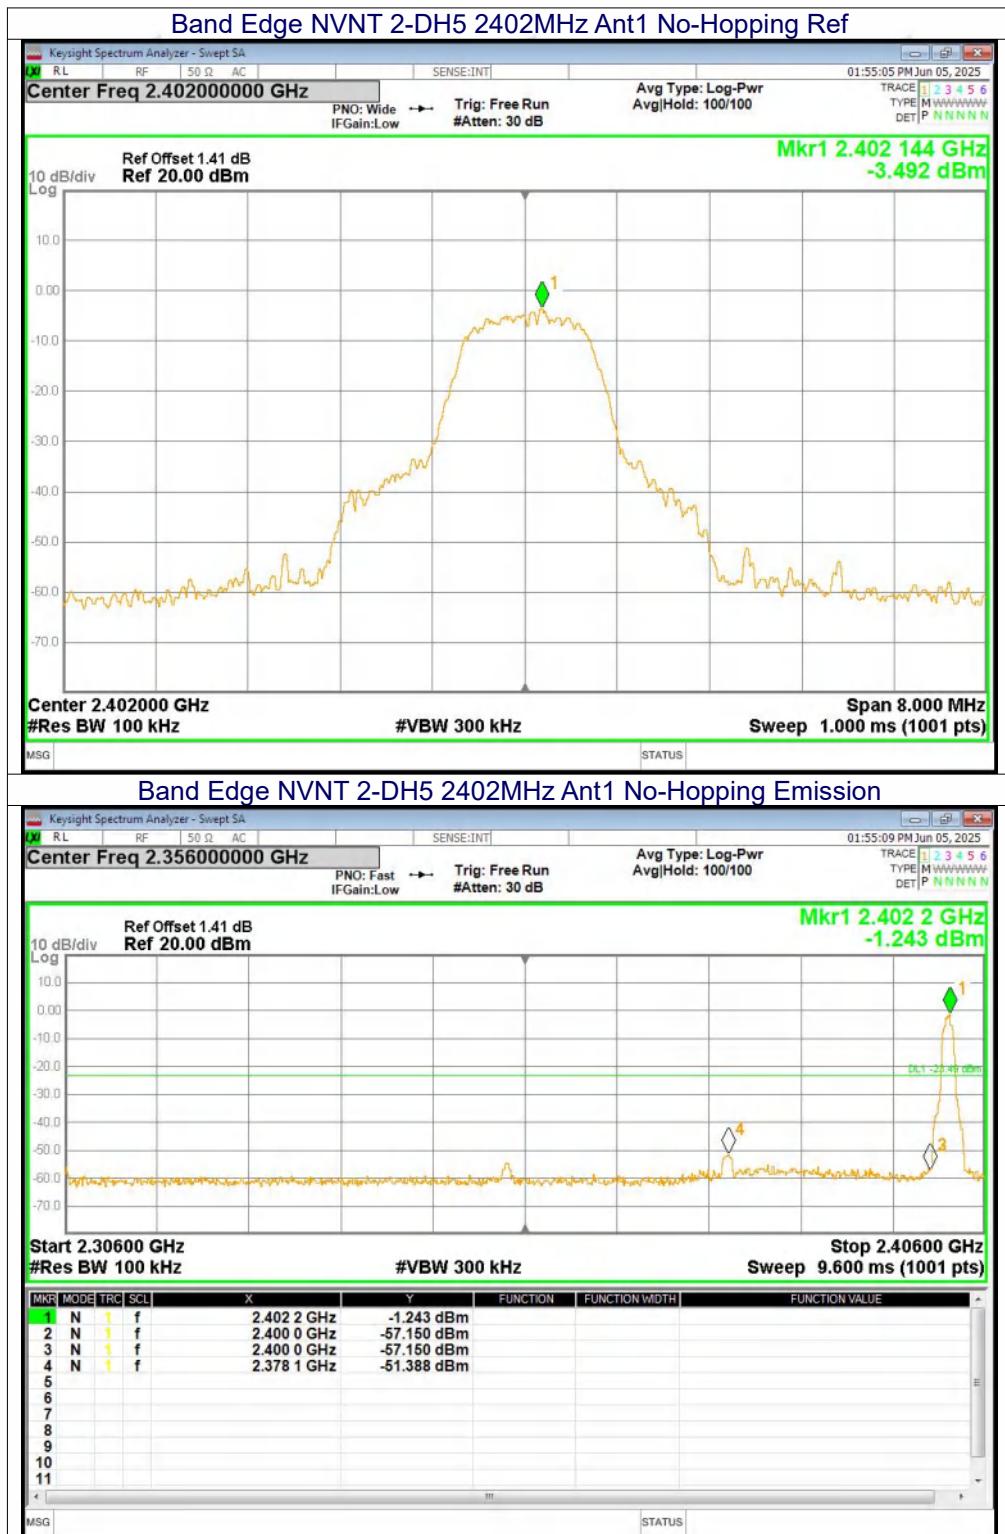

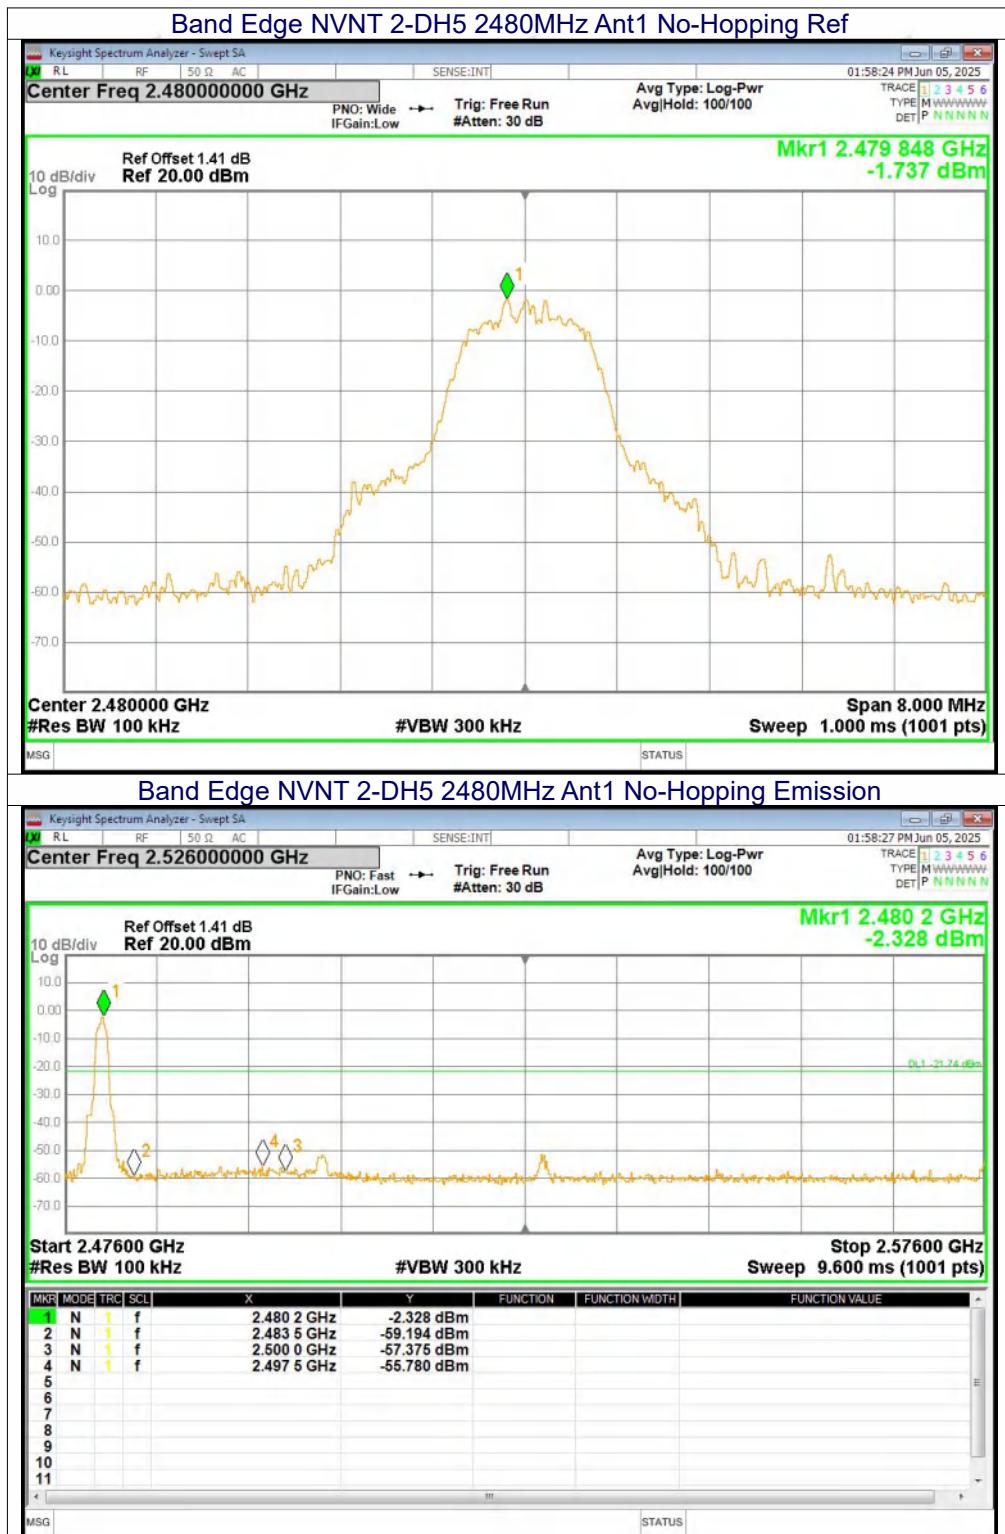



ZHONGHAN

Project No.: ZHT-250530133W01

Page 48 of 86


Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-47.09	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-47.61	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-48.3	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-47.35	-20	Pass







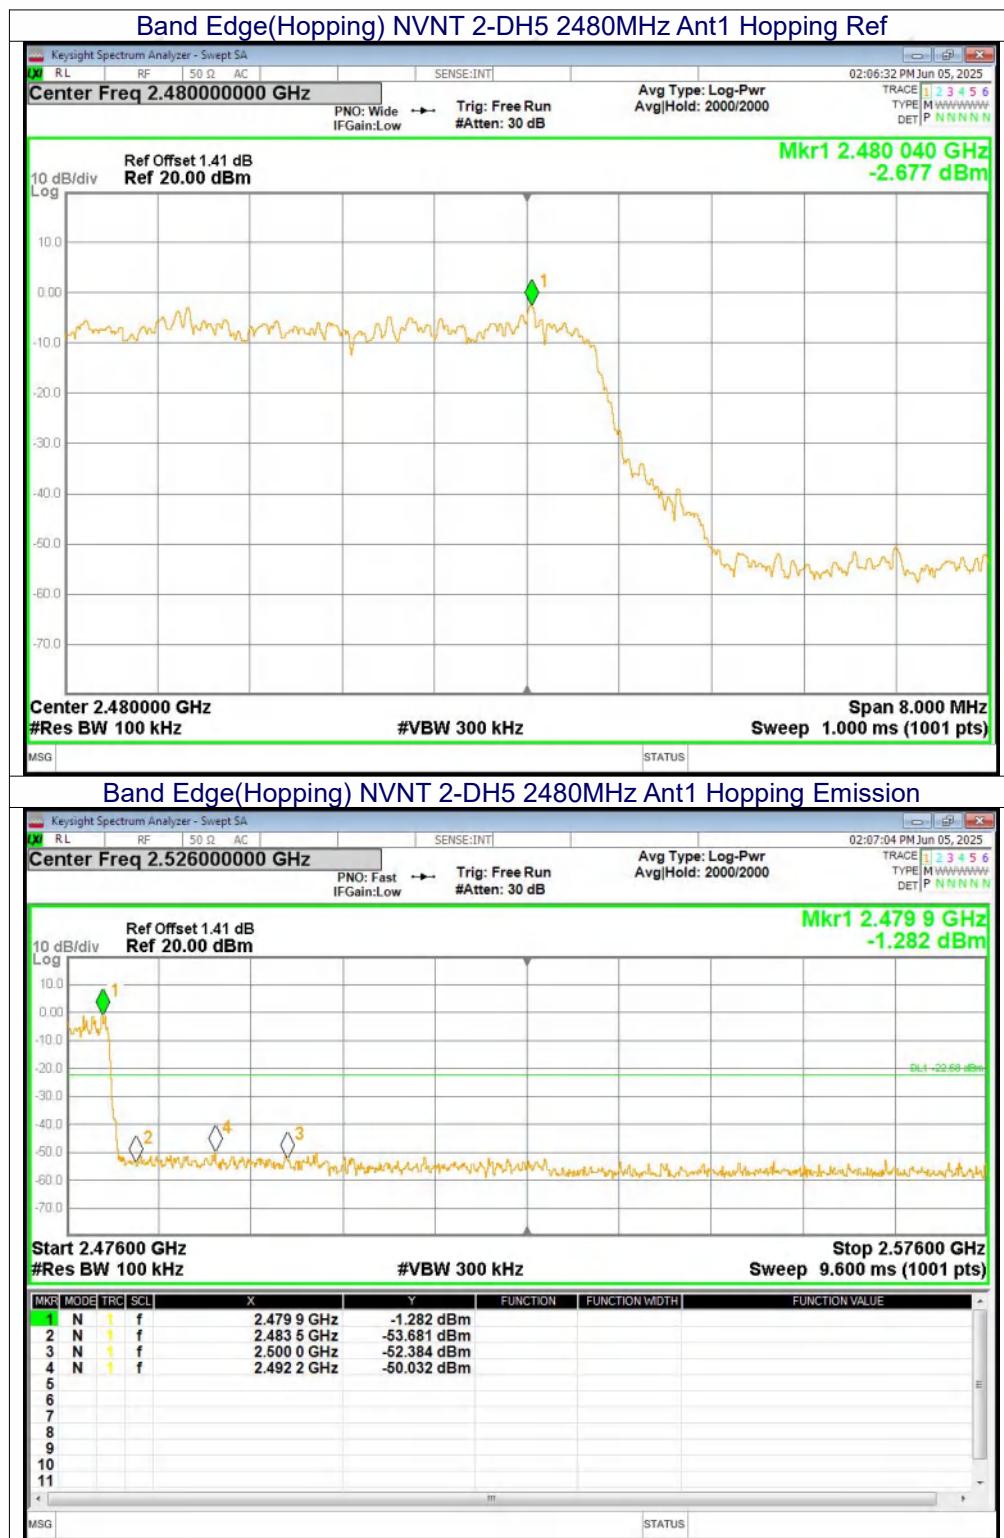




ZHONGHAN


Project No.: ZHT-250530133W01


Page 53 of 86


Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-43.98	-20	Pass
NVNT	1-DH5	2441	Ant1	-44.67	-20	Pass
NVNT	1-DH5	2480	Ant1	-42.83	-20	Pass
NVNT	2-DH5	2402	Ant1	-47.17	-20	Pass
NVNT	2-DH5	2441	Ant1	-45.19	-20	Pass
NVNT	2-DH5	2480	Ant1	-45.18	-20	Pass

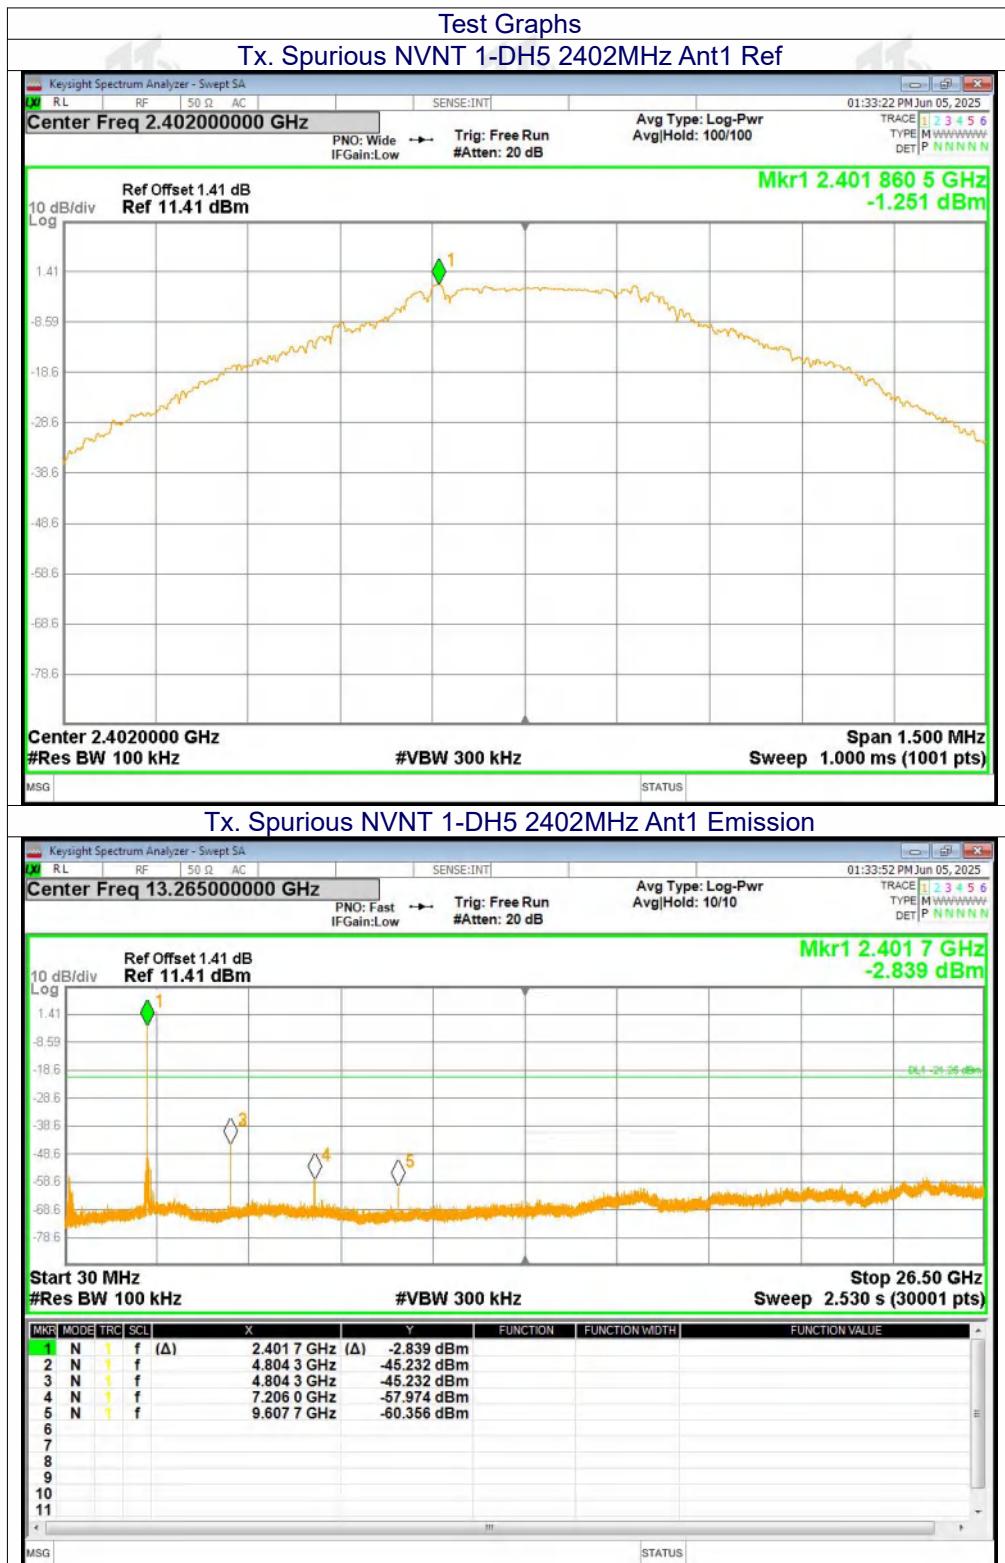


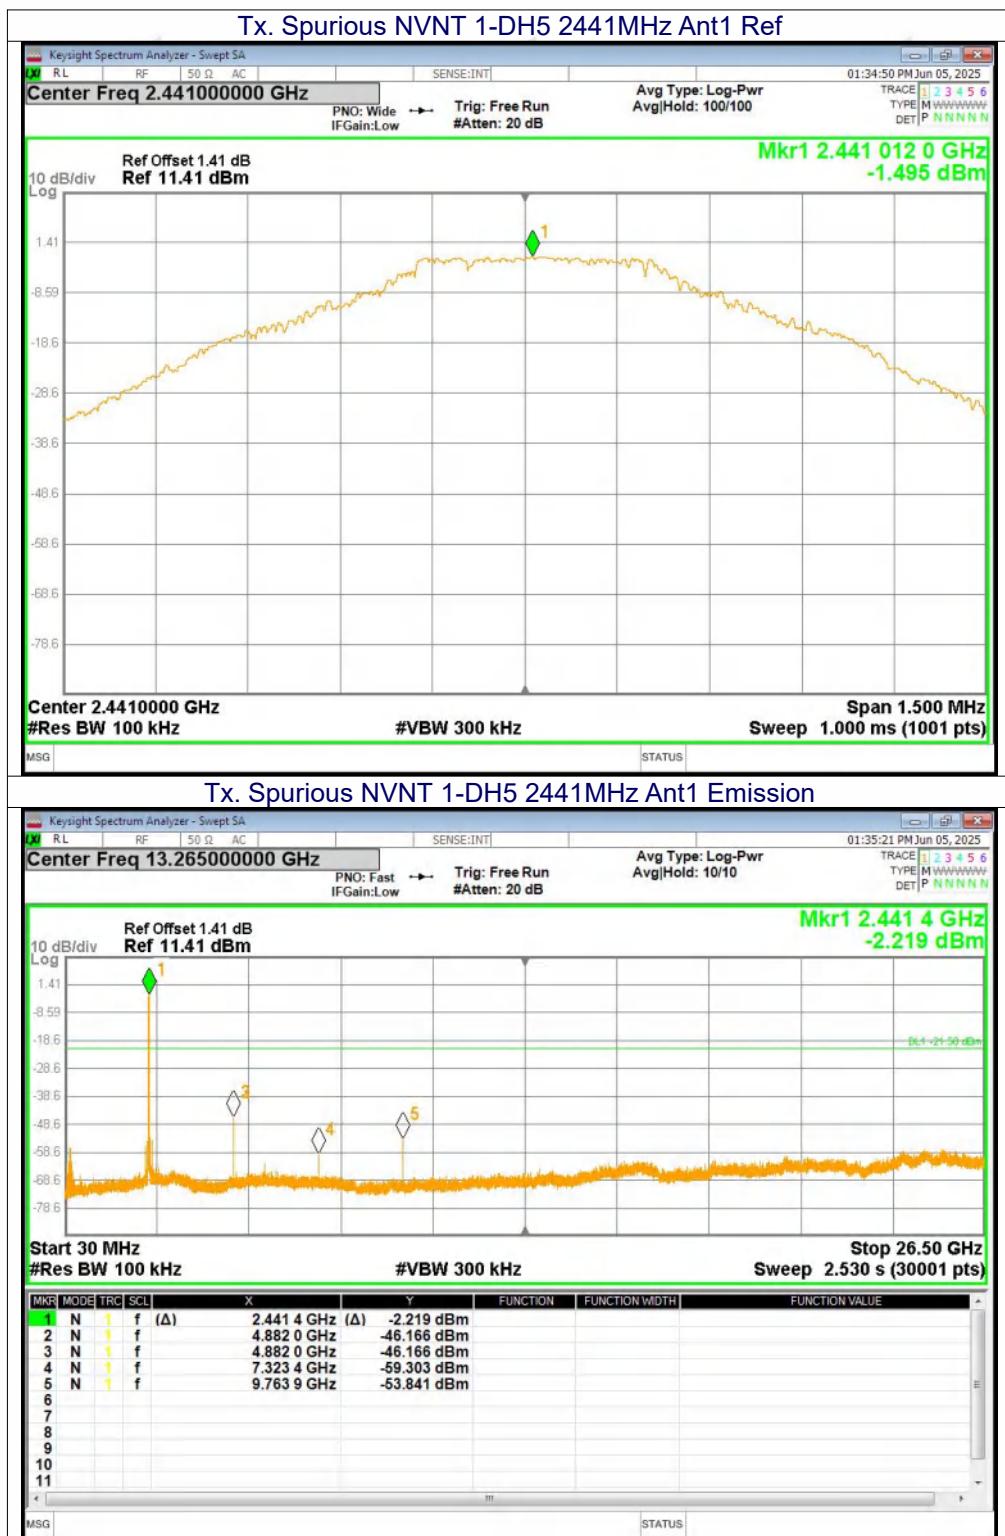

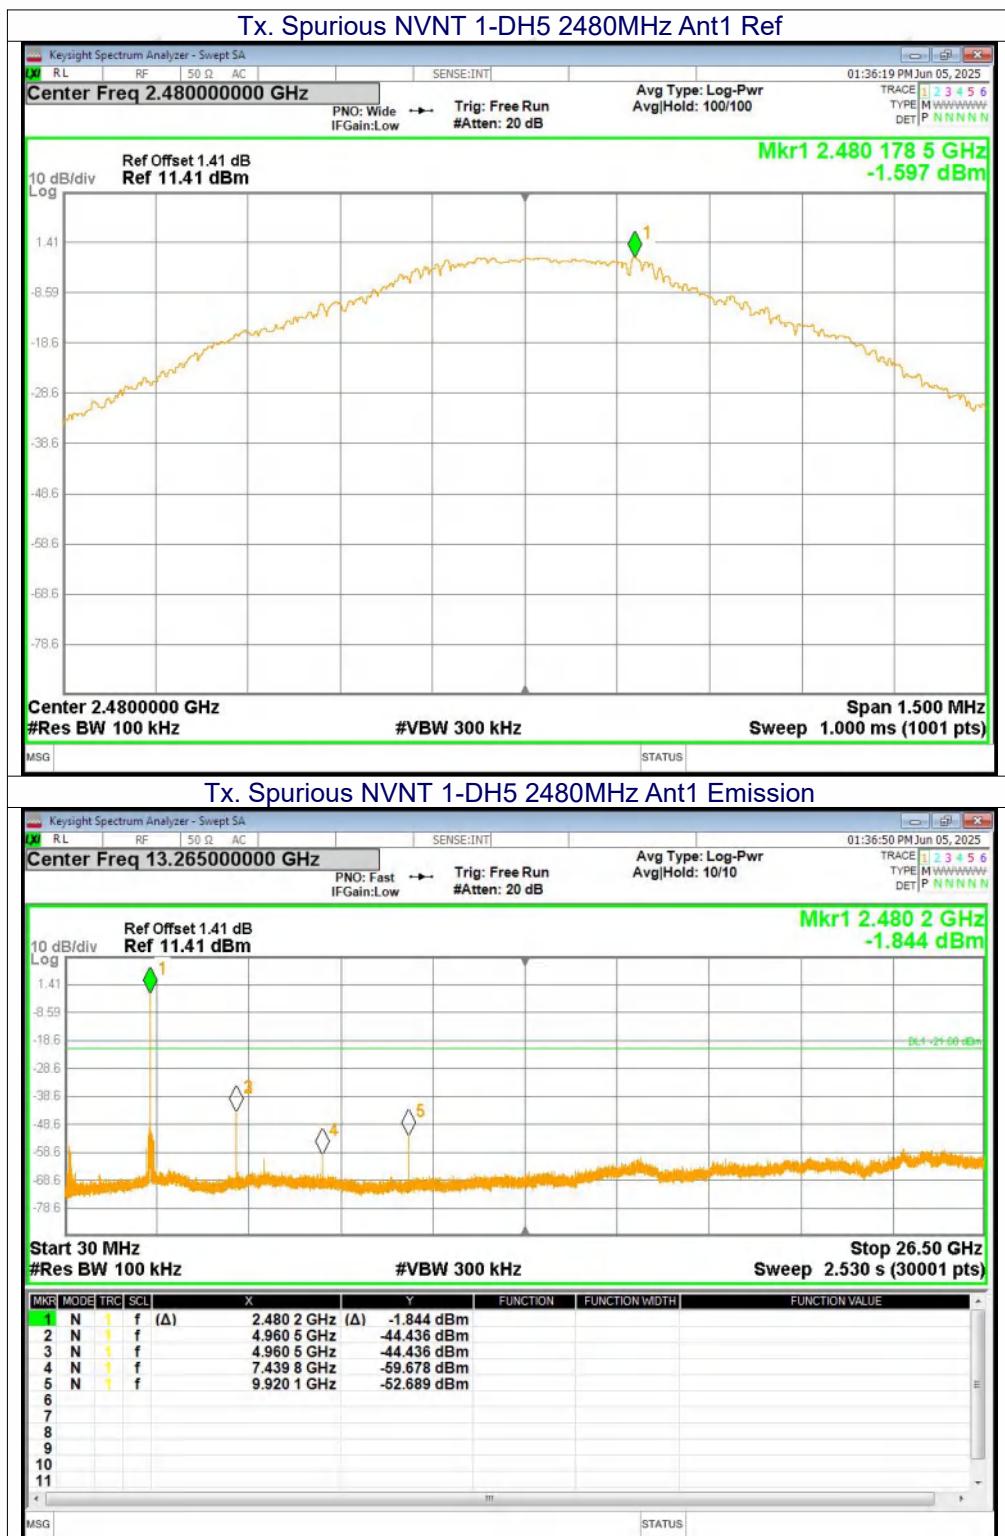

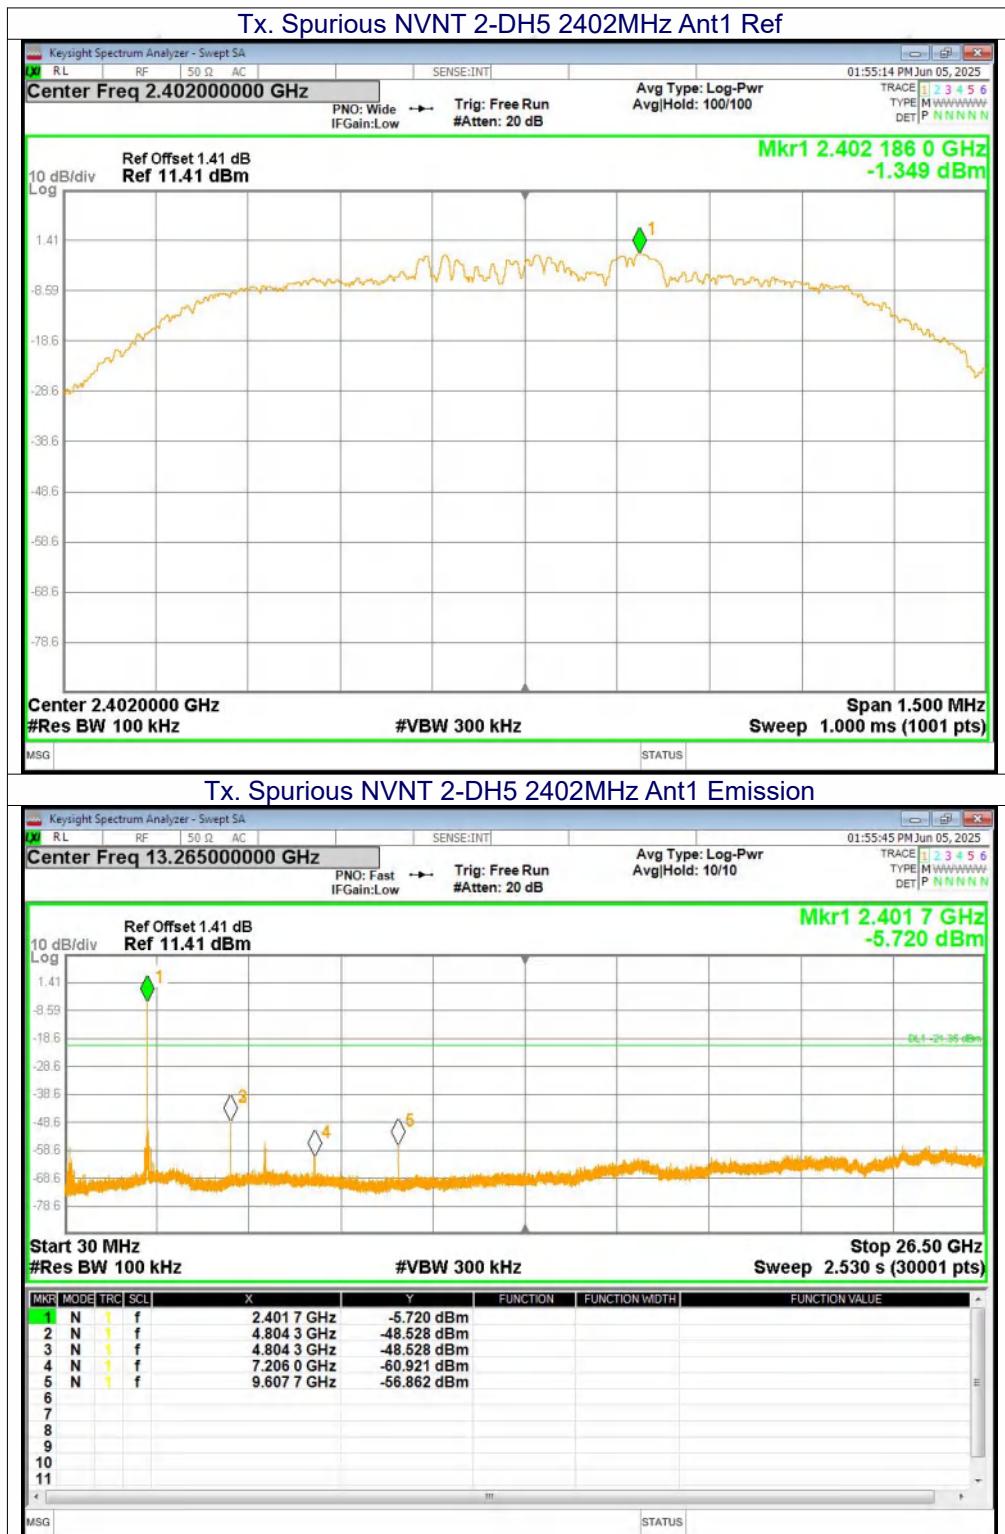

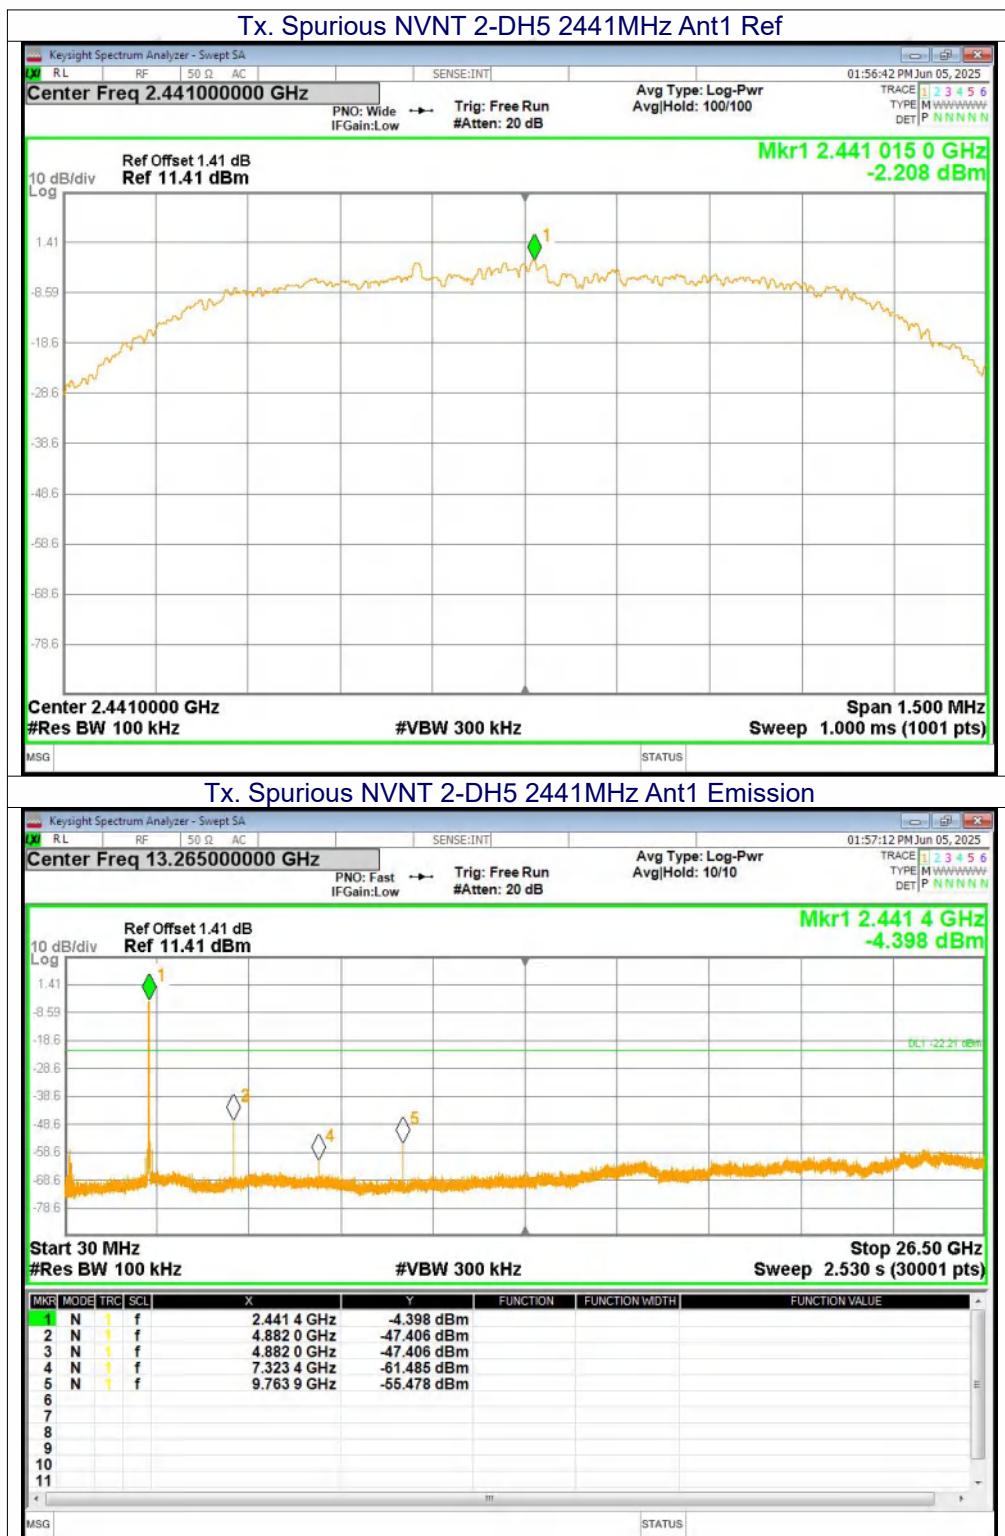

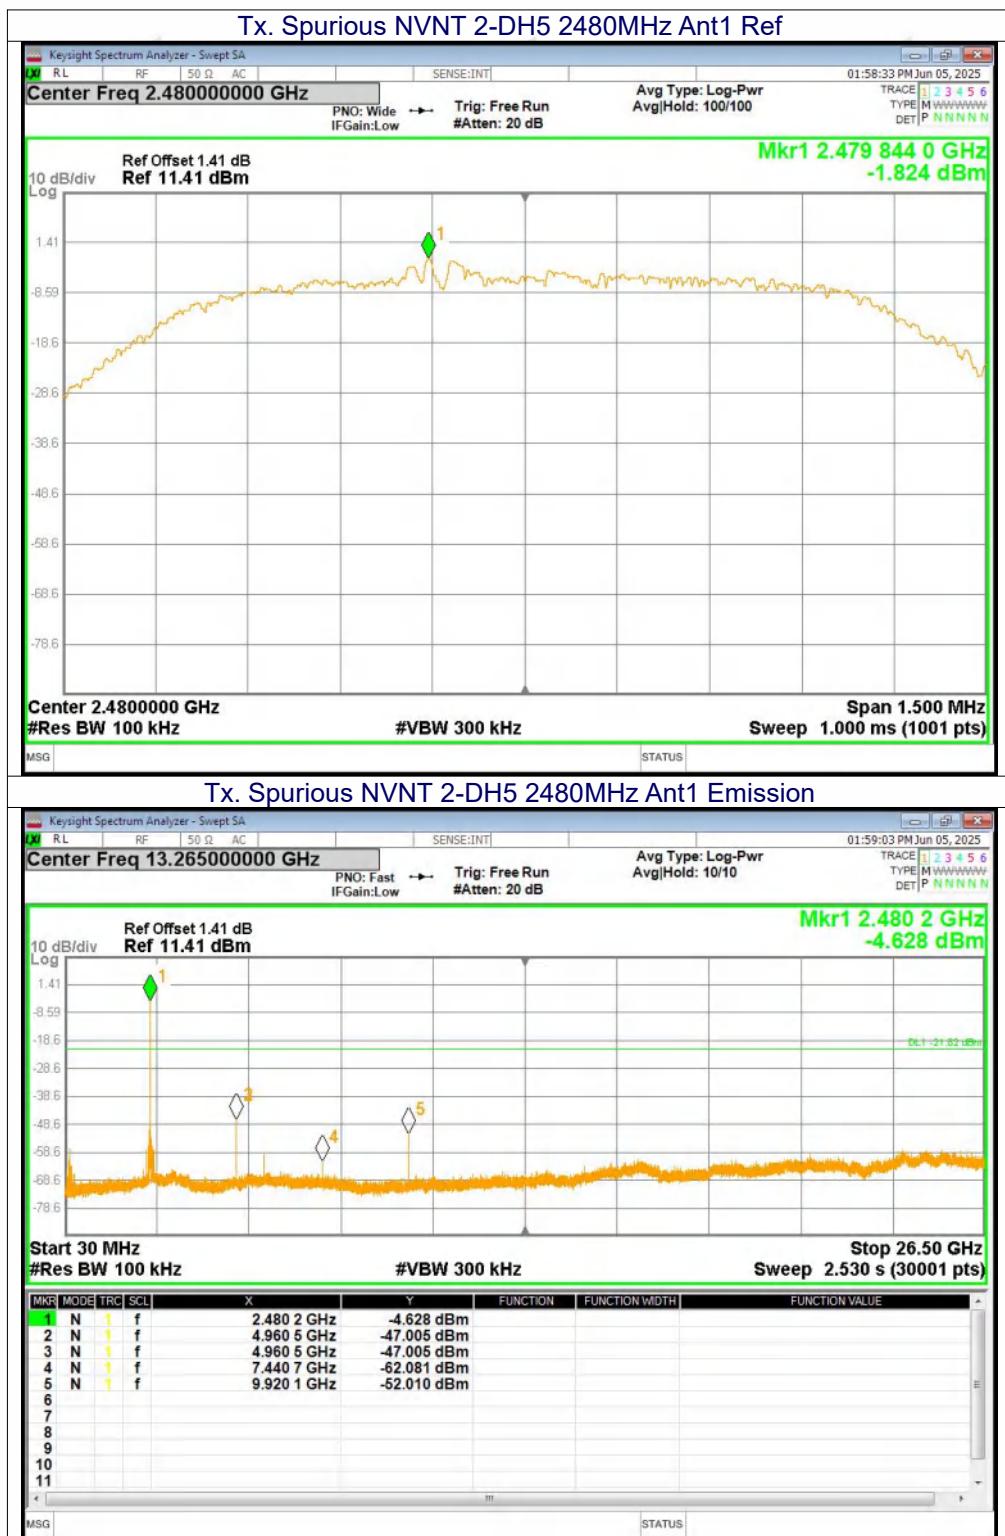

8. 20DB&99% BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013

8.1 Test Setup



8.2 Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

8.3 Test procedure


1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
8. The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30KHz RBW and 100 KHz VBW record the 99% bandwidth.


8.4 DEVIATION FROM STANDARD


No deviation.


8.5 Test Result


Mode	Test channel	20dB Emission Bandwidth (MHz)	99%Bandwidth (MHz)	Result
GFSK	Lowest	1.055	0.933	Pass
	Middle	1.03	0.951	
	Highest	1.05	0.948	
$\pi/4$ DQPSK	Lowest	1.322	1.221	Pass
	Middle	1.324	1.231	
	Highest	1.316	1.235	

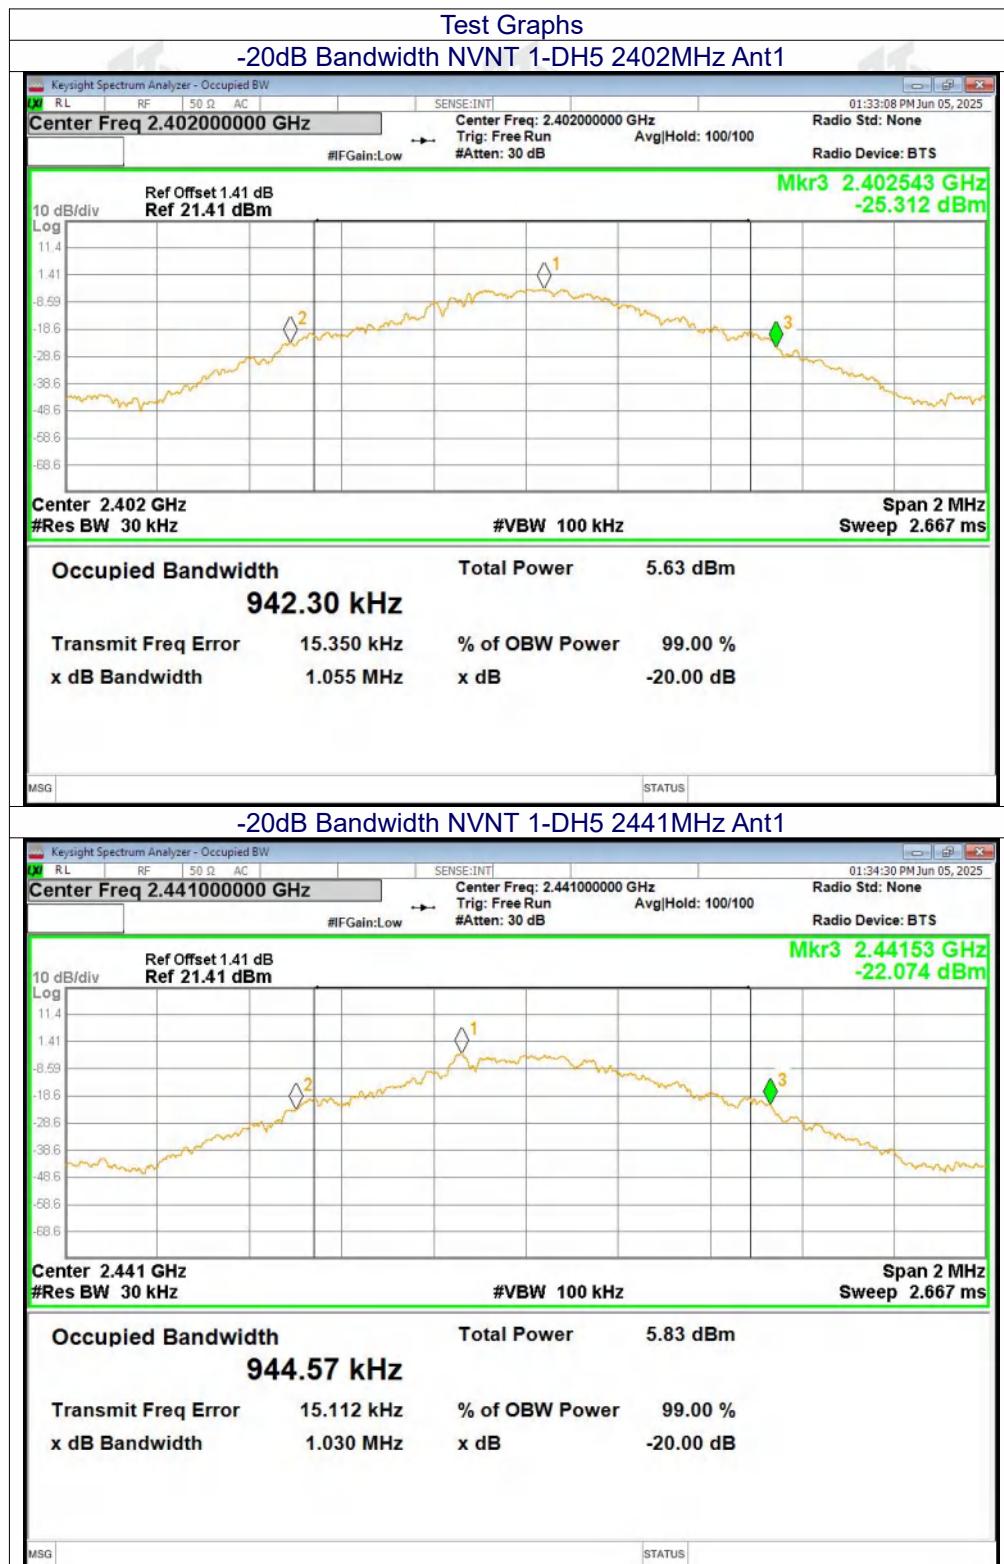


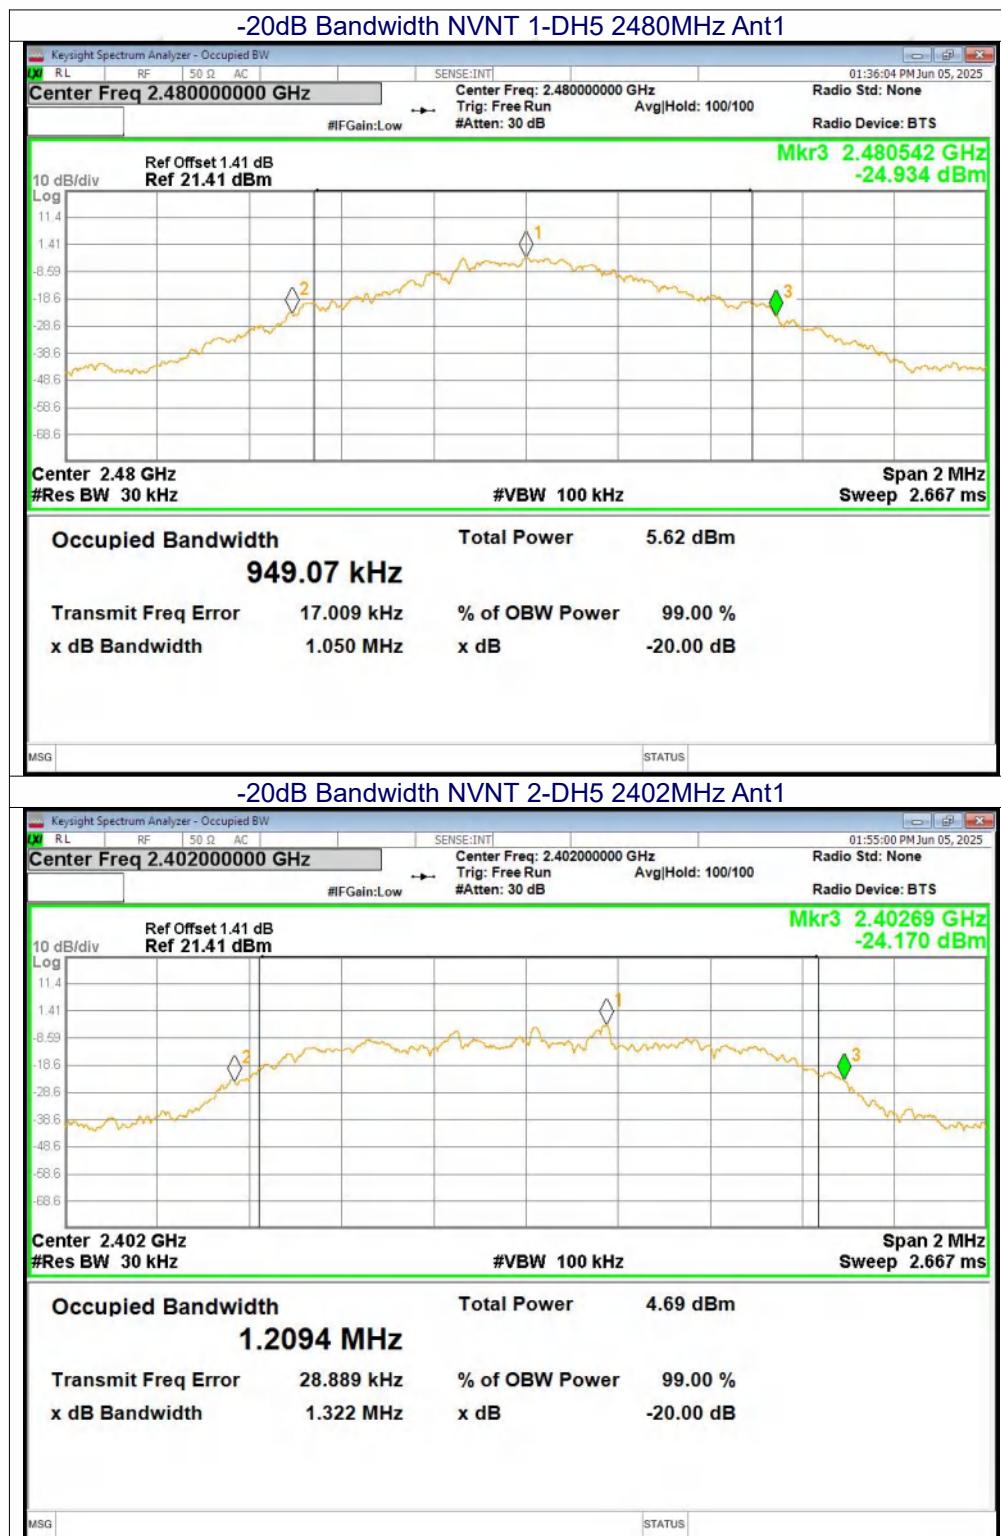

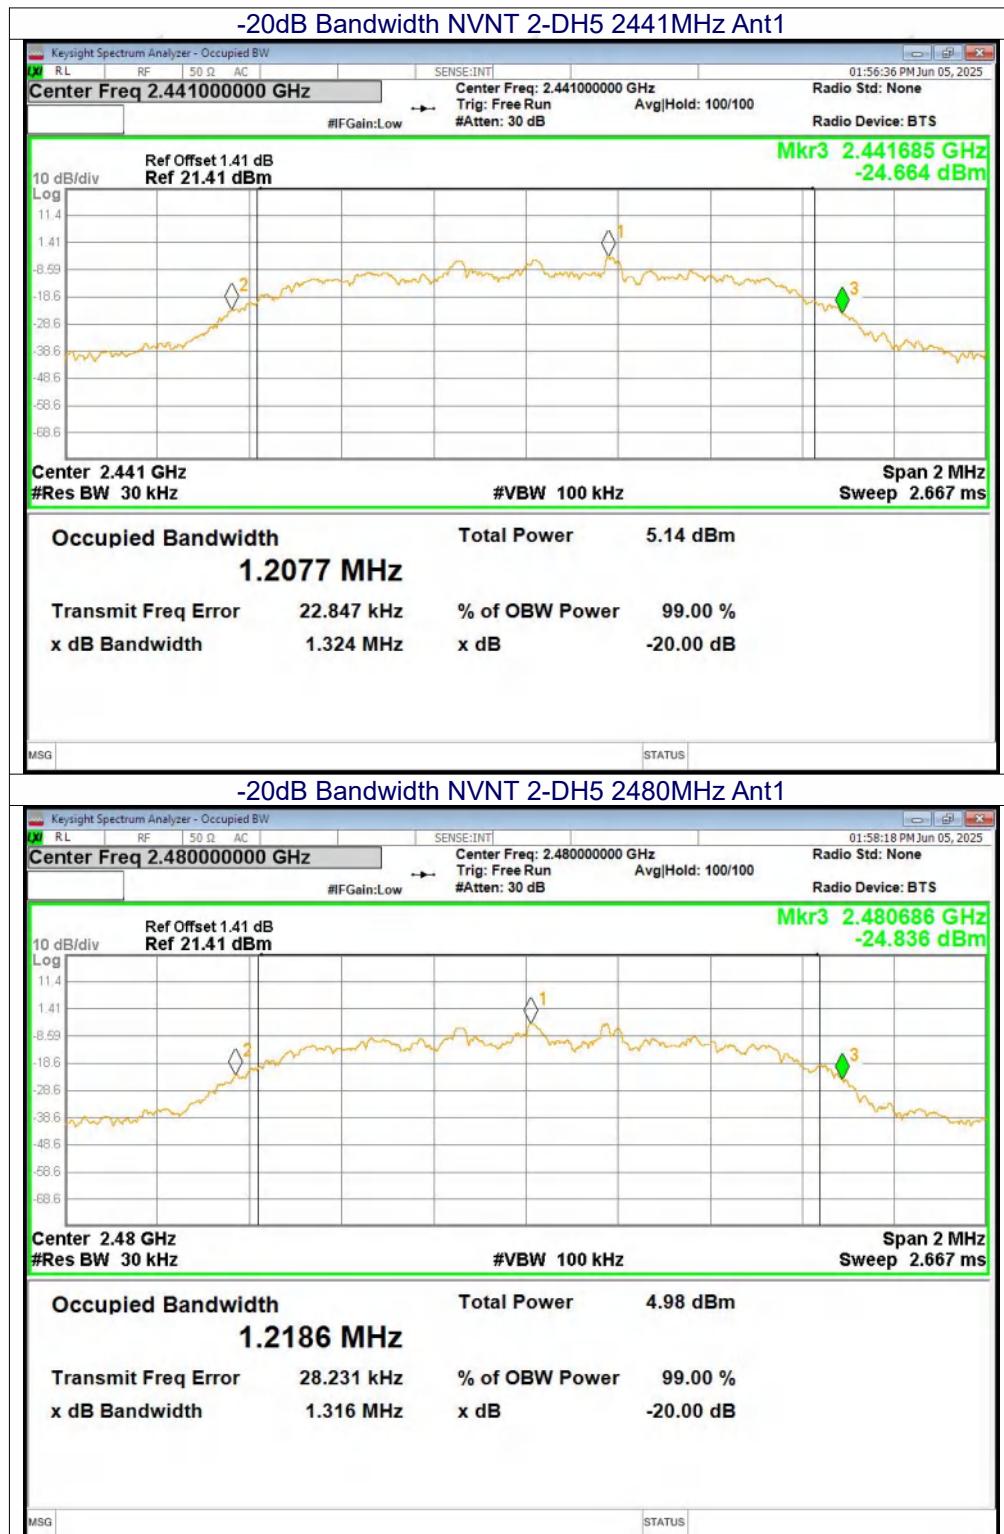

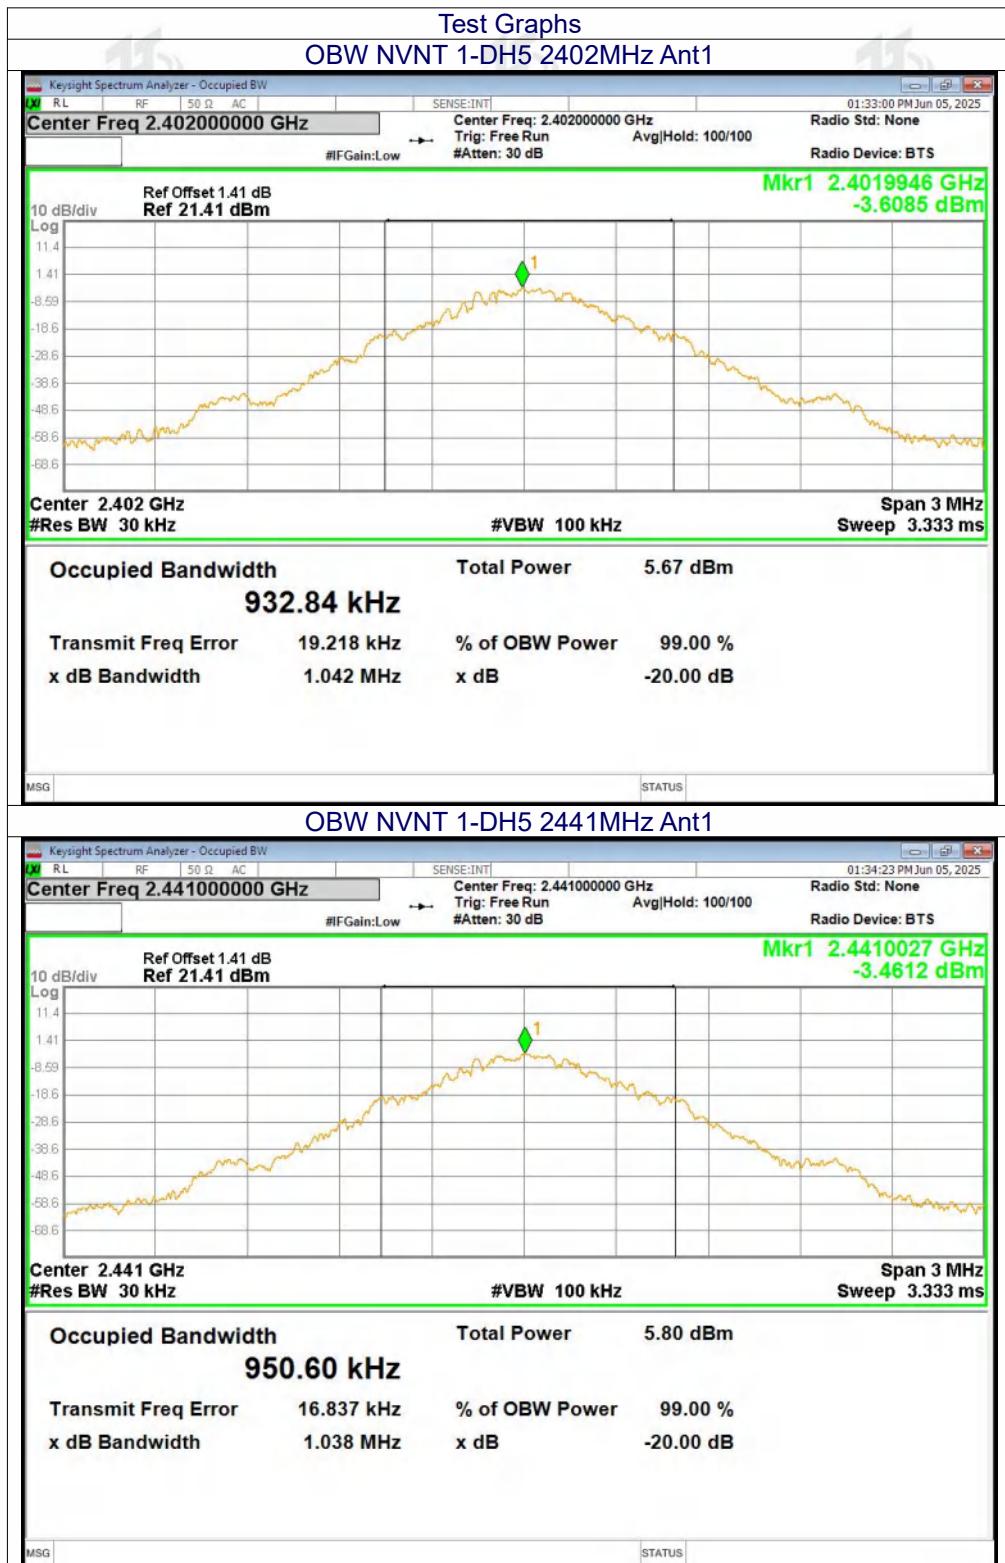

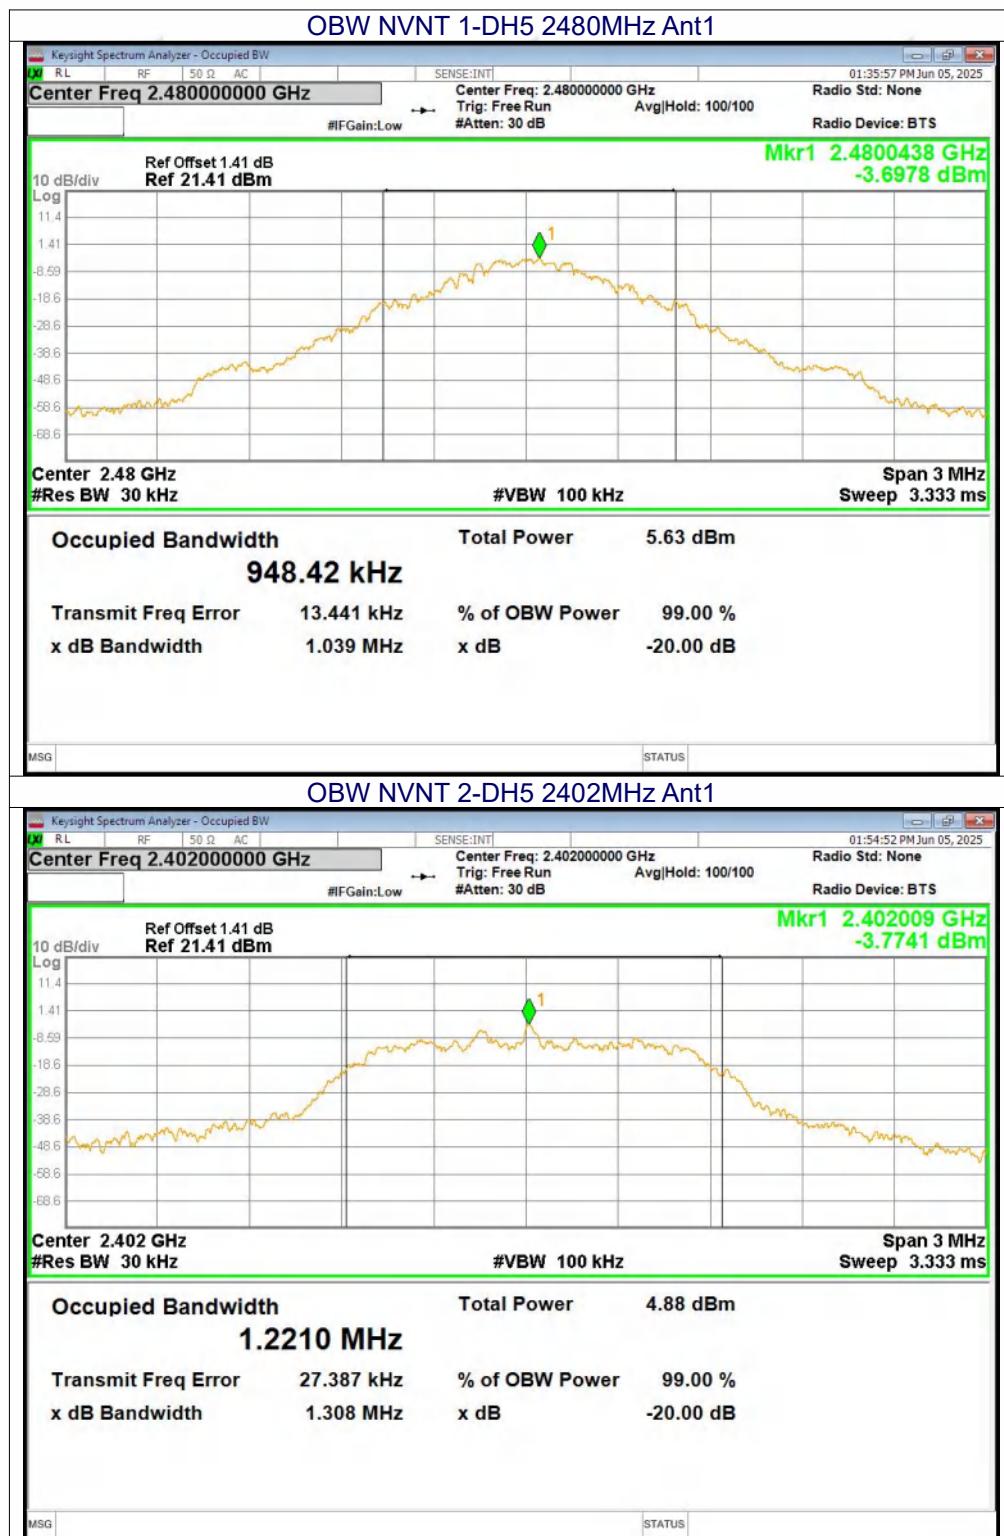

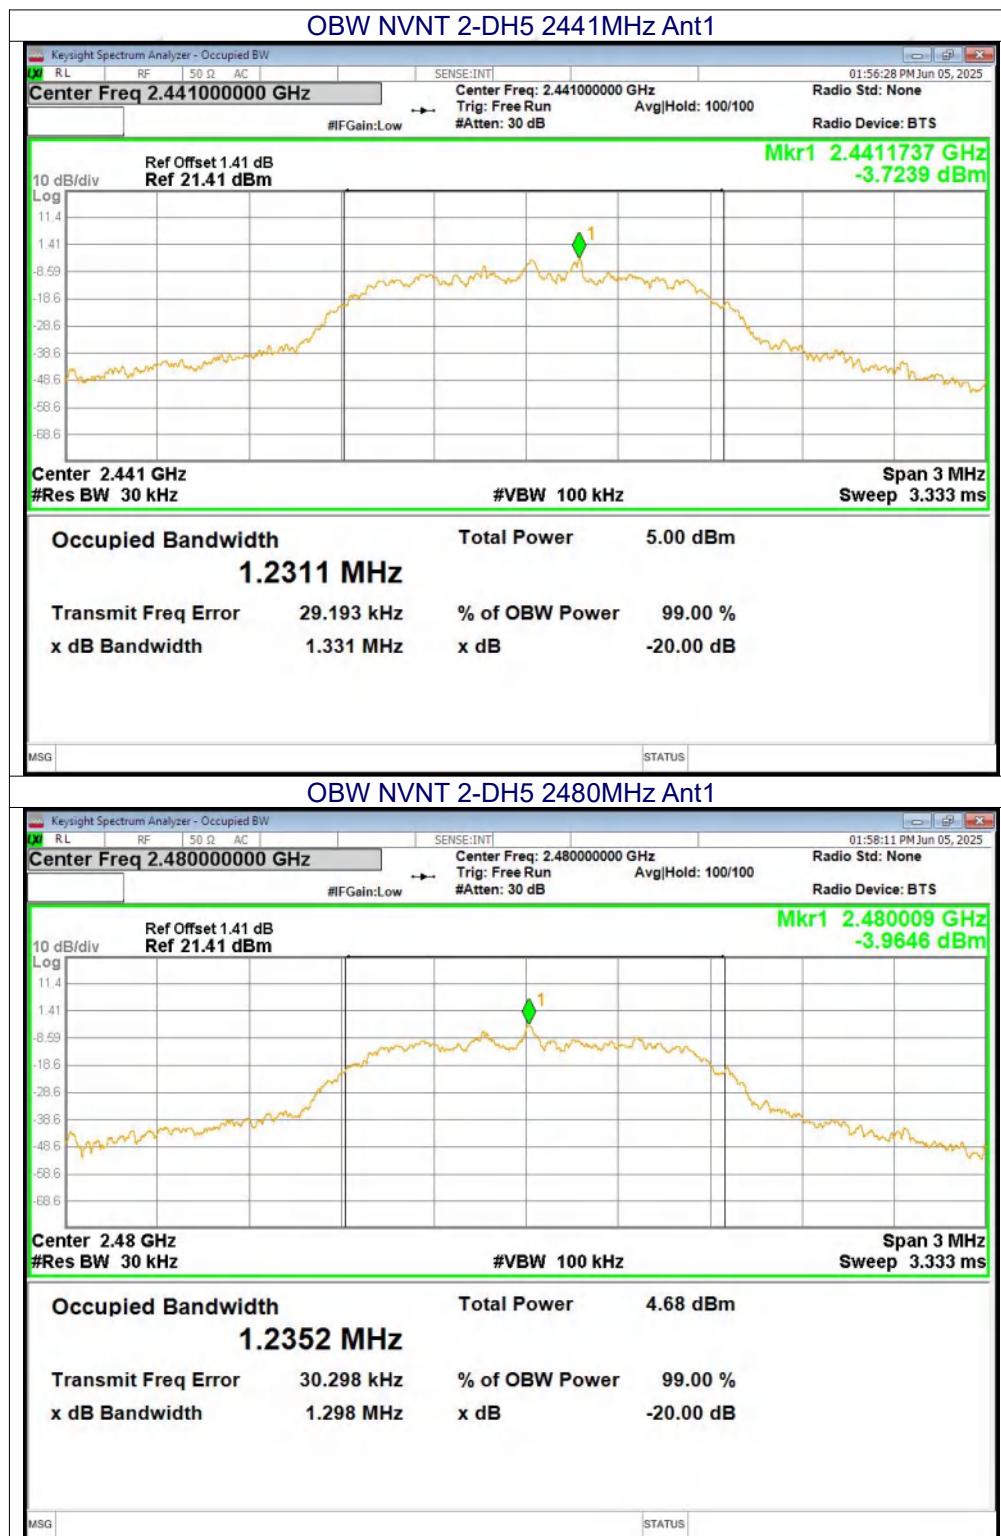

9. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013

9.1 Block Diagram Of Test Setup



9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW =6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


9.4 DEVIATION FROM STANDARD


No deviation.

9.5 Test Result

Mode	Test channel	Peak Output Power (dBm)	Peak Output Power Limit (dBm)	Result
GFSK	Lowest	-0.93	30.00	Pass
	Middle	-0.88		
	Highest	-1.02		
$\pi/4$ DQPSK	Lowest	-0.19	21.00	Pass
	Middle	-0.08		
	Highest	-0.2		



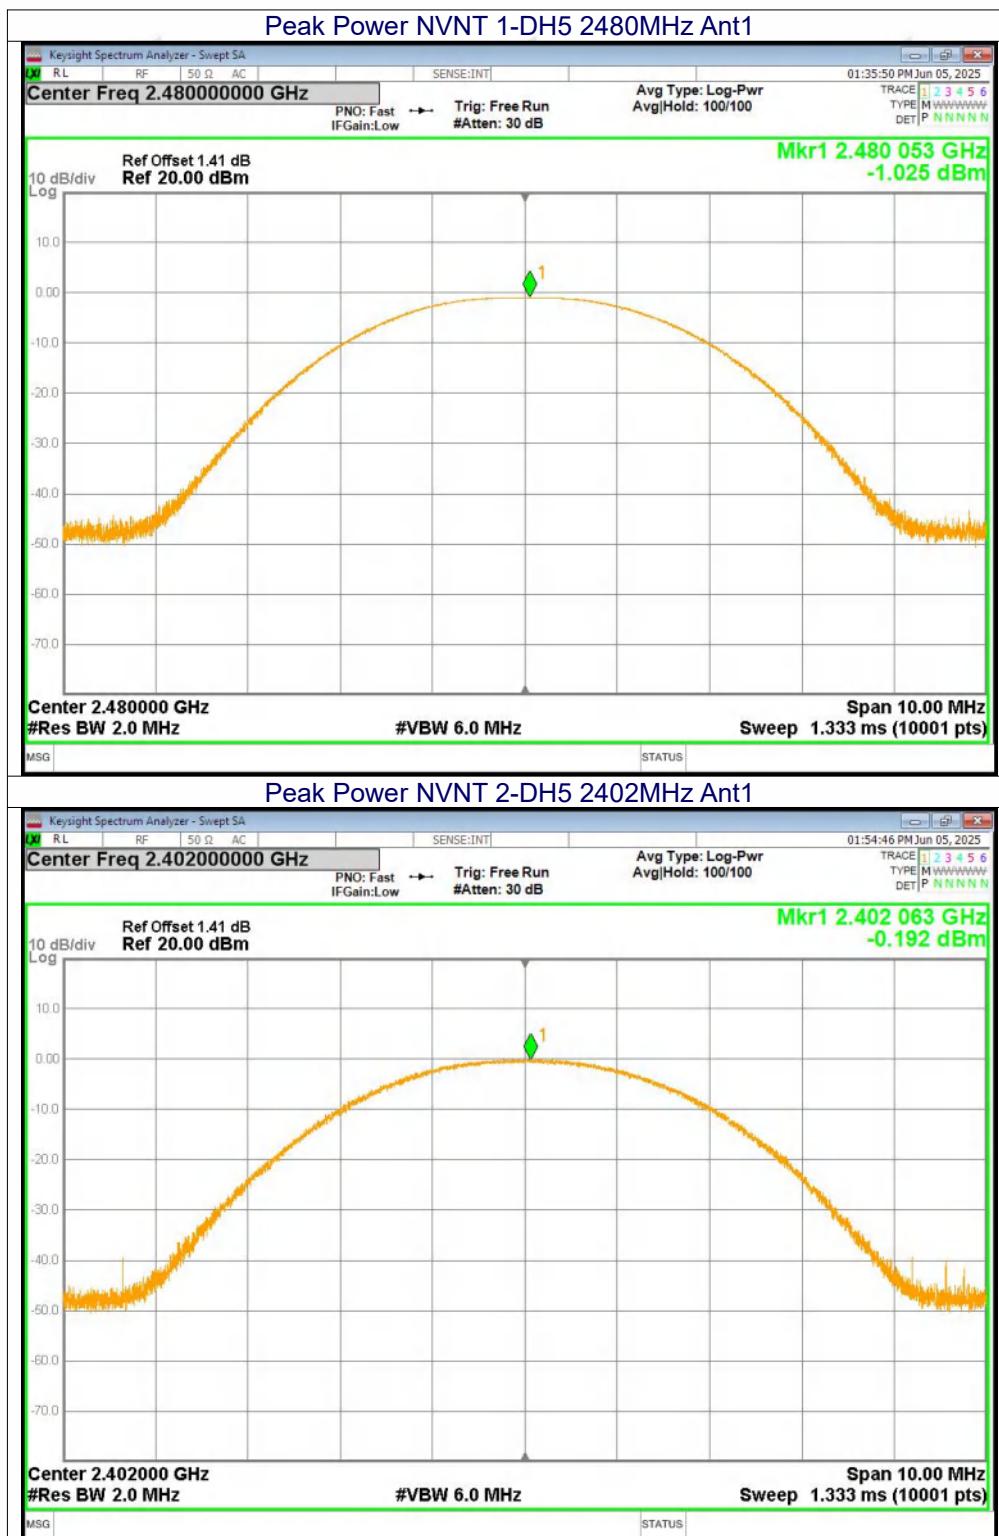

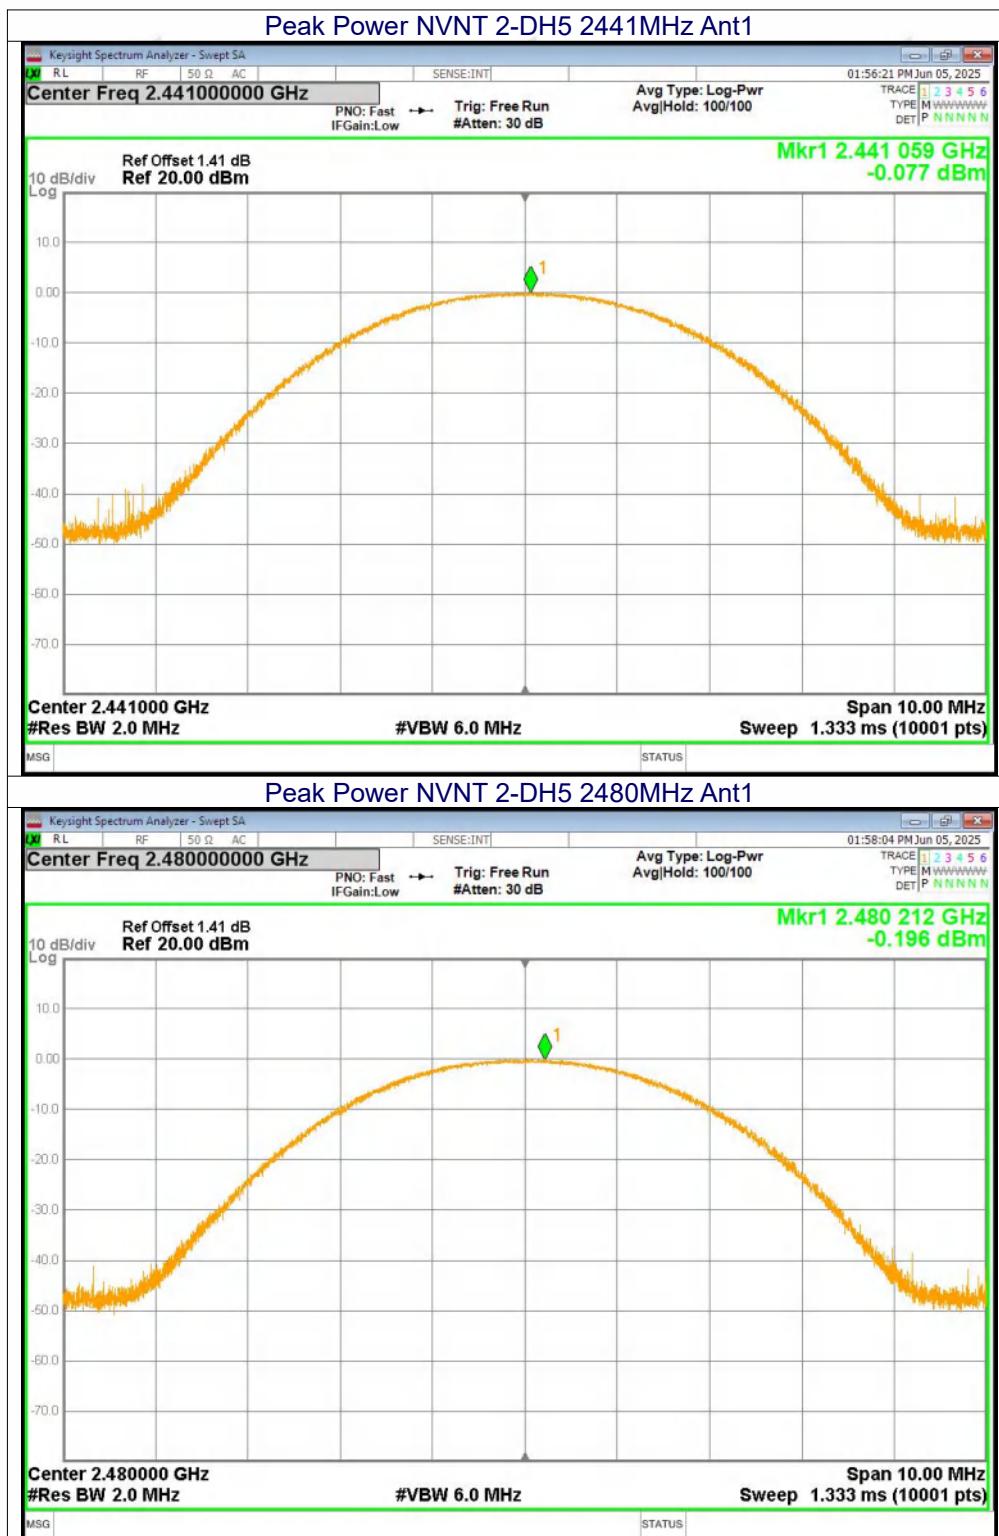

10. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=30KHz, VBW=100KHz, detector=Peak
Limit:	GFSK, π/4-DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

10.1 Test Setup



10.2 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


10.3 DEVIATION FROM STANDARD


No deviation.

10.4 Test Result

Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
1-DH5	Ant1	2401.92	2403.168	1.248	0.933	Pass
1-DH5	Ant1	2440.99	2442.012	1.022	0.951	Pass
1-DH5	Ant1	2479.01	2480.014	1.004	0.948	Pass
2-DH5	Ant1	2401.8526	2402.9992	1.1466	0.881	Pass
2-DH5	Ant1	2440.993	2442.0174	1.0244	0.883	Pass
2-DH5	Ant1	2479.0918	2480.0018	0.91	0.877	Pass

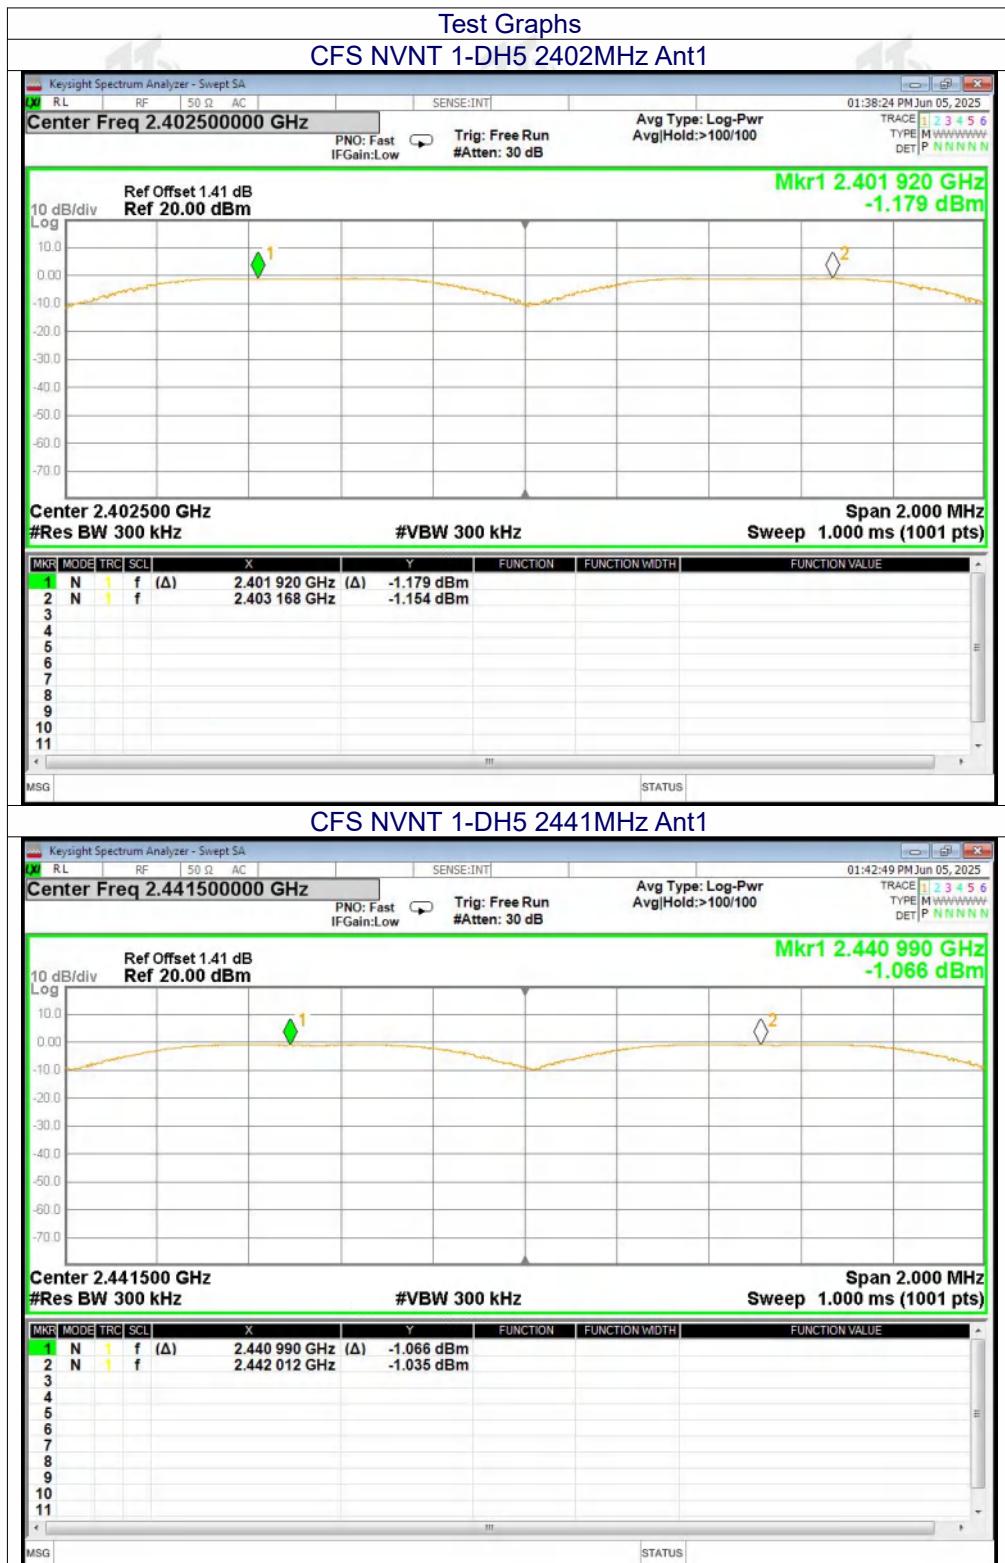

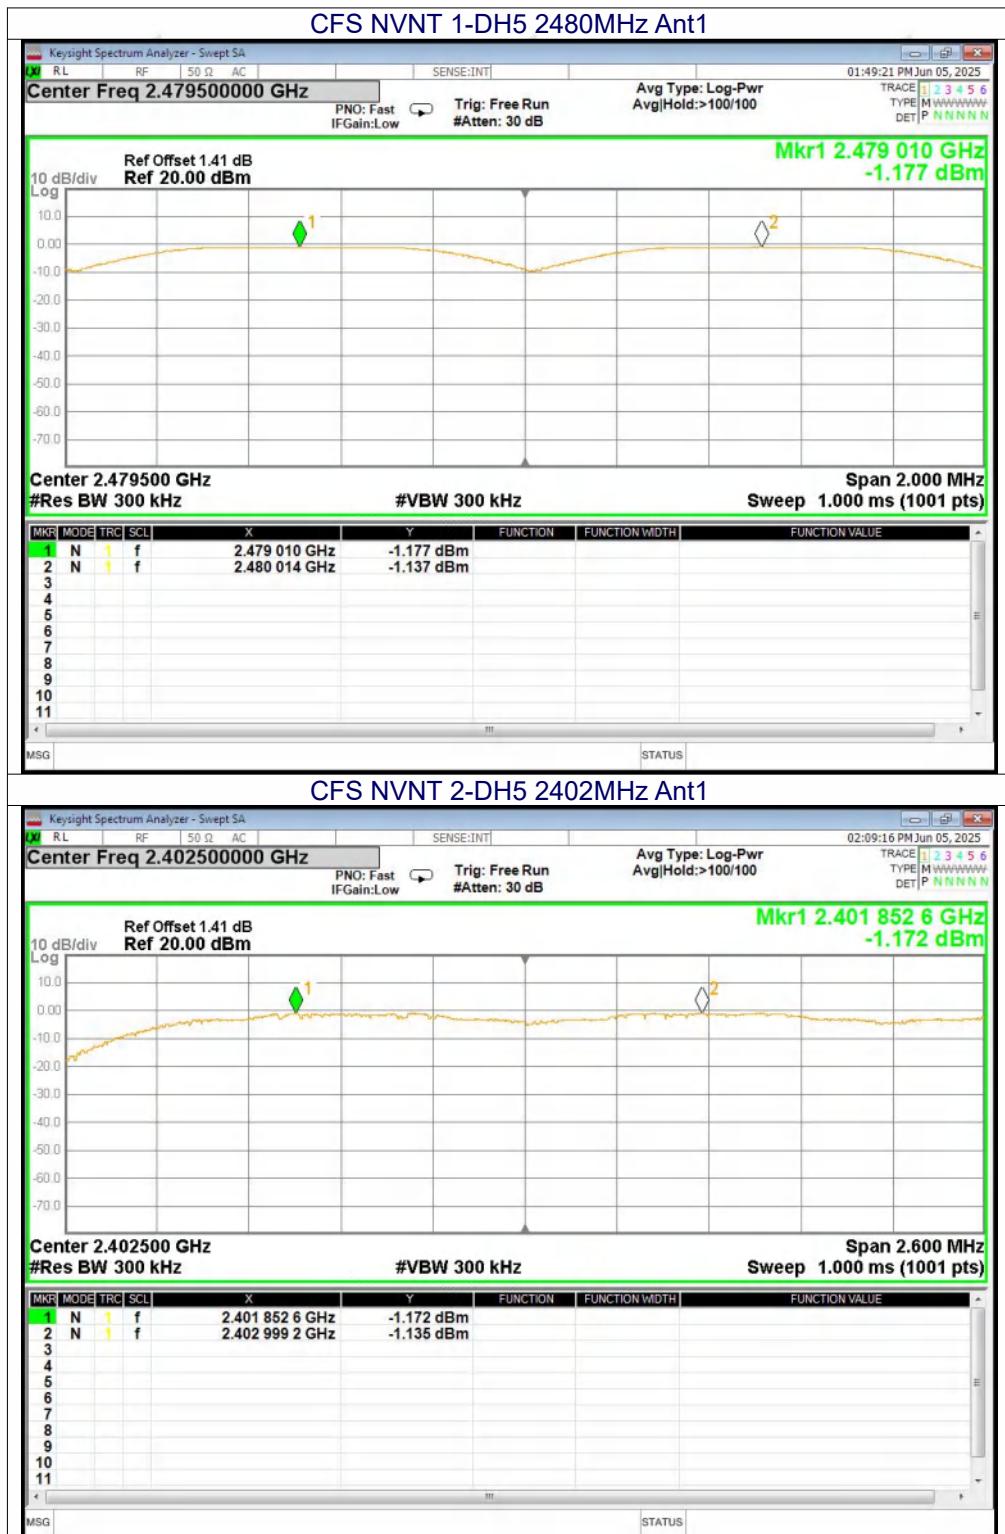

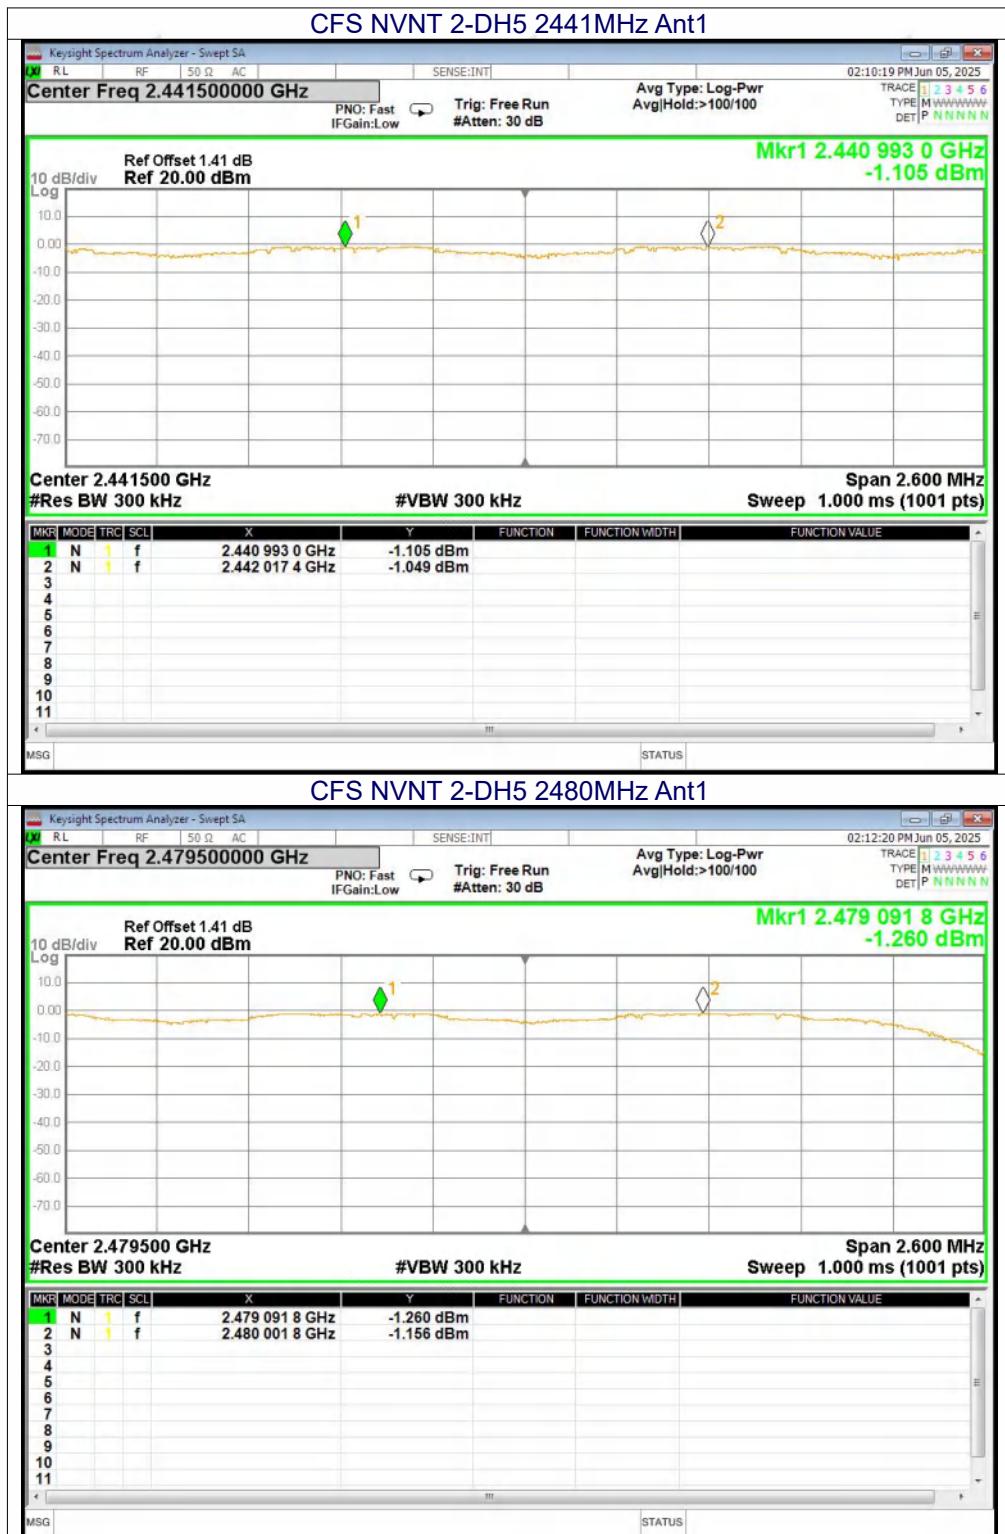

11. NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

11.1 Test Setup



11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

11.3 DEVIATION FROM STANDARD

No deviation.

11.4 Test Result

Mode	Antenna	Hopping Number	Limit	Verdict
1-DH5	Ant1	79	15	Pass
2-DH5	Ant1	79	15	Pass



12. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

12.1 Test Setup



12.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

12.3 DEVIATION FROM STANDARD

No deviation.




ZHONGHAN


Project No.: ZHT-250530133W01


Page 78 of 86


12.4 Test Result


Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2441	Ant1	0.376	118.816	316	31600	400	Pass
1-DH3	2441	Ant1	1.632	261.12	160	31600	400	Pass
1-DH5	2441	Ant1	2.88	285.12	99	31600	400	Pass
2-DH1	2441	Ant1	0.383	122.177	319	31600	400	Pass
2-DH3	2441	Ant1	1.638	265.356	162	31600	400	Pass
2-DH5	2441	Ant1	2.886	297.258	103	31600	400	Pass

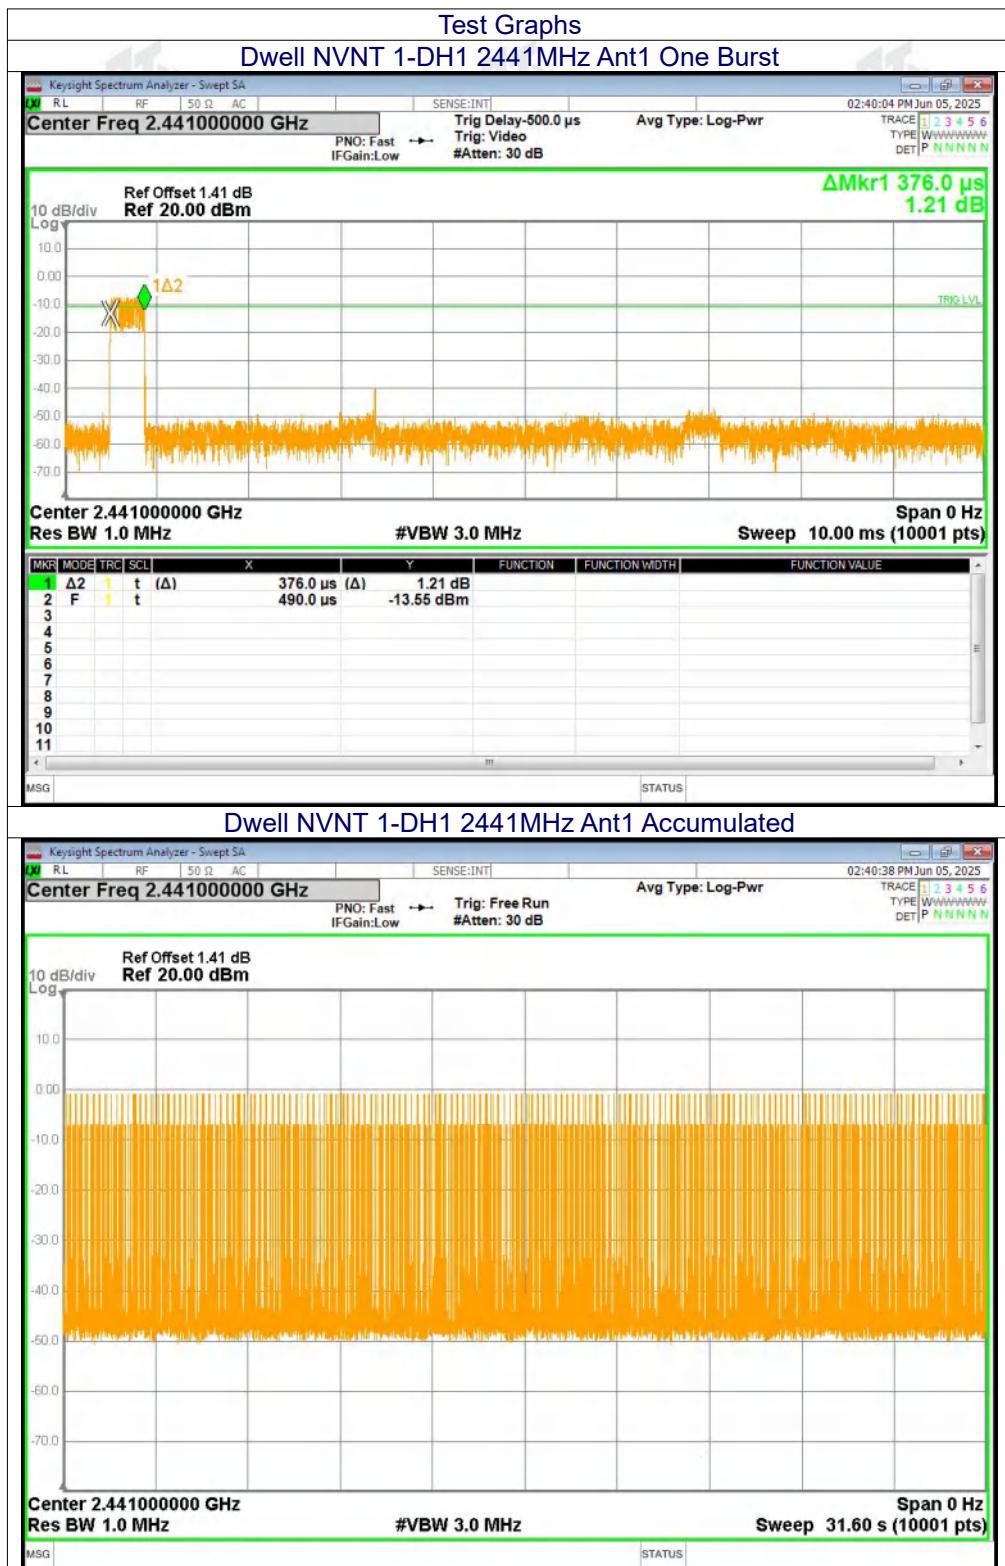


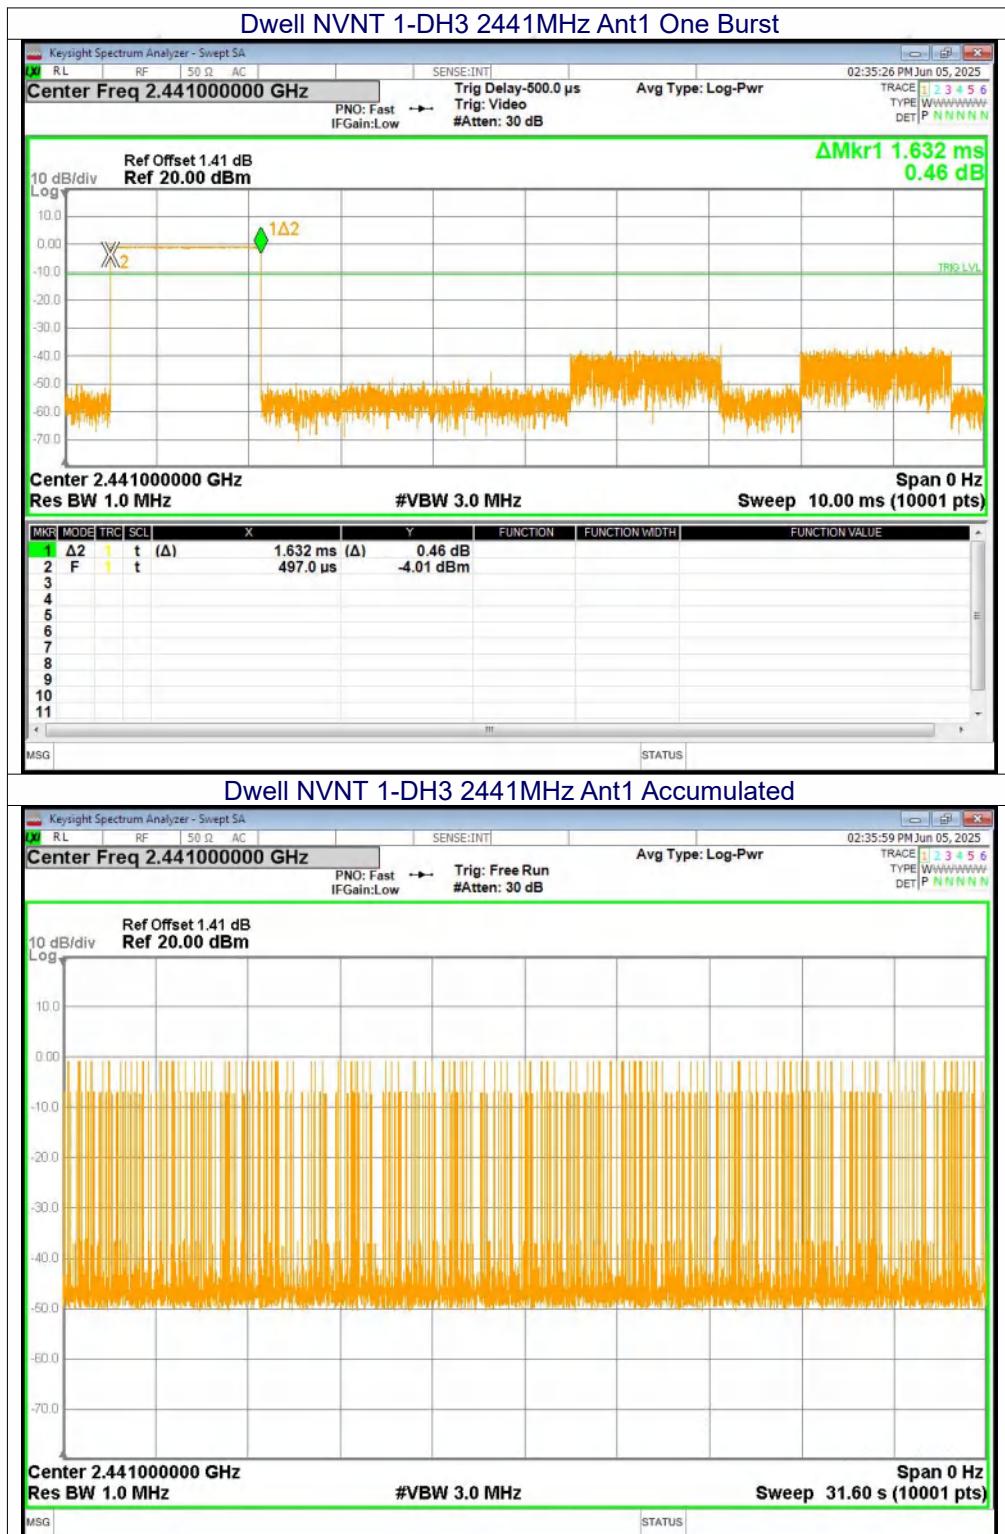

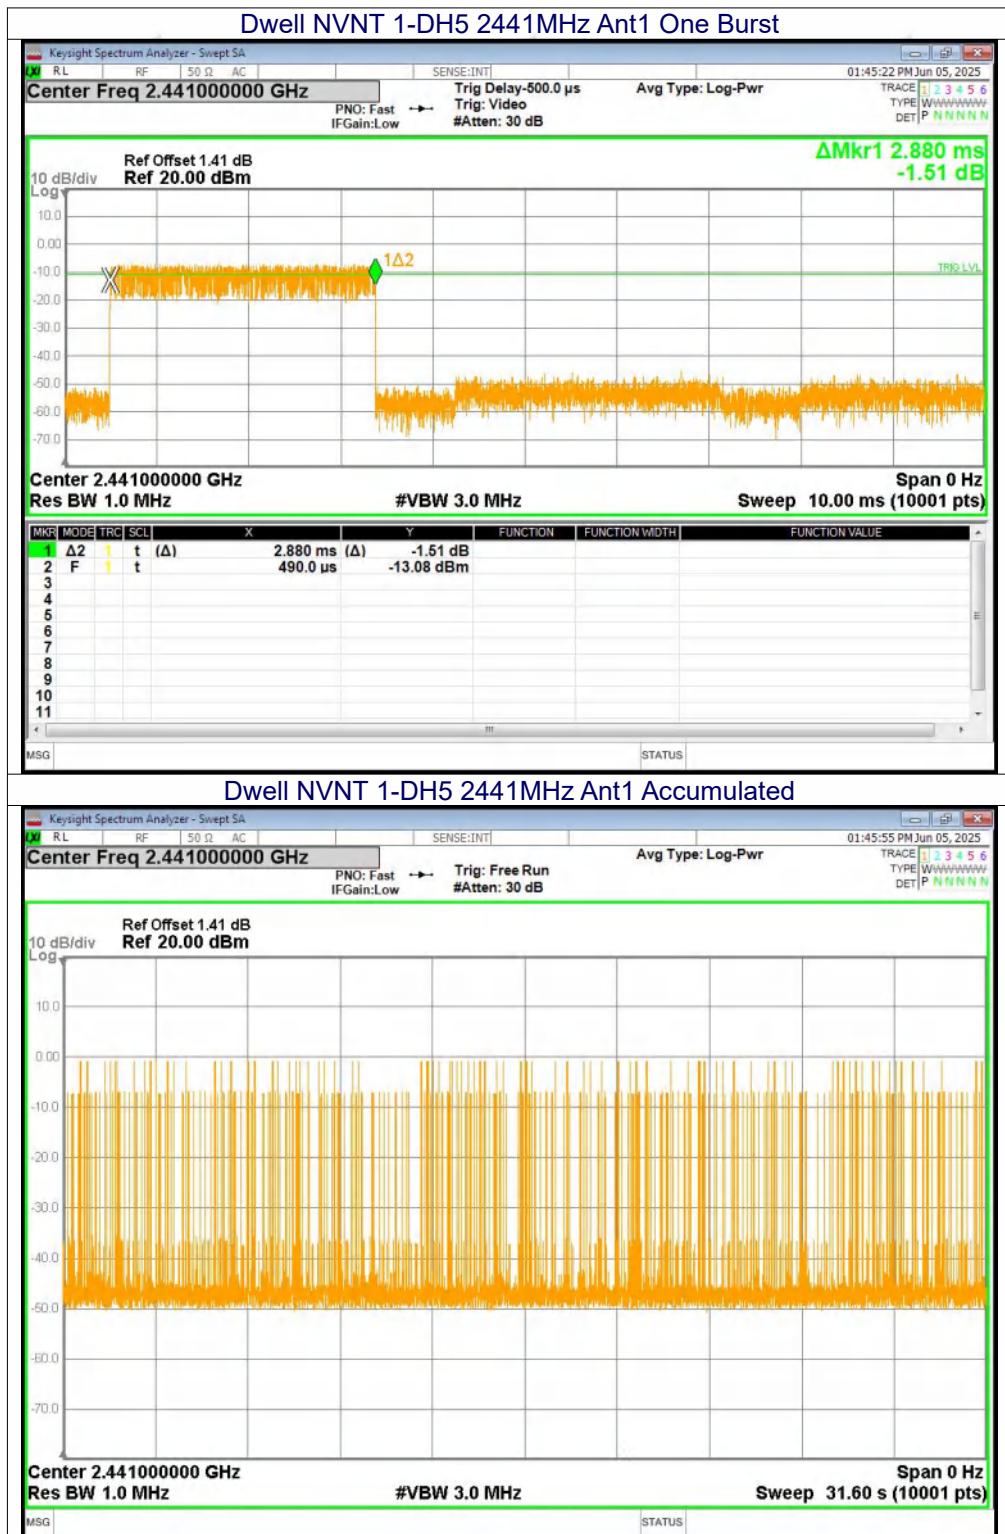

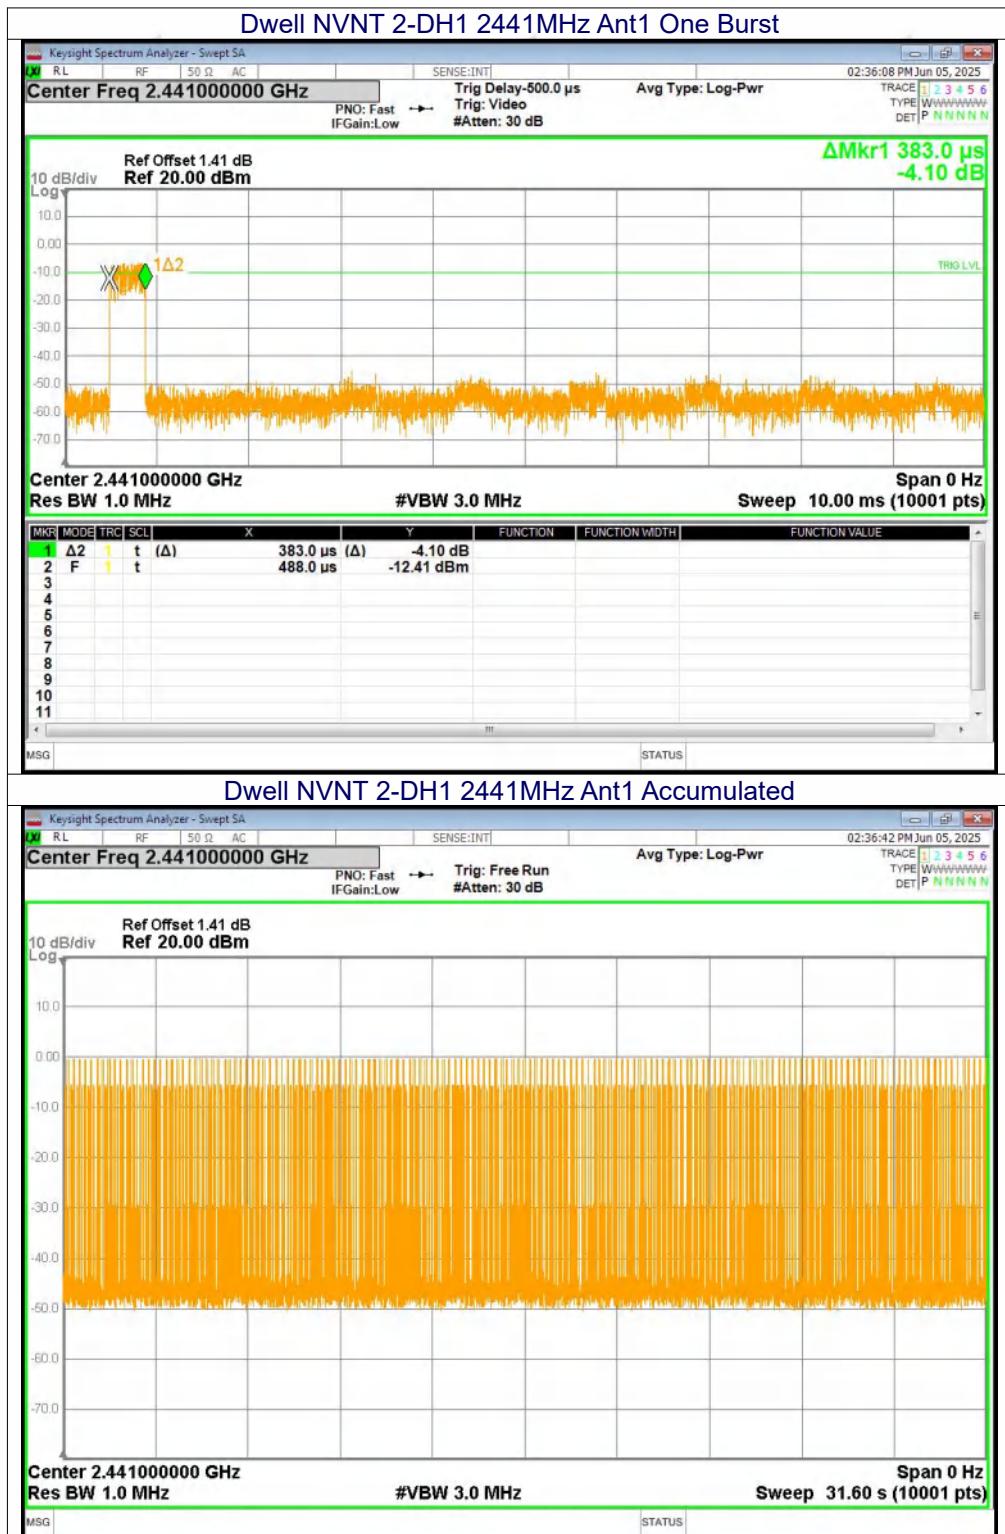

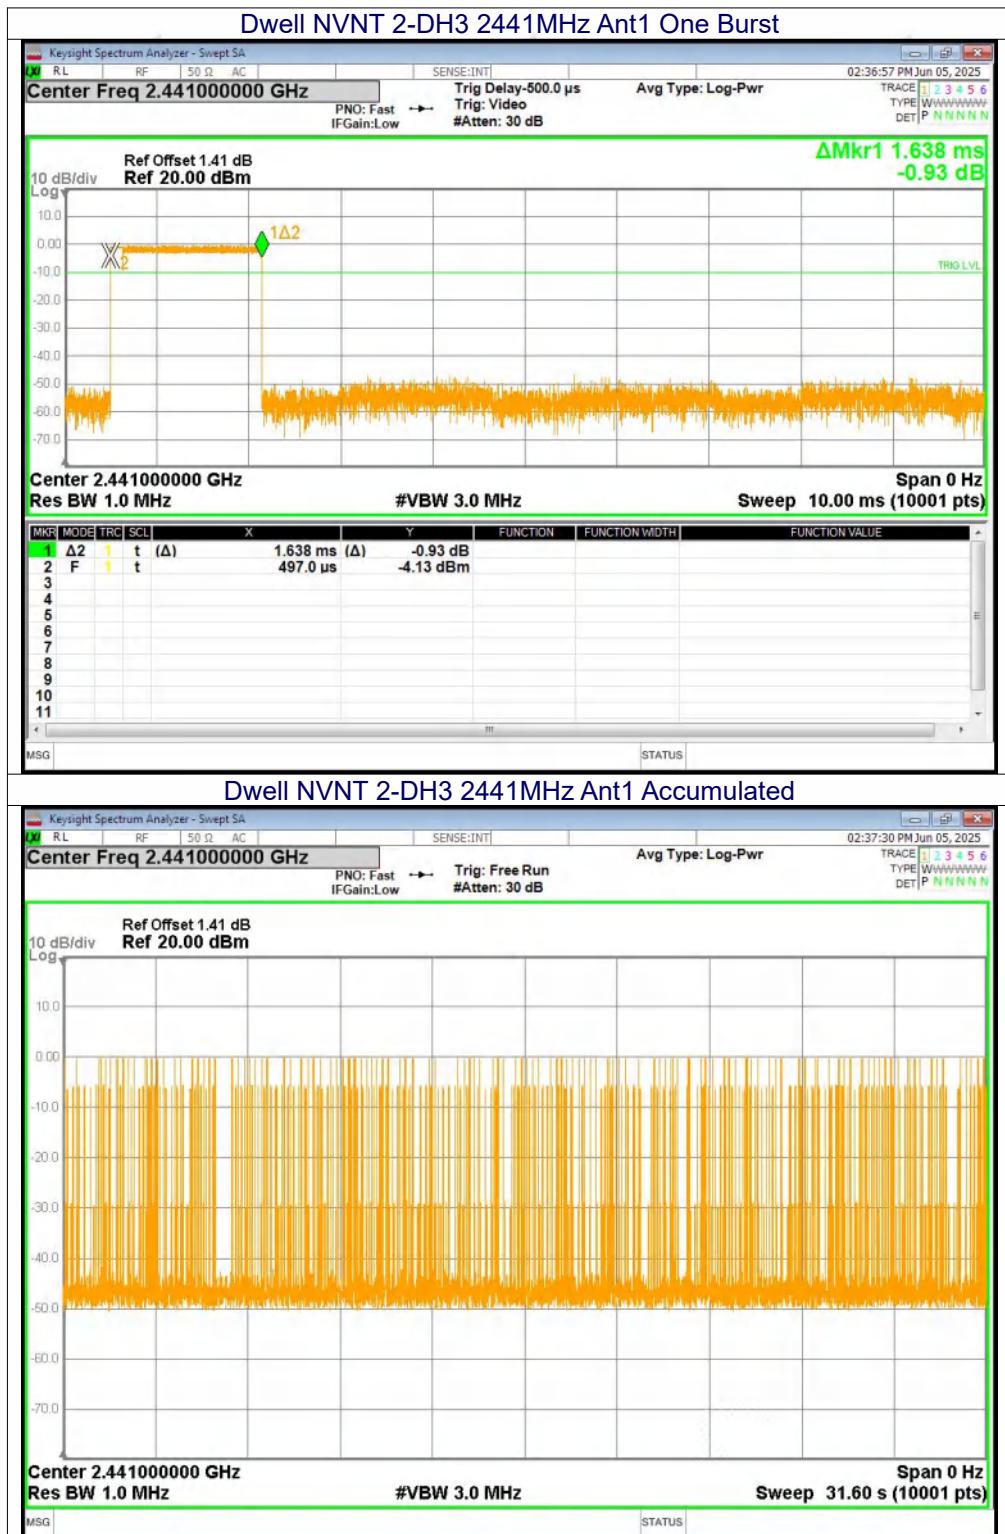

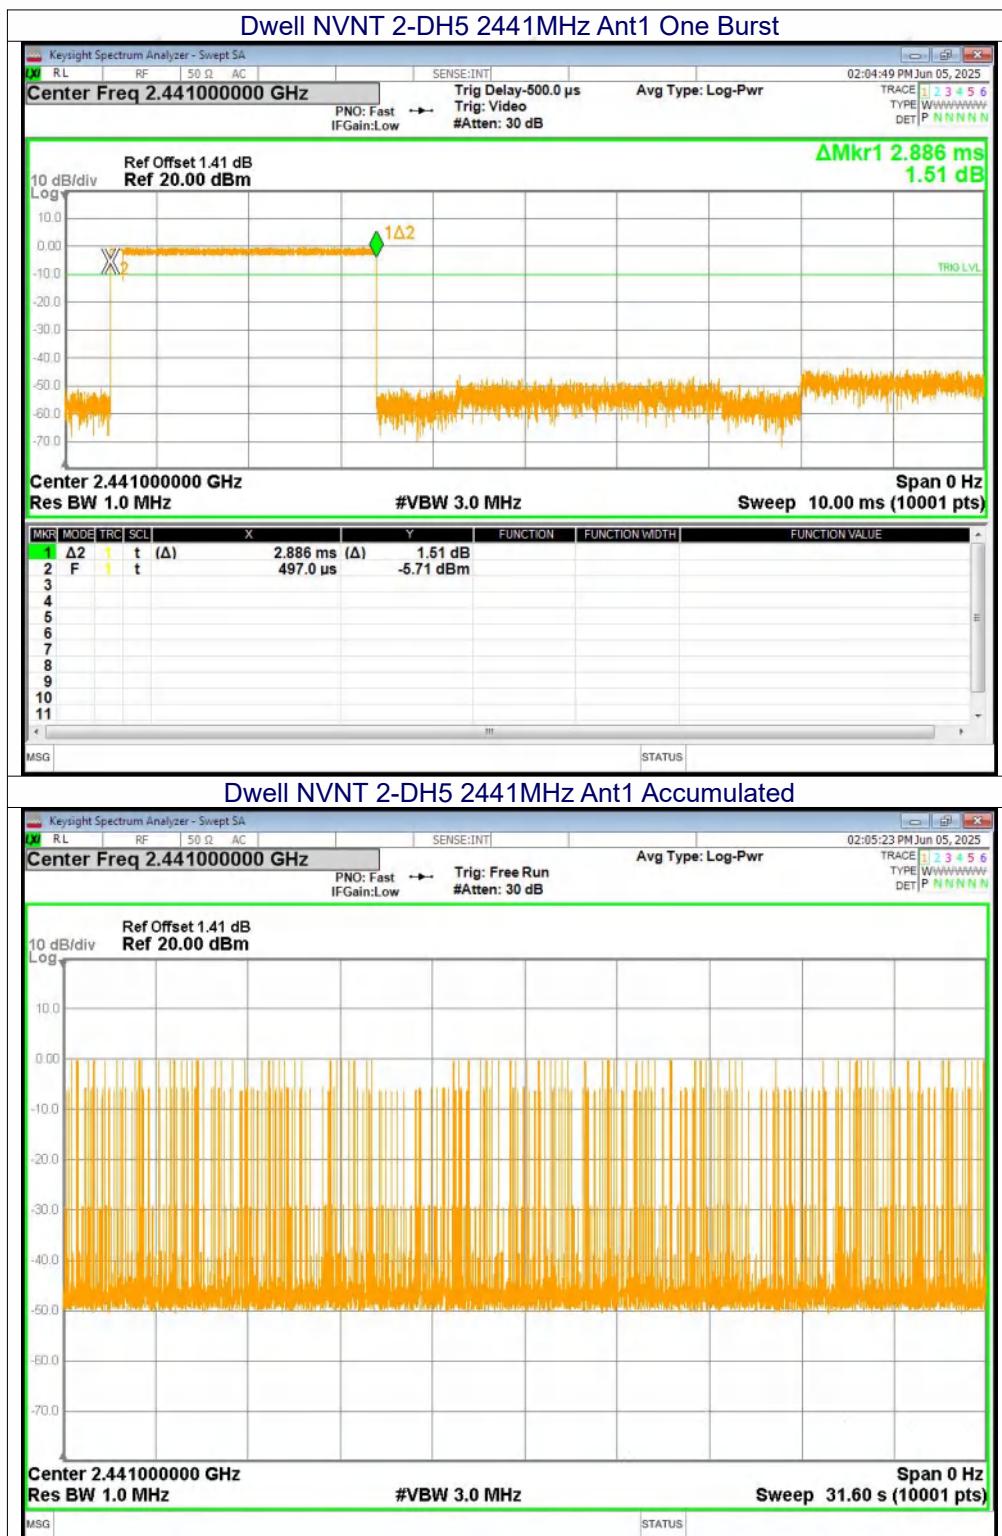



ZHONGHAN

Project No.: ZHT-250530133W01

Page 85 of 86

13. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna: The antenna is PCB Antenna, the best case gain of the antennas is -1.39dBi, reference to the appendix II for details	



ZHONGHAN

Project No.: ZHT-250530133W01
Page 86 of 86

14. Test Setup Photo

Reference to the appendix I for details.

15. EUT Constructional Details

Reference to the appendix II for details.

***** END OF REPORT *****