



FCC TEST REPORT

For

CUKTECH Technology Co.,Ltd.

CUKTECH CP13 Magnetic Power Bank

Test Model: WPB100

Prepared for : CUKTECH Technology Co.,Ltd.
Address : 4F Building B4, No.19 Suyuan Avenue, Jiangning District,Nanjing City,
Jiangsu,China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,
Baoan District, Shenzhen, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : December 19, 2024
Number of tested samples : 2
Sample No. : A241218094-1(Engineer sample), A241218094-2(Normal sample)
Date of Test : December 19, 2024 ~ March 27, 2025
Date of Report : March 28, 2025



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



FCC TEST REPORT	
KDB 680106 D01 Wireless Power Transfer v04	
Report Reference No.	: LCSA12094266EB
Date of Issue.....	: March 28, 2025
Testing Laboratory Name.....	: Shenzhen LCS Compliance Testing Laboratory Ltd.
Address.....	: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan District, Shenzhen, China
Testing Location/ Procedure.....	: Full application of Harmonised standards ☒ Partial application of Harmonised standards ☐ Other standard testing method ☐
Applicant's Name.....	: CUKTECH Technology Co.,Ltd.
Address.....	: 4F Building B4, No.19 Suyuan Avenue, Jiangning District,Nanjing City, Jiangsu,China
Test Specification	
Standard.....	: FCC CFR 47 PART 1, § 1.1310 KDB 680106 D01 Wireless Power Transfer v04
Test Report Form No.....	: LCSEMC-1.0
TRF Originator.....	: Shenzhen LCS Compliance Testing Laboratory Ltd.
Master TRF.....	: Dated 2023-12
Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
EUT Description.....	: CUKTECH CP13 Magnetic Power Bank
Trade Mark.....	: CUKTECH
Test Model.....	: WPB100
Ratings.....	: Please Refer to Page 6
Result	: Positive

Compiled by:

Li Huan/ Administrator

Supervised by:

Jack Liu/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



ISED -- TEST REPORT

Test Report No. :	LCSA12094266EB	March 28, 2025 Date of issue
-------------------	----------------	---------------------------------

Test Model.....	: WPB100
EUT.....	: CUKTECH CP13 Magnetic Power Bank
Applicant.....	: CUKTECH Technology Co.,Ltd.
Address.....	: 4F Building B4, No.19 Suyuan Avenue, Jiangning District,Nanjing City, Jiangsu,China
Telephone.....	:
Fax.....	:
Manufacturer.....	: CUKTECH Technology Co.,Ltd.
Address.....	: 4F Building B4, No.19 Suyuan Avenue, Jiangning District,Nanjing City, Jiangsu,China
Telephone.....	:
Fax.....	:
Factory.....	: Shenzhen Joway Power Supply Co., Ltd.
Address.....	: Floor 1-5 of Bldg 10th and Bldg 11th, Antuoshan High-Tech Industrial Park, Sha'er Community, Shajing Street, Bao'an District, Shenzhen,Guangdong, P.R. China
Telephone.....	:
Fax.....	:

Test Result	Positive
-------------	----------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Revision	Issue Date	Revisions	Revised By
000	March 28, 2025	Initial Issue	--





TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. SUPPORT EQUIPMENT LIST	6
1.3. EXTERNAL I/O CABLE	6
1.4. DESCRIPTION OF TEST FACILITY	6
1.5. TEST EQUIPMENT	6
1.6. MEASUREMENT UNCERTAINTY	7
1.7. DESCRIPTION OF TEST MODES	7
TEST MODES	7
1.8. COIL DESCRIPTION	7
1.9. COIL SIZE	8
1.10. COIL SPECIFICATIONS	8
1.11. DUTY CYCLE	8
2. TEST METHODOLOGY	9
2.1. REFERENCE EVALUATION METHOD	9
2.2. LIMIT	9
2.3. TEST SETUP DIAGRAM	10
2.4. MEASUREMENT PROCEDURE	10
2.5. EQUIPMENT APPROVAL CONSIDERATIONS OF KDB 680106 D01v04	11
3. TEST RESULTS	11
3.3 CONCLUSION	16
4. TEST SETUP PHOTOS	16



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : CUKTECH CP13 Magnetic Power Bank

Test Model : WPB100

Ratings : USB-C Input: 5V=3A 9V=3A 12V=2.5A 15V=2A Max
USB-C Output: 5V=3A 9V=3A 12V=2.5A 15V=2A 30W Max
Wireless Output: 15W Max
Battery Capacity: 5000mAh 7.2V 36Wh (Two Cells in Series)
Total Cell Capacity: 10000mAh
Rated Capacity: 5600mAh(5V=3A)

Hardware Version : /

Software Version : /

Wireless Charging :
Operating Frequency : 110-145kHz, 360kHz
Modulation Type : ASK
Antenna Type : Coil Antenna

1.2. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
ShenZhen HuaJin Electronics CO., LTD	Adapter	HJ-0502000W2-EU	---	FCC
HONOR	Phone	V30Pro	---	FCC

Note: Auxiliary equipment is provided by the laboratory.

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Type-C USB Port	1	N/A

1.4. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Test Equipment

Equipment	Manufacturer	Model	Serial no.	Calibrated date	Calibrated Due
Exposure Level Tester	Narda	ELT-400	N-0713	2024-11-11	2025-11-10
B-Field Probe	Narda	100cm ²	M-1154	2024-10-08	2025-10-07

Exposure Level Tester ELT-400 detailed parameters are as follows:



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Common parameter	
Operating temperature	-10 °C ~ +50 °C
Operation humidity	< 95 % (30 °C) or < 29 g/m ³
Weight	910 g
Size	180 mm x 100 mm x 55 mm(Main engine) / 290 mm x 125 mm Ø (Probe)
Display	LCD backlit display, 4 refresh rates per second
Battery	Nimh battery (4 x Mignon, AA), rechargeable
Operating time, typical	12 h
Power supply	100 ~240 V AC / 47 ~ 63 Hz
Charging time, typical	2 hours
Recommended calibration cycle	24 months
Country of origin	Germany

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Field Strength Uncertainty	: 1Hz~400KHz	1%	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Test Modes		
Mode 1	AC/DC Adapter(5V/3A)+EUT+mobile phone (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter(5V/3A)+EUT+mobile phone (Battery Status: <50%)	Record
Mode 3	AC/DC Adapter(5V/3A)+EUT+mobile phone (Battery Status: 100%)	Record
Mode 4	AC/DC Adapter(9V/3A)+EUT+mobile phone (Battery Status: <1%)	Pre-tested
Mode 5	AC/DC Adapter(9V/3A)+EUT+mobile phone (Battery Status: <50%)	Pre-tested
Mode 6	AC/DC Adapter(9V/3A)+EUT+mobile phone (Battery Status: 100%)	Pre-tested
Mode 7	AC/DC Adapter(12V/2.5A)+EUT+mobile phone (Battery Status: <1%)	Pre-tested
Mode 8	AC/DC Adapter(12V/2.5A)+EUT+mobile phone (Battery Status: <50%)	Pre-tested
Mode 9	AC/DC Adapter(12V/2.5A)+EUT+mobile phone (Battery Status: 100%)	Pre-tested
Mode 7	AC/DC Adapter(15V/2A)+EUT+mobile phone (Battery Status: <1%)	Pre-tested
Mode 8	AC/DC Adapter(15V/2A)+EUT+mobile phone (Battery Status: <50%)	Pre-tested
Mode 9	AC/DC Adapter(15V/2A)+EUT+mobile phone (Battery Status: 100%)	Pre-tested
Note: All test modes were pre-tested for ac and dc mode, but we only recorded the worst case in this report for ac mode.		

1.8. Coil Description

Config.	Mode	Descriptions
1	Standby (Flatbed Position) @134kHz	EUT Alone powered by AC/DC adapter
2	Operating (Flatbed Position) (Phone @134kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to AC/DC Adapter & Wireless Charging to WPT Client. 30W: Direct Contact 30W: 2mm Airgap, 2mm Shift Top as Worst-Case Position



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1.9. Coil Size

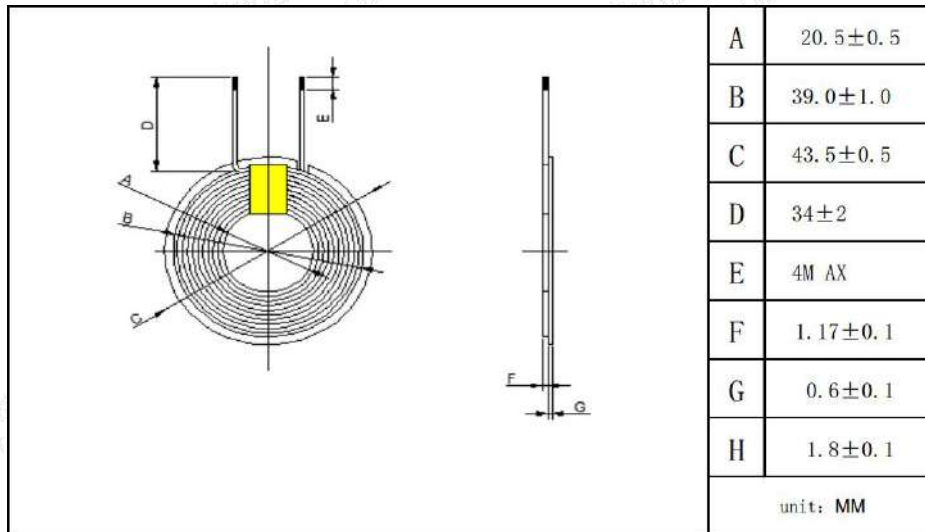


(Unit: mm)

1.10. Coil Specifications

Item	Parameter
Input inductance:	Transmitter 1: 6.5 μ H±10%
Material of enclosure(s):	Multiple strands of enamelled wire
Number of turns:	Transmitter 1: 10 turns

1.11. Duty Cycle

Mode	ON Time (ms)	Period (ms)	Duty Cycle (%)
Operating (110.0-145kHz)	/	/	100
Operating (360kHz)	/	/	100

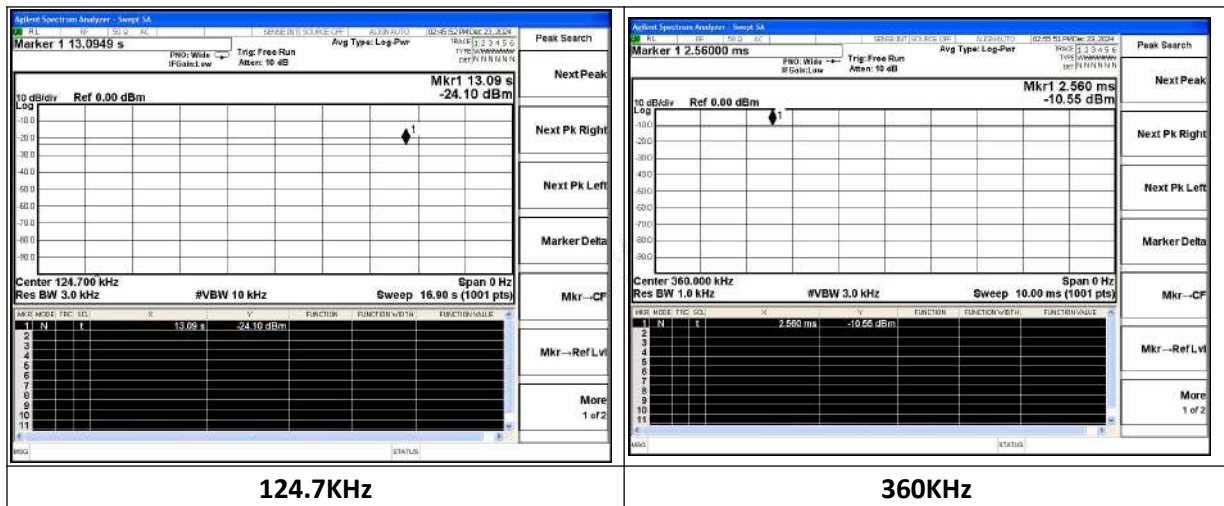

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2. TEST METHODOLOGY

2.1. Reference Evaluation Method

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v04: RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

FCC CFR 47 part1 1.1310: Radiofrequency radiation exposure limits.

FCC CFR 47 part2 2.1093: Radiofrequency radiation exposure evaluation: portable devices

FCC CFR 47 part 18.107: Industrial, Scientific, and Medical Equipment

April 2024 TCBC Workshop: Part 18 Wireless Power Transfer Devices: Clarifications on KDB 680106v04 and ECR Processes

2.2. Limit

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	/	/	f/300	<6
1500-100000	/	/	5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	/	/	f/1500	<30
1500-100000	/	/	1.0	<30

f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




2.3. Test Setup Diagram

Mobile Exposure Conditions

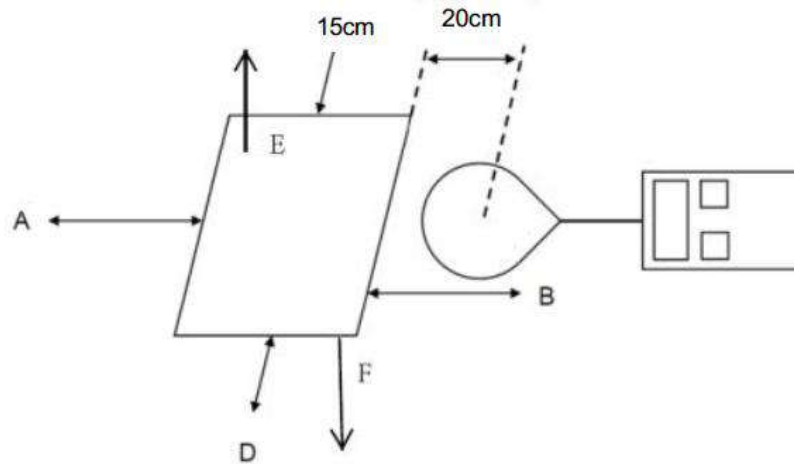

Note: The distance of the points A/B/C/D is 15cm, and the point E is 20cm.

Portable Exposure Conditions:

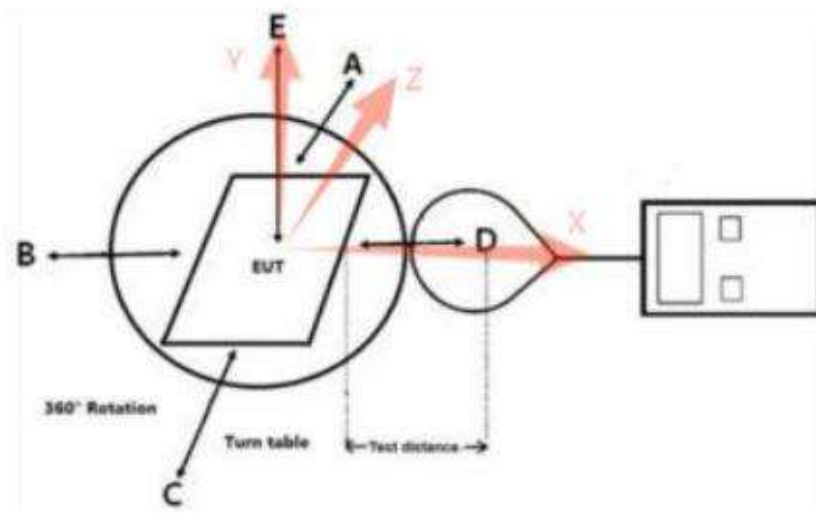

Note: The distance of the points A/B/C/D/E/F is 0,2,4,6,8,10,12,14,16,18, 20cm.

The values tested by the probe are X, Y, and Z on three axes perpendicular to the edge of the device. Top and bottom side coincident with the axis(Y) of the main coil.

2.4. Measurement Procedure

Mobile Exposure Conditions

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with the center of the probe at 15 cm surrounding the EUT and 20 cm above the top surface of the primary/client pair.
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**Portable Exposure Conditions**

- The RF exposure test was performed in anechoic chamber.
- Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

2.5. Equipment Approval Considerations of KDB 680106 D01v04

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operates in the frequency range 110-145 kHz, 360 kHz
The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.	Yes	The maximum output power of each primary coil is 15W.
A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)	Yes	Client device is placed directly in contact with the transmitter.
Only § 2.1091- Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).	No	Mixed mobile and portable exposure conditions
The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.	Yes	The E-field and H-field strengths from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested	Yes	Only one radiating structure and tested at maximum Output Power

3. TEST RESULTS**For portable exposure condition**

- The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- Operating modes with client device (1 %, 50%, 99% battery status of client device) have been tested, only show



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



the data of worst case of 1% battery status of client device.


- (3) Test performed with all the radiating structures operating at maximum power at the same time.
- (4) E-Field and H-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.
- (5) Validation of Field Estimates
 - (a) If R is the probe radius and the probe tip is in contact with the coil, then the probe center is R cm from the coil surface as bellowing picture

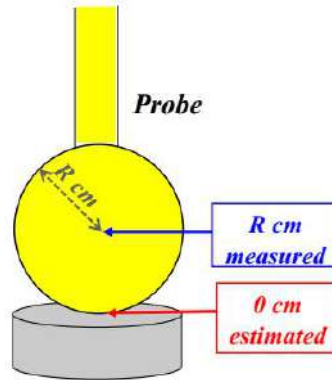

- (b) The probe then is measuring the field correctly at R cm from the surface, and only estimating the field at the 0 cm point of contact with the coil surface.
- (c) The validation requires showing that the model used to estimate the field provides data within 30% accuracy for at least the two, 2-cm-spaced closest points to where the estimates were made.
- (d) If there is only one estimated value, then a single validation point is sufficient.
- (e) Validation Example for 4 cm Probe Radius as following

Step 1

Validation Example for 4 cm Probe Radius

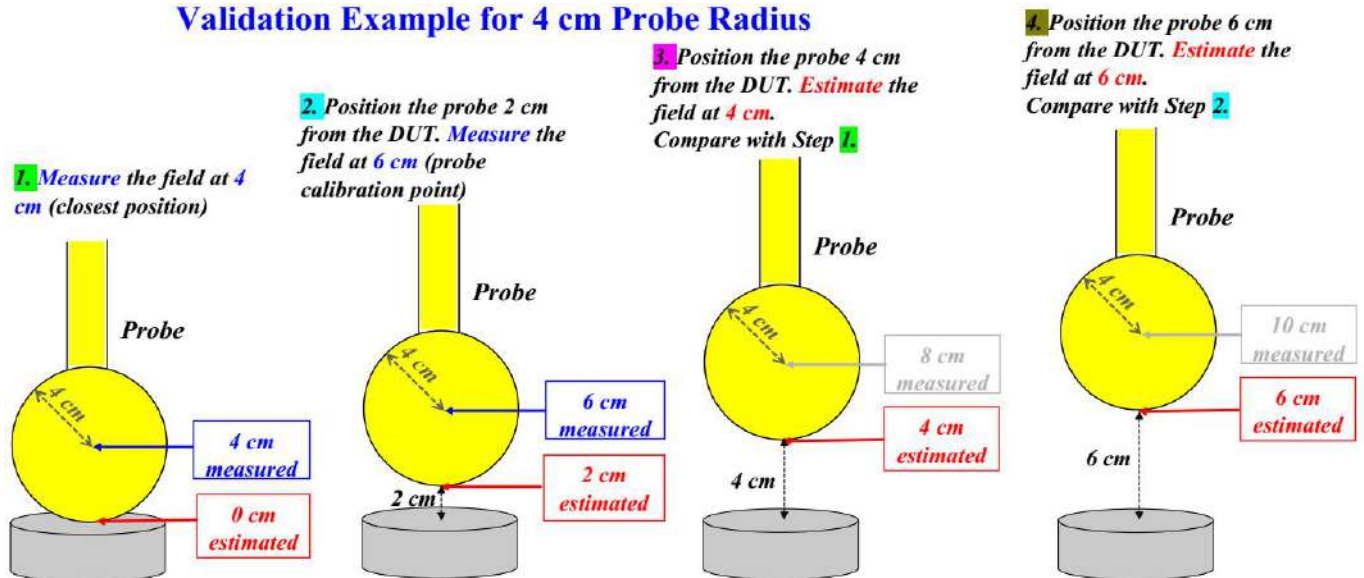

Step 2



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

Validation Example for 4 cm Probe Radius


1. Measure the field at 4 cm (closest position)

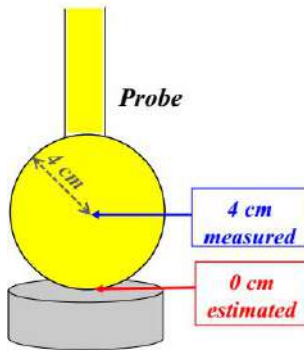


2. Position the probe 2 cm from the DUT. Measure the field at 6 cm (probe calibration point)

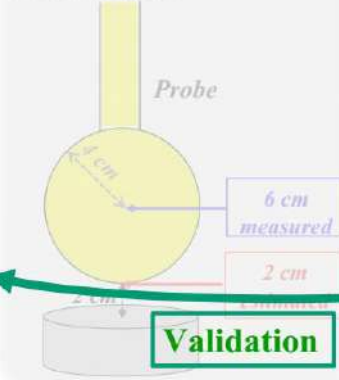

3. Position the probe 4 cm from the DUT. Estimate the field at 4 cm. Compare with Step 1.

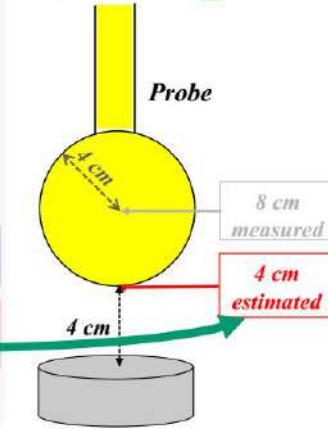


4. Position the probe 6 cm from the DUT. Estimate the field at 6 cm. Compare with Step 2.

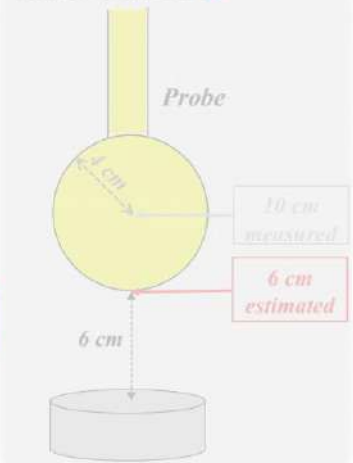


Step 3

Validation Example for 4 cm Probe Radius


1. Measure the field at 4 cm (closest position)

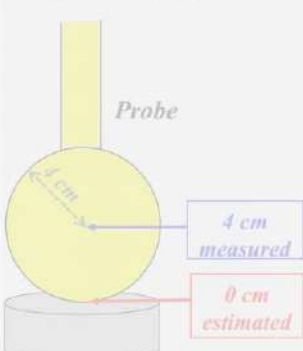


2. Position the probe 2 cm from the DUT. Measure the field at 6 cm (probe calibration point)

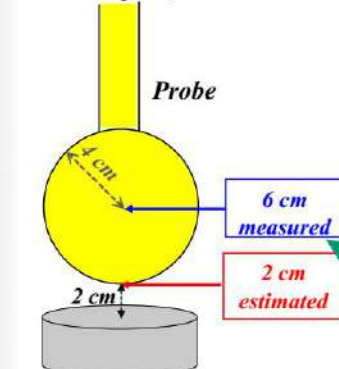

3. Position the probe 4 cm from the DUT. Estimate the field at 4 cm. Compare with Step 1.

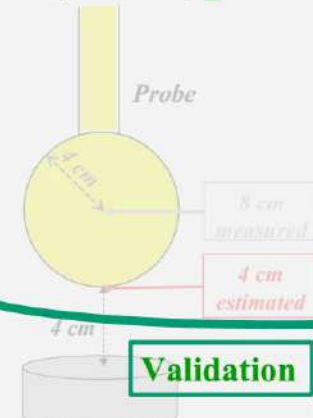

4. Position the probe 6 cm from the DUT. Estimate the field at 6 cm. Compare with Step 2.

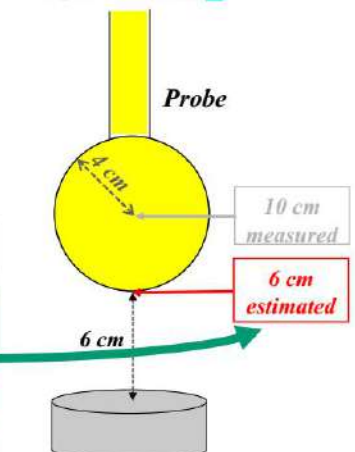

Description of the Validation Example for 4 cm Probe Radius

- Assume that $R=4$ cm. The field at 0 cm can only be estimated, but the field at 4 cm is measured exactly (at the center of the probe).
- Move the probe at 2 cm from the surface. The field at 2 cm can still only be estimated, but the field at 6 cm is measured exactly.
- Compare the estimates with the values at the same positions where the field was measured exactly (i.e., 4 cm and 6 cm)
- The difference between measurements and estimates needs to be no more than 30%.
- That validation of the estimates needs to be for the two closest points to the coil, but at least 2 cm apart (in this case they are). This is to avoid a validation at, say 2 cm and another one at 2.1 cm, that is essentially a repetition



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



- (6) According to Calibration information and specification about ETL-400 Probe (the B-Field Probe size is 100cm², the probe radius is 5.65cm), The Probe ETL-400 Probe's sensitive elements center is located in the probe's center, and the distance from the sensitive elements center to the tip of probe is 5.65cm.
- (7) The actual 0cm, 2cm, 4cm and 6cm field strengths need to be estimated for the positions that are not reachable via numerical calculation.
- (8) For validation purposes: If the value to show a 30% agreement between the mode and the probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.
- (9) Validation E-Field and H-Field as bellowing;
110-145KHz

Validation Mode: TM1 H-Field (A/m)			Validation Position: Top	
	Results	Difference Values	Difference Limit	Conclusion
Estimated Distance: 0 cm	0.6297	14.45%	≤ 30%	Compliance
Measured Distance: 5.65 cm	0.5502		≤ 30%	Compliance
Estimated Distance: 2 cm	0.6625	25.69%	≤ 30%	Compliance
Measured Distance: 7.65 cm	0.5271		≤ 30%	Compliance
Estimated Distance: 4 cm	0.5495	10.16%	≤ 30%	Compliance
Measured Distance: 7.65 cm	0.4988		≤ 30%	Compliance

Validation Mode: TM1 E-Field (V/m)			Validation Position: Top	
	Results	Difference Values	Difference Limit	Conclusion
Estimated Distance: 0 cm	37.6107	26.86%	≤ 30%	Compliance
Measured Distance: 5.65 cm	29.6471		≤ 30%	Compliance
Estimated Distance: 2 cm	34.6412	27.56%	≤ 30%	Compliance
Measured Distance: 7.65 cm	27.1575		≤ 30%	Compliance
Estimated Distance: 4 cm	31.3803	22.47%	≤ 30%	Compliance
Measured Distance: 7.65 cm	25.6223		≤ 30%	Compliance

360Khz

Validation Mode: TM1 H-Field (A/m)			Validation Position: Top	
	Results	Difference Values	Difference Limit	Conclusion
Estimated Distance: 0 cm	0.6285	11.99%	≤ 30%	Compliance
Measured Distance: 5.65 cm	0.5612		≤ 30%	Compliance
Estimated Distance: 2 cm	0.6513	29.25%	≤ 30%	Compliance
Measured Distance: 7.65 cm	0.5039		≤ 30%	Compliance
Estimated Distance: 4 cm	0.5364	21.85%	≤ 30%	Compliance
Measured Distance: 7.65 cm	0.4402		≤ 30%	Compliance

Validation Mode: TM1 E-Field (V/m)			Validation Position: Top	
	Results	Difference Values	Difference Limit	Conclusion
Estimated Distance: 0 cm	37.5204	26.86%	≤ 30%	Compliance
Measured Distance: 5.65 cm	29.6310		≤ 30%	Compliance
Estimated Distance: 2 cm	34.4972	26.63%	≤ 30%	Compliance
Measured Distance: 7.65 cm	27.2239		≤ 30%	Compliance
Estimated Distance: 4 cm	31.4231	22.72%	≤ 30%	Compliance
Measured Distance: 7.65 cm	25.6059		≤ 30%	Compliance

Note 1: The compliance location as probe tip;

Note 2: The format of difference is;

The E Validation Difference = $(E_{\text{Estimated Distance}} - E_{\text{Measured Distance}}) / E_{\text{Measured Distance}} * 100\%$ The H Validation Difference = $(H_{\text{Estimated Distance}} - H_{\text{Measured Distance}}) / H_{\text{Measured Distance}} * 100\%$ **H-Field and E-Field Emission level with a combination of measured and estimated results.**

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**Test condition: Mode 1****110-145KHz**

Distance(cm)	H-Field Result(A/m)							Limit(A/m)
	Type	Top	Bottom	Left	Right	Front	Back	
0	Estimate	0.7799	0.6397	0.6465	0.5242	0.4788	0.5272	1.63
2	Estimate	0.6907	0.5343	0.5186	0.4753	0.5212	0.3760	1.63
4	Estimate	0.5614	0.5491	0.6162	0.5711	0.4141	0.5200	1.63
6	Measured	0.4174	0.4656	0.3457	0.5216	0.2925	0.3812	1.63
8	Measured	0.2605	0.2942	0.2884	0.2129	0.3145	0.3256	1.63
10	Measured	0.0452	0.2345	0.1674	0.0789	0.0023	0.0914	1.63
12	Measured	0.1463	0.0842	0.1458	0.0933	0.0382	0.0690	1.63
14	Measured	0.1690	0.0833	0.0618	0.1846	0.0953	0.0690	1.63
16	Measured	0.1488	0.1290	0.1796	0.0313	0.1089	0.2396	1.63
18	Measured	0.1053	0.0851	0.0189	0.0026	0.0010	0.0739	1.63
20	Measured	0.0290	0.0515	0.0970	0.0344	0.0478	0.0301	1.63

360kHz

Distance(cm)	H-Field Result(A/m)							Limit(A/m)
	Type	Top	Bottom	Left	Right	Front	Back	
0	Estimate	0.7841	0.6726	0.6119	0.5460	0.5009	0.4957	1.63
2	Estimate	0.7194	0.6154	0.4994	0.4064	0.5239	0.3614	1.63
4	Estimate	0.5794	0.5613	0.6315	0.5739	0.4047	0.5901	1.63
6	Measured	0.4291	0.5188	0.3566	0.5489	0.2457	0.3541	1.63
8	Measured	0.2383	0.3311	0.3666	0.2756	0.3462	0.2636	1.63
10	Measured	0.0668	0.2340	0.1747	0.1222	0.0100	0.0821	1.63
12	Measured	0.1134	0.1115	0.1538	0.0994	0.0313	0.0912	1.63
14	Measured	0.1067	0.0504	0.0514	0.1927	0.0851	0.0682	1.63
16	Measured	0.1811	0.1293	0.1028	-0.0110	0.1172	0.2257	1.63
18	Measured	0.1461	0.0746	0.0331	0.0723	0.0017	0.1102	1.63
20	Measured	0.0961	0.0401	0.1804	0.1139	0.0447	0.0084	1.63

110-145KHz

Distance(cm)	E-Field Result(V/m)							Limit(V/m)
	Type	Top	Bottom	Left	Right	Front	Back	
0	Estimate	37.7328	36.2747	36.3933	32.0980	31.7726	31.5040	613
2	Estimate	34.5438	34.3537	33.9702	30.7342	29.6441	29.2140	613
4	Estimate	31.2793	30.8067	31.2325	27.9926	27.0267	26.5917	613
6	Measured	28.9722	26.9172	27.8752	23.7511	22.6686	22.4325	613
8	Measured	24.5522	23.1612	23.7859	20.6186	19.5559	19.2877	613
10	Measured	22.3430	21.2324	21.7028	17.5480	16.1686	16.2221	613
12	Measured	20.1390	19.3797	19.8489	15.3403	13.5226	13.1694	613
14	Measured	17.3041	17.0251	17.0429	13.1401	11.4411	11.2256	613
16	Measured	15.9769	14.8416	15.5665	10.1586	9.2920	9.1952	613
18	Measured	12.7107	11.6051	12.2277	8.4566	7.4288	7.2618	613
20	Measured	7.7236	7.3813	7.5708	5.3346	4.3620	3.9639	613



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



360kHz

Distance(cm)	E-Field Result(V/m)							Limit(V/m)
	Type	Top	Bottom	Left	Right	Front	Back	
0	Estimate	37.7780	36.2560	36.4259	32.1046	31.8300	31.4224	613
2	Estimate	34.4706	34.3399	33.9746	30.8233	29.5993	29.2933	613
4	Estimate	31.3301	30.7719	31.2108	28.0734	26.9942	26.5045	613
6	Measured	28.9734	26.9921	27.8702	23.7601	22.6471	22.4413	613
8	Measured	24.5458	23.1495	23.7434	20.6031	19.5384	19.2463	613
10	Measured	22.3427	21.1692	21.7604	17.5173	16.1266	16.3097	613
12	Measured	20.0854	19.3064	19.8442	15.2670	13.4438	13.1785	613
14	Measured	17.3474	16.9362	17.0280	13.1298	11.4057	11.1844	613
16	Measured	16.0039	14.7899	15.5913	10.1564	9.2820	9.2470	613
18	Measured	12.6212	11.6538	12.1819	8.4331	7.3874	7.2354	613
20	Measured	7.7468	7.3281	7.5525	5.3272	4.4524	3.9409	613

3.3 Conclusion

A minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for portable exposure. The detected emissions are below the limitations according FCC KDB 680106.

4. TEST SETUP PHOTOS

(The separation distance from the geometric center of the probe to the edge of the device is 6.25cm)



0cm-Left



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



0cm-Right



0cm-Top




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

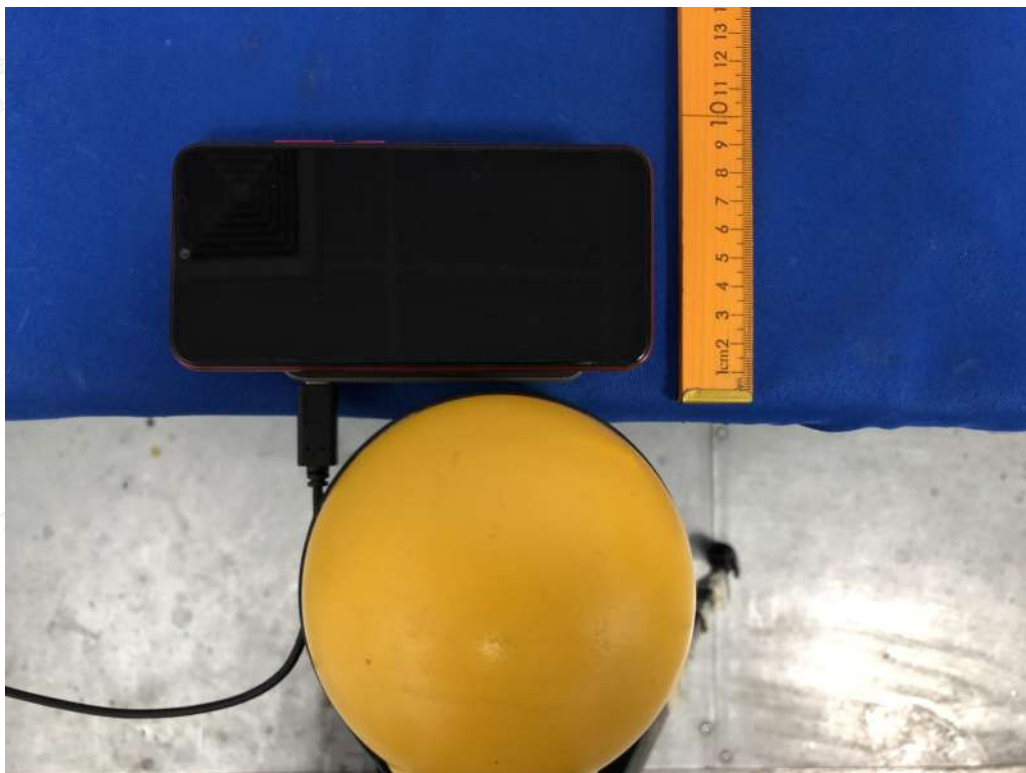

0cm-Bottom

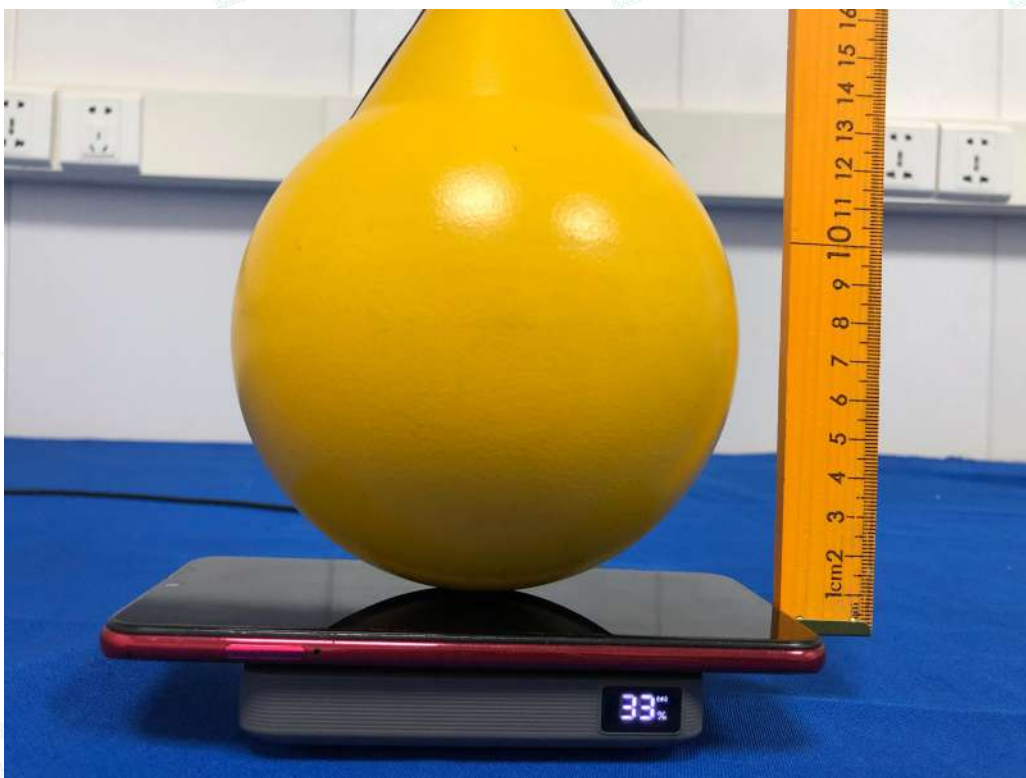

0cm-Front



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



0cm-Back

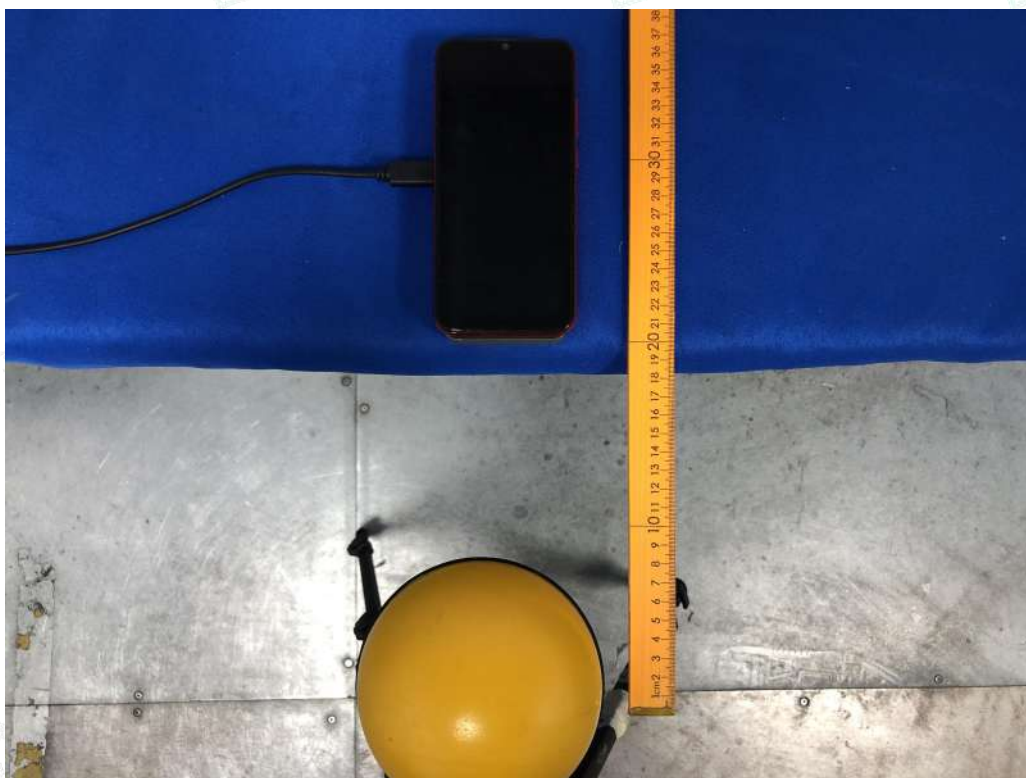

20cm-Left




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

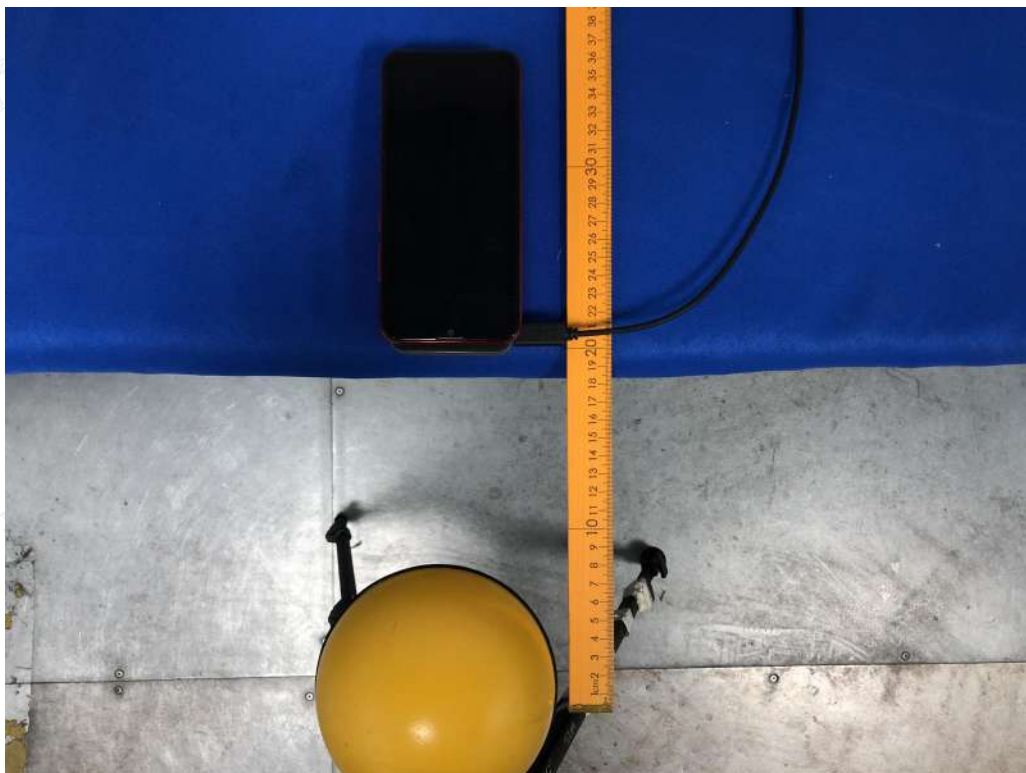

20cm-Right



20cm-Top




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

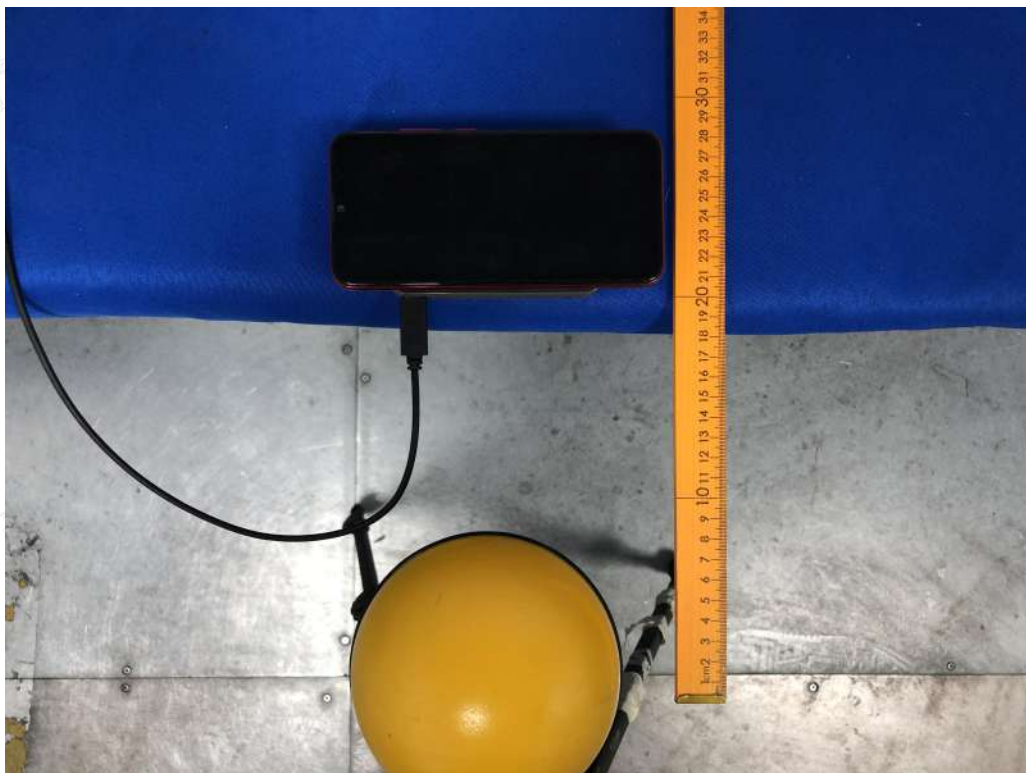

20cm-Bottom

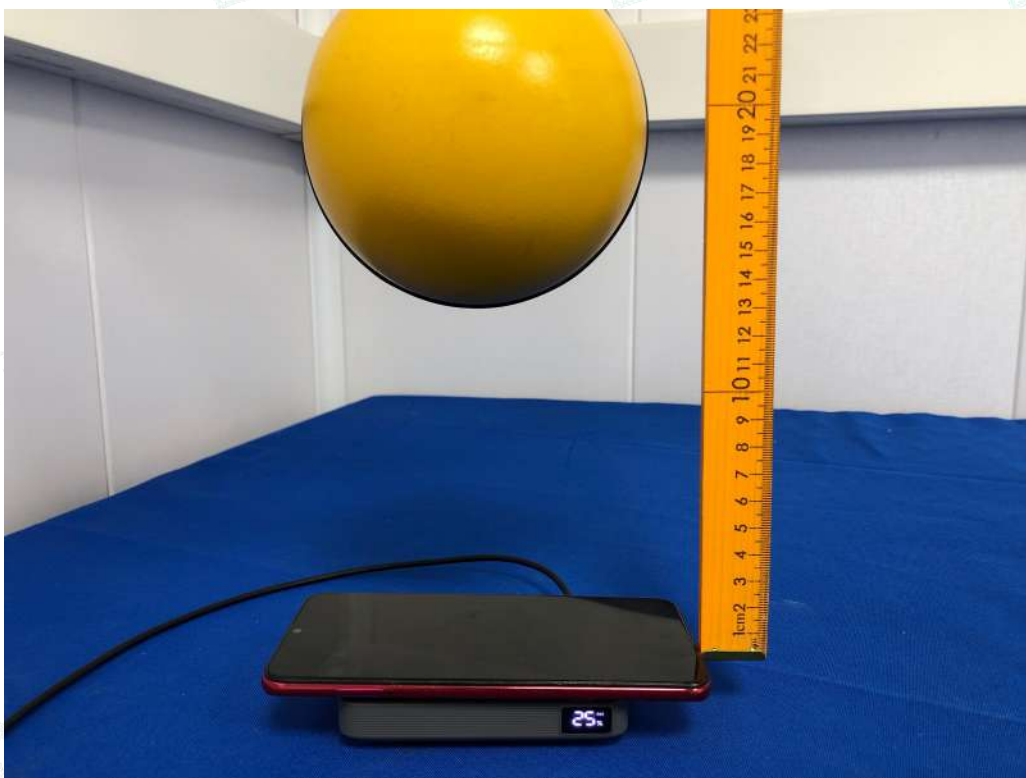

20cm-Front




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

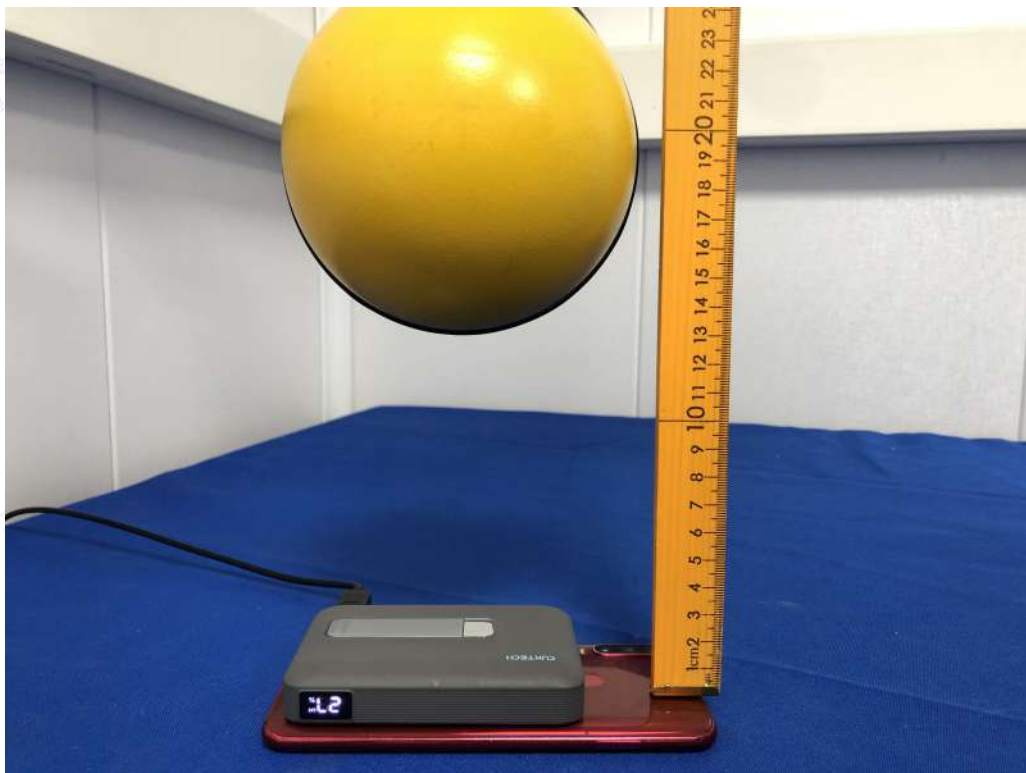

20cm-Back

-----THE END OF REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity