

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT**FCC PART 15.407****Report Reference No.....: GTS20191209006-2-25****FCC ID.....: 2AL6KBL-M8821CS1**

Compiled by

(position+printed name+signature) .: File administrators Peter Xiao

Supervised by

(position+printed name+signature) .: Test Engineer Moon Tan



Approved by

(position+printed name+signature) .: Manager Simon Hu

Date of issue: Dec.21, 2019

Representative Laboratory Name.: Shenzhen Global Test Service Co.,Ltd.

Address: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

Applicant's name.....: Shenzhen Bilian Electronic Co.,Ltd.

Address: Building B1, Zhongxing Industrial Zone, Juling, Jutang Community, Guanlan street, LongHua district, Shenzhen, China

Test specificationStandard: **FCC Part 15.407: UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE DEVICES**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: IEEE 802.11 a/b/g/n/ac(1T1R)WLAN with Bluetooth Module

Trade Mark: N/A

Manufacturer: Shenzhen Bilian Electronic Co.,Ltd.

Model/Type reference: BL-M8821CS1

Listed Models: N/A

Operation Frequency.....: From 5180MHz to 5240MHz/ 5745MHz to 5825MHz

Hardware Version: 1.0

Software Version: V1.0

Rating: DC 3.3V

Result: **PASS**

TEST REPORT

Test Report No. : GTS20191209006-2-25	Dec.21, 2019 Date of issue
---	-------------------------------

Equipment under Test : IEEE 802.11 a/b/g/n/ac(1T1R)WLAN with Bluetooth Module

Model /Type : BL-M8821CS1

Listed Models : N/A

Applicant : **Shenzhen Bilian Electronic Co.,Ltd.**

Address : Building B1, Zhongxing Industrial Zone, Juling, Jutang Community,
Guanlan street, LongHua district, Shenzhen, China

Manufacturer : **Shenzhen Bilian Electronic Co.,Ltd.**

Address : Building B1, Zhongxing Industrial Zone, Juling, Jutang Community,
Guanlan street, LongHua district, Shenzhen, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. Product Description	5
2.3. Equipment Under Test	6
2.4. Short description of the Equipment under Test (EUT)	6
2.5. EUT operation mode	6
2.6. Block Diagram of Test Setup	6
2.7. Related Submittal(s) / Grant (s)	6
2.8. Special Accessories	6
2.9. Modifications	6
3. TEST ENVIRONMENT	7
3.1. Address of the test laboratory	7
3.2. Test Facility	7
3.3. Environmental conditions	7
3.4. Test Description	8
3.5. Statement of the measurement uncertainty	9
3.6. Equipments Used during the Test.....	10
4. TEST CONDITIONS AND RESULTS	11
4.1. AC Power Conducted Emission	11
4.2. Radiated Emission	13
4.3. Duty Cycle	21
4.4. Maximum Average Output Power	25
4.5. Power Spectral Density	27
4.6. 6dB Bandwidth	36
4.7. 26dBc Bandwidth	43
4.8. Band Edge Compliance.....	50
4.9. Antenna Requirement	59
5. TEST SETUP PHOTOS OF THE EUT	60
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	60

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE DEVICES.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 789033 D02](#): GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Dec.13, 2019
	:	
Testing commenced on	:	Dec.13, 2019
	:	
Testing concluded on	:	Dec.21, 2019

2.2. Product Description

Product Name	IEEE 802.11 a/b/g/n/ac(1T1R)WLAN with Bluetooth Module
Trade Mark	N/A
Model/Type reference	BL-M8821CS1
List Models	N/A
Model Declaration	N/A
Power supply:	DC 3.3V
Bluetooth	
Operation frequency	2402-2480MHz
Channel Number	79 channels for Bluetooth (DSS) 40 channels for Bluetooth (DTS)
Channel Spacing	1MHz for Bluetooth (DSS) 2MHz for Bluetooth (DTS)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK for Bluetooth (DSS) GFSK for Bluetooth (DTS)
WIFI(2.4G Band)	
Frequency Range	2412MHz ~ 2462MHz
Channel Spacing	5MHz
Channel Number	11 Channel for 20MHz bandwidth(2412~2462MHz) 7 channels for 40MHz bandwidth(2422~2452MHz)
Modulation Type	802.11b: DSSS; 802.11g/n: OFDM
WIFI(5.2G Band)	
Frequency Range	5180MHz ~ 5240MHz
Channel Number	4 channels for 20MHz bandwidth(5180-5240MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Modulation Type	802.11a/n/ac: OFDM
WIFI (5.8G Band)	
Frequency Range	5745MHz ~ 5825MHz
Channel Number	5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5775MHz)
Modulation Type	802.11a/n/ac: OFDM
Antenna Description	External Antenna , 2.0dBi for 2.4G, 2.0dBi for 5G

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 3.3V

2.4. Short description of the Equipment under Test (EUT)

This is a IEEE 802.11 a/b/g/n/ac(1T1R)WLAN with Bluetooth Module.
For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode


The application provider specific test software to control sample in continuous TX and RX.

IEEE 802.11a/ac20/ac40/ac80/n20/n40:

UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

2.6. Block Diagram of Test Setup

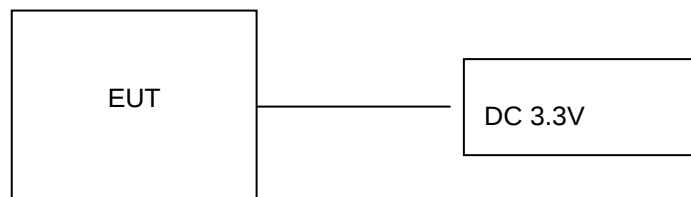

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AL6KBL-M8821CS1** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.8. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
BLOOMS	Computer	C615	--	SDOC
PHILIPS	Displayer	203V5L	--	SDOC

The Computer and Displayer is provided by the laboratory.

2.9. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Test Description

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.203	Antenna gain	802.11ac	☒ Lowest ☒ Middle ☒ Highest	802.11ac	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.407(a)	Power spectral density	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Middle ☒ Highest	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.407(a)	Spectrum bandwidth – 26 dB bandwidth	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Middle ☒ Highest	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.407(e)	Spectrum bandwidth – 6 dB bandwidth	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Middle ☒ Highest	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.407(a)	Maximum output power	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Middle ☒ Highest	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Middle ☒ Highest	☒ ☒ ☒	☐	☐	☐	complies
§15.407(b)	Band edge compliance conducted	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Highest	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.407(b)	Band edge compliance radiated	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Highest	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Highest	☒	☐	☐	☐	complies
§15.407(a)	TX spurious emissions conducted	-/-	-/-	-/-	-/-	☐	☐	☒	☐	complies
§15.407(a)	TX spurious emissions radiated	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Middle ☒ Highest	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.407(g)	Frequency Stability	-/-	-/-	-/-	-/-	☒	☐	☐	☐	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	☐	☐	☒	☐	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	-/-	802.11ac	-/-	☒	☐	☐	☐	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	802.11a/ac 20/ac40/ac8 0 802.11n HT20/40	-/-	802.11ac	-/-	☒	☐	☐	☐	complies

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power	802.11a	6 Mbps
Power Spectral Density	802.11ac20/ac40/ac80 802.11n HT20/40	MCS0
6dB Bandwidth		
26dB Bandwidth		
Radiated Emission30M~1GHz& Radiated Emission 1GHz~10 th Harmonic		
Band Edge	802.11a	6 Mbps
	802.11ac20/ac40/ac80 802.11n HT20/40	MCS0

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2019/09/20	2020/09/19
LISN	R&S	ESH2-Z5	893606/008	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESPI3	101841-cd	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESCI7	101102	2019/09/20	2020/09/19
Spectrum Analyzer	Agilent	N9020A	MY48010425	2019/09/20	2020/09/19
Spectrum Analyzer	R&S	FSV40	100019	2019/09/20	2020/09/19
Vector Signal generator	Agilent	N5181A	MY49060502	2019/09/20	2020/09/19
Signal generator	Agilent	E4421B	3610AO1069	2019/09/20	2020/09/19
Climate Chamber	ESPEC	EL-10KA	A20120523	2019/09/20	2020/09/19
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2019/09/23	2020/09/22
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2019/10/12	2020/10/11
Bilog Antenna	Schwarzbeck	VULB9163	000976	2019/05/26	2020/05/25
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2019/09/20	2020/09/19
Amplifier	Schwarzbeck	BBV 9743	#202	2019/09/20	2020/09/19
Amplifier	Schwarzbeck	BBV9179	9719-025	2019/09/20	2020/09/19
Amplifier	EMCI	EMC051845B	980355	2019/09/20	2020/09/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/09/20	2020/09/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2019/09/20	2020/09/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2019/09/20	2020/09/19
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2019/09/20	2020/09/19
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2019/09/20	2020/09/19
Data acquisition card	Agilent	U2531A	TW53323507	2019/09/20	2020/09/19
Power Sensor	Agilent	U2021XA	MY5365004	2019/09/20	2020/09/19
Test Control Unit	Tonscend	JS0806-1	178060067	2019/06/20	2020/06/19
Automated filter bank	Tonscend	JS0806-F	19F8060177	2019/06/20	2020/06/19
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

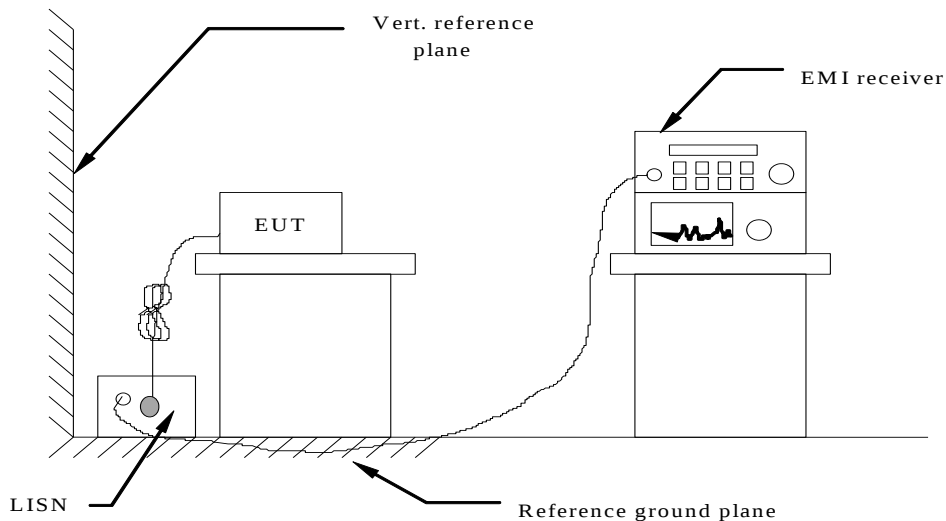

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 5V power from PC, the PC received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark: We measured Conducted Emission at all mode in AC 120V/60Hz, the worst case was recorded .


Power supply:

AC 120V/60Hz

Polarization

L

Test Graph

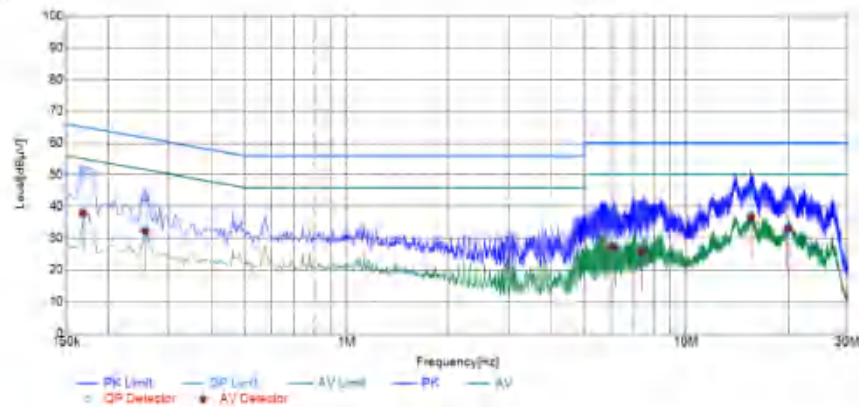

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG Result [dBμV]	QP Limit [dBμV]	AVG Limit [dBμV]	QP Margin [dB]	AVG Margin [dB]	Line	Remark
1	0.1682	41.49	27.69	10.26	51.75	37.95	65.05	55.05	13.30	17.10	L1	PASS
2	0.2550	32.66	22.24	10.12	42.78	32.36	61.59	51.59	18.81	19.23	L1	PASS
3	6.1554	26.90	17.06	10.49	37.39	27.55	60.00	50.00	22.61	22.45	L1	PASS
4	7.4371	28.21	15.37	10.53	38.74	25.90	60.00	50.00	21.26	24.10	L1	PASS
5	15.5330	34.63	25.71	11.11	45.74	36.82	60.00	50.00	14.26	13.18	L1	PASS
6	19.9097	29.34	21.62	11.51	40.85	33.13	60.00	50.00	19.15	16.87	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

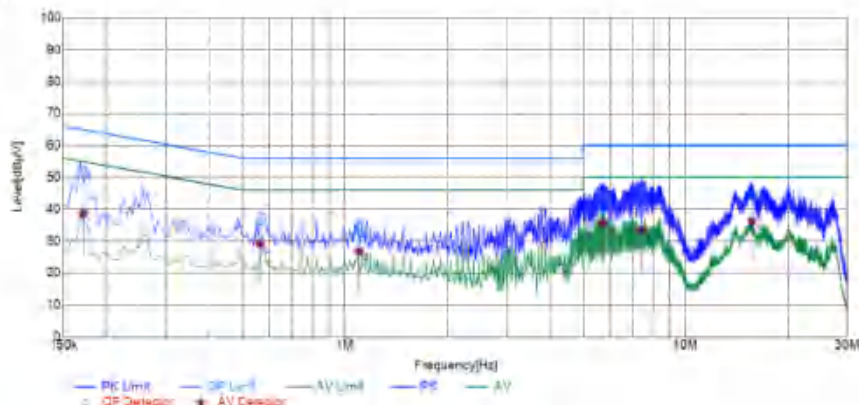

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG Result [dBμV]	QP Limit [dBμV]	AVG Limit [dBμV]	QP Margin [dB]	AVG Margin [dB]	Line	Remark
1	0.1709	41.97	28.39	10.25	52.22	38.64	64.92	54.92	12.70	16.28	N	PASS
2	0.5601	25.92	19.07	10.21	36.13	29.28	56.00	46.00	19.87	16.72	N	PASS
3	1.0973	24.37	16.64	10.21	34.58	26.85	56.00	46.00	21.42	19.15	N	PASS
4	5.7221	34.12	25.38	10.45	44.57	35.83	60.00	50.00	15.43	14.17	N	PASS
5	7.4315	35.20	22.98	10.53	45.73	33.51	60.00	50.00	14.27	16.49	N	PASS
6	15.6741	33.22	25.39	11.11	44.33	36.50	60.00	50.00	15.67	13.50	N	PASS


Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB)

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

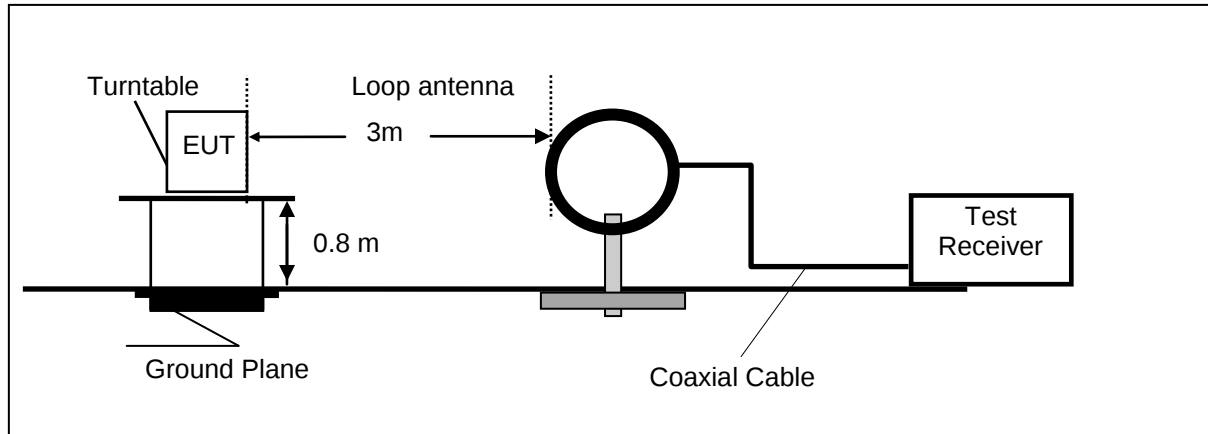

Frequency range 30MHz – 1000MHz

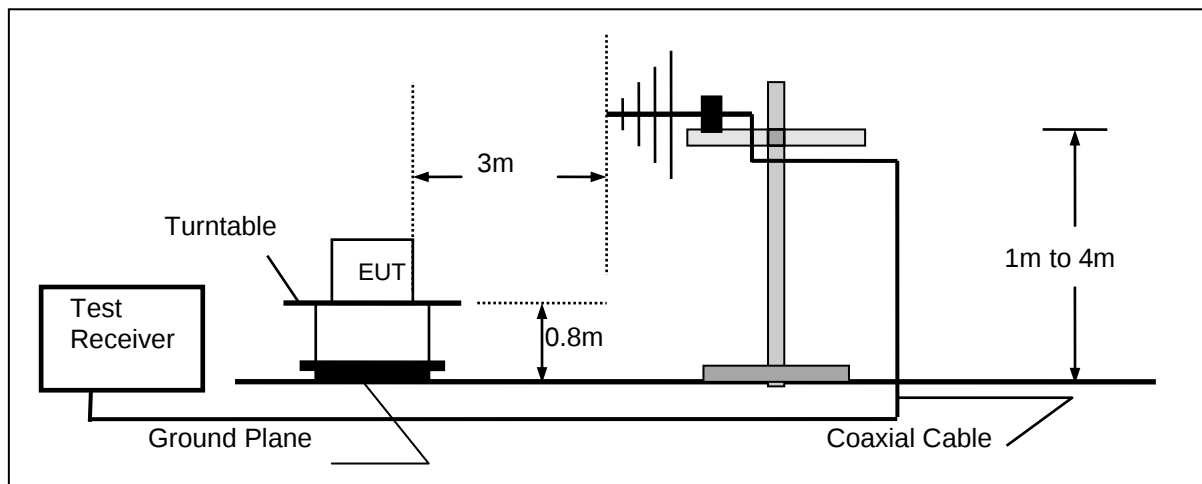

Frequency range above 1GHz

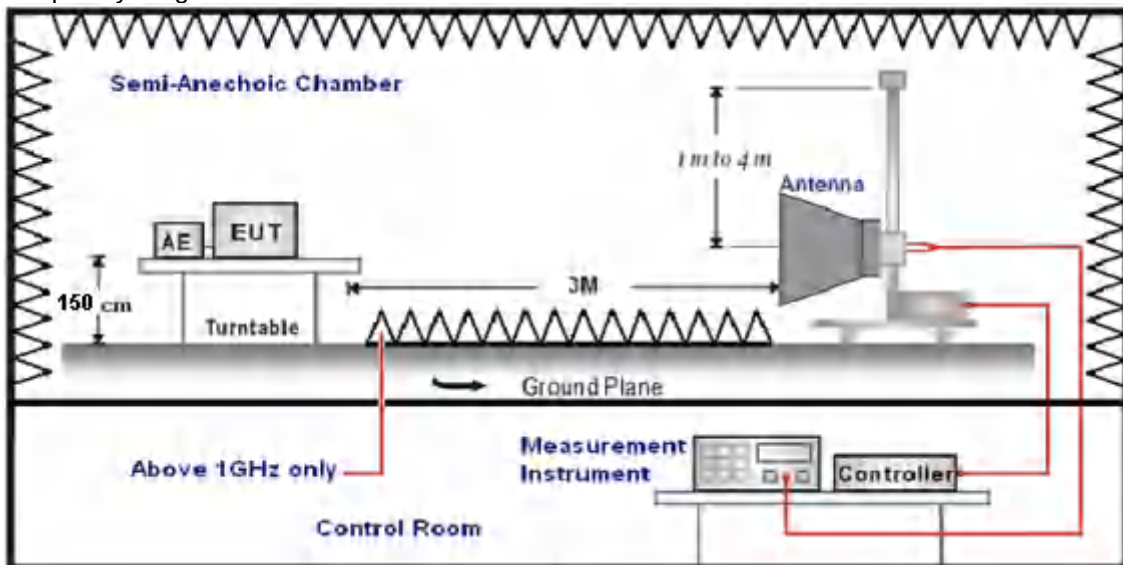

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing above 1GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 24MHz and maximum operation frequency was 5825MHz.so radiated emission test frequency band from 9KHz to 40GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd}=AF +CL-AG$$

RADIATION LIMIT


According to §15.407 (b): Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850	-27 (beyond 10MHz of the bandedge)	68.2
	-17 (within 10 MHz of band edge)	78.2

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(KHz))+40\log(300/3)$	$2400/F(KHz)$
0.49-1.705	3	$20\log(24000/F(KHz))+40\log(30/3)$	$24000/F(KHz)$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS


Remark: We measured Radiated Emission at all mode from 30MHz to 25GHz in AC 120V/60Hz and the worst case was recorded.

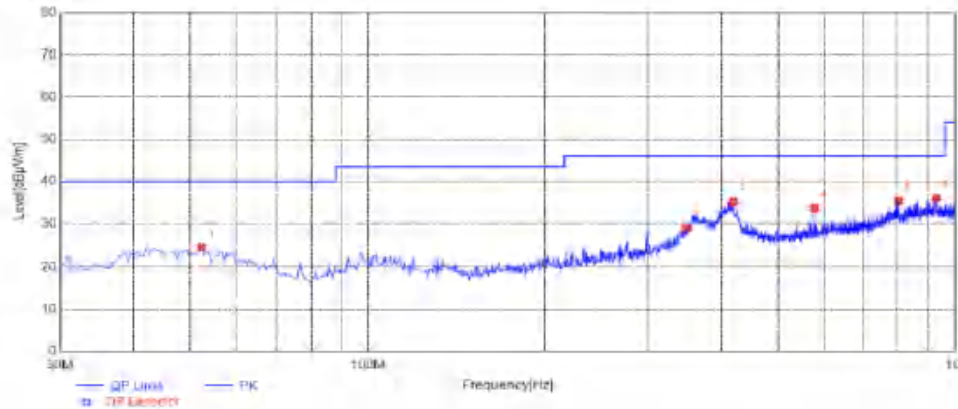For 30MHz-1GHz**Horizontal****Test Graph****Suspected List**

NO	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	52.3100	31.10	-6.68	24.42	40.00	15.58	100	290	PK	Horizontal	PASS
2	348.6450	34.72	-5.96	28.76	46.00	17.24	100	40	PK	Horizontal	PASS
3	419.4550	39.96	-4.78	35.18	46.00	10.82	100	80	PK	Horizontal	PASS
4	576.1100	36.07	-2.48	33.59	46.00	12.41	100	70	PK	Horizontal	PASS
5	802.6050	34.12	1.18	35.30	46.00	10.70	100	230	PK	Horizontal	PASS
6	930.6450	31.10	5.05	36.15	46.00	9.85	100	360	PK	Horizontal	PASS

Note: 1. Result (dBμV/m) = Reading (dBμV/m) + Factor (dB)

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

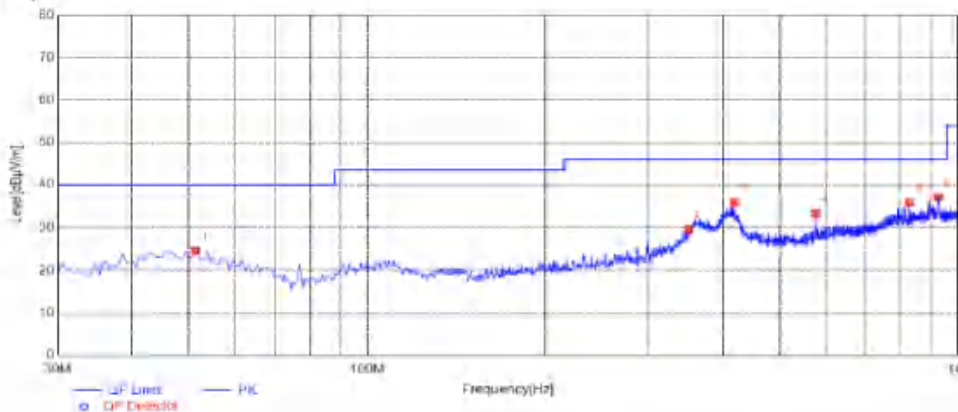Vertical**Test Graph****Suspected List**

NO	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	51.3400	31.11	-6.66	24.45	40.00	15.55	100	100	PK	Vertical	PASS
2	350.5850	35.51	-5.95	29.56	46.00	16.44	100	260	PK	Vertical	PASS
3	418.9700	40.57	-4.80	35.77	46.00	10.23	100	80	PK	Vertical	PASS
4	576.1100	35.77	-2.48	33.29	46.00	12.71	100	160	PK	Vertical	PASS
5	830.7350	34.39	1.35	35.74	46.00	10.26	100	310	PK	Vertical	PASS
6	929.6750	31.72	5.26	36.98	46.00	9.02	100	50	PK	Vertical	PASS

Note: 1. Result (dBμV/m) = Reading (dBμV/m) + Factor (dB)

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

For 1GHz to 40GHz
5150-5250MHz:

802.11a Mode Channel 36 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	39.99	38.55	33.13	11.26	56.67	68.20	-11.53	Peak	Horizontal
1	10360	30.51	38.55	33.13	11.26	47.19	54.00	-6.81	AV	Horizontal
1	10360	41.58	38.55	33.13	11.26	58.26	68.20	-9.94	Peak	Vertical
1	10360	29.01	38.55	33.13	11.26	45.69	54.00	-8.31	AV	Vertical

802.11a Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	39.86	38.55	33.13	11.26	56.54	68.20	-11.66	Peak	Horizontal
1	10400	30.47	38.55	33.13	11.26	47.15	54.00	-6.85	AV	Horizontal
1	10400	40.41	38.55	33.13	11.26	57.09	68.20	-11.11	Peak	Vertical
1	10400	29.40	38.55	33.13	11.26	46.08	54.00	-7.92	AV	Vertical

802.11a Mode Channel 48 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	39.97	38.55	33.13	11.26	56.65	68.20	-11.55	Peak	Horizontal
1	10480	30.86	38.55	33.13	11.26	47.54	54.00	-6.46	AV	Horizontal
1	10480	41.25	38.55	33.13	11.26	57.93	68.20	-10.27	Peak	Vertical
1	10480	29.10	38.55	33.13	11.26	45.78	54.00	-8.22	AV	Vertical

802.11n20 Mode Channel 36 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	40.92	38.55	33.13	11.26	57.60	68.20	-10.60	Peak	Horizontal
1	10360	31.90	38.55	33.13	11.26	48.58	54.00	-5.42	AV	Horizontal
1	10360	40.20	38.55	33.13	11.26	56.88	68.20	-11.32	Peak	Vertical
1	10360	29.15	38.55	33.13	11.26	45.83	54.00	-8.17	AV	Vertical

802.11n20 Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	39.36	38.55	33.13	11.26	56.04	68.20	-12.16	Peak	Horizontal
1	10400	31.83	38.55	33.13	11.26	48.51	54.00	-5.49	AV	Horizontal
1	10400	40.50	38.55	33.13	11.26	57.18	68.20	-11.02	Peak	Vertical
1	10400	29.24	38.55	33.13	11.26	45.92	54.00	-8.08	AV	Vertical

802.11n20 Mode Channel 48 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	40.28	38.55	33.13	11.26	56.96	68.20	-11.24	Peak	Horizontal
1	10480	30.78	38.55	33.13	11.26	47.46	54.00	-6.54	AV	Horizontal
1	10480	41.56	38.55	33.13	11.26	58.24	68.20	-9.96	Peak	Vertical
1	10480	29.45	38.55	33.13	11.26	46.13	54.00	-7.87	AV	Vertical

802.11n40 Mode_Channel 38_5190 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10380	40.79	38.55	33.13	11.26	57.47	68.20	-10.73	Peak	Horizontal
1	10380	31.07	38.55	33.13	11.26	47.75	54.00	-6.25	AV	Horizontal
1	10380	41.28	38.55	33.13	11.26	57.96	68.20	-10.24	Peak	Vertical
1	10380	29.05	38.55	33.13	11.26	45.73	54.00	-8.27	AV	Vertical

802.11n40 Mode_Channel 46_5230 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10460	40.10	38.55	33.13	11.26	56.78	68.20	-11.42	Peak	Horizontal
1	10460	30.38	38.55	33.13	11.26	47.06	54.00	-6.94	AV	Horizontal
1	10460	41.01	38.55	33.13	11.26	57.69	68.20	-10.51	Peak	Vertical
1	10460	29.09	38.55	33.13	11.26	45.77	54.00	-8.23	AV	Vertical

802.11ac20 Mode_Channel 36_5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	40.77	38.55	33.13	11.26	57.45	68.20	-10.75	Peak	Horizontal
1	10360	30.08	38.55	33.13	11.26	46.76	54.00	-7.24	AV	Horizontal
1	10360	41.98	38.55	33.13	11.26	58.66	68.20	-9.54	Peak	Vertical
1	10360	28.22	38.55	33.13	11.26	44.90	54.00	-9.10	AV	Vertical

802.11ac20 Mode_Channel 40_5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	39.55	38.55	33.13	11.26	56.23	68.20	-11.97	Peak	Horizontal
1	10400	31.48	38.55	33.13	11.26	48.16	54.00	-5.84	AV	Horizontal
1	10400	40.18	38.55	33.13	11.26	56.86	68.20	-11.34	Peak	Vertical
1	10400	29.90	38.55	33.13	11.26	46.58	54.00	-7.42	AV	Vertical

802.11ac20 Mode_Channel 48_5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	40.00	38.55	33.13	11.26	56.68	68.20	-11.52	Peak	Horizontal
1	10480	30.11	38.55	33.13	11.26	46.79	54.00	-7.21	AV	Horizontal
1	10480	40.99	38.55	33.13	11.26	57.67	68.20	-10.53	Peak	Vertical
1	10480	29.18	38.55	33.13	11.26	45.86	54.00	-8.14	AV	Vertical

802.11ac40 Mode_Channel 38_5190 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10380	40.81	38.55	33.13	11.26	57.49	68.20	-10.71	Peak	Horizontal
1	10380	31.86	38.55	33.13	11.26	48.54	54.00	-5.46	AV	Horizontal
1	10380	41.92	38.55	33.13	11.26	58.60	68.20	-9.60	Peak	Vertical
1	10380	28.02	38.55	33.13	11.26	44.70	54.00	-9.30	AV	Vertical

802.11ac40 Mode_Channel 46 _ 5230 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10460	40.35	38.55	33.13	11.26	57.03	68.20	-11.17	Peak	Horizontal
1	10460	31.84	38.55	33.13	11.26	48.52	54.00	-5.48	AV	Horizontal
1	10460	40.47	38.55	33.13	11.26	57.15	68.20	-11.05	Peak	Vertical
1	10460	28.13	38.55	33.13	11.26	44.81	54.00	-9.19	AV	Vertical

802.11ac80 Mode_Channel 42 _ 5210 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10420	39.38	38.55	33.13	11.26	56.06	68.20	-12.14	Peak	Horizontal
1	10420	31.60	38.55	33.13	11.26	48.28	54.00	-5.72	AV	Horizontal
1	10420	40.42	38.55	33.13	11.26	57.10	68.20	-11.10	Peak	Vertical
1	10420	29.22	38.55	33.13	11.26	45.90	54.00	-8.10	AV	Vertical

5725-5850MHz:**802.11a Mode_Channel 149 _ 5745 MHz**

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	39.55	38.55	33.13	11.26	56.23	68.20	-11.97	Peak	Horizontal
1	11490	30.93	38.55	33.13	11.26	47.61	54.00	-6.39	AV	Horizontal
1	11490	40.75	38.55	33.13	11.26	57.43	68.20	-10.77	Peak	Vertical
1	11490	29.96	38.55	33.13	11.26	46.64	54.00	-7.36	AV	Vertical

802.11a Mode_Channel 157 _ 5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	39.43	38.55	33.13	11.26	56.11	68.20	-12.09	Peak	Horizontal
1	11570	31.60	38.55	33.13	11.26	48.28	54.00	-5.72	AV	Horizontal
1	11570	40.44	38.55	33.13	11.26	57.12	68.20	-11.08	Peak	Vertical
1	11570	29.60	38.55	33.13	11.26	46.28	54.00	-7.72	AV	Vertical

802.11a Mode_Channel 165 _ 5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	40.16	38.55	33.13	11.26	56.84	68.20	-11.36	Peak	Horizontal
1	11650	31.65	38.55	33.13	11.26	48.33	54.00	-5.67	AV	Horizontal
1	11650	41.54	38.55	33.13	11.26	58.22	68.20	-9.98	Peak	Vertical
1	11650	28.15	38.55	33.13	11.26	44.83	54.00	-9.17	AV	Vertical

802.11n20 Mode_Channel 149_ 5745 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	39.92	38.55	33.13	11.26	56.60	68.20	-11.60	Peak	Horizontal
1	11490	31.55	38.55	33.13	11.26	48.23	54.00	-5.77	AV	Horizontal
1	11490	40.16	38.55	33.13	11.26	56.84	68.20	-11.36	Peak	Vertical
1	11490	28.46	38.55	33.13	11.26	45.14	54.00	-8.86	AV	Vertical

802.11n20 Mode_Channel 157_ 5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	39.64	38.55	33.13	11.26	56.32	68.20	-11.88	Peak	Horizontal
1	11570	30.40	38.55	33.13	11.26	47.08	54.00	-6.92	AV	Horizontal
1	11570	41.92	38.55	33.13	11.26	58.60	68.20	-9.60	Peak	Vertical
1	11570	29.43	38.55	33.13	11.26	46.11	54.00	-7.89	AV	Vertical

802.11n20 Mode_Channel 165_ 5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	40.09	38.55	33.13	11.26	56.77	68.20	-11.43	Peak	Horizontal
1	11650	30.99	38.55	33.13	11.26	47.67	54.00	-6.33	AV	Horizontal
1	11650	40.46	38.55	33.13	11.26	57.14	68.20	-11.06	Peak	Vertical
1	11650	28.70	38.55	33.13	11.26	45.38	54.00	-8.62	AV	Vertical

802.11n40 Mode_Channel 151_ 5755 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11510	39.24	38.55	33.13	11.26	55.92	68.20	-12.28	Peak	Horizontal
1	11510	30.66	38.55	33.13	11.26	47.34	54.00	-6.66	AV	Horizontal
1	11510	41.34	38.55	33.13	11.26	58.02	68.20	-10.18	Peak	Vertical
1	11510	29.30	38.55	33.13	11.26	45.98	54.00	-8.02	AV	Vertical

802.11n40 Mode_Channel 159_ 5795MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11590	40.26	38.55	33.13	11.26	56.94	68.20	-11.26	Peak	Horizontal
1	11590	30.04	38.55	33.13	11.26	46.72	54.00	-7.28	AV	Horizontal
1	11590	40.39	38.55	33.13	11.26	57.07	68.20	-11.13	Peak	Vertical
1	11590	28.21	38.55	33.13	11.26	44.89	54.00	-9.11	AV	Vertical

802.11ac20 Mode_Channel 149_ 5745 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	39.20	38.55	33.13	11.26	55.88	68.20	-12.32	Peak	Horizontal
1	11490	30.68	38.55	33.13	11.26	47.36	54.00	-6.64	AV	Horizontal
1	11490	40.25	38.55	33.13	11.26	56.93	68.20	-11.27	Peak	Vertical
1	11490	29.01	38.55	33.13	11.26	45.69	54.00	-8.31	AV	Vertical

802.11ac20 Mode Channel 157 _ 5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	40.29	38.55	33.13	11.26	56.97	68.20	-11.23	Peak	Horizontal
1	11570	31.63	38.55	33.13	11.26	48.31	54.00	-5.69	AV	Horizontal
1	11570	41.89	38.55	33.13	11.26	58.57	68.20	-9.63	Peak	Vertical
1	11570	29.61	38.55	33.13	11.26	46.29	54.00	-7.71	AV	Vertical

802.11ac20 Mode Channel 165 _ 5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	40.63	38.55	33.13	11.26	57.31	68.20	-10.89	Peak	Horizontal
1	11650	30.85	38.55	33.13	11.26	47.53	54.00	-6.47	AV	Horizontal
1	11650	41.83	38.55	33.13	11.26	58.51	68.20	-9.69	Peak	Vertical
1	11650	28.93	38.55	33.13	11.26	45.61	54.00	-8.39	AV	Vertical

802.11ac40 Mode Channel 151 _ 5755 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11510	40.39	38.55	33.13	11.26	57.07	68.20	-11.13	Peak	Horizontal
1	11510	31.15	38.55	33.13	11.26	47.83	54.00	-6.17	AV	Horizontal
1	11510	41.38	38.55	33.13	11.26	58.06	68.20	-10.14	Peak	Vertical
1	11510	28.70	38.55	33.13	11.26	45.38	54.00	-8.62	AV	Vertical

802.11ac40 Mode Channel 159 _ 5795MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11590	40.37	38.55	33.13	11.26	57.05	68.20	-11.15	Peak	Horizontal
1	11590	30.55	38.55	33.13	11.26	47.23	54.00	-6.77	AV	Horizontal
1	11590	41.27	38.55	33.13	11.26	57.95	68.20	-10.25	Peak	Vertical
1	11590	28.43	38.55	33.13	11.26	45.11	54.00	-8.89	AV	Vertical

802.11ac80 Mode Channel 155 _ 5775 MHz


Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11550	40.70	38.55	33.13	11.26	57.38	68.20	-10.82	Peak	Horizontal
1	11550	30.01	38.55	33.13	11.26	46.69	54.00	-7.31	AV	Horizontal
1	11550	40.30	38.55	33.13	11.26	56.98	68.20	-11.22	Peak	Vertical
1	11550	29.91	38.55	33.13	11.26	46.59	54.00	-7.41	AV	Vertical

REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;

4.3. Duty Cycle

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General UNII Test Procedures New Rules v01 B Duty Cycle (x), Transmission Duration (T):

- A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on and off times of the transmitted signal
- The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zerospan measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST RESULTS

5150-5250MHz:

802.11a Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	1.00	0

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	1.00	0

802.11ac20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
40	5200	1.00	0

802.11n HT40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	1.00	0

802.11ac40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
38	5190	1.00	0

802.11ac80 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
42	5210	1.00	0

5725-5850MHz:

802.11a Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	1.00	0

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	1.00	0

802.11ac20 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
157	5785	1.00	0

802.11n HT40 Test Mode

Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	1.00	0

802.11ac40 Test Mode


Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
151	5755	1.00	0

802.11ac80 Test Mode


Channel	Frequency (MHz)	Duty Cycle	Duty factor (dB)
155	5775	1.00	0

5150-5250MHz:


802.11a

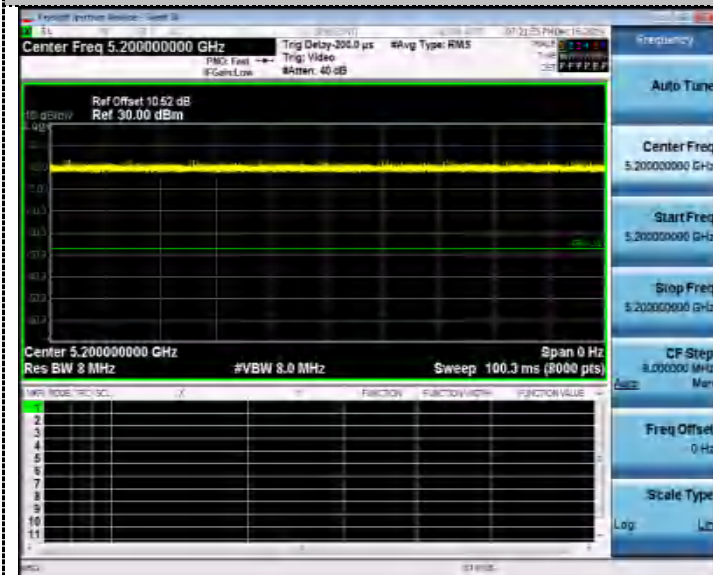


802.11n HT20

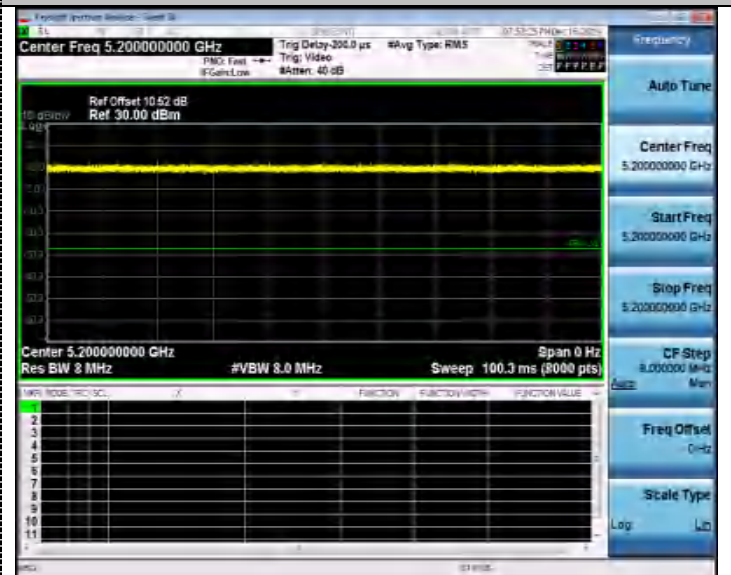


802.11ac20

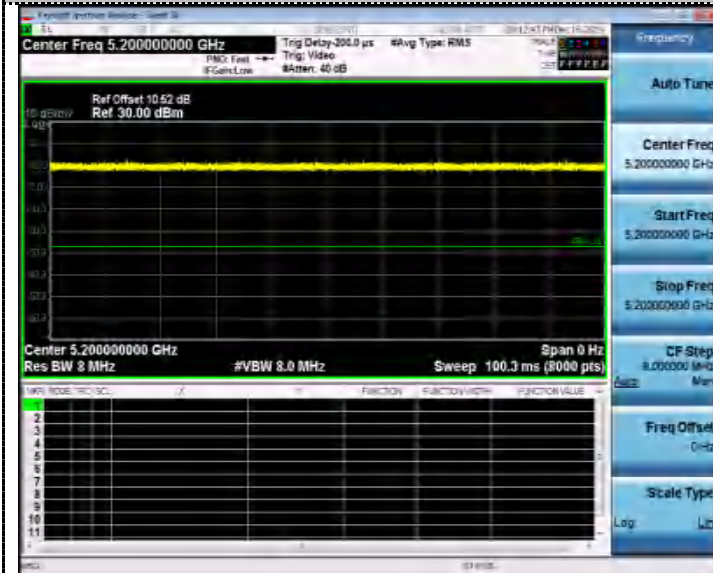


802.11n HT40

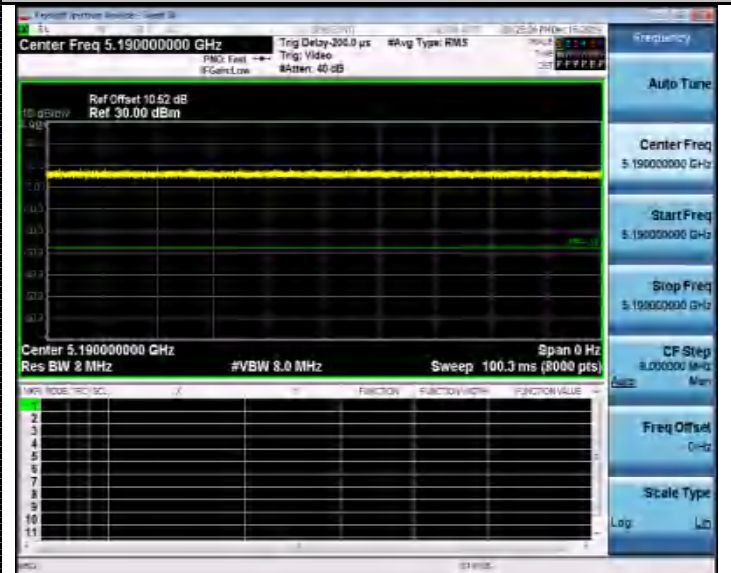

802.11ac40

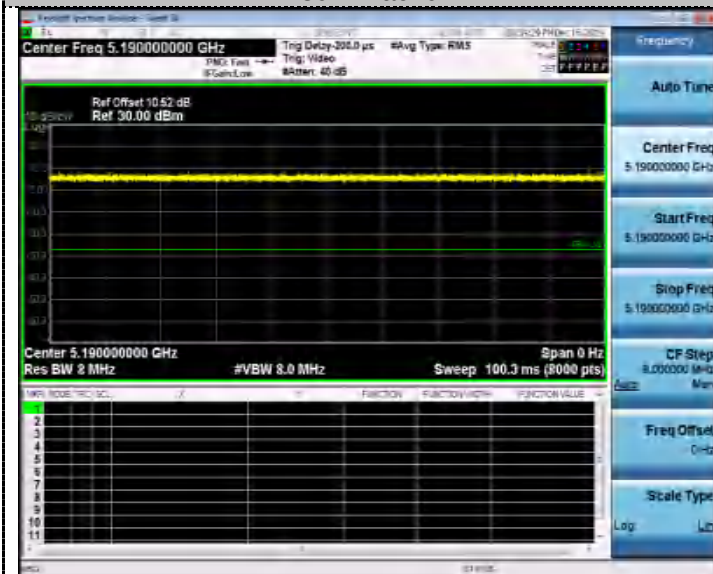


802.11ac80

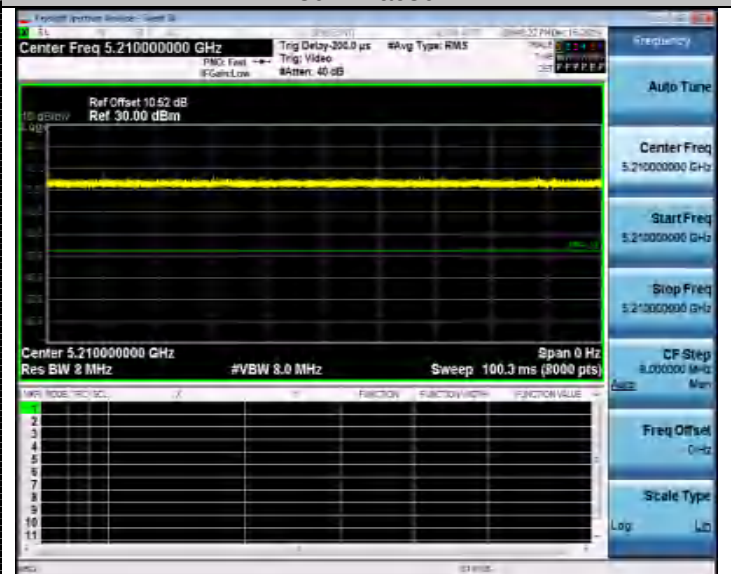


5725-5850MHz:


802.11a

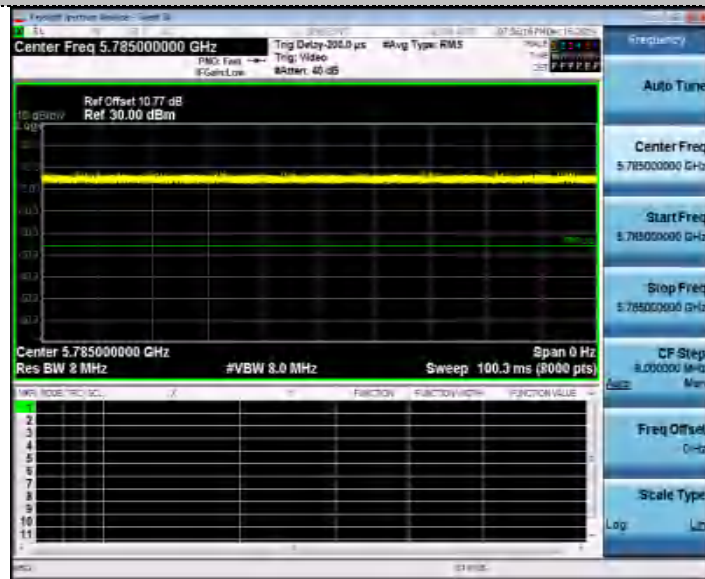


802.11n HT20

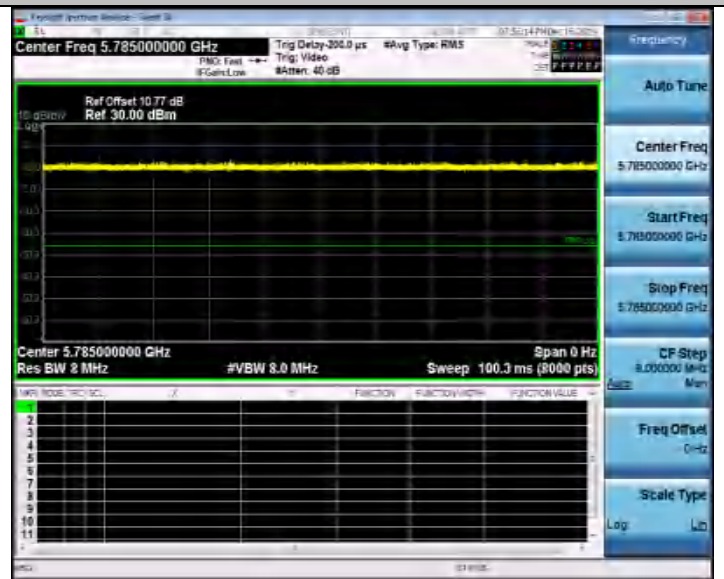


802.11ac20

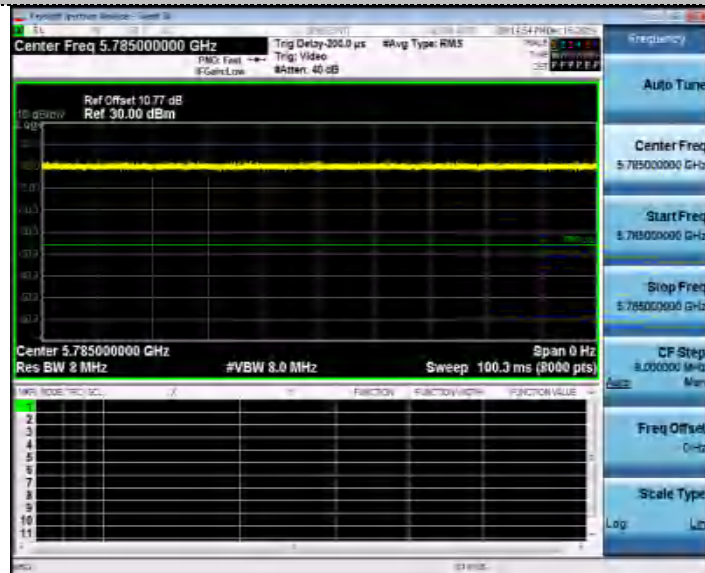


802.11n HT40

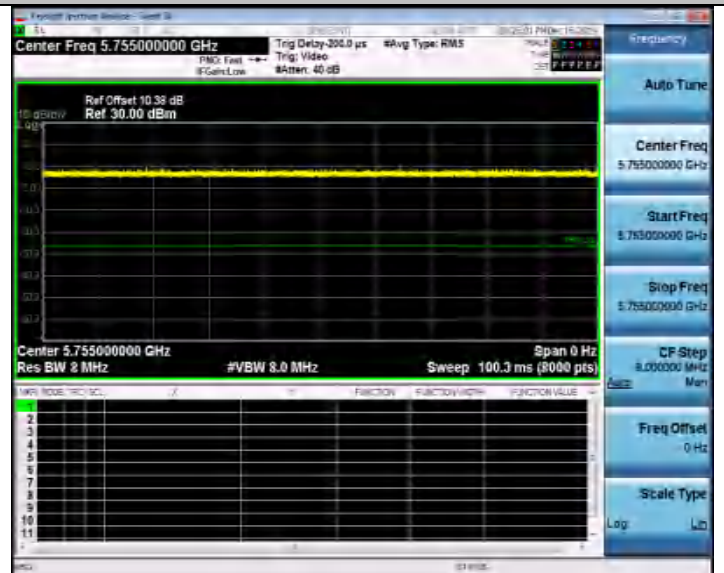

802.11ac40

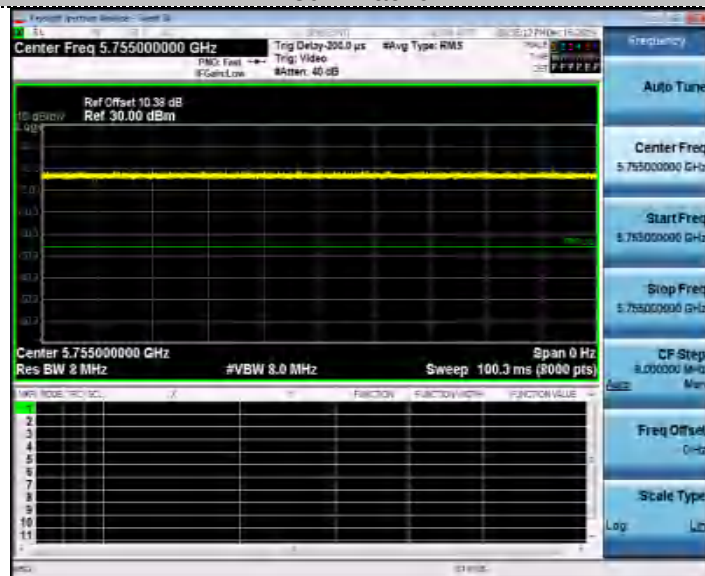


802.11ac80

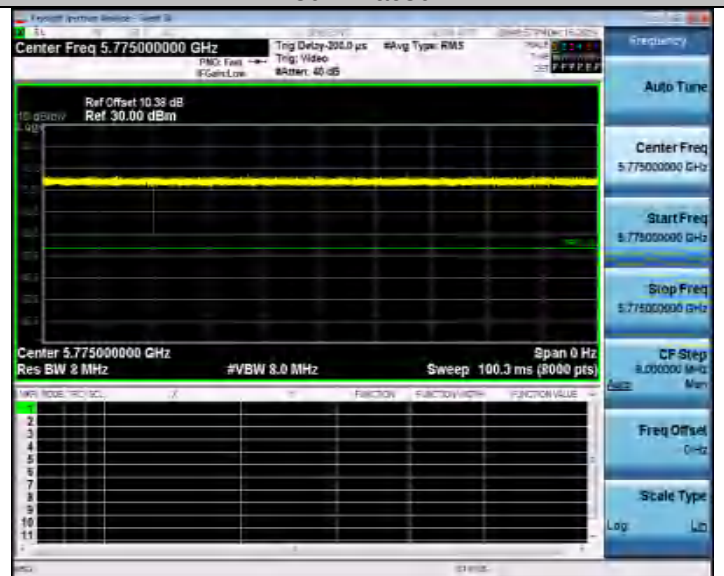

4.4. Maximum Average Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General UNII Test Procedures New Rules v01 Section E3 Measurement using a Power Meter (PM):

- a. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied
 1. The EUT is configured to transmit continuously or to transmit with a constant duty cycle
 2. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 3. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b. If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in section II.B
- c. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).

LIMIT

According to §15.407(a): The maximum output power should be not exceed follow:

Frequency Range (MHz)	Limit
5150-5250	Fixed: 1 Watt (30dBm) Mobile and portable: 250mW (24dBm)
5250-5350	250mW (24dBm)
5470-5725	250mW (24dBm)
5725-5850	1 Watt (30dBm)
Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm)	

TEST RESULTS

5150-5250MHz:


Channel	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a						
36	5180	11.82	0	11.82	24.00	PASS
40	5200	11.66	0	11.66	24.00	PASS
48	5240	11.34	0	11.34	24.00	PASS
802.11n20						
36	5180	11.98	0	11.98	24.00	PASS
40	5200	11.02	0	11.02	24.00	PASS
48	5240	11.82	0	11.82	24.00	PASS
802.11ac20						
36	5180	11.89	0	11.89	24.00	PASS
40	5200	11.98	0	11.98	24.00	PASS
48	5240	11.42	0	11.42	24.00	PASS
802.11n40						
38	5190	11.75	0	11.75	24.00	PASS
46	5230	11.27	0	11.27	24.00	PASS
802.11ac40						
38	5190	11.02	0	11.02	24.00	PASS
46	5230	11.41	0	11.41	24.00	PASS
802.11ac80						
42	5210	11.29	0	11.29	24.00	24.00

5725-5850MHz:

Channel	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a						
149	5745	9.53	0	9.53	30.00	PASS
157	5785	9.14	0	9.14	30.00	PASS
165	5825	9.85	0	9.85	30.00	PASS
802.11n20						
149	5745	9.37	0	9.37	30.00	PASS
157	5785	9.51	0	9.51	30.00	PASS
165	5825	9.56	0	9.56	30.00	PASS
802.11ac20						
149	5745	9.59	0	9.59	30.00	PASS
157	5785	9.68	0	9.68	30.00	PASS
165	5825	9.86	0	9.86	30.00	PASS
802.11n40						
151	5755	9.52	0	9.52	30.00	PASS
159	5795	9.02	0	9.02	30.00	PASS
802.11ac40						
151	5755	9.78	0	9.78	30.00	PASS
159	5795	9.14	0	9.14	30.00	PASS
802.11ac80						
155	5775	9.50	0	9.50	30.00	PASS

4.5. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 789033 D02 General UNII Test Procedures New Rules v01 F: The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission

- a. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- b. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- c. Make the following adjustments to the peak value of the spectrum, if applicable:
 1. If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
 2.) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- d. The result is the Maximum PSD over 1 MHz reference bandwidth.
- e. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:
 1. Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
 2. Set $VBW \geq 3 RBW$.
 3. If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 4. If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 5. Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.
- f. Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).

LIMIT

According to §15.407(a): The maximum output power should be not exceed follow:

Frequency Range (MHz)	Limit
5150-5250	Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz
5250-5350	11dBm/MHz
5470-5725	11dBm/MHz
5725-5850	30dBm/500kHz

TEST RESULTS**5150-5250MHz:****802.11a Test Mode**

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-0.86	0	0	-0.86	11	PASS
40	5200	-0.72	0	0	-0.72	11	PASS
48	5240	-1.07	0	0	-1.07	11	PASS

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-1.17	0	0	-1.17	11	PASS
40	5200	-0.72	0	0	-0.72	11	PASS
48	5240	-1.06	0	0	-1.06	11	PASS

802.11ac20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
36	5180	-1.26	0	0	-1.26	11	PASS
40	5200	-0.71	0	0	-0.71	11	PASS
48	5240	-0.96	0	0	-0.96	11	PASS

802.11n40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-4.34	0	0	-4.34	11	PASS
46	5230	-4.21	0	0	-4.21	11	PASS

802.11ac40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
38	5190	-4.30	0	0	-4.30	11	PASS
46	5230	-4.23	0	0	-4.23	11	PASS

802.11ac80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/1MHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/1MHz)	Limits (dBm/1MHz)	Verdict
42	5210	-6.07	0	0	-6.07	11	PASS

5725-5850MHz:

802.11a Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	-1.23	0	2.20	0.97	30	PASS
157	5785	-7.04	0	2.20	-4.84	30	PASS
165	5825	-1.96	0	2.20	0.24	30	PASS

802.11n HT20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	-1.00	0	2.20	1.20	30	PASS
157	5785	-1.34	0	2.20	0.86	30	PASS
165	5825	-2.16	0	2.20	0.04	30	PASS

802.11ac20 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5745	-1.25	0	2.20	0.95	30	PASS
157	5785	-1.35	0	2.20	0.85	30	PASS
165	5825	-2.34	0	2.20	-0.14	30	PASS

802.11n40Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	-5.09	0	2.20	-2.89	30	PASS
157	5795	-4.89	0	2.20	-2.69	30	PASS

802.11ac40 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
149	5755	-5.12	0	2.20	-2.92	30	PASS
157	5795	-4.89	0	2.20	-2.69	30	PASS

802.11ac80 Test Mode

Channel	Frequency (MHz)	Report PSD (dBm/300KHz)	Duty factor (dB)	RBW factor (dB)	Report PSD+ Duty factor+ RBW factor (dBm/500kHz)	Limits (dBm/500kHz)	Verdict
155	5775	-7.99	0	2.20	-5.79	30	PASS

Note:

1. The test results including the cable lose.

5150-5250MHz:

802.11a

802.11n HT20



CH 36



CH 36



CH 40







CH 40



CH 48




CH 48

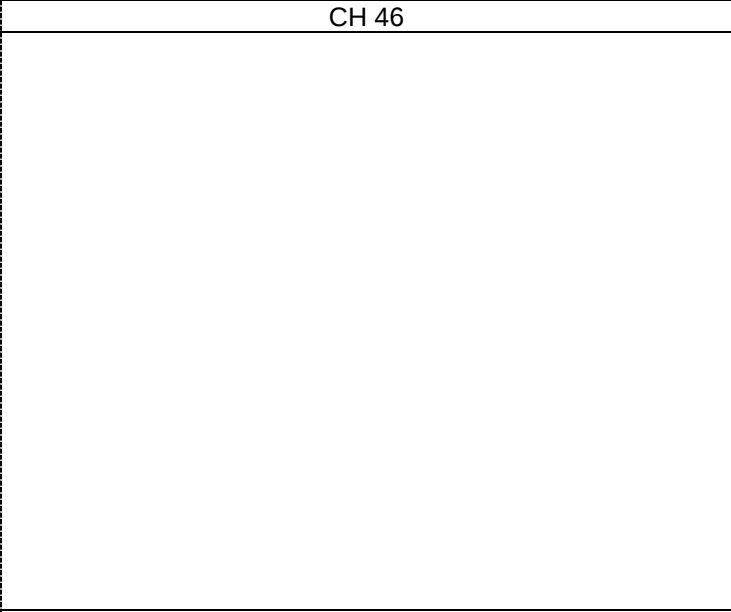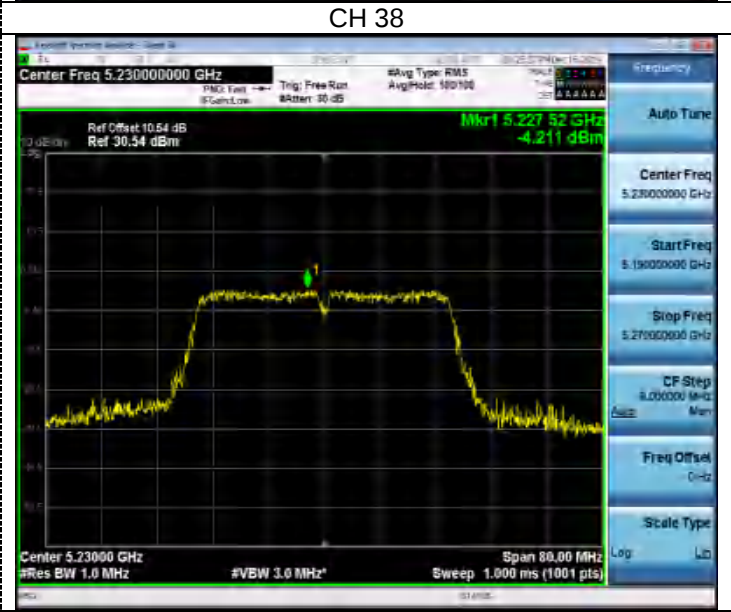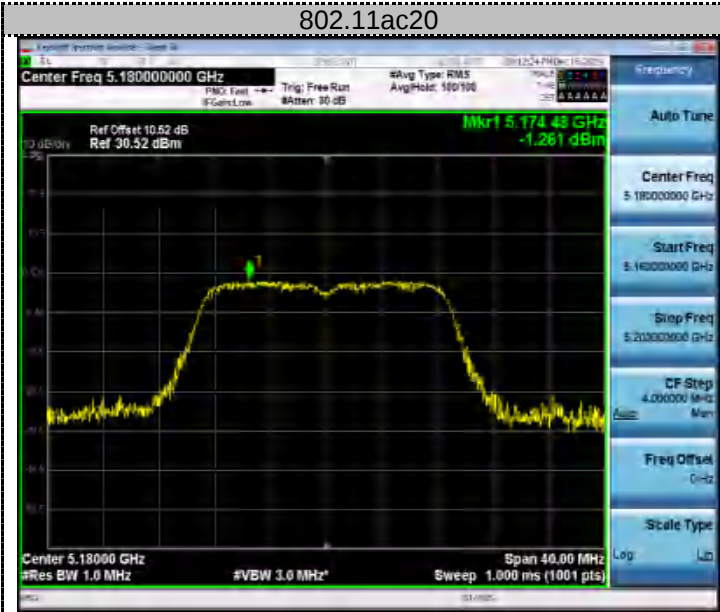



CH 38

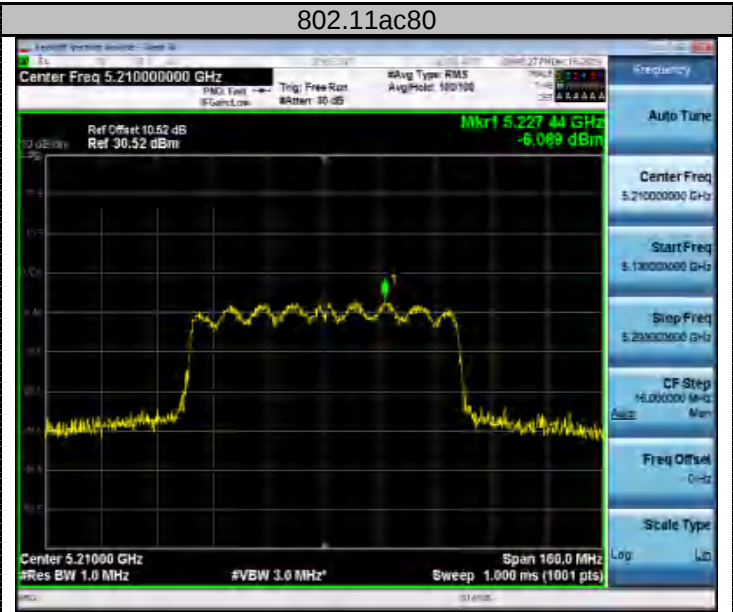


CH 42



CH 46

802.11a



CH 149



CH 149



CH 157



CH 157



CH 165



CH 165



CH 149




CH 151





CH 157



CH 159




CH 165

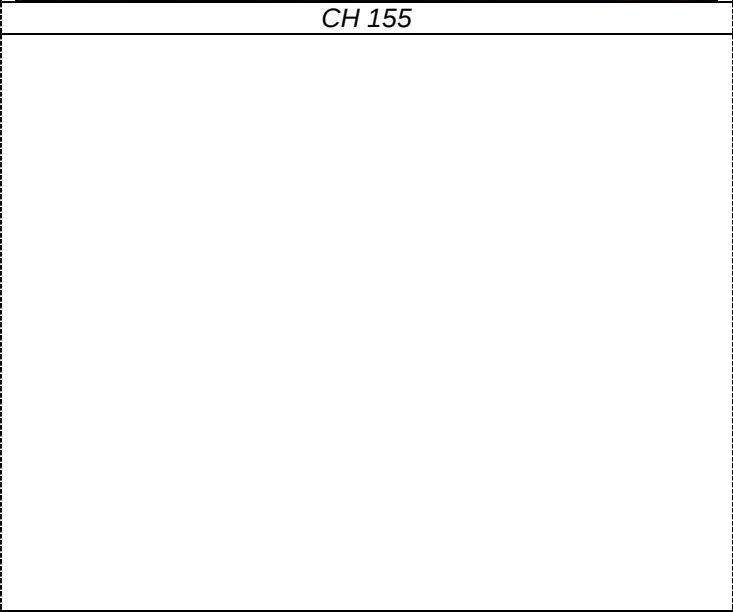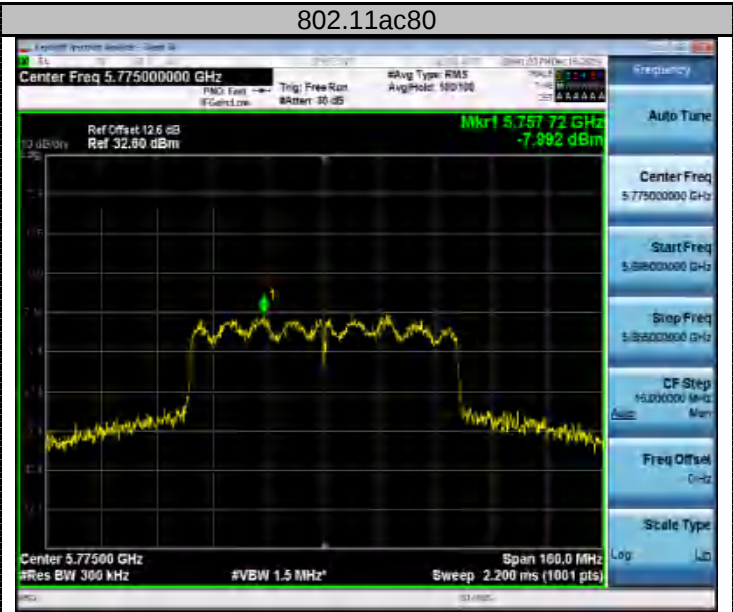

CH 159

4.6. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General UNII Test Procedures New Rules v01 for one of the following procedures may be used for section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

LIMIT


For Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz

TEST RESULTS


Type	Channel	99%Bandwidth (MHz)	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	149	17.387	16.560	≥ 500	Pass
	157	17.216	16.560		
	165	17.158	16.560		
802.11nHT20	149	18.370	17.800	≥ 500	Pass
	157	18.161	17.720		
	165	18.039	17.720		
802.11ac20	149	18.327	17.760	≥ 500	Pass
	157	18.090	17.680		
	165	18.058	17.720		
802.11n40	151	37.478	36.560	≥ 500	Pass
	159	37.252	36.560		
802.11ac40	151	37.540	36.560	≥ 500	Pass
	159	37.255	36.560		
802.11ac80	155	76.134	76.320	≥ 500	Pass

99%Bandwidth


802.11a

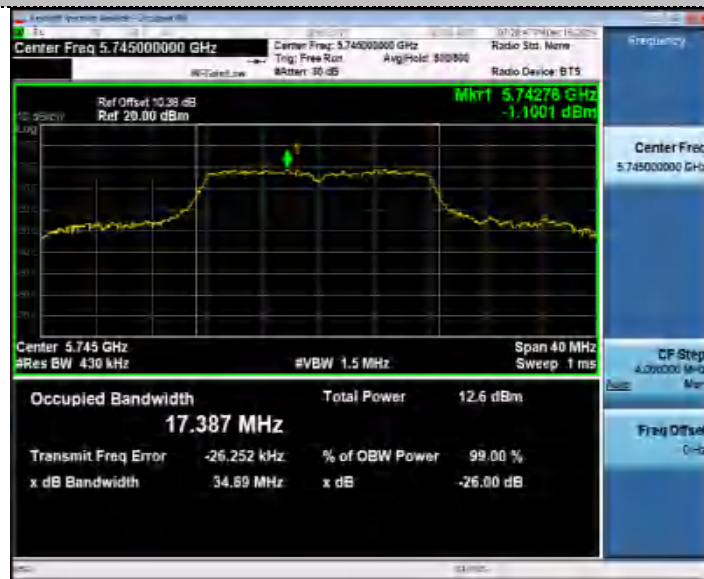


802.11n HT20

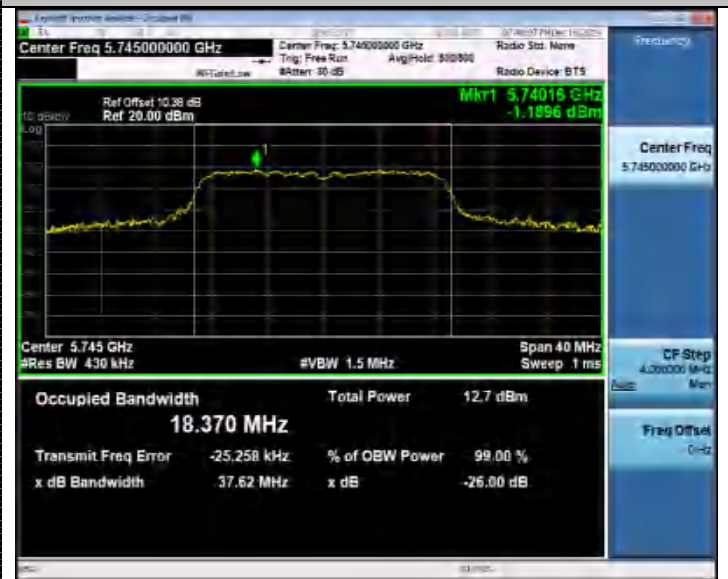


CH149

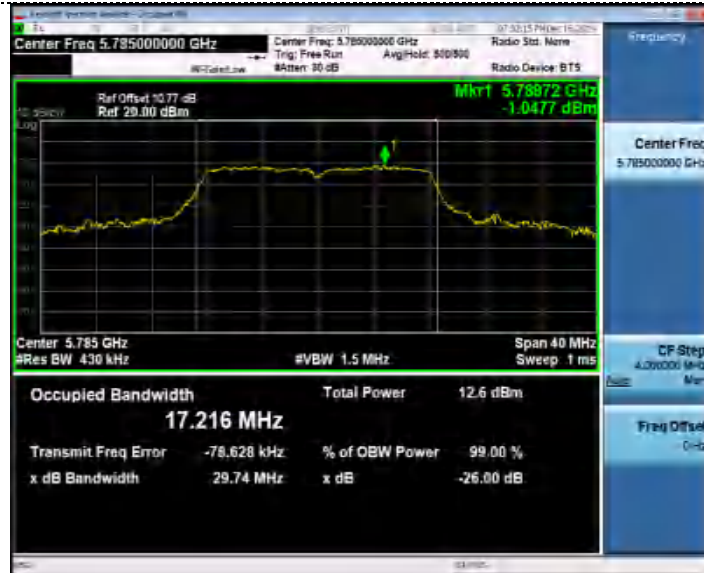

CH149

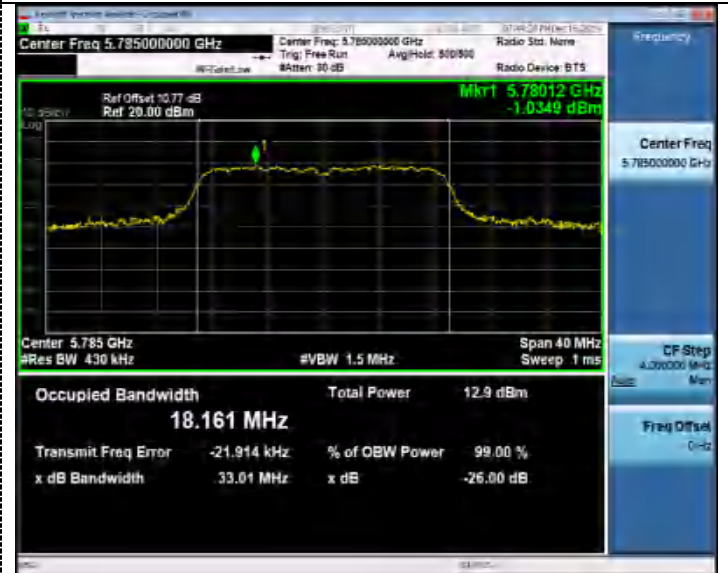

CH157

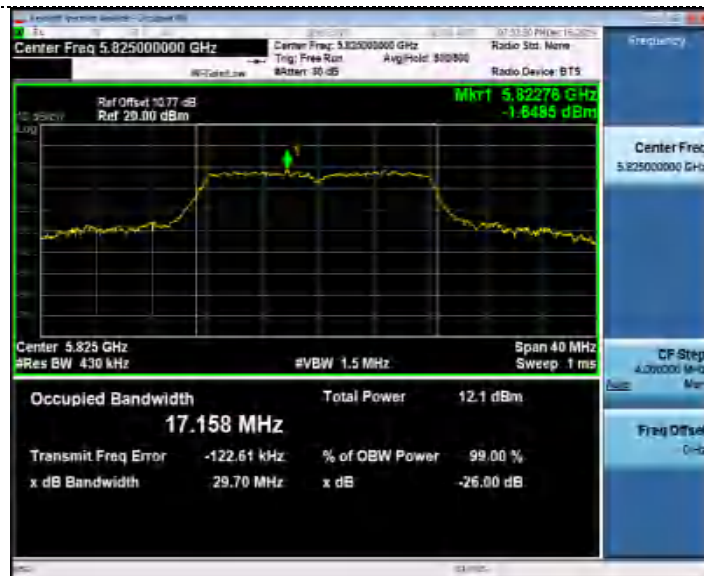

CH157



CH165




CH165




99%Bandwidth


802.11ac20

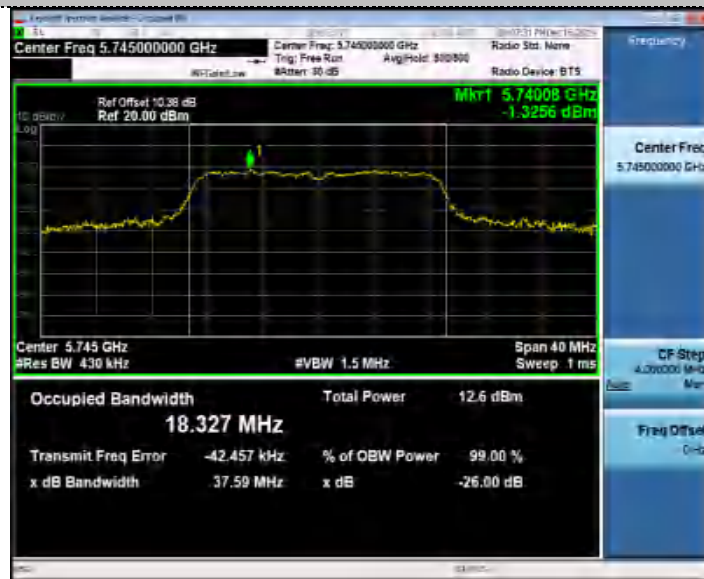

802.11n HT40

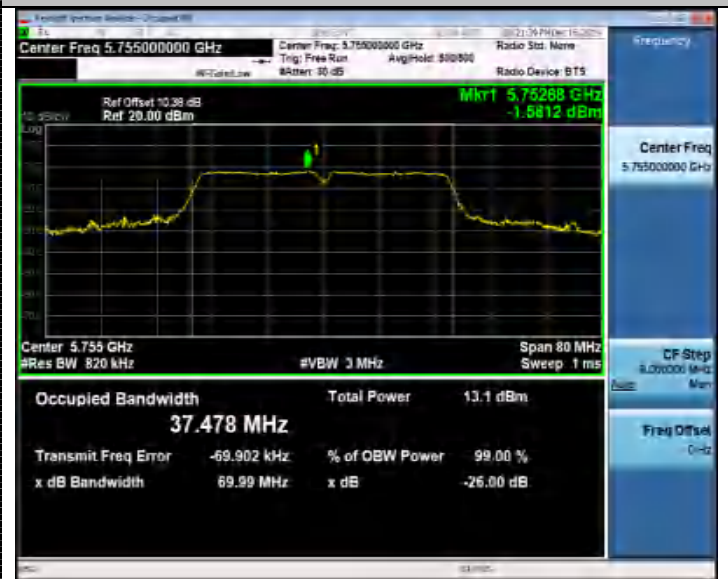


CH149

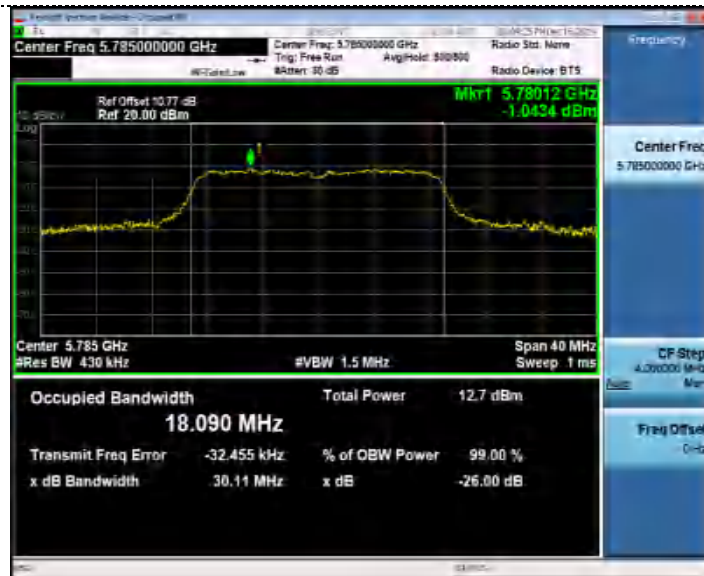

CH151



CH157

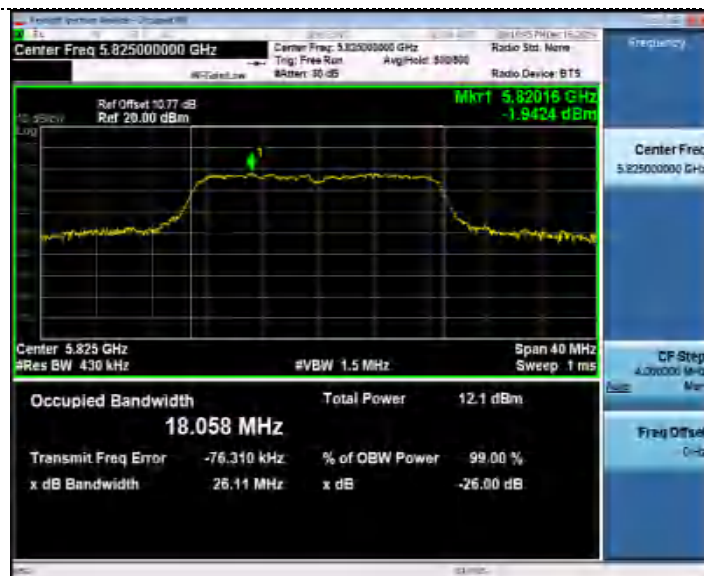

CH159



CH165



6dB Bandwidth

802.11a



802.11n HT20



CH149



CH149



CH157



CH157



CH165

CH165

6dB Bandwidth

802.11ac20



802.11n HT40



CH149



CH151



CH157




CH159



CH165

802.11ac80

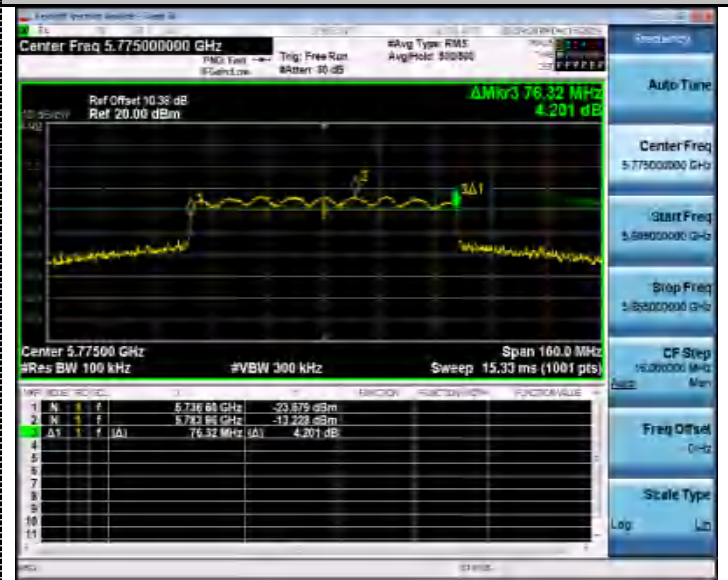


CH155



CH159

4.7. 26dBc Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General UNII Test Procedures New Rules v01 for one of the following procedures may be used for Emission Bandwidth (EBW) measurement:

- Set RBW = 300 kHz (approximately 1% of the emission bandwidth).
- Set the video bandwidth (VBW) = 1000 KHz (VBW > RBW)
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

LIMIT

No Limits for 26dBc Bandwidth

TEST RESULTS


Type	Channel	99%Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	36	16.965	20.280	-	Pass
	40	16.996	21.000		
	48	16.940	21.160		
802.11nHT20	36	17.904	21.360	-	Pass
	40	17.899	21.440		
	48	17.893	21.280		
802.11ac20	36	17.898	21.400	-	Pass
	40	17.859	21.280		
	48	17.881	21.120		
802.11n40	38	36.998	43.360	-	Pass
	46	37.061	43.120		
802.11ac40	38	36.994	43.280	-	Pass
	46	37.073	43.520		
802.11ac80	155	75.677	83.680	-	Pass

99%Bandwidth


802.11a




802.11n HT20

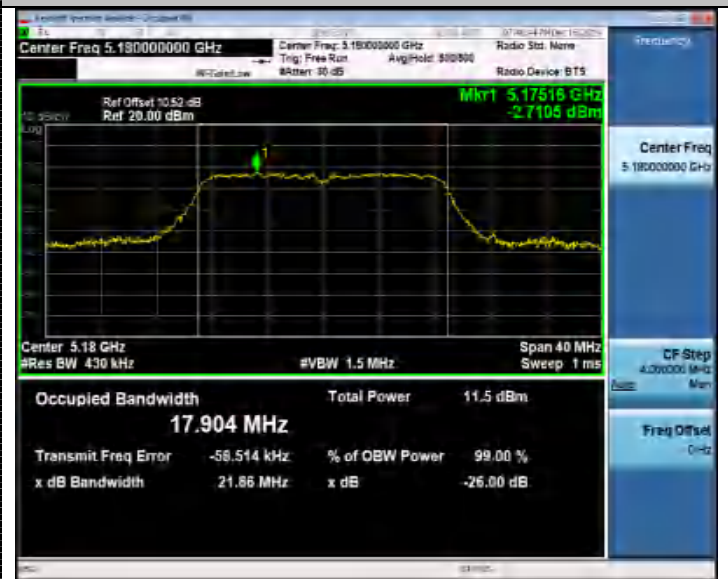


CH36

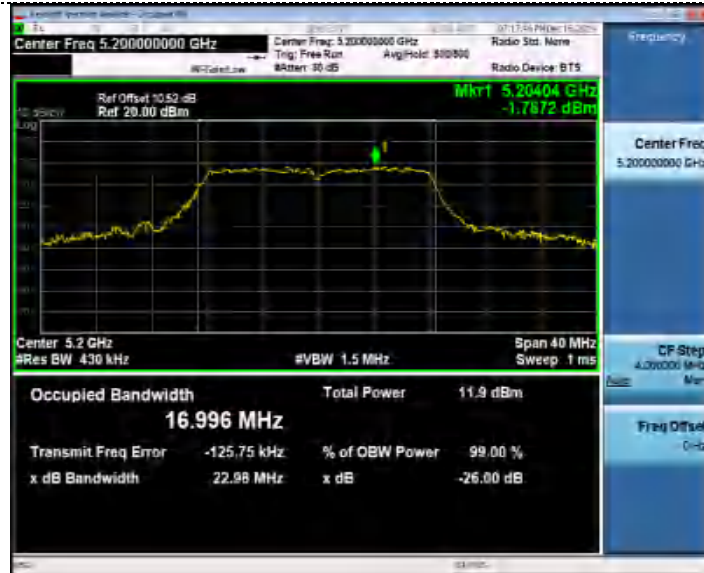

CH36

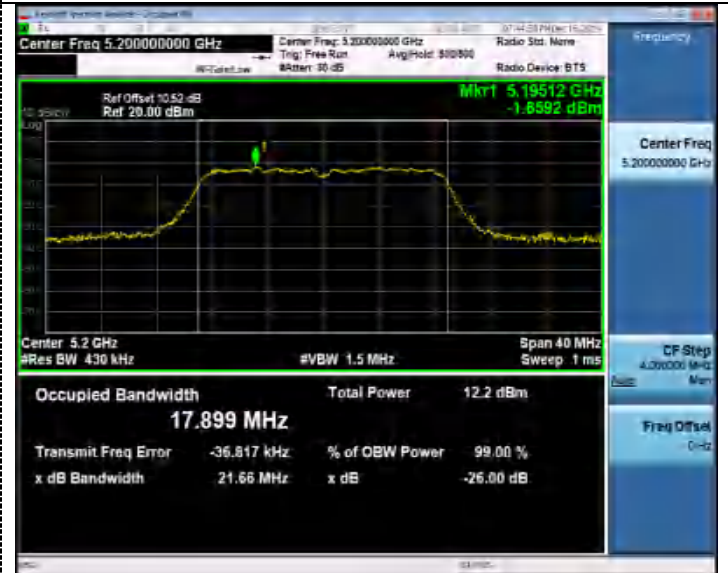

CH40

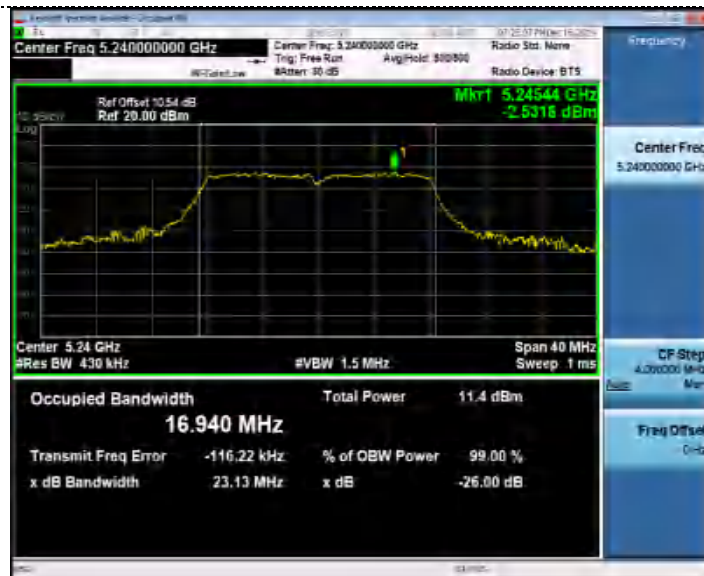

CH40



CH48




CH48




99%Bandwidth


802.11ac20

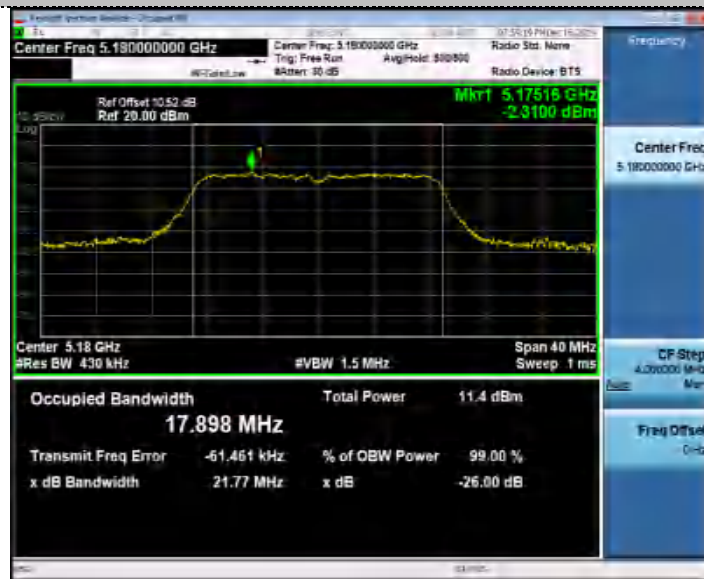

802.11n HT40

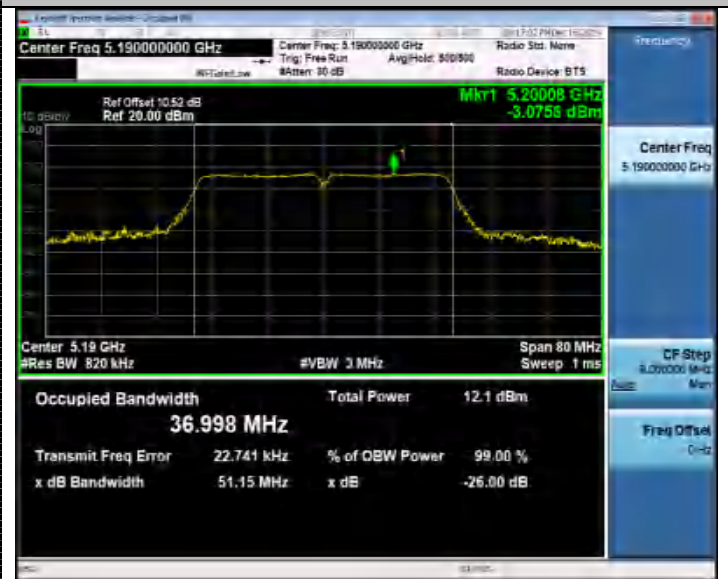

CH36

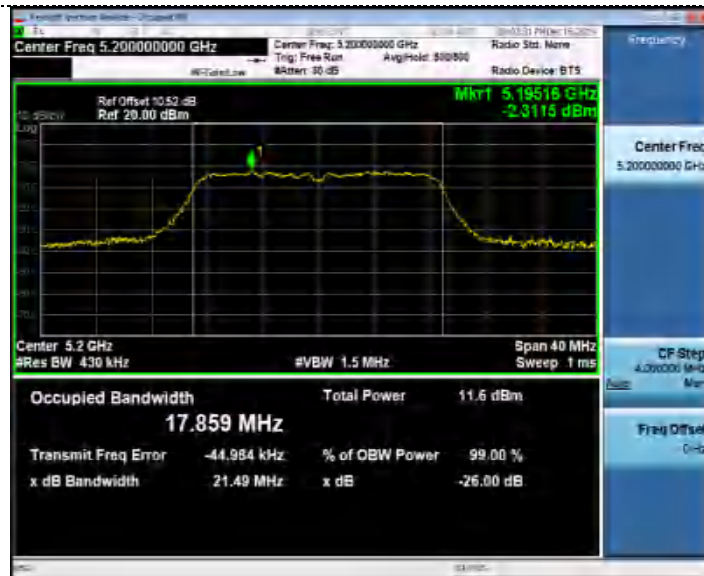

CH38



CH40



CH46



CH48



26dB Bandwidth

802.11a



802.11n HT20



CH36



CH36



CH40



CH40



CH48



CH48



26dB Bandwidth

802.11ac20



802.11n HT40



CH36



CH38



CH40



CH46




CH48

26dB Bandwidth

802.11ac40



802.11ac80

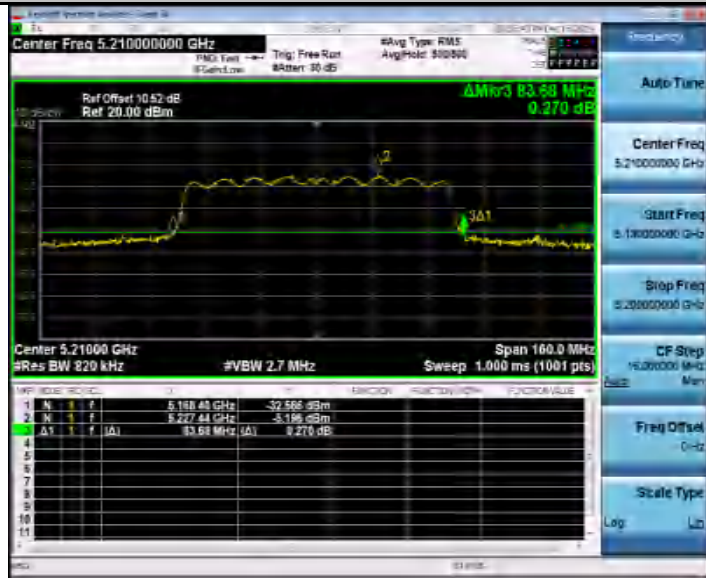

CH38



CH42




CH46



4.8. Band Edge Compliance

TEST CONFIGURATION

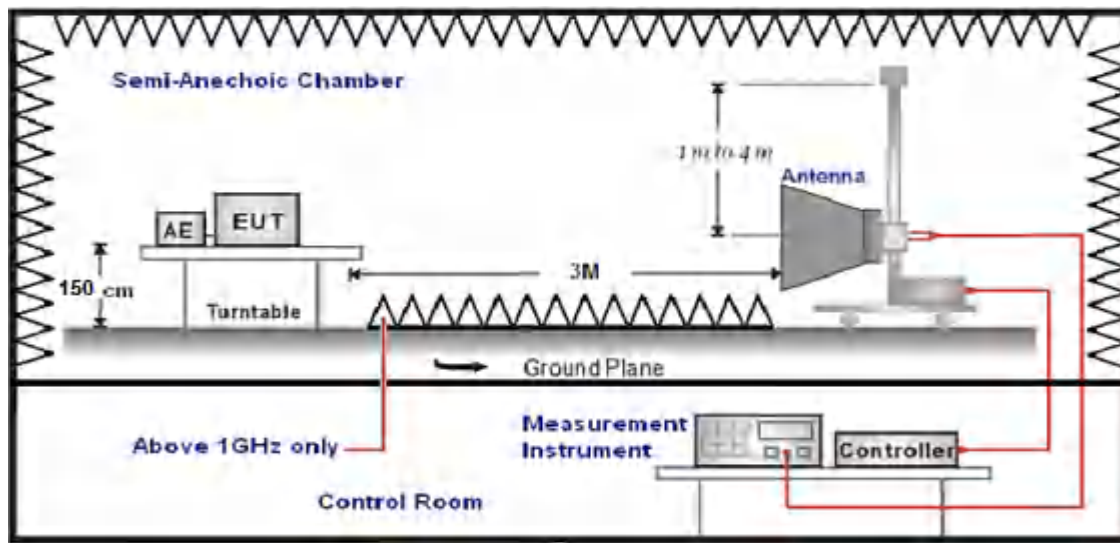

LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

According to §15.407 (b): Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850	-27 (beyond 10MHz of the bandedge)	68.2
	-17 (within 10 MHz of band edge)	78.2

TEST PROCEDURE

1. The EUT was placed on a turn table which is 1.5m above 1GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
1GHz-18GHz	Double Ridged Horn Antenna	3

6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-18GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

TEST RESULTS

Remark:For radiated bandedge We measured at 802.11 a/802.11 ac/802.11 n mode, recorded worst case at 802.11 a mode;

For Radiated Bandedge Measurement

802.11 a/ Channel 36 :5180 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
4500.0	35.08	35.58	29.04	8.28	49.90	68.20	-18.30	Peak	Horizontal
4500.0	30.29	35.58	29.04	8.28	45.11	54.00	-8.89	AV	Horizontal
5150.0	39.27	35.58	29.04	8.28	54.09	68.20	-14.11	Peak	Horizontal
5150.0	30.67	35.58	29.04	8.28	45.49	54.00	-8.51	AV	Horizontal

802.11 a/ Channel 48 :5240 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5350.0	35.08	35.42	29.06	8.39	49.83	68.20	-18.37	Peak	Horizontal
5350.0	30.36	35.42	29.06	8.39	45.11	54.00	-8.89	AV	Horizontal
5460.0	39.20	35.42	29.06	8.39	53.95	68.20	-14.25	Peak	Horizontal
5460.0	30.67	35.42	29.06	8.39	45.42	54.00	-8.58	AV	Horizontal

802.11 a/ Channel 149 :5745 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5650.0	35.14	35.29	29.13	8.65	49.95	68.20	-18.25	Peak	Horizontal
5700.0	30.22	35.29	29.13	8.65	45.03	68.20	-23.17	Peak	Horizontal
5720.0	39.29	35.29	29.13	8.65	54.10	68.20	-14.10	Peak	Horizontal
5725.0	30.67	35.29	29.13	8.65	45.48	68.20	-22.72	Peak	Horizontal



802.11 a/ Channel 165 :5825 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5850.0	35.05	35.29	29.18	8.80	49.96	68.20	-18.24	Peak	Horizontal
5855.0	30.32	35.29	29.18	8.80	45.23	68.20	-22.97	Peak	Horizontal
5875.0	39.08	35.29	29.18	8.80	53.99	68.20	-14.21	Peak	Horizontal
5925.0	30.75	35.29	29.18	8.80	45.66	68.20	-22.54	Peak	Horizontal



REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;


For Conducted Band edge Measurement
The test results have included the antenna gain

5150-5250MHz:

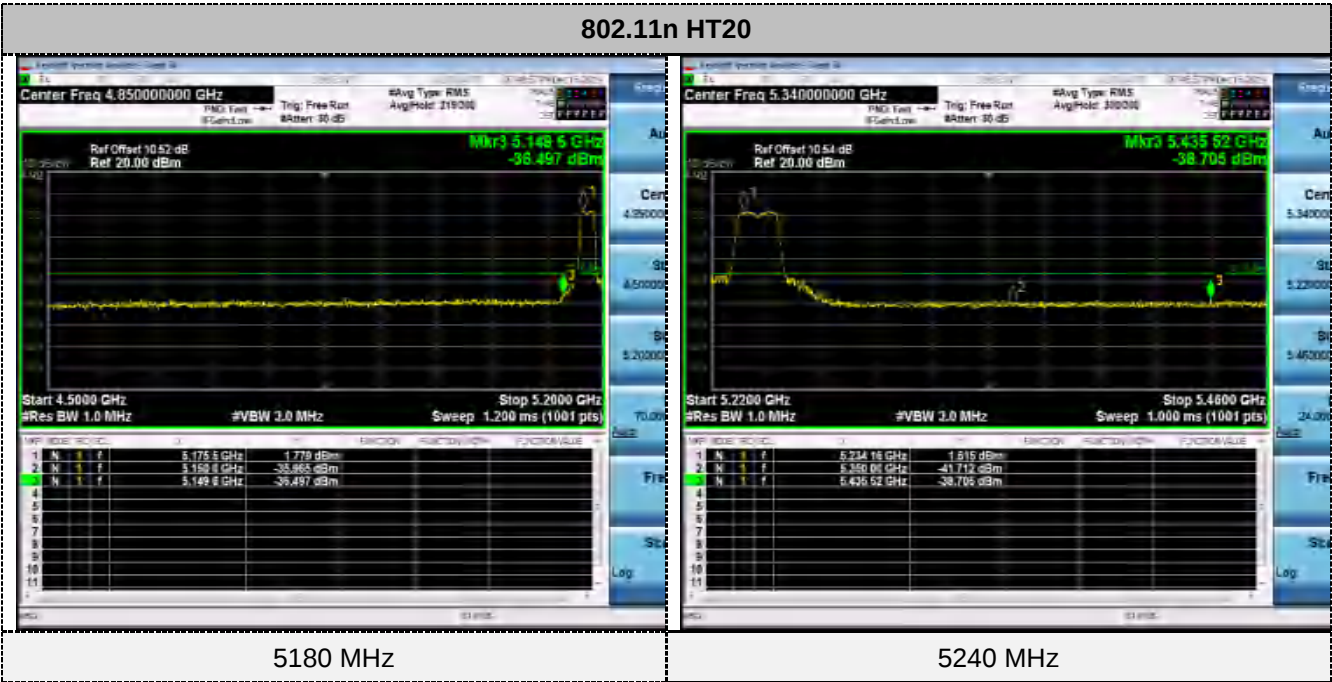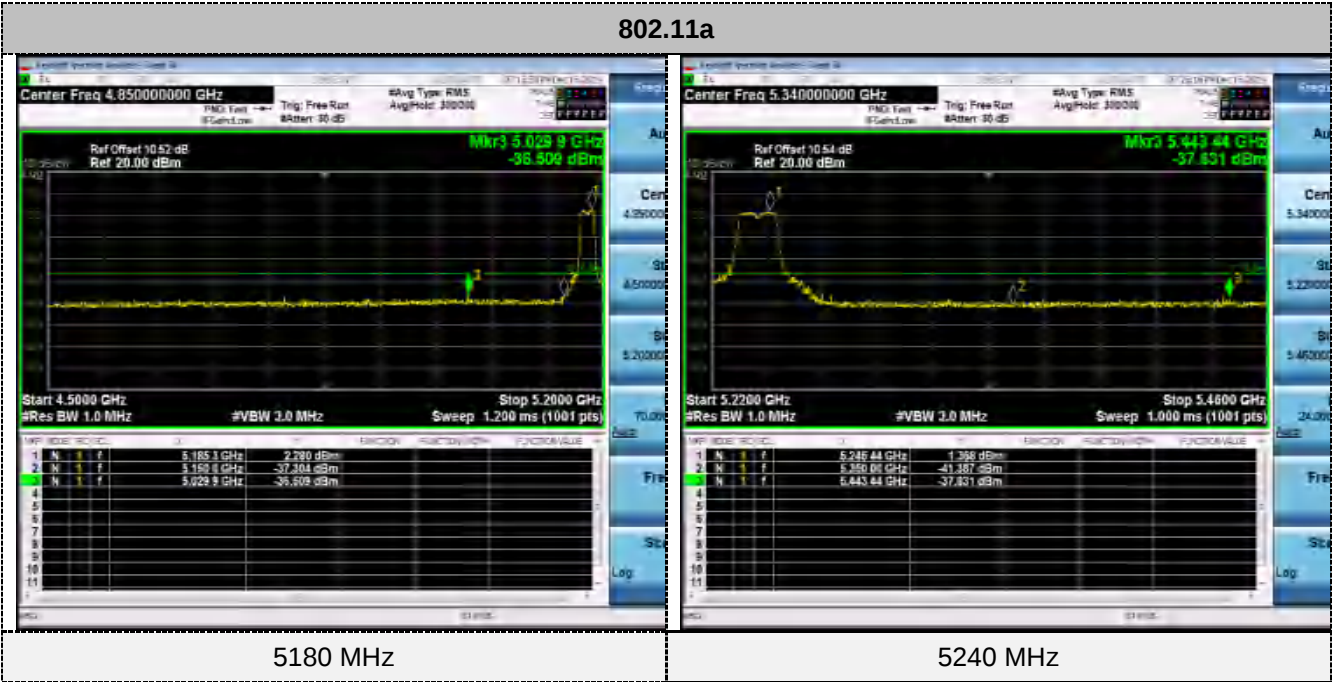

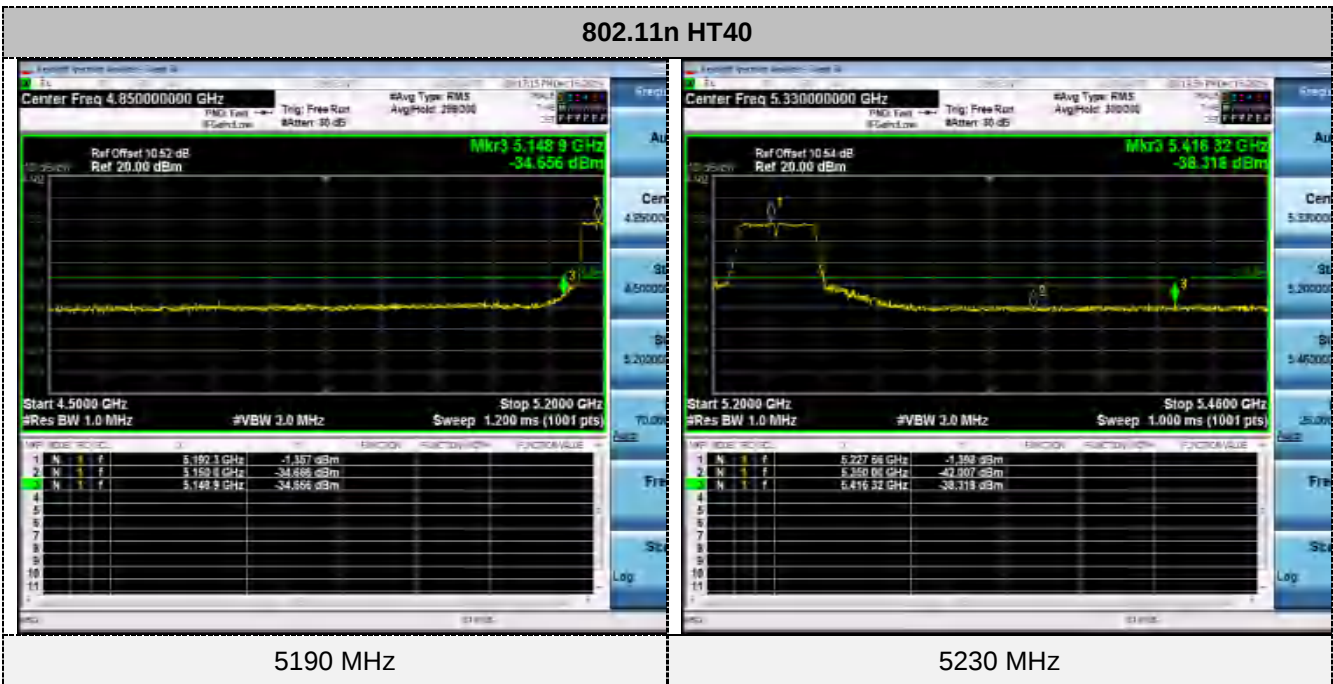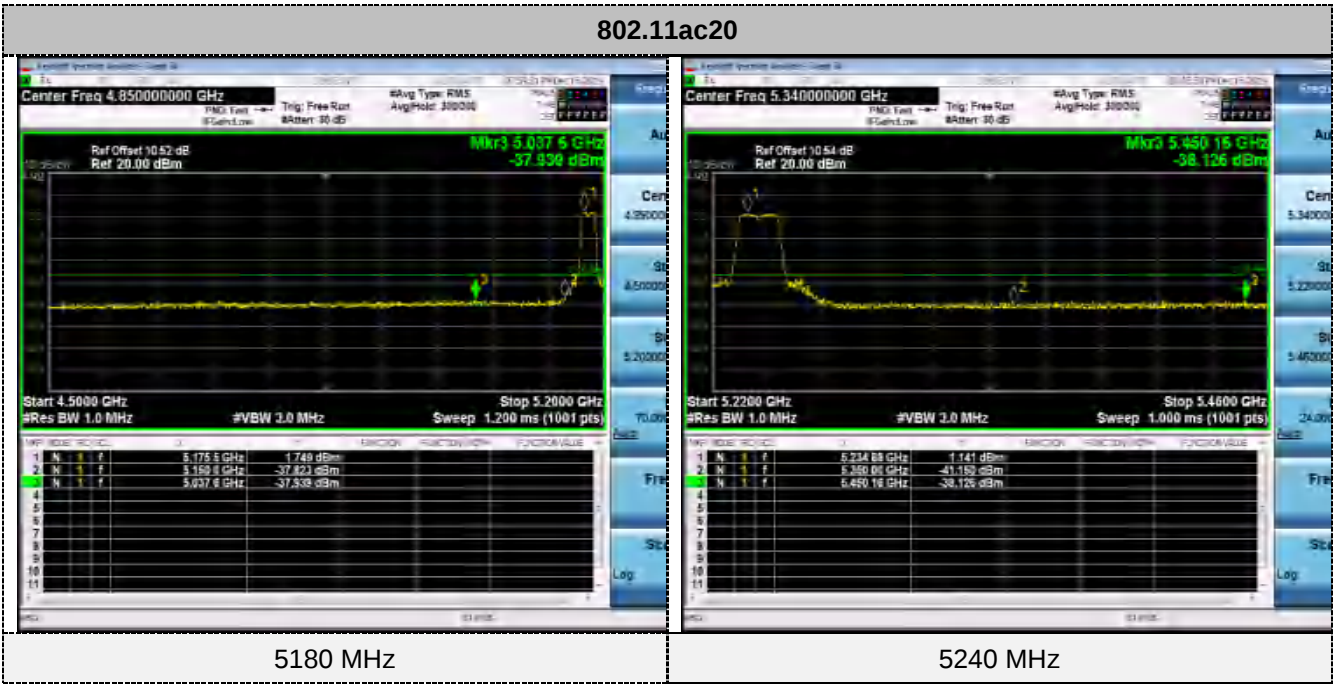

802.11ac40

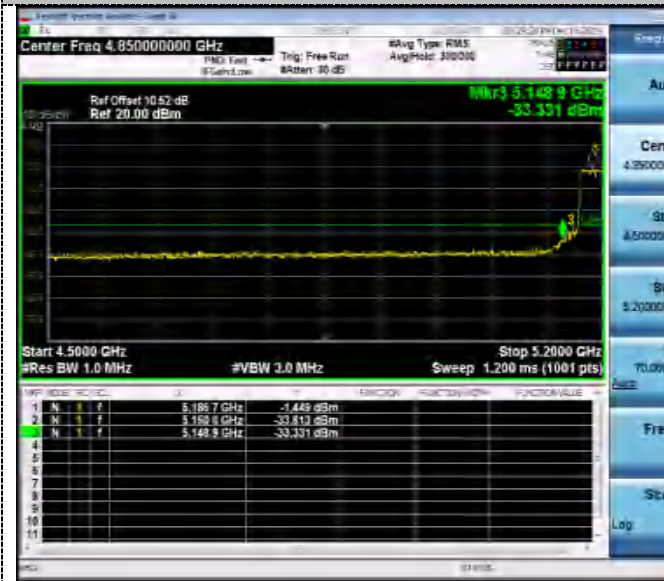

5190 MHz



5230 MHz

802.11ac80





5210 MHz



5210 MHz

5725-5850MHz:

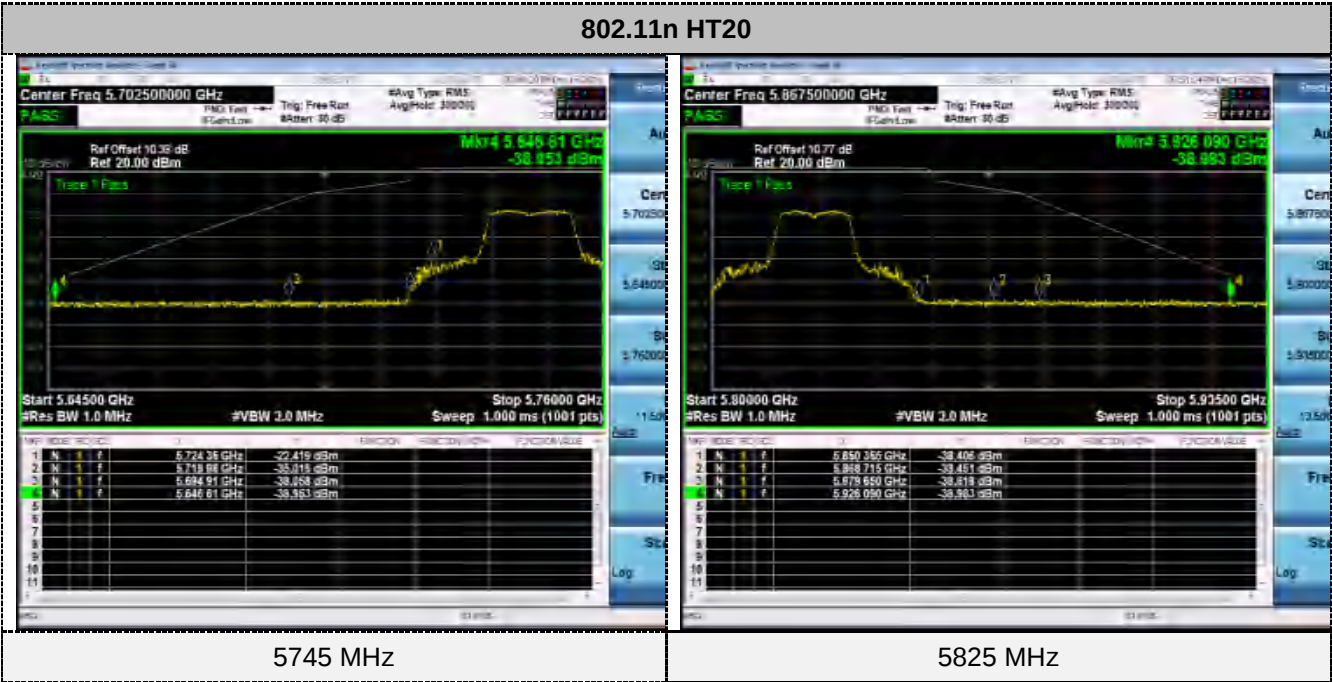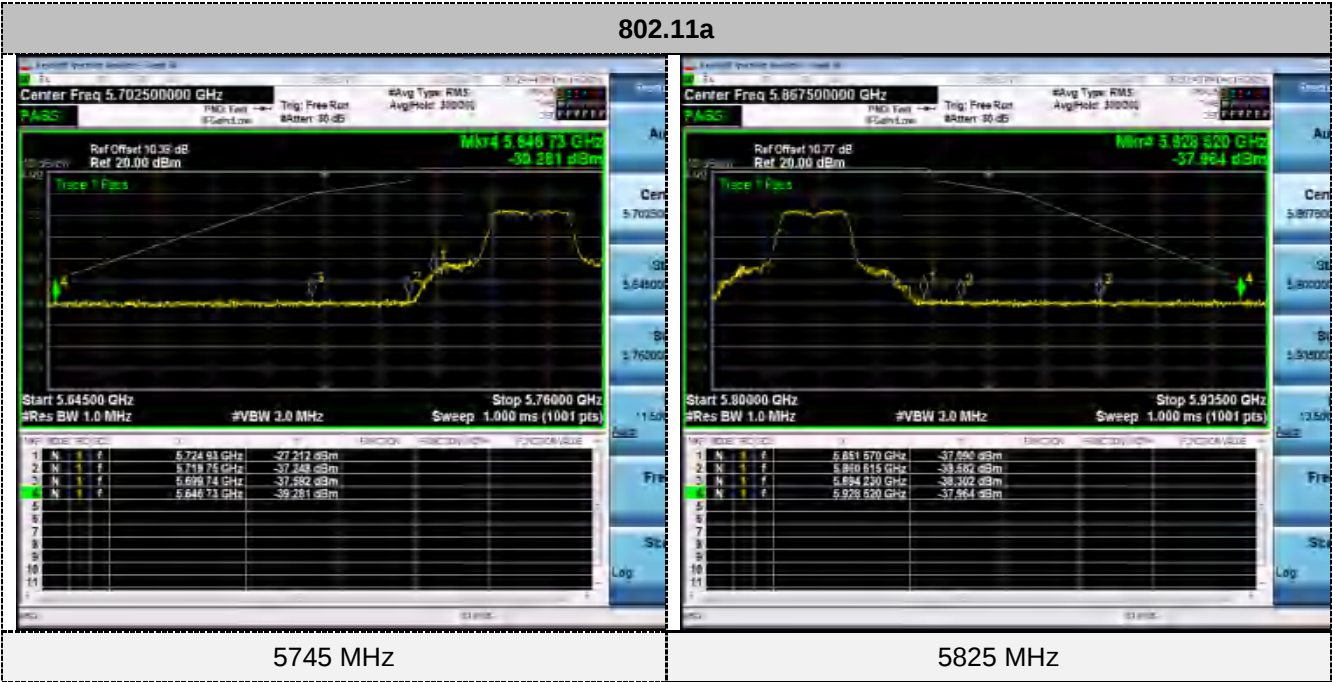

802.11ac20



5745 MHz



5825 MHz

802.11n HT40



5755 MHz



5795 MHz

802.11ac40



5755 MHz



5795 MHz

802.11ac80



5775 MHz



5775 MHz

4.9. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Information

The antenna is External Antenna, through the buckle stretched out, The directional gains of antenna used for transmitting is 2.0Bi.

Reference to the test report No. **GTS20191209006-2-22**

5. TEST SETUP PHOTOS OF THE EUT

Reference to the Test Report NO. GTS20191209006-2-22

6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the Test Report NO. GTS20191209006-2-22

.....End of Report.....