



SPECIFICATION

产品型号: DESC	Ø5.4mmX34.8mmXØ0.25m m	版本: Rev: 1.0	客户 CUST: 客户料号 CUST P/N	顺东电子
---------------	---------------------------	-----------------	---------------------------	------

一. 尺寸 DIMENSION:(mm)

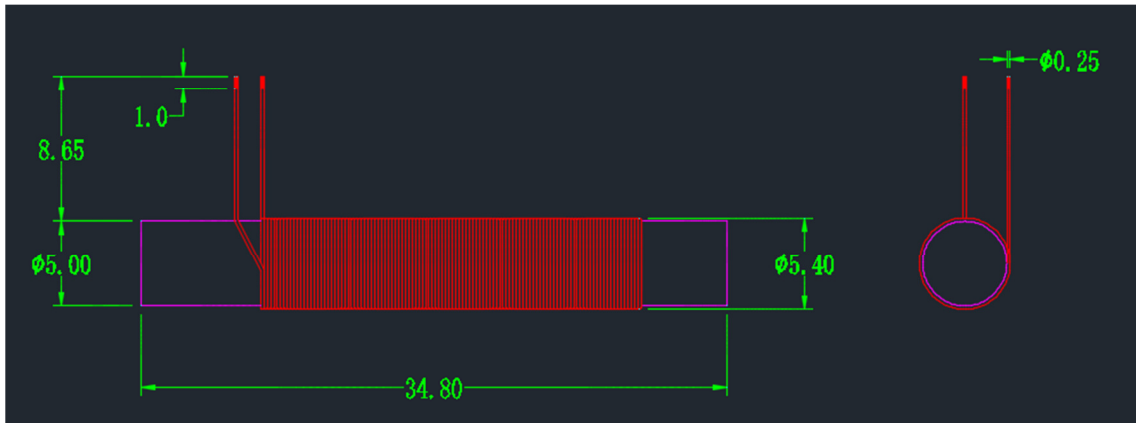

二. 原理图 SCHEMATIC DIAGRAM

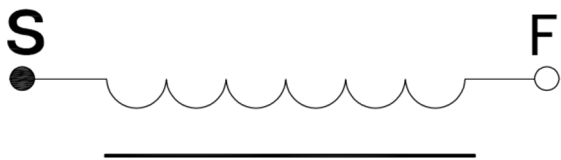

注:

- 交叉出线;
- 出线位置缠 8mm 宽度高温胶纸 1-2Ts;

Operation Frequency:10.5KHz-205KHz
Gain: 0dBi

Note:

- Cross outgoing line;
- Wrap 8mm wide high-temperature adhesive tape 1-2Ts around the outlet position

三. 线路参数 Winding Specfication:

序号 NO.	端 子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S F	漆包线 2UEW- wire 0.25	190Ts	ccw

四. 电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERALTURE:25±10 °C,湿度 RELATIVE HUMIDTY:65±20%

序号 NO.	项目 TERMINAL	端子 TERMINAL	标准 SPECIFICATION	测试条件 1KHz/0.3V	测试仪器 TEST EQUPLMENTS
1	IND	S-F	L=980UH±10%	1KHz/0.3V	LCZ1062B
2	IND	S-F	L=980UH±10%	1KHz/0.3V	TH2811D
3	DCR	S-F	L=980UH±10%	1KHz/0.3V	TH2511
4	Q	S-F		1KHz/0.3V	