

承认书

SPECIFICATION FOR APPROVEAL

客户名称 (CUSTOMER) : ZLGD

客户料号 (PART NO.) : ZLGD A1-0076

品 名 (DESCRIPTION) : 线圈+磁片 Coil+magnetic sheet

规格 (SPECIFICATION) : 0.08 105P covered wire, 38.0x15, inductance 6.8uH, magnetic isolation plate. Ø 44X0.8 (slot opening) 7 MM from magnetic edge

日 期 (DATE) : 20240608

本司确认 (TRX APPROVAL)		
制作 make	审核 check	承认日期 Date of recognition
潘锡明	邱志辉	20240608
客户确认 (CUSTOMER APPROVAL)		
工程 engineering	批准 approve	承认日期 Date of recognition
确认结果 (Result): ☐ 合格 Qualified ☐ 不合格 unqualified ☐ 其它 others		

东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

东莞市石碣镇新风西路107号

No.107 Xinfeng West Road, Shijie Town, Dongguan City

Tel电话: 0769-86016320

Fax传真: 0769-86372427


东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION

产品型号: DESC	ZLGD0-15*38.0 -07-FR	版本 Rev:A	Customer:	ZLGD
			Description:	Coil+magnetic sheet
			Date:	20240608

一、尺寸DIMENSION: (mm)

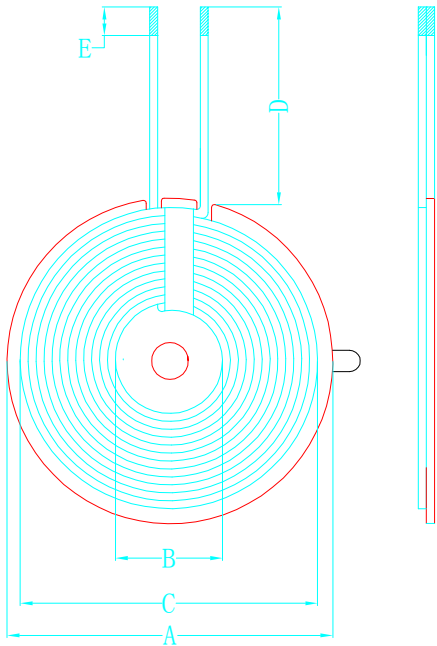

A	44.0±1.0
B	15.0±1.0
C	38.0+2.0
D	7.0+2.0
E	3.5±1.5
F	
G	
H	
I	
J	
K	
L	

Note:

1. The coil is attached with hard magnetism in reverse, and the magnetic sheet has holes and double slots, and the thickness of the magnetic sheet is between 0.7 and 0.90, and the position of the coil is centered.
2. The back of the magnetic disk is attached with ears. White double-sided
3. Coil outlet position 8mm high temperature
4. The coil must not be loose

二、原理图 (schematic diagram:)

三、绕线参数(WindingSpecification:)

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1		0.08X105P covered wire	12TS	anticlockwise

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10° C,湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.		6.8UH (must be within 6.5-7.1)	100KHZ/1.0V	SHDA 1062
2	IND.				
3	Q value				
4	DCR				

拟制/日期PREPARED BY/DATE	审核/日期CHECKED BY/DATE	客户/日期CUSTOMEU/DATE