


- 性能参数
- 1、频率范围：433MHz
 - 2、驻波比： ≤ 1.5
 - 3、输入阻抗：50
 - 4、增益：2db
 - 5、线径：1.05mm
 - 6、弹簧外径：4.6mm
 - 7、总长度包括焊接部分：300mm
 - 8、接口形式：焊接

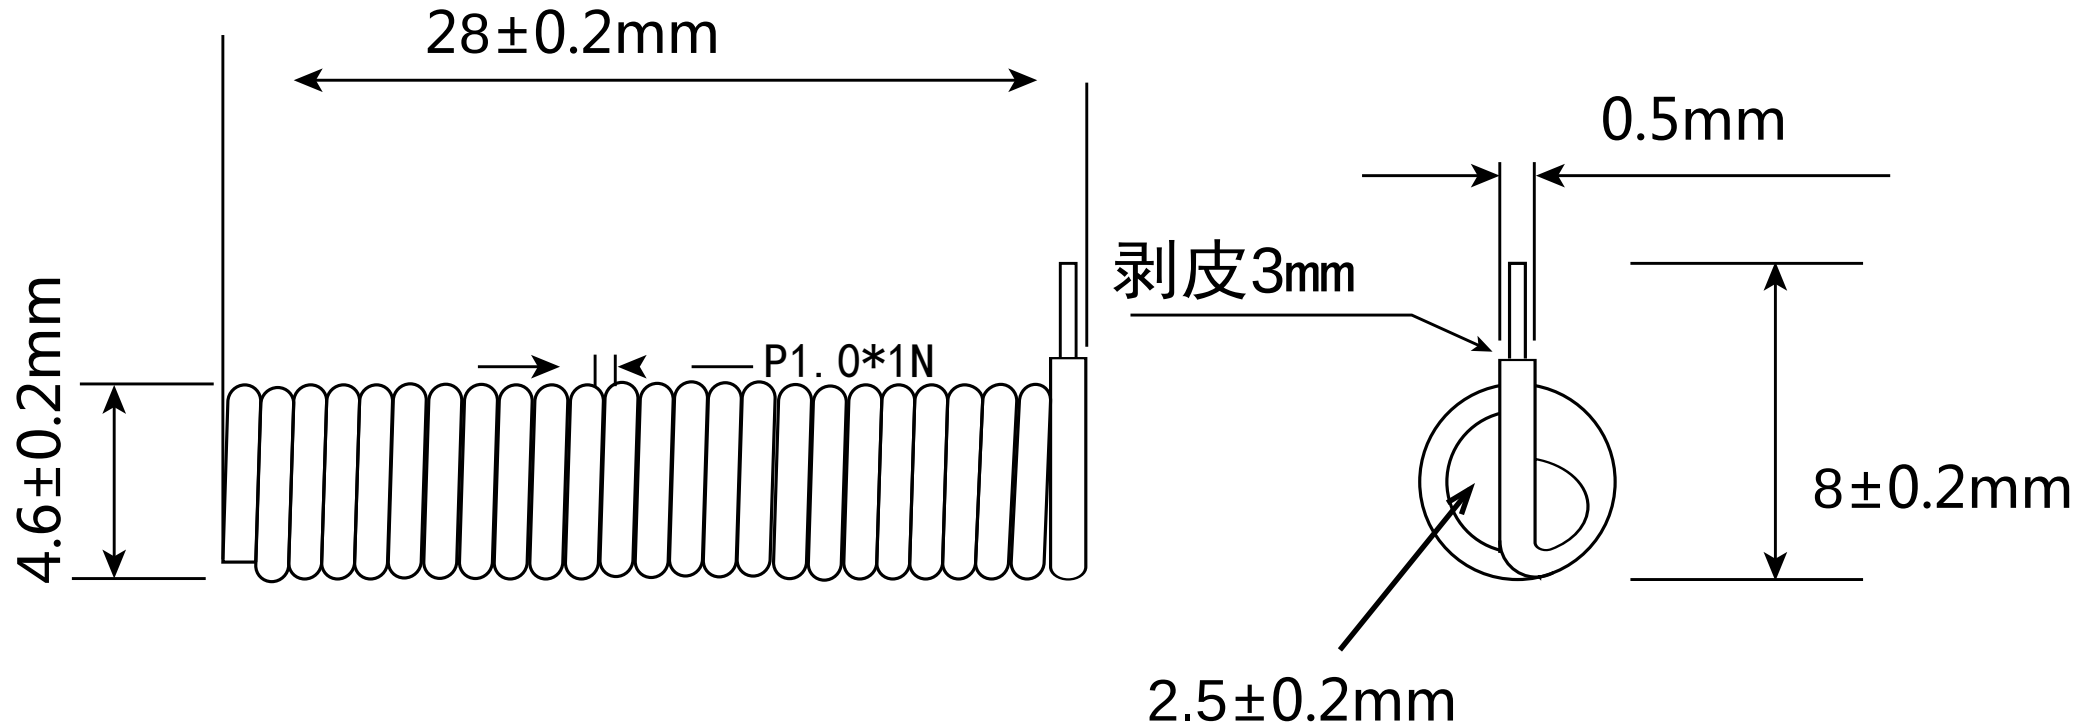

材料: 单 芯线径 $1.05 \pm 0.02 \text{ mm}$,
25圈, 绝缘材质黑色PVC料

300MM


温度：线皮塑胶最高温度120

Zhongshan Kaiyi Electronics Co., Ltd.

Address: No. 7 Beihai Road, Guzhen Town, Zhongshan City, Guangdong Province.

Only radiated measurements are used to show compliance with FCC limits for fundamental and spurious emissions.

1. Frequency range: 433.92MHz
2. Standing wave ratio: ≤ 1.5
3. Input impedance: 50Ω
4. Gain: 2db
5. Wire diameter: 1.05mm
6. Spring outer diameter: 4.6mm
7. Total length including welding part: 300mm
8. Interface form: Welding

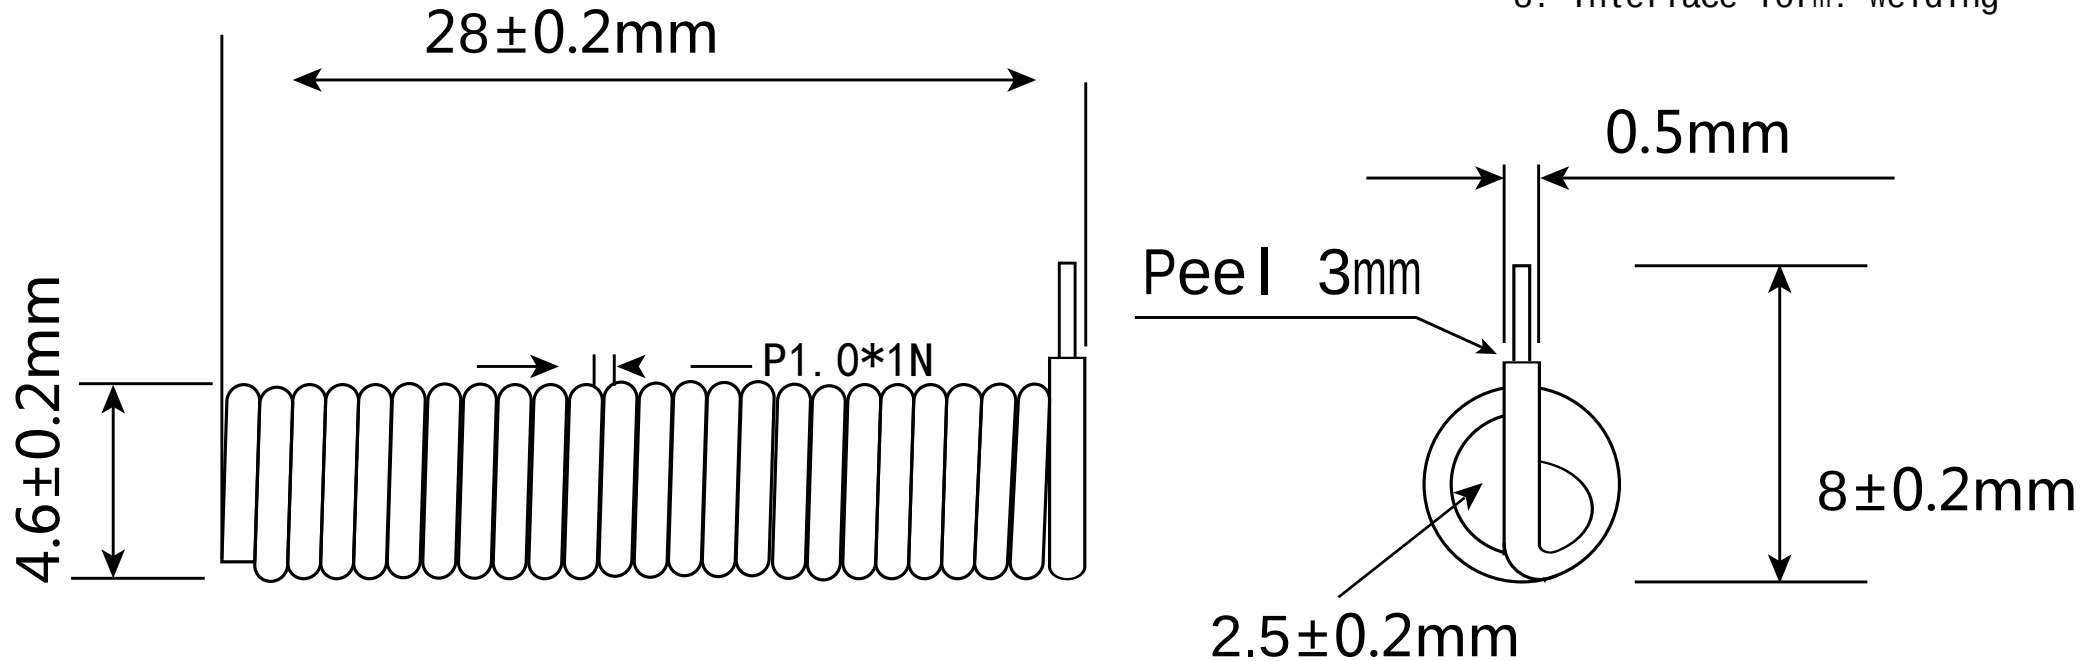

Material: Single copper core wire diameter $1.05 \pm 0.02\text{mm}$, straight length: 300MM, number of turns: 25 turns for spring type, insulation material black PVC.

Temperature: Maximum temperature for wire skin plastic 120°C .