

7.1.6 Watch Fast Charger Inductive Coil Module Dimensions

Dongguan Yinze Electronic Technology Co., Ltd.
Add: No. 901, Building 2, Xinghan (Chuangfu Center City), Chaishan Town, Dongguan City

2




1

REV. 0000 | DESCRIPTION OR Revision

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. NO ELECTRICAL SHORTS BETWEEN GND PAD AND SURROUNDING METAL.
2. THE TOP SURFACE OF THE INDUCTIVE COIL ASSEMBLY (DATUM A) SHALL BE 0.40MM ±0.25MM PROUD OF THE SURROUNDING SURFACE.
3. COMPONENTS AND TERMINALS ON THE CONTROL MODULE SHALL BE FULLY ENCAPSULATED WITH A RIGID GLUE TO PROTECT COMPONENTS.
4. THE CONTROL MODULE SHOULD BE CONTAINED WITHIN A SHEET METAL ENCLOSURE. THE THERMAL CONDUCTIVITY ENCLOSURE (THERMAL CONDUCTIVITY TARGET 1.5 W/mK).

D

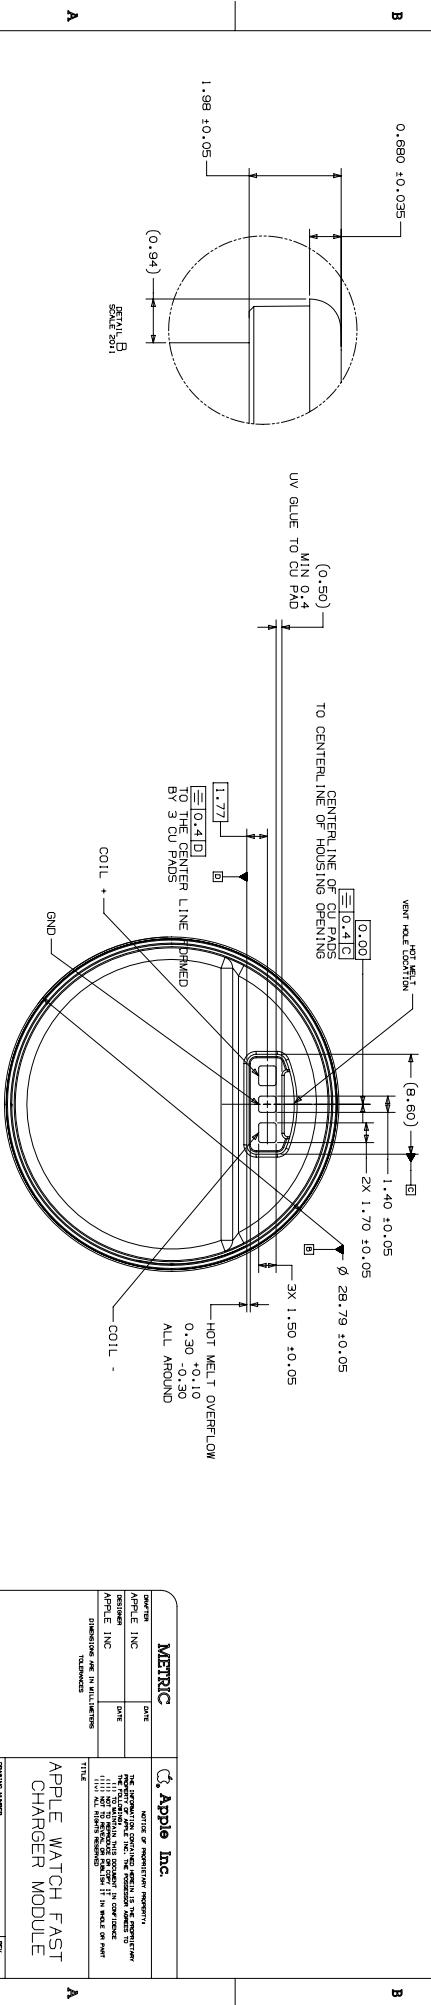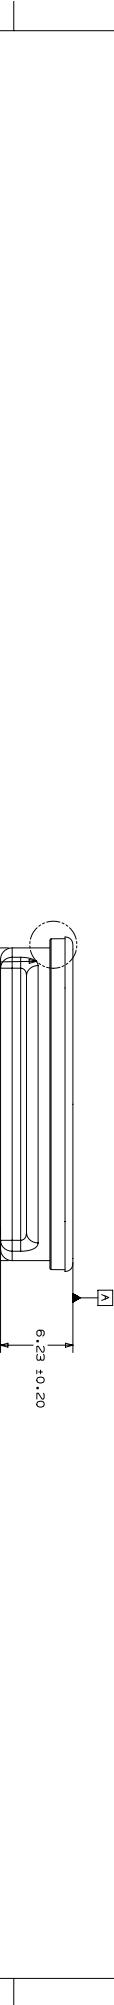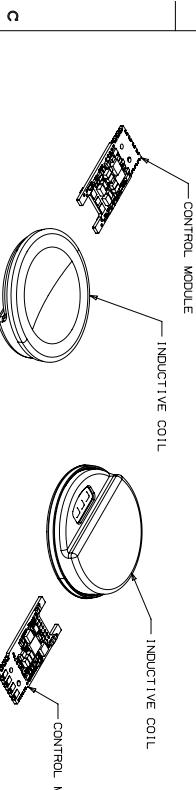

4

3

2

NX GENERATED